


Q- Test your NAT configuration by sending a ping from the internal PC to the external PC and capture the NAT translation table on the router to verify the address mapping.

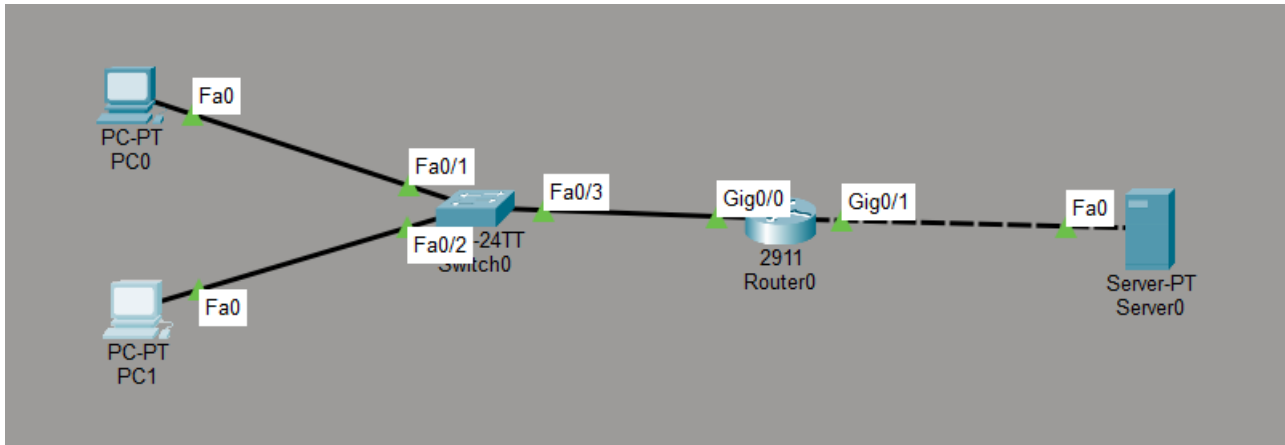

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int g 0/0
Router(config-if)#ip address 192.168.1.1 255.255.255.0
Router(config-if)#ip nat inside
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#int g 0/1
Router(config-if)#ip address 200.1.1.1 255.255.255.0
Router(config-if)#ip nat outside
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/1, changed state to up

Router(config-if)#exit
Router(config)#do wr
Building configuration...
[OK]
Router(config)#access-list 1 permit 192.168.1.0 0.0.0.255
Router(config)#ip nat inside source list 1 interface gigabitEthernet 0/1 overload
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip nat translations
Pro Inside global      Inside local      Outside local      Outside global
tcp 200.1.1.1:1025      192.168.1.10:1025 200.1.1.10:80      200.1.1.10:80

Router#show ip nat statistics
Total translations: 6 (0 static, 6 dynamic, 6 extended)
Outside Interfaces: GigabitEthernet0/1
Inside Interfaces: GigabitEthernet0/0
Hits: 25 Misses: 14
Expired translations: 8
Dynamic mappings:
Router#
```

PC 0 Ping

```
C:\>ping 200.1.1.10

Pinging 200.1.1.10 with 32 bytes of data:

Reply from 200.1.1.10: bytes=32 time<1ms TTL=127
Reply from 200.1.1.10: bytes=32 time=1ms TTL=127
Reply from 200.1.1.10: bytes=32 time<1ms TTL=127
Reply from 200.1.1.10: bytes=32 time<1ms TTL=127

Ping statistics for 200.1.1.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

PC 1 Ping

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 200.1.1.10

Pinging 200.1.1.10 with 32 bytes of data:

Reply from 200.1.1.10: bytes=32 time<1ms TTL=127
Reply from 200.1.1.10: bytes=32 time<1ms TTL=127
Reply from 200.1.1.10: bytes=32 time<1ms TTL=127
Reply from 200.1.1.10: bytes=32 time<1ms TTL=127

Ping statistics for 200.1.1.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

The NAT translation table confirms that the private IP 192.168.1.10 is translated to the public IP 200.1.1.1 using PAT. The external web server 200.1.1.10 is accessed through HTTP port 80. The NAT statistics also show successful translated traffic, confirming that PAT is functioning correctly