


Q- Modify your Packet Tracer topology to add a third internal PC. Update your NAT or PAT configuration so all three internal PCs can access the external network, and verify that each translation appears in the router's NAT table.

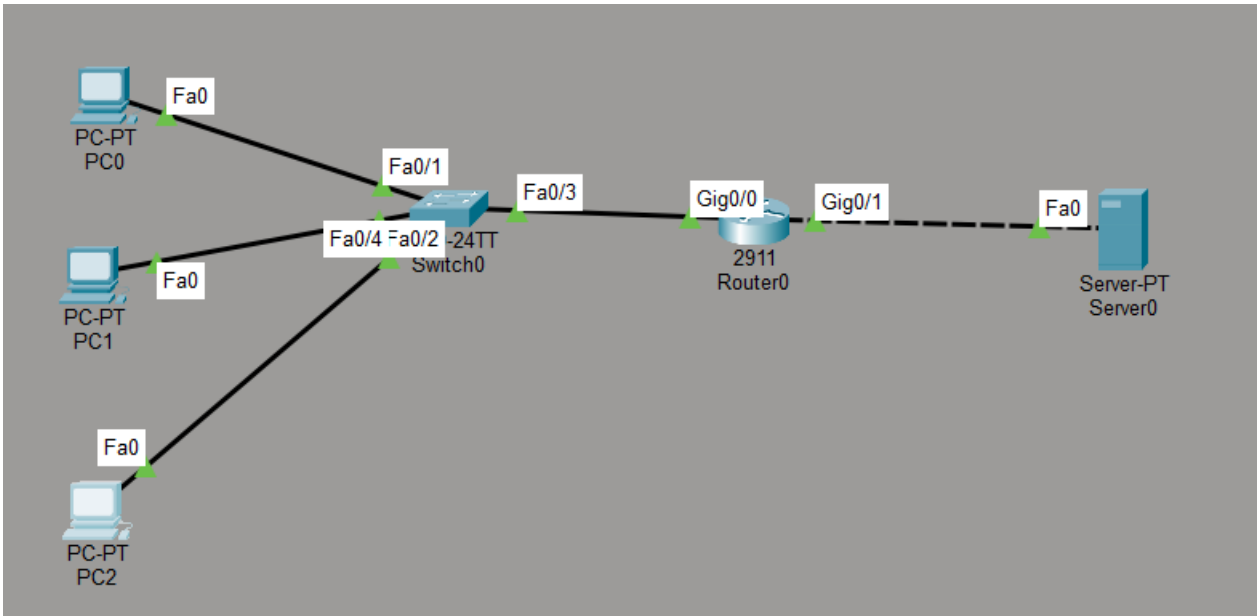

PC 2 :

PC2

PhysicalConfigDesktopProgrammingAttributes

IP Configuration

InterfaceFastEthernet0

IP Configuration

☒ DHCP

☒ Static

IPv4 Address192.168.1.30

Subnet Mask255.255.255.0

Default Gateway192.168.1.1


DNS Server0.0.0.0

IPv6 Configuration

Router

```
Router#
Router#show ip nat translations
Pro  Inside global      Inside local      Outside local      Outside global
icmp 200.1.1.1:1         192.168.1.30:1    200.1.1.10:1       200.1.1.10:1
icmp 200.1.1.1:2         192.168.1.30:2    200.1.1.10:2       200.1.1.10:2
icmp 200.1.1.1:3         192.168.1.30:3    200.1.1.10:3       200.1.1.10:3
icmp 200.1.1.1:4         192.168.1.30:4    200.1.1.10:4       200.1.1.10:4
tcp  200.1.1.1:1025      192.168.1.10:1025 200.1.1.10:80      200.1.1.10:80
tcp  200.1.1.1:1026      192.168.1.10:1026 200.1.1.10:80      200.1.1.10:80
Router#
```

PC 2 Ping

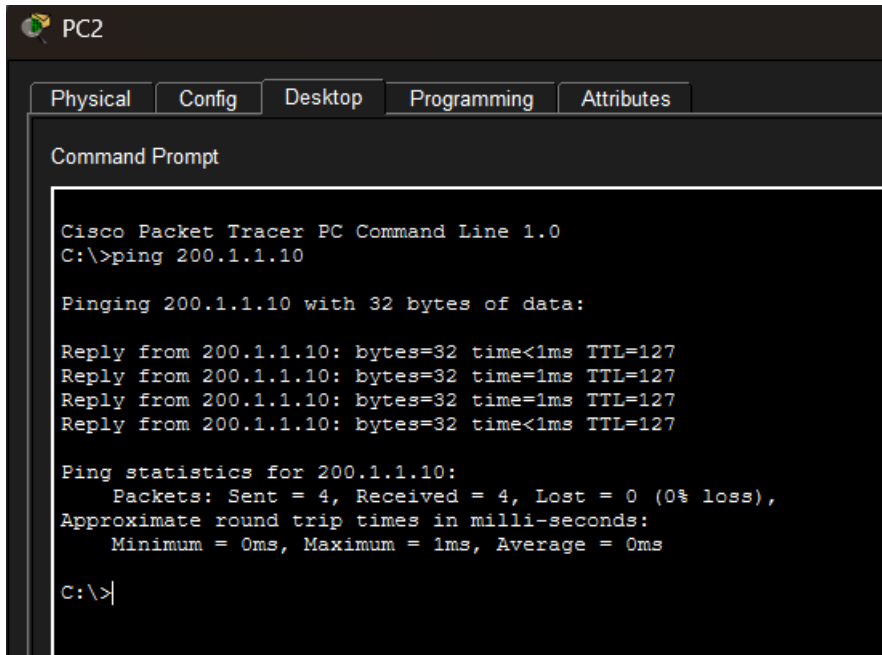

The screenshot shows a Cisco Packet Tracer interface for PC2. The 'Desktop' tab is selected, displaying a Command Prompt window. The prompt shows the execution of a ping command to 200.1.1.10, resulting in four successful replies with 0% loss and a 0ms average round trip time.

```
PC2
Physical Config Desktop Programming Attributes
Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 200.1.1.10

Pinging 200.1.1.10 with 32 bytes of data:

Reply from 200.1.1.10: bytes=32 time<1ms TTL=127
Reply from 200.1.1.10: bytes=32 time=1ms TTL=127
Reply from 200.1.1.10: bytes=32 time=1ms TTL=127
Reply from 200.1.1.10: bytes=32 time<1ms TTL=127

Ping statistics for 200.1.1.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>|
```