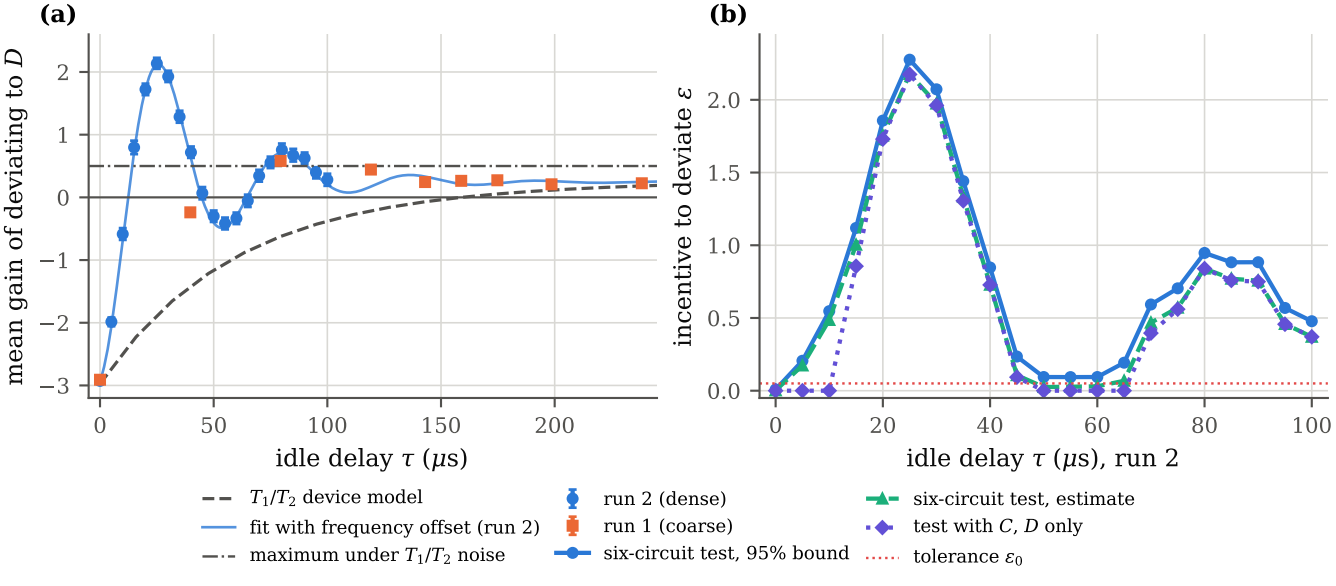
(a)
(b)
mean gain of deviating to D
idle delay τ (μs)
incentive to deviate ε
idle delay τ (μs), run 2
T_1/T_2 device model
fit with frequency offset (run 2)
maximum under T_1/T_2 noise
run 2 (dense)
run 1 (coarse)
six-circuit test, 95% bound
six-circuit test, estimate
test with C, D only
tolerance ε_0