
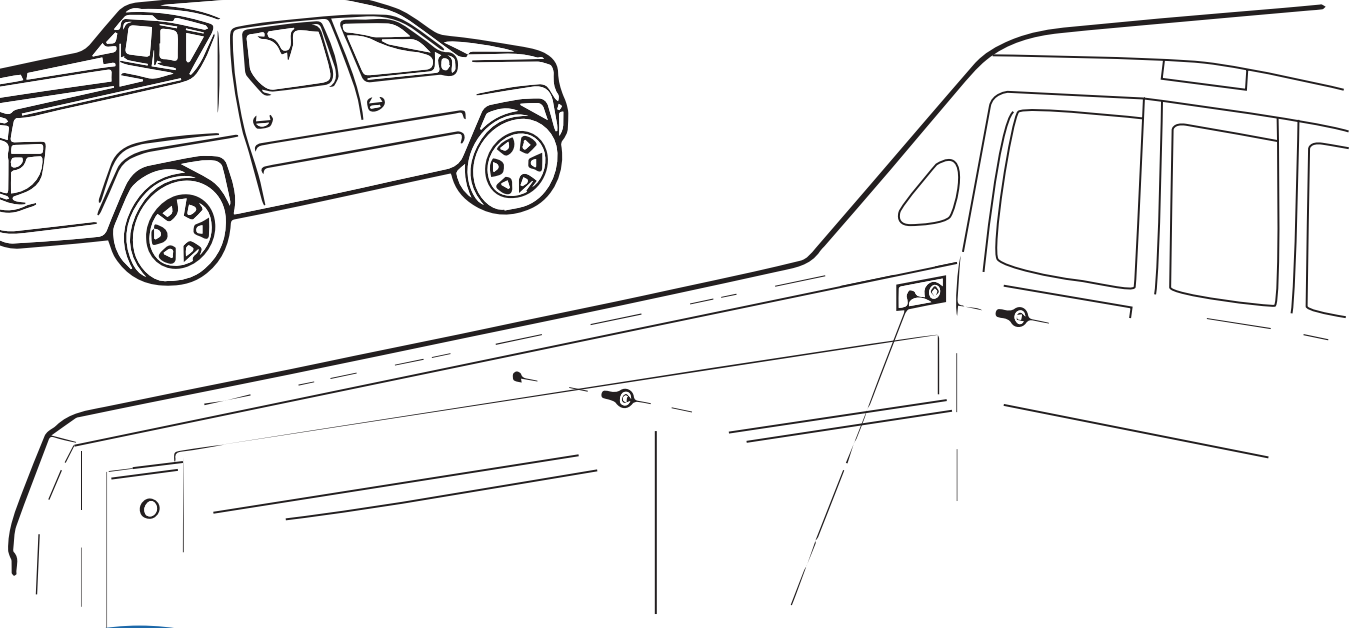



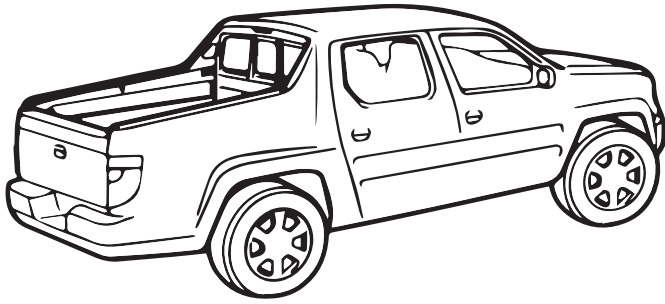


#LR-42-600 |

INSTRUCTIONS


HONDA RIDGELINE
ALTERNATIVE BRACKETS

1. Remove factory tie down with supplied torque screw tools.

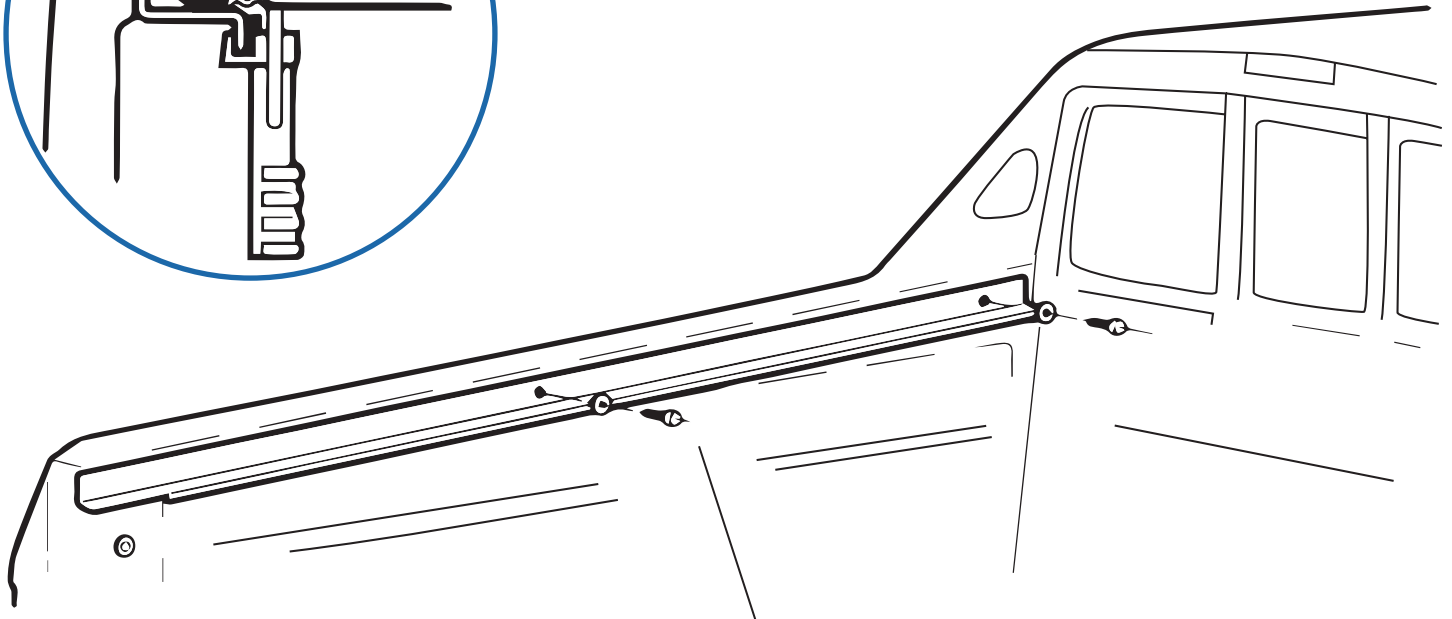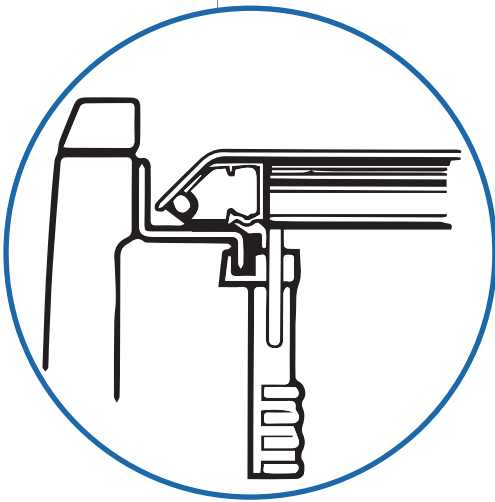

2. Bolt rail to side wall using supplied bolt and washer.

Hardware: Small 25mm seal washer, large 33mm seal washer, angle seal pad (front), flat seal pad (rear), and rubber filler gasket

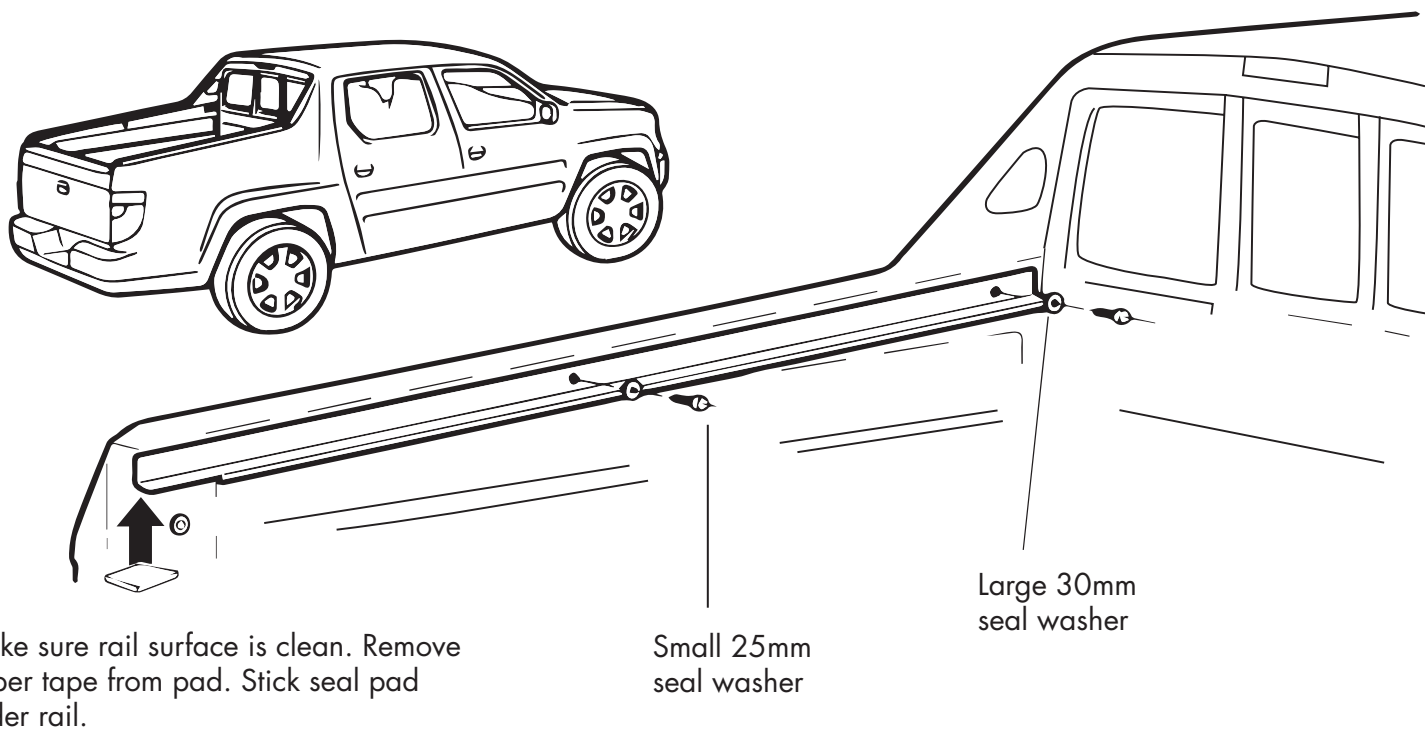

NOTE: Installation on a Ridgeline may cause a gap that could allow water into the bed. Installation may need silicone to prevent leaking. Silicone not included.

