

Installation Instructions

I - Sheet Number I-B031101 Rev.A



Premium Style. Lasting Performance.

For proper installation and best possible fit, please read all instructions BEFORE you begin.
For technical assistance or to obtain missing parts, please call Customer Relations at 1-800-241-7219.

Para una instalación adecuada y el mejor ajuste posible, lea todas las instrucciones ANTES de comenzar.
Para obtener asistencia técnica o para obtener piezas que faltan, por favor llame a Relaciones con el cliente en 1-800-241-7219.

Pour une installation correcte et le meilleur ajustement possible, s'il vous plaît lire toutes les instructions AVANT de commencer.
Pour une assistance technique ou pour obtenir des pièces manquantes, s'il vous plaît communiquer avec les Relations à la clientèle au 1-800-241-7219.

Care and Cleaning

- **Wash only with mild soap & dry with a clean cloth.**
Lavar con jabón suave y seque con un paño limpio.
Laver avec un savon doux et séchez avec un chiffon propre.
- **Every 3 months or 5000 miles check the cover tension and all components for tightness.**
Revise cada 3 meses o 5,000 millas la tensión de la cubierta y todos los componentes estén ajustados.
Vérifiez tous les 3 mois ou 5000 miles la tension couvercle et le serrage des composants.

Congratulations!

You have purchased one of the many quality Lund® branded products offered by Lund International, Inc. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.

Usted ha comprado uno de los muchos productos de calidad ofrecidos por Lund® de marca productos ofrecidos por Lund International, Inc. Tomamos el orgullo extremo en nuestros productos y queremos que disfrute durante años de su inversión. Hemos hecho todos los lo posible para que su producto es de calidad superior en cuanto a ajuste, durabilidad, acabado y facilidad de la instalación.

Vous avez acheté un des nombreux produits de qualité offerts par Lund® marque produits offerts par Lund International, Inc. Nous sommes extrêmement fiers de nos produits et souhaitons que vous tiriez des années de satisfaction de votre investissement. Nous avons pris toutes les efforts pour s'assurer que votre produit est de qualité supérieure en termes de durabilité, de finition et la facilité de l'installation.

INSTALLATION INSTRUCTIONS

PART# 22688311/ 23088311

NOTE: Please read this information before installing. Check components received with components listed below. **NO DRILLING REQUIRED** for installation of these side bars. To obtain correct installation, we recommend you to follow these step by step installation instructions carefully. Please take care when installing this product to protect the finish and your investment.

| QTY | DESCRIPTION |
|-----|--|
| 1 | Side Bar, left side |
| 1 | Side Bar, right side |
| 1 | Front Support Bracket-left |
| 1 | Front Support Bracket-right |
| 2 | Center Support Bracket |
| 1 | Rear Support Bracket-left |
| 1 | Rear Support Bracket-right |
| 6 | 12mm x 1.75 x 120mm Hex Bolt-zinc plated |
| 10 | 12mm Flat washer-zinc plated |
| 10 | 12mm Split Lock washer-zinc plated |
| 4 | 12mm x 1.75 x 50mm Hex Bolt-zinc plated |
| 2 | 8mm x 1.25 x 25mm Hex Bolt-zinc plated |
| 4 | 8mm Flat washer-zinc plated |
| 2 | 8mm Split washer-zinc plated |

Step One: Locate left side brackets, 12mm x 120mm Hex Bolts, 12mm Lock washers and 12mm Flat washers. Remove front, center, and rear cab mount bolts located under the cab. Loosely attach brackets to the bottom of the cab mounts with the hardware listed in this step (Figure 1, 2 & 3).

Rear Bracket

Center Bracket

Front Bracket

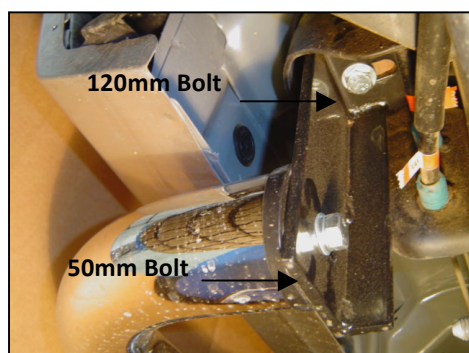


Figure 1

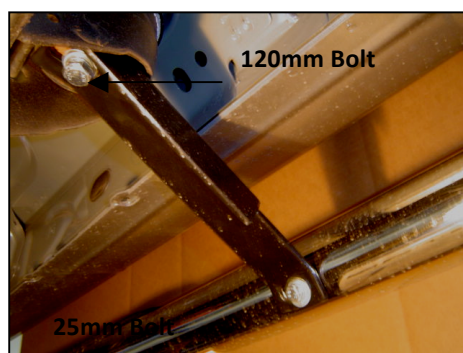


Figure 2

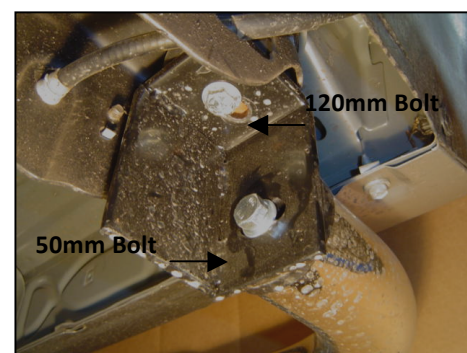


Figure 3

Step Two: Secure the side bar to the front and rear brackets using the 12mm x 50mm Hex Bolts, Lock washers and Flat Washers provided. Secure the Center Bracket to the Side Bar using 8mm x 25mm Hex Bolts, Lock washers and Flat washers provided. After checking to make sure the sidebar is level and square with the side of the vehicle, completely tighten all hardware.

Step Three: Repeat steps one and two on opposite side of vehicle.

IMPORTANT: Side Bars have a 300 lb. weight capacity. To protect your investment, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish.

Cleaning Instructions:

For stainless steel, aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap, window or glass cleaner may be used to clean stainless steel.

For gloss black and chrome finishes. Mild soap, window and glass cleaner may be used. Do not use any type of polish or wax that contains abrasive that could damage the finish.

For textured coated finishes, a mild soap on a damp sponge should be used. Do not apply polish or wax that requires to be applied or removed by means of buffing on textured coated finishes. This type of coating should only be protected with a spray on wax that does not required any removal or buffing. This type of wax is commonly used at car wash facilities.