

# Installation Instructions

I - Sheet Number I-B040733 Rev. A



Premium Style. Lasting Performance.

For proper installation and best possible fit, please read all instructions BEFORE you begin.  
For technical assistance or to obtain missing parts, please call Customer Relations at 1-800-241-7219.

Para una instalación adecuada y el mejor ajuste posible, lea todas las instrucciones ANTES de comenzar.  
Para obtener asistencia técnica o para obtener piezas que faltan, por favor llame a Relaciones con el cliente en 1-800-241-7219.

Pour une installation correcte et le meilleur ajustement possible, s'il vous plaît lire toutes les instructions AVANT de commencer.  
Pour une assistance technique ou pour obtenir des pièces manquantes, s'il vous plaît communiquer avec les Relations à la clientèle au 1-800-241-7219.

## Care and Cleaning

- **Wash only with mild soap & dry with a clean cloth.**  
Lavar con jabón suave y seque con un paño limpio.  
Laver avec un savon doux et séchez avec un chiffon propre.
- **Every 3 months or 5000 miles check the cover tension and all components for tightness.**  
Revise cada 3 meses o 5,000 millas la tensión de la cubierta y todos los componentes estén ajustados.  
Vérifiez tous les 3 mois ou 5000 miles la tension couvercle et le serrage des composants.

## Congratulations!

You have purchased one of the many quality Lund® branded products offered by Lund International, Inc. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.

Usted ha comprado uno de los muchos productos de calidad ofrecidos por Lund® de marca productos ofrecidos por Lund International, Inc. Tomamos el orgullo extremo en nuestros productos y queremos que disfrute durante años de su inversión. Hemos hecho todos los lo posible para que su producto es de calidad superior en cuanto a ajuste, durabilidad, acabado y facilidad de la instalación.

Vous avez acheté un des nombreux produits de qualité offerts par Lund® marque produits offerts par Lund International, Inc. Nous sommes extrêmement fiers de nos produits et souhaitons que vous tiriez des années de satisfaction de votre investissement. Nous avons pris toutes les efforts pour s'assurer que votre produit est de qualité supérieure en termes de durabilité, de finition et la facilité de l'installation.

# Installation Instructions

Part # 26278407/ 26378407

| <u>QTY</u> | <u>DESCRIPTION</u>   |
|------------|----------------------|
| 1          | Side Bar, left side  |
| 1          | Side Bar, right side |
| 1          | hardware kit         |

**NOTE:** Please read this information before installing. Check components received with components listed above. To obtain correct installation we recommend you to follow these step by step installation instructions carefully. Please take care when installing this product to protect the finish and your investment.

**Step One:** Locate hardware and check contents with the hardware listed below.

**Parts List :**

|    |                                   |    |                            |
|----|-----------------------------------|----|----------------------------|
| 1  | front support bracket, left side  | 16 | 8mm lock washer            |
| 1  | front support bracket, right side | 8  | 8mm nut clips              |
| 1  | rear support bracket, left side   | 4  | 12mm x 50mm hex head bolts |
| 1  | rear support bracket, right side  | 2  | 12mm x 40mm bolt plate     |
| 16 | 8mm x 30mm hex head bolts         | 6  | 12mm flat washer           |
| 8  | 8mm hex nuts                      | 4  | 12mm lock washer           |
| 24 | 8mm flat washer                   | 2  | 12mm hex nuts              |

**Step Two:** Locate one front support bracket, left side, four 8mm bolts, two 8mm nuts, six flat washers and Four lock washers. Place nut clips in the two existing holes in the backside of the cab. Secure the brackets to the vehicle as shown in Fig 1. **Do not** fully tighten at this time

**Step Three:** Locate one rear support bracket, left side, four 8mm bolts, two 8mm nuts, six flat washers and four lock washers. Place nut clips in the two existing holes in the backside of the cab. Secure the brackets to the vehicle as shown in Fig 2. **Do not** fully tighten at this time

**Step Four:** Locate the left side bar, two 12mm bolts, two 12mm flat washers and two 12mm lock washers. Secure the side bar and rings to the support brackets using the hardware listed in this step. (Fig #1) Fully tight all hardware at this time. Torque part to 30ft. lbs.

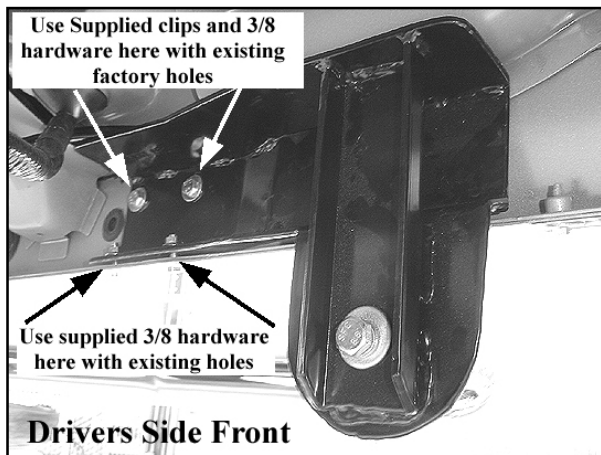


Fig #1

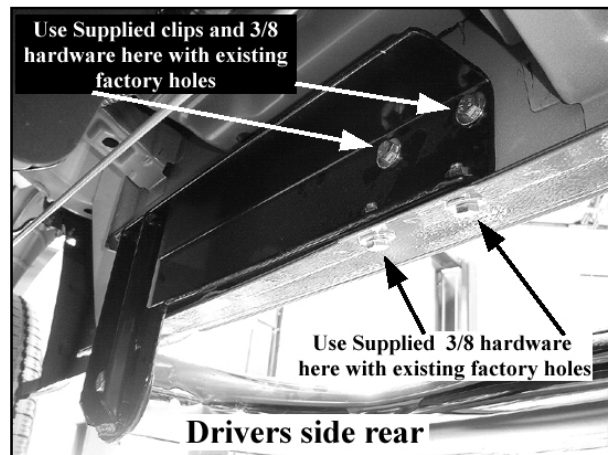


Fig #2

(Photos are for reference only, actual brackets may be different.)

**Step Five:** Repeat steps two through four on opposite side of vehicle.

Be sure to use all hardware supplied and tighten all bolts.

### Cleaning Instructions

Black Powder Coat finish: Mild soap, window or glass cleaner may be used. Do not use any type of polish or wax that contains abrasives that could damage the finish.

Stainless Steel finish: Mild soap, window or glass cleaner may be used.