





Flares - Focus ZX3

Contents



Driver Front
Flare



Driver Rear
Flare



Driver Front
Top Insert




Driver Rear
Top Insert




Passenger Front
Top Insert



Passenger Rear
Top Insert




Passenger Front
Flare



Passenger Rear
Flare




Driver Front
Bottom Insert



Driver Rear
Bottom Insert



Passenger Front
Bottom Insert



Passenger Rear
Bottom Insert


Kit contents vary based on part number. Refer to chart for your kit's contents.

Part Number	Passenger Front Flare	Passenger Front Top Insert	Passenger Front Bottom Insert	Passenger Rear Flare	Passenger Rear Top Insert	Passenger Rear Bottom Insert	Driver Front Flare	Driver Front Top Insert	Driver Front Bottom Insert	Driver Rear Flare	Driver Rear Top Insert	Driver Rear Bottom Insert
	855539	1	1	1								
	855615						1	1	1			
	855639				1	1	1					
	855702									1	1	1
	850747	1	1	1	1	1	1	1	1	1	1	1
	810812	1	1	1	1	1	1	1	1	1	1	1

Tools Required



Car Wash Supplies



Clean Towel



Clean Rag



Rubbing Alcohol

Important



WARNING/CAUTION/NOTE

Please read this manual and follow instructions carefully. To emphasize special information, the symbol and the words **WARNING**, **CAUTION** and **NOTE** have special meanings. These special meanings apply except when laws or regulations require that the signal words be used with a different meaning.

Preparation Before Painting / Installation


A trial fit is recommended to ensure proper positioning and fit, since installing and then removing the Fender Flares will significantly degrade the adhesive performance of the tape. Please check fit of parts before painting as we will not accept the return of modified or painted parts, nor assume any responsibility for parts painted in error. Wash your vehicle to remove any debris and/or dirt. Dry the vehicle with a clean towel.

Front Flare Installation Steps

FF02




Clean front fender flare mounting location with rubbing alcohol and a clean rag.

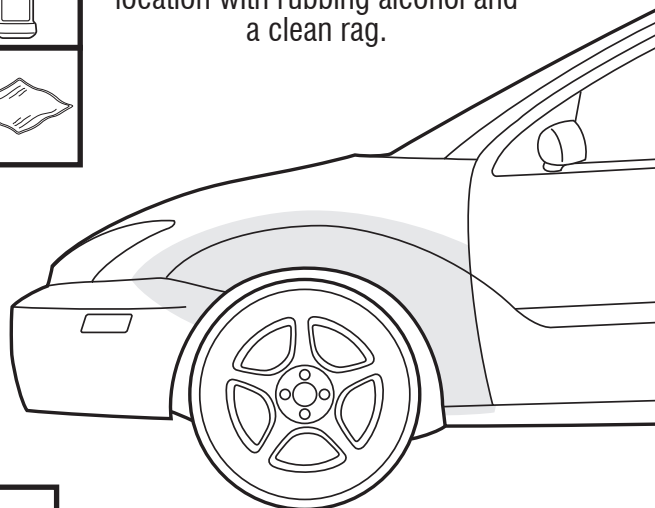


1

Remove tape liner from inserts and attach to fender flare.

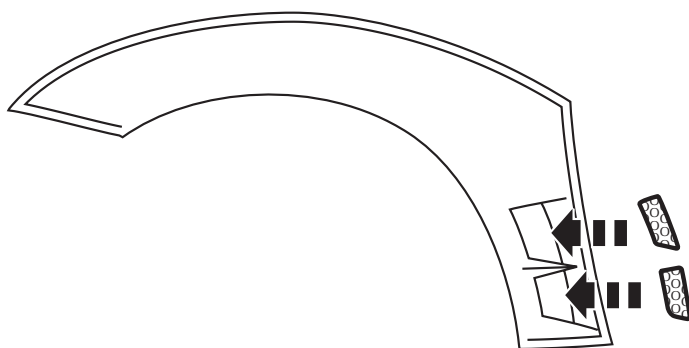


2

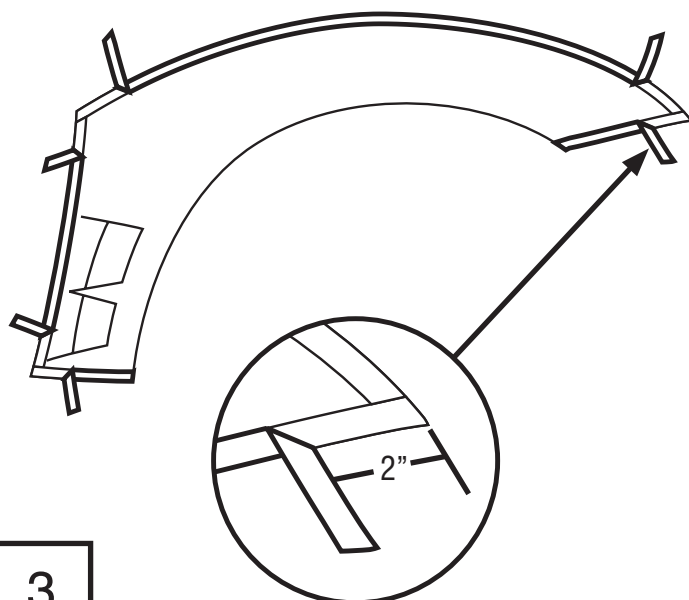


3

Use the wheel well flange to position the fender flare. Align the fender flare to the body's contours and panels.

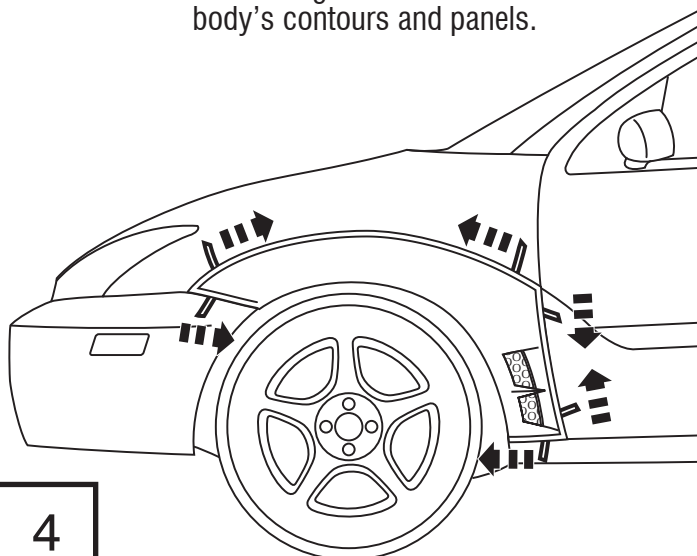

4

Apply strong pressure to all tape flanges. Start from the center and work outward.

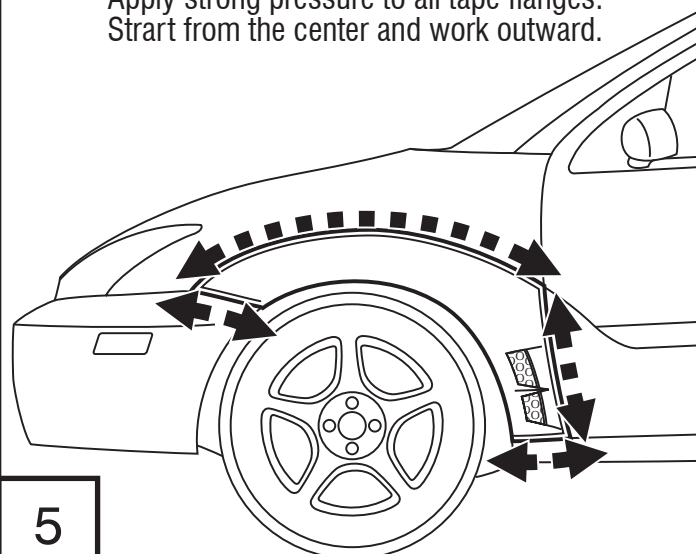

5


Repeat steps 1 through 5 for front passenger's side front fender flare.

Rear Flare Installation Steps

FF02




Clean rear fender flare mounting location with rubbing alcohol and a clean rag.

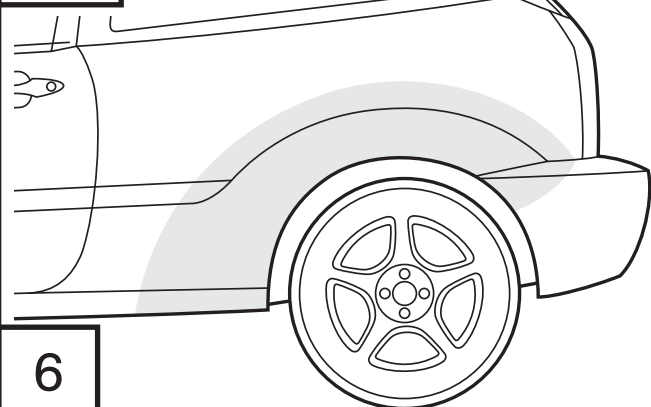


6


Remove tape liner from inserts and attach to fender flare.

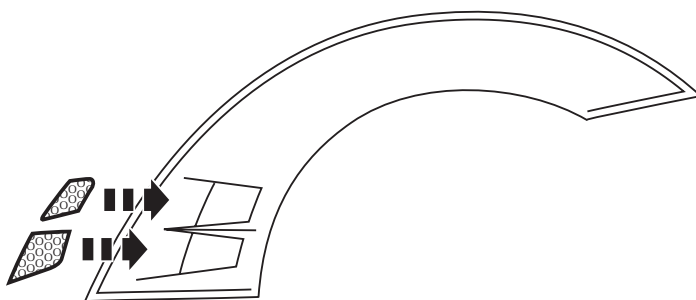

7

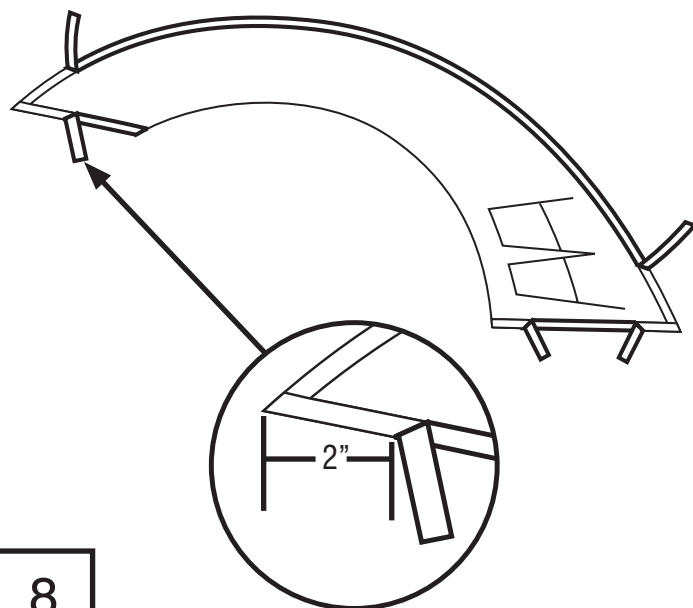


8

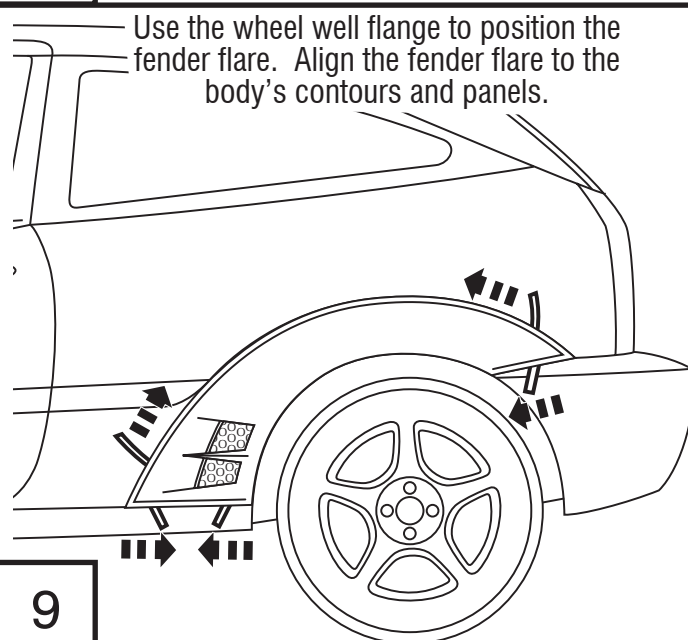

9

Apply strong pressure to all tape flanges. Start from the center and work outward.

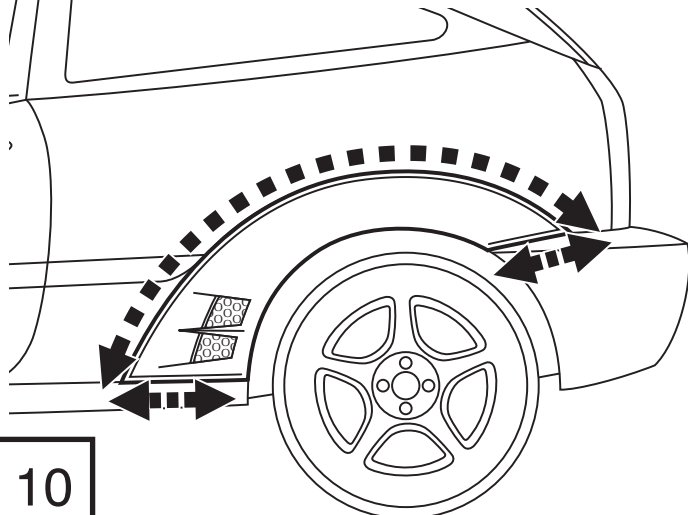

10

Repeat steps 6 through 10 for rear passenger's side rear fender flare.

Care and Cleaning

1. Avoid the use of automatic “brush-style” car washes.
2. Do not use cleaning solvents of any kind.
3. Wash only with mild soap & dry with a clean cloth.

Congratulations!

You have purchased one of the many quality items offered by Auto Ventshade. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.



Lund International, Ventshade Accessories Division
655 Raco Drive, Lawrenceville, GA 30045
800-241-7219 • Fax 770-339-5839 • Visit us at lundinternational.com

© 2004 Lund International, Inc. All rights reserved.
Auto Ventshade™, the Auto Ventshade™ logo and the AVS™ logo are trademarks of Lund International, Inc.