




Thank you for purchasing one of our many quality items. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment.

This product has been designed and engineered to correctly fit your vehicle. For easiest installation and best final appearance, read the complete instruction before you begin.

## INSTALLATION INSTRUCTIONS:

1. Carefully slide tailgate protection down over top of tailgate.
2. Making sure tailgate protection is centered on tailgate, mark and drill 1/8" holes through tailgate protector and tailgate where shown. **Note: on models with ribs exposed make sure to drill through ribs.** Now remove tailgate protector and enlarge the 1/8" holes to 5/32" in tailgate protector. Reinstall the tailgate protector on to the tailgate. Place a small amount of silicone in the screw holes. Tighten in place with screws provided (HAND TIGHTEN ONLY).

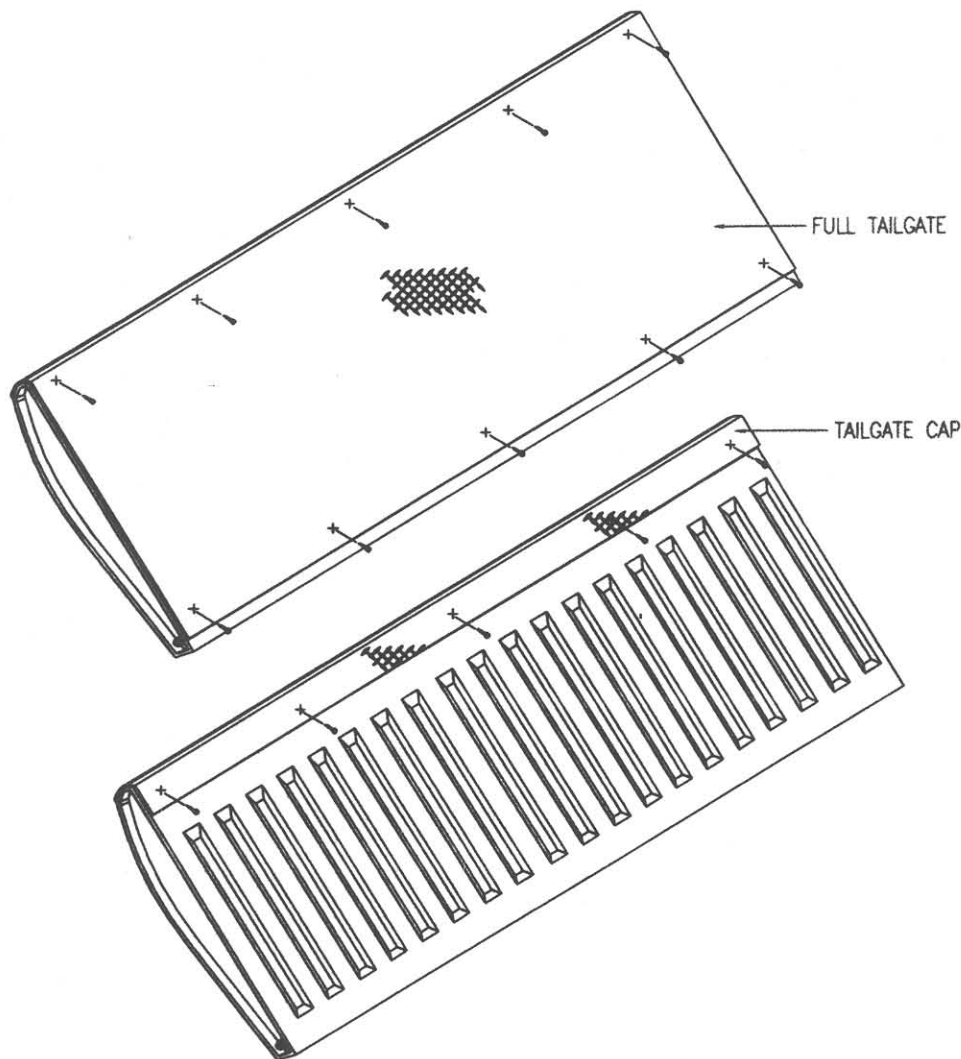

Lund International

800-241-7219 • Visit us at [lundinternational.com](http://lundinternational.com)

© 2012 Lund International, Inc. All rights reserved.

Lund® and the Lund® logo are trademarks of Lund International, Inc.

