




## Genesis Roll Up Tonneau Cover


For proper installation and best possible fit, please read all instructions BEFORE you begin.

*For technical assistance or to obtain missing parts, please call Customer Service at 1-800-328-5863.*


### Contents



(A) Cover Assembly



(B) Driver Side Rail




(C) Passenger Side Rail




2X

(D) Flange Nut



2X

(E) Carriage Bolt



6X

(F) Clamp Assembly


### Tools Required



7/16"  
Combination Wrench



7/16"  
Socket



### Important




#### WARNING/CAUTION/NOTE

Please read this manual and follow its instructions carefully. To emphasize special information, the symbol and the words **WARNING**, **CAUTION** and **NOTE** have special meanings. These special meanings apply except when laws or regulations require that the signal words be used with a different meaning.

### Preparation Before Installation


- Wash the upper rail surfaces of the truck bed.
- Be sure to completely dry the upper surfaces of your truck bed before installing your rails.

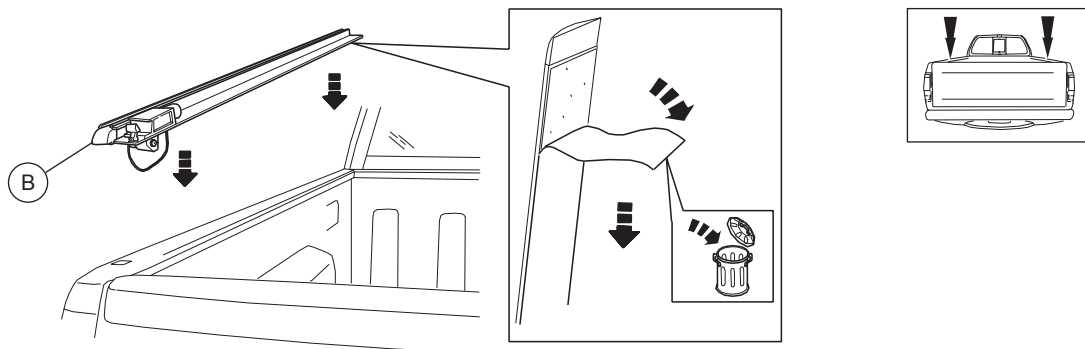

Remove the white backing from the foam on the front and side rails. It will be necessary to release the buckles on the front rail to do this but do not unroll the cover. Re-fasten the buckles once the foam backing is removed.


1

With the tailgate closed, lay the ends of the driver side rail on the truck bed bulkhead and tailgate. The latches are positioned toward the rear and the foamed side of the rail faces the inner side wall of the truck bed.

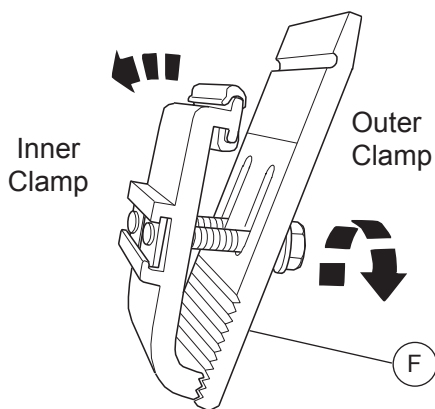

2


Loosen all clamp bolts as far as possible without allowing the assemblies to completely separate.

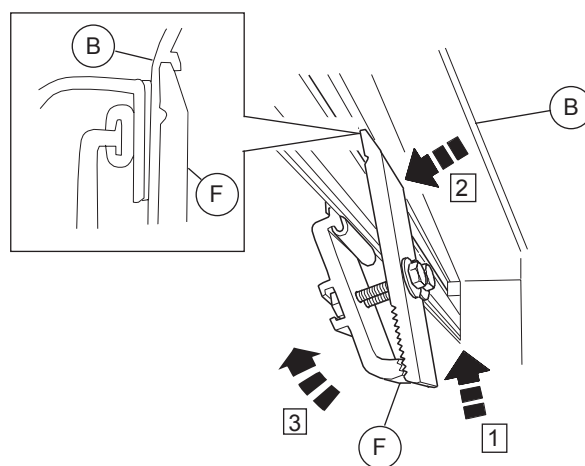


3

The upper tip of the outer clamp needs to be located up into the side rail and rotated out until the outer clamp and the side rail mate together as shown.

The rear clamp needs to be positioned as far back as possible while the front clamp needs to be positioned as far forward as possible. the middle clamp should be centered as best as the truck bed will allow. Proceed to step 5 and install the rear clamp first, the front clamp second and the middle clamp last.

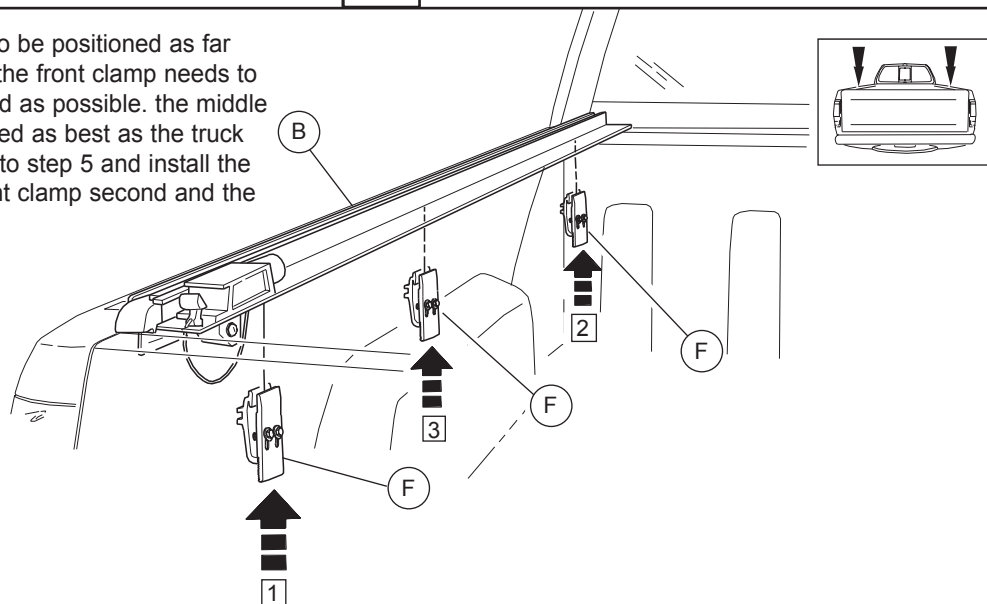


4

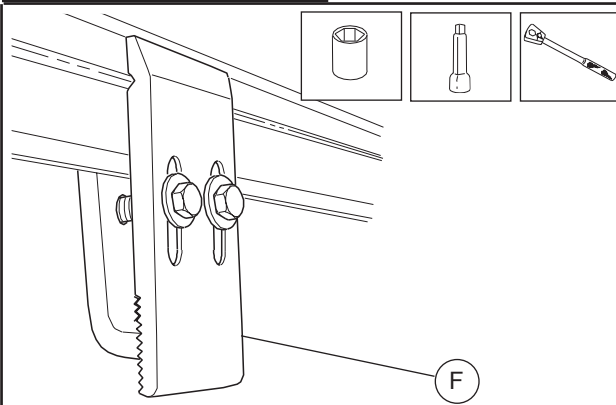

Position each inner clamp as shown and tighten the two bolts on each clamp.


**5**

Note: Repeat steps 1-5 for Passenger Side Rail.

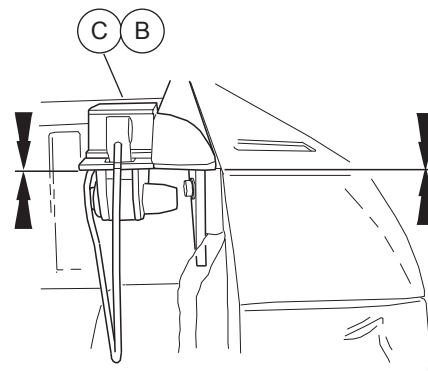

**6**


Open the tailgate and make sure the driver and passenger side rails are horizontal as shown. If they are not, proceed to step 7, otherwise proceed to step 8.

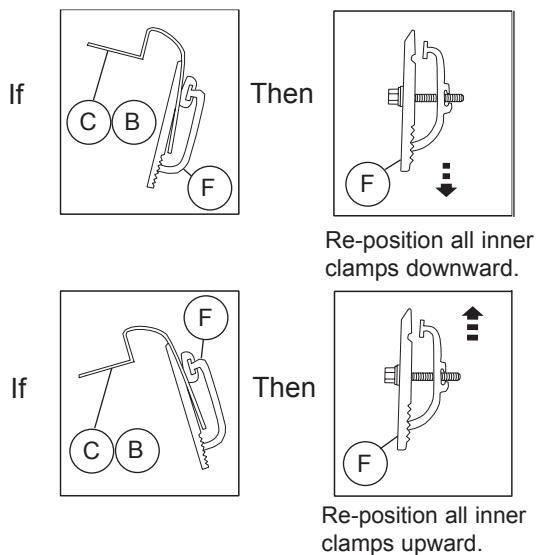


**7**

Repeat until both side rails are horizontal as shown in step 6.  
Note: Make sure tail gate is closed for this adjustment.

**8**




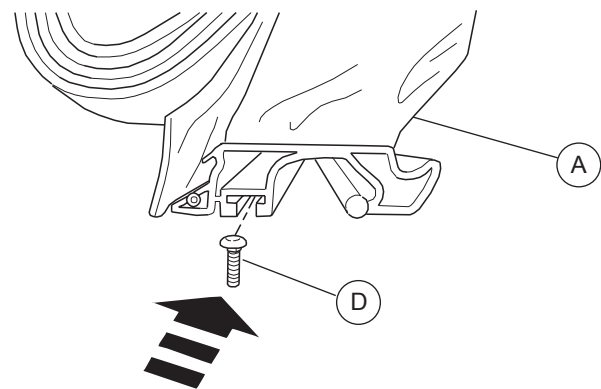


Slide one carriage bolt approx 1/2" into the t-slot at each end of the front rail as shown.


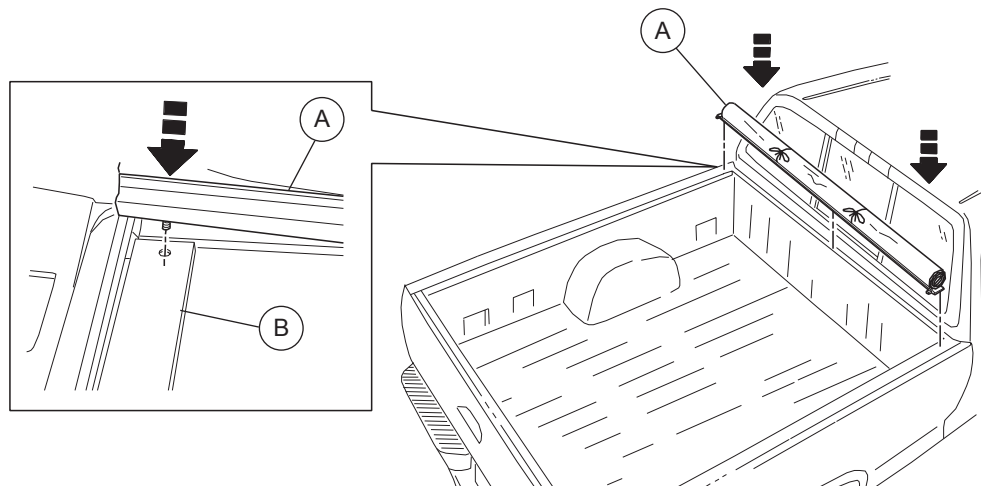



**9**

Set the cover assembly in place as shown.

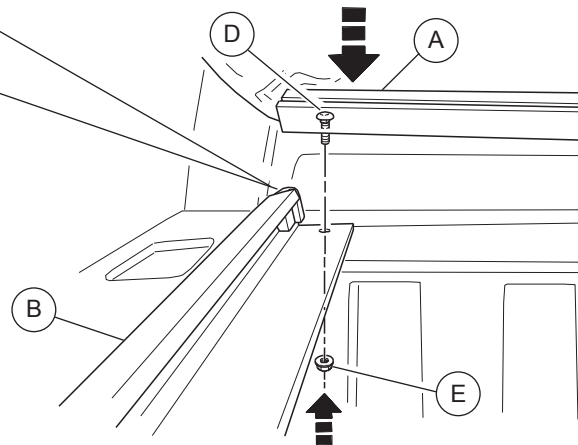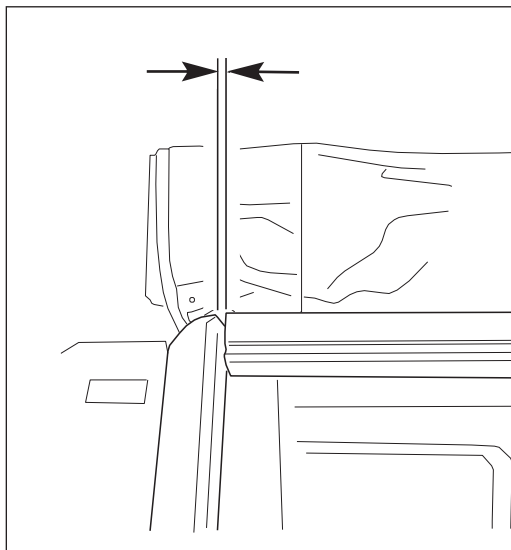


Loosely install the flange nuts as shown.  
Position the front rail so the gaps at each end of the  
front rail are equal.  
Tighten both flange nuts.

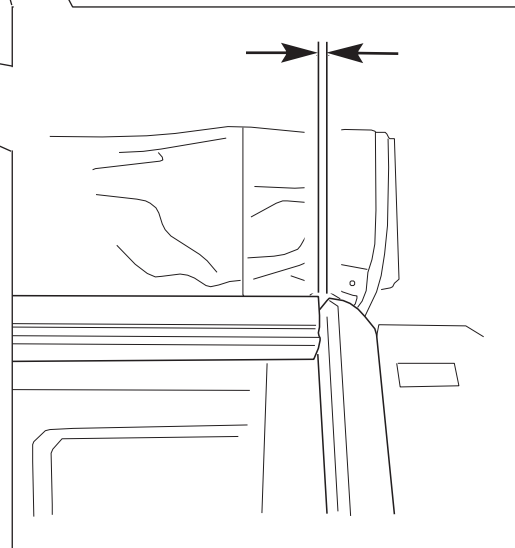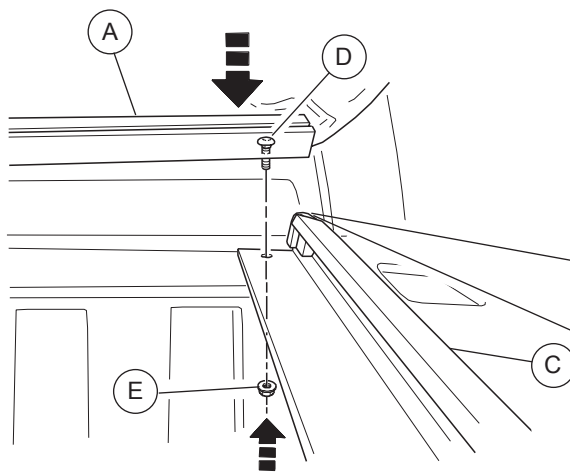

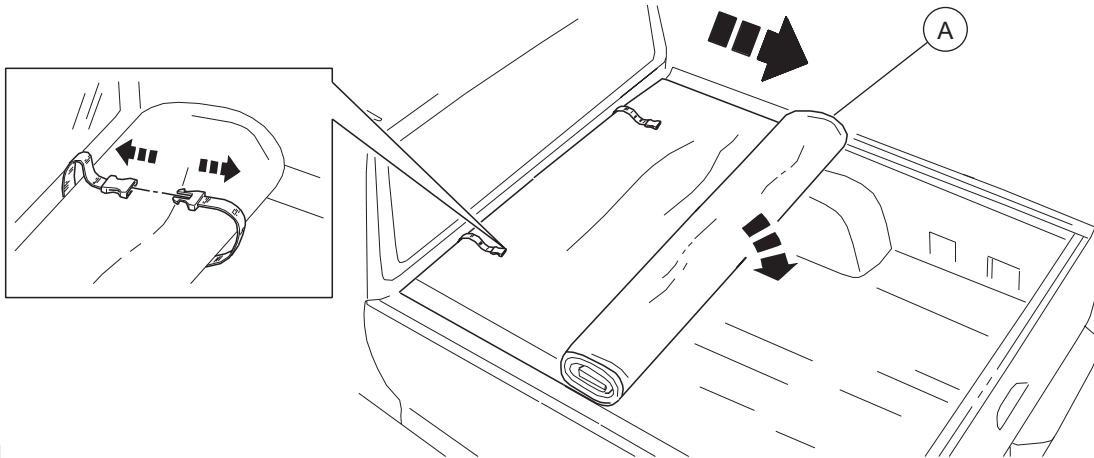

11

Release the buckles and unroll the cover.

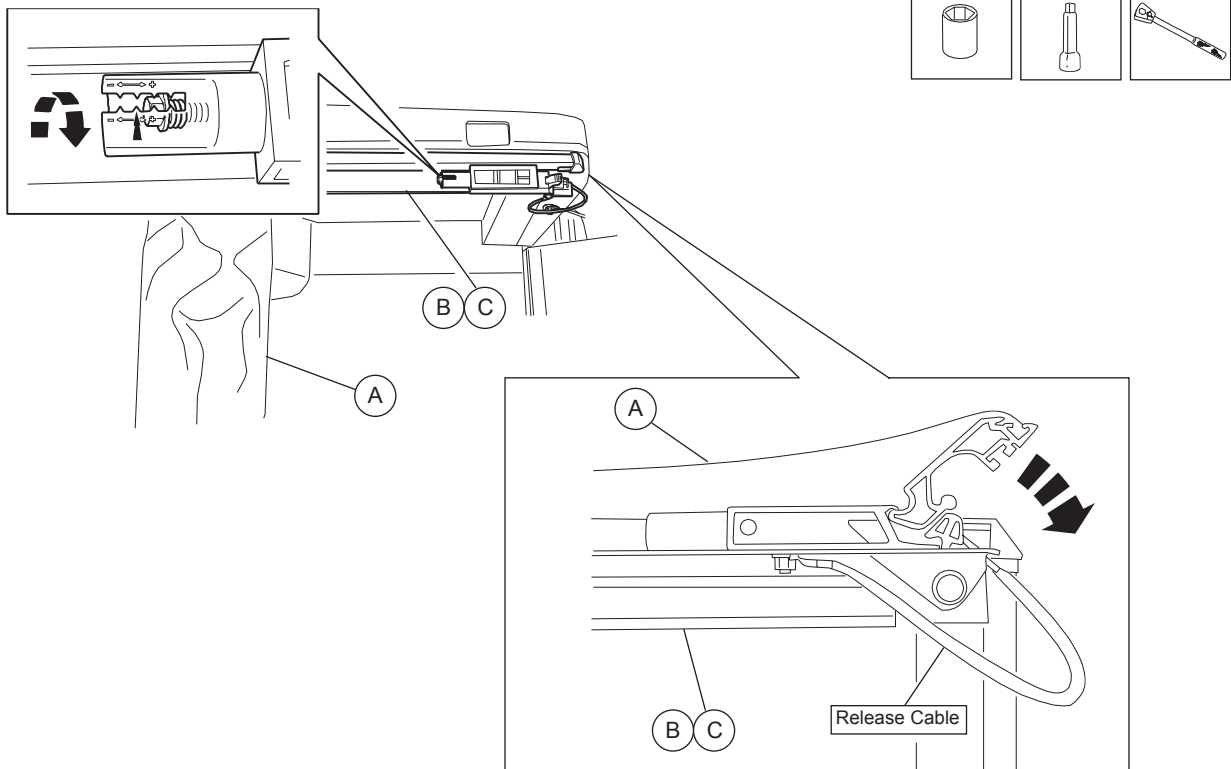

Engage rear rail to latch assembly and rotate down as shown.

If the cover is too tight, loosen the adjusting bolts evenly on both sides towards the

If the cover is too loose, tighten the adjusting bolts evenly on both sides towards the

+

Note: Proper cover tension is achieved when the rear rail requires moderate pressure to fully latch.

To access the truck bed, pull both release cables and roll cover forward.

Fasten buckle straps to stow cover.

12

## Inspection After Installation

1. After installation is complete, confirm proper operation.

## Care and Cleaning

1. Wash only with mild soap & dry with a clean cloth.
2. Avoid the use of automatic "brush - style" car washes.
3. Do not use cleaning solvents of any kind.
4. Periodically check the cover tension and all components for tightness.  
Refer to step 12 for cover tension adjustment.
- ⚠ 5. Do not use release cables as handles.
- ⚠ 6. Do not pull on release cables to enter truck bed.
- ⚠ 7. Do not use any part of this tonneau as a tie down.
- ⚠ 8. Do not drive with the cover un-secured.

## Congratulations!

You have purchased one of the many quality products offered by Lund. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.



Lund International, Lund Accessories Division  
775 Tipton Industrial Drive, Building 2, Suite F  
Lawrenceville, GA 30045  
800-328-5863 • Fax 800-782-5448 • Visit us at [lundinternational.com](http://lundinternational.com)

© 2004 Lund International, Inc. All rights reserved.  
Lund ® and the Lund ® logo are trademarks of Lund International, Inc.