

Installation Instructions

I - Sheet Number I-B110401 Rev.A



Premium Style. Lasting Performance.

For proper installation and best possible fit, please read all instructions BEFORE you begin.
For technical assistance or to obtain missing parts, please call Customer Relations at 1-800-241-7219.

Para una instalación adecuada y el mejor ajuste posible, lea todas las instrucciones ANTES de comenzar.
Para obtener asistencia técnica o para obtener piezas que faltan, por favor llame a Relaciones con el cliente en 1-800-241-7219.

Pour une installation correcte et le meilleur ajustement possible, s'il vous plaît lire toutes les instructions AVANT de commencer.
Pour une assistance technique ou pour obtenir des pièces manquantes, s'il vous plaît communiquer avec les Relations à la clientèle au 1-800-241-7219.

Care and Cleaning

- **Wash only with mild soap & dry with a clean cloth.**
Lavar con jabón suave y seque con un paño limpio.
Laver avec un savon doux et séchez avec un chiffon propre.
- **Every 3 months or 5000 miles check the cover tension and all components for tightness.**
Revise cada 3 meses o 5,000 millas la tensión de la cubierta y todos los componentes estén ajustados.
Vérifiez tous les 3 mois ou 5000 miles la tension couvercle et le serrage des composants.

Congratulations!

You have purchased one of the many quality Lund® branded products offered by Lund International, Inc. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.

Usted ha comprado uno de los muchos productos de calidad ofrecidos por Lund® de marca productos ofrecidos por Lund International, Inc. Tomamos el orgullo extremo en nuestros productos y queremos que disfrute durante años de su inversión. Hemos hecho todos los lo posible para que su producto es de calidad superior en cuanto a ajuste, durabilidad, acabado y facilidad de la instalación.



Vous avez acheté un des nombreux produits de qualité offerts par Lund® marque produits offerts par Lund International, Inc. Nous sommes extrêmement fiers de nos produits et souhaitons que vous tiriez des années de satisfaction de votre investissement. Nous avons pris toutes les efforts pour s'assurer que votre produit est de qualité supérieure en termes de durabilité, de finition et la facilité de l'installation.

Installation Instructions


Part # 22668104/ 23068104

PARTS LIST:


1	Driver/Left Sidebar	12	12-1.75mm x 30mm Hex Head Bolts
1	Passenger/Right Sidebar	12	12mm Lock Washers
3	Driver/Left Side Panel Brackets	12	12mm Hex Nuts
3	Passenger/Right Side Panel Brackets	24	12mm ID x37mm OD x 3mm Flat Washers
3	Driver/Left Sidebar Brackets	12	8-1.25mm x 25mm Hex Head Bolts
3	Passenger/Right Sidebar Brackets	24	8mm Lock Washers
		12	8mm Hex Nuts
		24	8mm ID x 24mm OD x 2mm Flat Washers

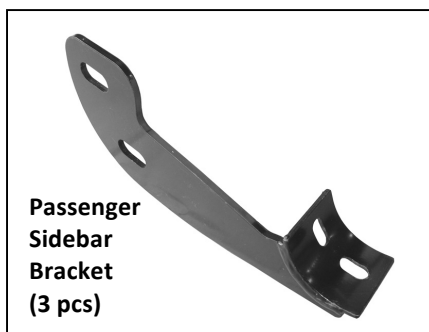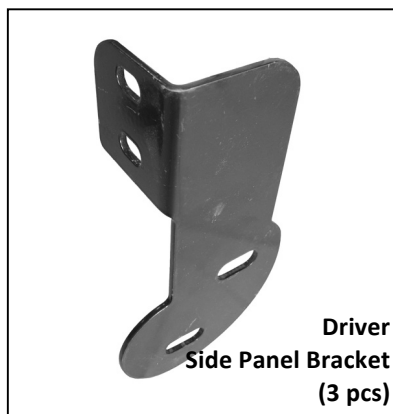

Passenger Sidebar



Driver Sidebar



PROCEDURE:

1. **REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.**
2. On the passenger side of the vehicle, locate the six factory threaded studs located on the side panel underneath of the vehicle **(Figure 1)**.
3. Partially attach all three passenger Side Panel Brackets to the factory threaded studs using the included (6) 8mm Flat Washers, (6) 8mm Lock Washers, and (6) 8mm Hex Nuts **(Figure 1)**.
4. Once all three Side Panel Brackets are partially installed, loosely attach the Sidebar Brackets on the front side of the Side Panel Brackets using the included (6) 12mm x 30mm Hex Head Bolts, (6) 12mm Lock Washers, (6) 12mm Hex Nuts, and (6) 12mm Flat Washers. **NOTE:** The cradles on the Sidebar Brackets should be facing the front of the vehicle when installed **(Figure 1 & 2)**.
5. Position passenger Sidebar onto Brackets and attach it using the included (6) 8mm x 25mm Hex Head Bolts, (6) 8mm Lock Washers, and (6) 8mm Flat Washers **(Figure 3)**.
6. Level and adjust Sidebar; then tighten all hardware at this time.
7. Repeat steps 2-6 for driver Sidebar.
8. Do periodic inspections to the installation to make sure that all hardware is secure and tight.

To protect your investment, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish. Do not use any type of polish or wax that may contain abrasives that could damage the finish.

For stainless steel: Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap may be used also to clean the Sidebar.

For gloss black finishes: Mild soap may be used to clean the Sidebar.

(Passenger Side Installation Shown)

