RB-RS485

RS485 Breakout Kit - RS485 Breakout Kit for Raspberry Pi

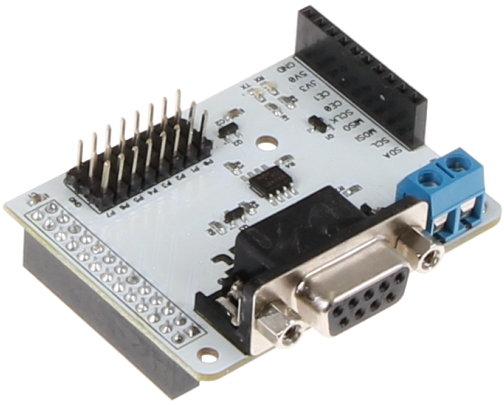

With this break out board, you can expand your Raspberry (3) A/B/ B+ with a serial RS485 interface.

KEY FEATURES	
Model	RS485 Breakout Kit
Used Controller	Maxim MAX481 DS
Function	Translates the UART signals from GPIO14(TXD) and GPIO15 (RXD) to RS485 level and outputs them to the DB9 connector on pin 2 (A) and pin 3 (B)
Pin-Assignment	On the additional pin headers, it is also possible to access the GPIO signals directly. The assignment of the additional header is indicated directly on the expansion board.
Pin-Assignment P0	GPIO17
Pin-Assignment P1	GPIO18
Pin-Assignment P2	GPIO27
Pin-Assignment P3	GPIO22
Pin-Assignment P4	GPIO23
Pin-Assignment P5	GPIO24
Pin-Assignment P6	GPIO25
Pin-Assignment P7	GPIO4
Compatible to	Raspberry Pi A, A+, B, B+, 2B, 3B, 3B+, Banana Pi, Orange Pi

ADDITIONAL INFORMATION	
Dimensions	49 x 56 x 23 mm
Weight	26 g
Items Shipped	RS485 Breakout Kit
EAN	4250236809427
Tariff No.	8473302000

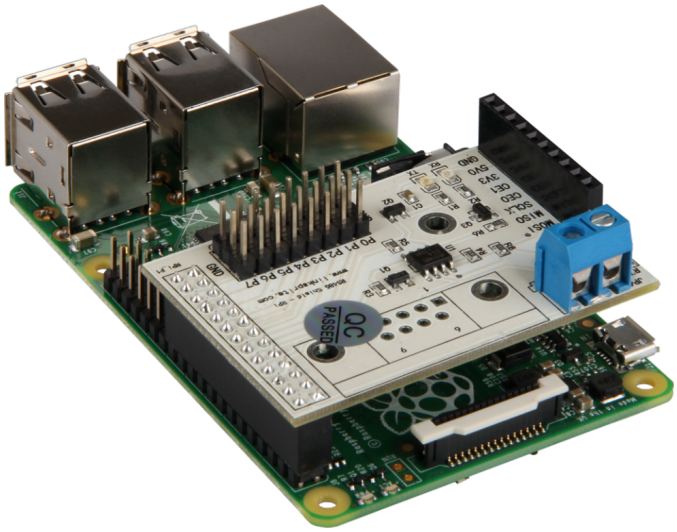

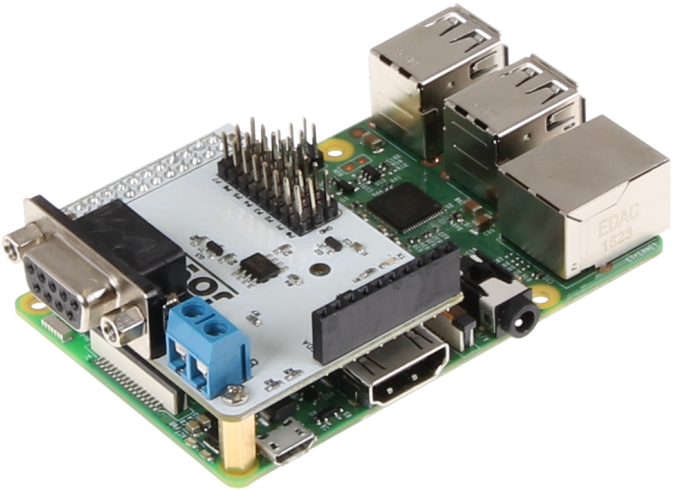

Published: 18.11.2020