Please check the examination details bel	ow before ente	ring your candidate	information
Candidate surname	ow before ente	Other names	
Centre Number Candidate No	umber		
Pearson Edexcel Inter	nation	al Advan	ced Level
Time 1 hour 20 minutes	Paper reference	WPH	13/01
Physics			•
International Advanced Su UNIT 3: Practical Skills in	•	•	d Level
You must have: Scientific calculator, ruler			Total Marks

Instructions

- Use **black** ink or ball-point pen.
- **Fill in the boxes** at the top of this page with your name, centre number and candidate number.
- Answer all questions.
- Answer the questions in the spaces provided
 - there may be more space than you need.
- Show all your working out in calculations and include units where appropriate.

Information

- The total mark for this paper is 50.
- The marks for **each** question are shown in brackets
 - use this as a guide as to how much time to spend on each question.
- The list of data, formulae and relationships is printed at the end of this booklet.

Advice

- Read each question carefully before you start to answer it.
- Try to answer every question.
- Check your answers if you have time at the end.

Turn over ▶





Answer ALL questions.

1 A student was given a collection of old coins.

She placed the coins alongside a ruler, as shown, to determine the diameter and thickness of the coins.






(a) Determine the average volume of one of the coins.	(4)
Average volume =	
(b) The mass of the 20 coins shown is 196 g.	
Determine the average density of the coins.	(2)
Average density =	
(c) Determine whether the coins could be made from brass.	
density of brass = $8550 \text{kg m}^{-3} \pm 2\%$	(2)




(d) The surfaces of the coins are uneven, which introduces a systematic error.	
Describe an alternative method the student could have used to determine the average volume of one of the coins, which would avoid this error.	2
Your description should include details of how any measuring equipment is used.	(4)
(Total for Question 1 = 12 ma	nrks)



2 A student directed a ray of light from air into a semi-circular block of transparent material as shown.

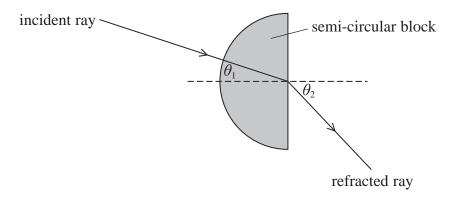

He varied the angle of incidence θ_1 and measured the corresponding angles of refraction θ_2 . He used the protractor shown below.

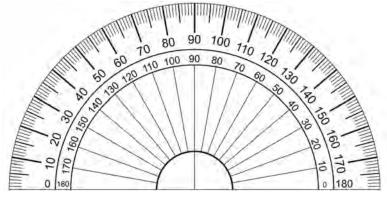

(Source: PAL)

(a) When the measured value of θ_1 is 35°, the measured value of θ_2 is 62°.


Calculate the percentage uncertainty in each of these values.



Percentage uncertainty in $\theta_1 = \dots$

Percentage uncertainty in $\theta_2 =$

(b) The student plotted a graph of $\sin \theta_2$ against $\sin \theta_1$ as shown.

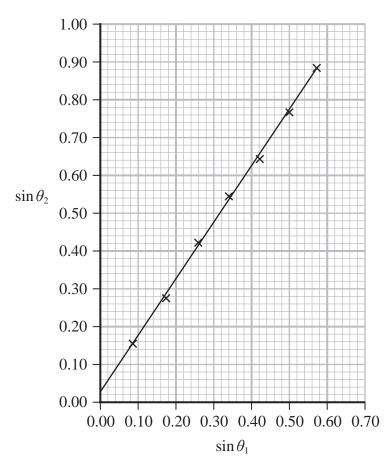

(i) Explain why the gradient of this graph can be used to determine the refractive index of the transparent material.

(3)

(ii) Determine the refractive index of the transparent material.

(2)

Refractive index =



Describe a possible cause for this error, and how the studof this error.	dent could reduce the effect
	(2)
(Te	otal for Question 2 = 10 marks)



	tudent investigated the relationship between the resistance R of a light dependent istor (LDR) and the light intensity I incident upon the LDR.	
(a)	The student determined R using a circuit that included an ammeter and a voltmeter.	
	Draw a circuit the student could have used.	
		(2)
(b)	She varied I by varying the distance d between the LDR and a filament bulb.	
(b)	She varied I by varying the distance d between the LDR and a filament bulb. Describe a method the student could have used to obtain accurate values for	
(b)	She varied I by varying the distance d between the LDR and a filament bulb. Describe a method the student could have used to obtain accurate values for R and d .	(2)
(b)	Describe a method the student could have used to obtain accurate values for	(3)
(b)	Describe a method the student could have used to obtain accurate values for	(3)
(b)	Describe a method the student could have used to obtain accurate values for	(3)
(b)	Describe a method the student could have used to obtain accurate values for	(3)
(b)	Describe a method the student could have used to obtain accurate values for	(3)
(b)	Describe a method the student could have used to obtain accurate values for	(3)
(b)	Describe a method the student could have used to obtain accurate values for	(3)
(b)	Describe a method the student could have used to obtain accurate values for	(3)
(b)	Describe a method the student could have used to obtain accurate values for	(3)
(b)	Describe a method the student could have used to obtain accurate values for	(3)
(b)	Describe a method the student could have used to obtain accurate values for	(3)
(b)	Describe a method the student could have used to obtain accurate values for	(3)
(b)	Describe a method the student could have used to obtain accurate values for	(3)



(c) Sketch the relationship between I and d on the axes below. **(2)** d (d) The student calculated the intensity of light incident on the LDR at each value of d. The output power of the filament lamp was 9.0 W. Calculate the intensity of the light incident on the LDR when d is 20 cm. (3)

(e) (i)	Identify one control variable in this investigation.	
		(1)

(ii) State how this variable can be controlled. (1)

(Total for Question 3 = 12 marks)

Light intensity =






4 A student investigated the motion of a small metal sphere moving horizontally from the lower end of a rigid curved track.

The track was supported by a clamp stand. The student adjusted the position of the track so that the end of the track was a height H above the ground as shown.

She determined the horizontal distance D travelled by the sphere before it reached the ground, for different values of H.

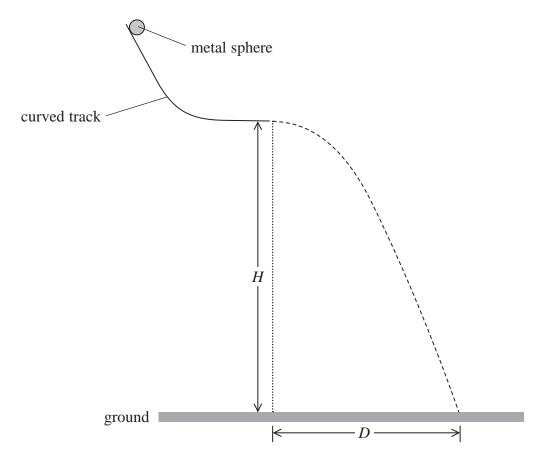

(a) For each value of H, the student released the sphere from the same position on the track.

Explain why this ensured the sphere always reached the end of the track with the same horizontal speed.

(3)

(b) The student derived the following equation for the relationship between D and H

$$D^2 = \frac{2v^2}{g}H$$

where v is the horizontal velocity of the sphere at the end of the track.

She recorded her results in a table.


<i>H</i> / m	<i>D</i> / m	
0.2	0.38	
0.35	0.53	
0.5	0.63	
0.75	0.76	
1	0.89	
1.2	0.96	

Criticise	the	recording	of	these	results.
-----------	-----	-----------	----	-------	----------

1	P	9	1	
	4	<u>_</u>	J	١

(c) (i) Plot a graph of D^2 on the y-axis against H on the x-axis. Use the additional column of the table for your processed data.

(6)

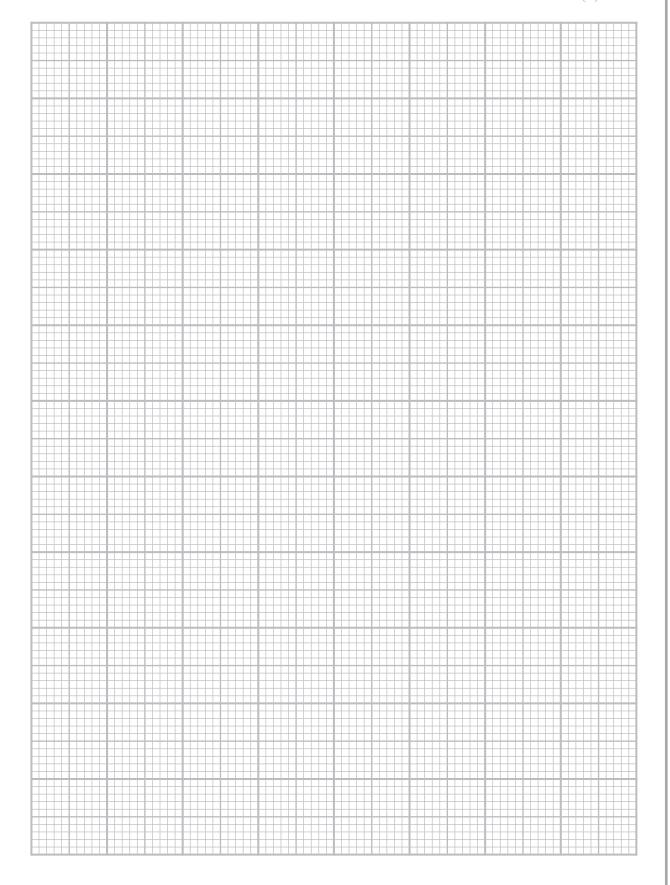

(ii)	The gradient of the graph is equal to $\frac{2v^2}{g}$	
	Determine the value of v using your graph.	(3)
	$v = \dots$	
(iii)	The student used a light gate and data logger to measure v . The measured value was $1.98\mathrm{ms^{-1}}$.	
	Comment on the value of <i>v</i> determined using your graph.	(2)

TOTAL FOR PAPER = 50 MARKS





List of data, formulae and relationships

Acceleration of free fall $g = 9.81 \text{ m s}^{-2}$ (close to Earth's surface)

Electron charge $e = -1.60 \times 10^{-19} \text{ C}$

Electron mass $m_{\rm e} = 9.11 \times 10^{-31} \text{ kg}$

Electronvolt $1 \, eV = 1.60 \times 10^{-19} \, J$

Gravitational field strength $g = 9.81 \text{ N kg}^{-1}$ (close to Earth's surface)

Planck constant $h = 6.63 \times 10^{-34} \text{ J s}$

Speed of light in a vacuum $c = 3.00 \times 10^8 \text{ m s}^{-1}$

Unit 1

Mechanics

Power

Kinematic equations of motion $s = \frac{(u+v)t}{2}$

v = u + at

 $s = ut + \frac{1}{2}at^2$

 $v^2 = u^2 + 2as$

Forces $\Sigma F = ma$

 $g = \frac{F}{m}$

W = mg

Momentum p = mv

Moment of force moment = Fx

Work and energy $\Delta W = F \Delta s$

 $E_{\rm k} = \frac{1}{2} m v^2$

 $\Delta E_{
m grav} = mg\Delta h$

 $P = \frac{E}{t}$

 $P = \frac{W}{t}$



Efficiency

$$efficiency = \frac{-useful\ power\ output}{total\ power\ input}$$

Materials

Density $\rho = \frac{m}{V}$

Stokes' law $F = 6\pi \eta r v$

Hooke's law $\Delta F = k\Delta x$

Elastic strain energy $\Delta E_{\rm el} = \frac{1}{2} F \Delta x$

Young modulus $E = \frac{\sigma}{\varepsilon}$ where

Stress $\sigma = \frac{F}{A}$

Strain $\varepsilon = \frac{\Delta x}{x}$

Unit 2

Waves

Wave speed $v = f\lambda$ Speed of a transverse wave on a string $v = \sqrt{\frac{T}{\mu}}$

Intensity of radiation $I = \frac{P}{A}$

Refractive index $n_1 \sin \theta_1 = n_2 \sin \theta_2$

 $n = \frac{c}{v}$

Critical angle $\sin C = \frac{1}{n}$

Diffraction grating $n\lambda = d\sin\theta$

Electricity

Potential difference $V = \frac{W}{Q}$

Resistance $R = \frac{V}{I}$

Electrical power, energy P = VI

 $P = I^2 R$ V^2

 $P = \frac{V^2}{R}$ W = VIt

Resistivity $R = \frac{\rho l}{A}$

Current $I = \frac{\Delta Q}{\Delta t}$

I = nqvA

Resistors in series $R = R_1 + R_2 + R_3$

Resistors in parallel $\frac{1}{R} = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3}$

Particle nature of light

Photon model E = hf

Einstein's photoelectric $hf = \emptyset + \frac{1}{2} m v_{\text{max}}^2$

equation

de Broglie wavelength $\lambda = \frac{n}{p}$



