

Foto: Dr. Matthias Otte

This work has been carried out within the framework of the EUROfusion Consortium and has received funding from the Euratom research and training programme 2014–2018 under grant agreement No. 633053. The views and opinions expressed herein do not necessarily reflect those of the European Commission.



EUROfusion

HELMHOLTZ

RESEARCH FOR GRAND CHALLENGES



IMPURITY TRANSPORT AND RADIATION AT THE STELLARATOR WENDELSTEIN 7-X

Promotionskolloquium

March 23, 2026

P. Scholl^{1,2}

¹Max Planck Institute for Plasma Physics,
Wendelsteinstr. 1, D-17491 Greifswald, Germany

²Ernst-Moritz-Arndt University Greifswald
Domstr. 11, D-17489 Greifswald, Germany

CONTENTS

Motivation

Core Bolometer at W7-X

Radiation Feedback Control

Line-of-Sight Sensitivity

Tomography

Conclusions and Outlook

MOTIVATION

NUCLEAR FUSION: ENERGY CHALLENGE

Lawson criterion for net energy gain:

$$n_e T \tau_E \geq \frac{12 f_{\text{tot}}}{\langle \sigma_{\text{DT}} v \rangle f_H^2 E_\alpha - 4 L_Z(T)} T^2$$

$$\gtrsim 3 \times 10^{21} \text{keVs/m}^3$$

(requires temperatures $T \sim 10^1$ - 10^3 keV)


Triple Product

Key figure of merit for fusion performance combining density, temperature, and energy confinement time

WENDELSTEIN 7-X

Key Challenge

Managing heat loads on plasma-facing components during long, high performance plasma

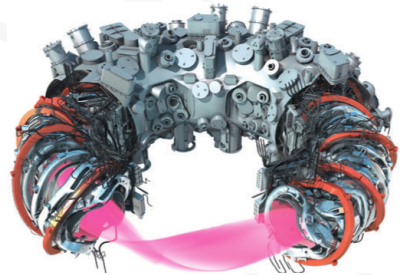


WENDELSTEIN 7-X

Key Challenge


Managing heat loads on plasma-facing components during long, high performance plasma

⇒ Dissipation of large fraction of heat load (energy) in scrape-off layer and particle flux to the target through detachment

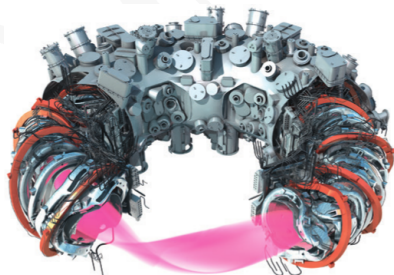

PLASMA RADIATION

- adjust plasma profiles so radiation in SOL increases and transport across separatrix reduced

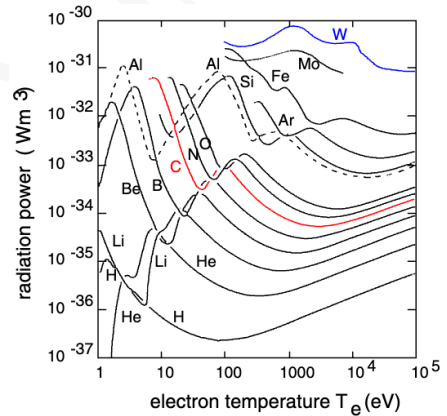


PLASMA RADIATION

- adjust plasma profiles so radiation in SOL increases and transport across separatrix reduced

Impurity Seeding

Injection of low-Z (He, N₂) or high-Z (Ne, Ar) impurities to enhance edge radiation and cooling

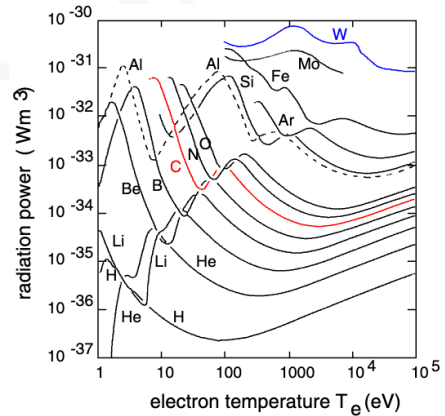

PLASMA RADIATION


- adjust plasma profiles so radiation in SOL increases and transport across separatrix reduced

Impurity Seeding

Injection of low-Z (He, N₂) or high-Z (Ne, Ar) impurities to enhance edge radiation and cooling

- avoid critical impurity accumulation, use working gas

⇒ stable control w. radiation information?

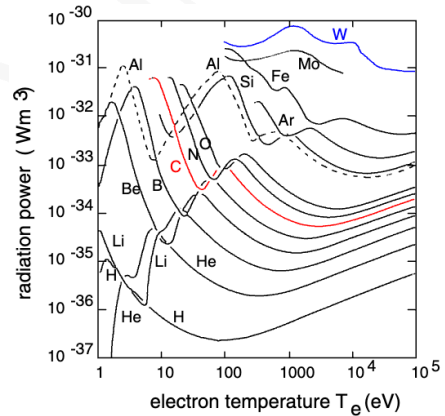


CORE BOLOMETER AT W7-X

BOLOMETER DIAGNOSTIC

Metal Resistor Bolometers:


- Thin metal (gold) film absorbers
- Wheatstone bridge circuit configuration
- Multicamera system: HBC & VBCI/r (32 + 2×24 channels)
- Spatial resolution: ~ 5 cm at magnetic axis

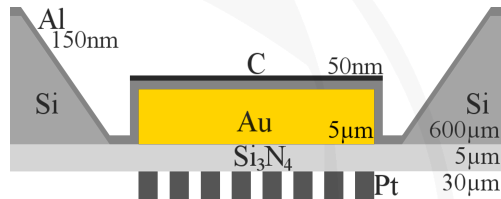

BOLOMETER DIAGNOSTIC

Metal Resistor Bolometers:


- Thin metal (gold) film absorbers
- Wheatstone bridge circuit configuration
- Multicamera system: HBC & VBCI/r (32 + 2×24 channels)
- Spatial resolution: ~ 5 cm at magnetic axis


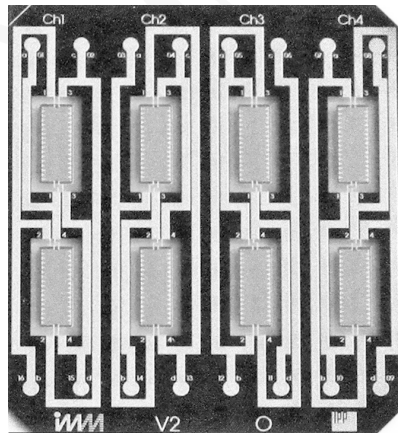


BOLOMETER DIAGNOSTIC


Metal Resistor Bolometers:

- Thin metal (gold) film absorbers
- Wheatstone bridge circuit configuration
- Multicamera system: HBC & VBCI/r (32 + 2×24 channels)
- Spatial resolution: ~ 5 cm at magnetic axis

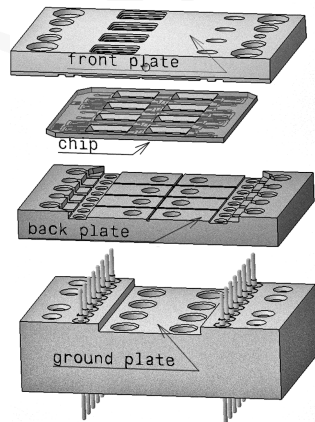

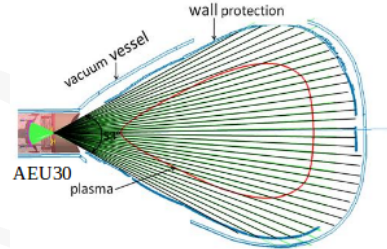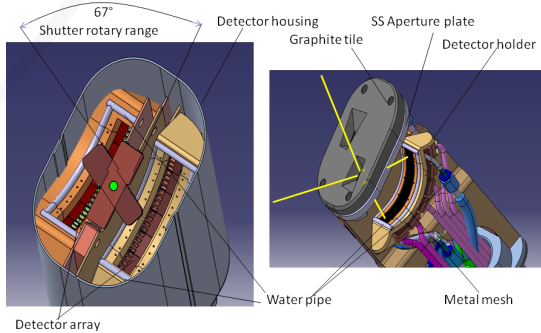

horizontal bolometer camera (HBC)




AEU21

vertical bolometer camera (VBC)

PERFORMANCE

Performance Characteristics:

- Measures total radiation power (broadband)
- Near unity absorption efficiency 600-0.2 nm
- In-situ ohmic heating calibration with Wheatstone bridge (F_M , f_M)
- $\{0.4, 0.8, \dots 6.4\}$ ms sampling
- *Gaussian* uncertainty:
 $1.6 \mu\text{W} \leftrightarrow \text{SNR} > 1000$

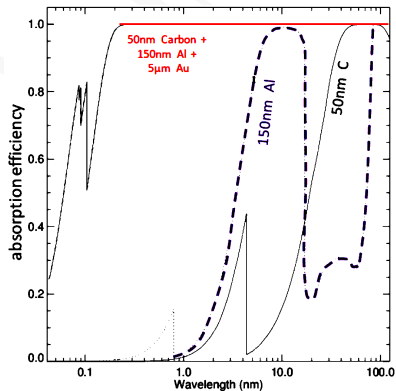

PERFORMANCE

Performance Characteristics:

- Measures total radiation power (broadband)
- Near unity absorption efficiency 600-0.2 nm
- In-situ ohmic heating calibration with Wheatstone bridge (F_M , f_M)
- $\{0.4, 0.8, \dots 6.4\}$ ms sampling
- *Gaussian* uncertainty:
 $1.6 \mu\text{W} \leftrightarrow \text{SNR} > 1000$

Power Per Detector:

$$P_M = F_M \cdot \left(\frac{d(\Delta \tilde{U}_M)}{dt} + f_M \Delta \tilde{U}_M \right)$$

Global Radiation Power:

$$P_{\text{rad}} = \frac{V_{\text{P,tor}}}{V_C} \sum_M \frac{P_M V_M}{K_M}$$

PERFORMANCE

Chord Brightness

Line-integrated measurement along each detector's line of sight provides radial profile information ($P_{\text{chord}} \sim P_M/K_M$)

Applications:

- Power balance calculations
- **Tomographic reconstruction**
- **Real-time feedback control**

⇒ **controlled radiative cooling in the plasma edge**

Power Per Detector:


$$P_M = F_M \cdot \left(\frac{d(\Delta \tilde{U}_M)}{dt} + f_M \Delta \tilde{U}_M \right)$$

Global Radiation Power:

$$P_{\text{rad}} = \frac{V_{\text{P,tor}}}{V_C} \sum_M \frac{P_M V_M}{K_M}$$

RADIATION FEEDBACK CONTROL


FEEDBACK SYSTEM

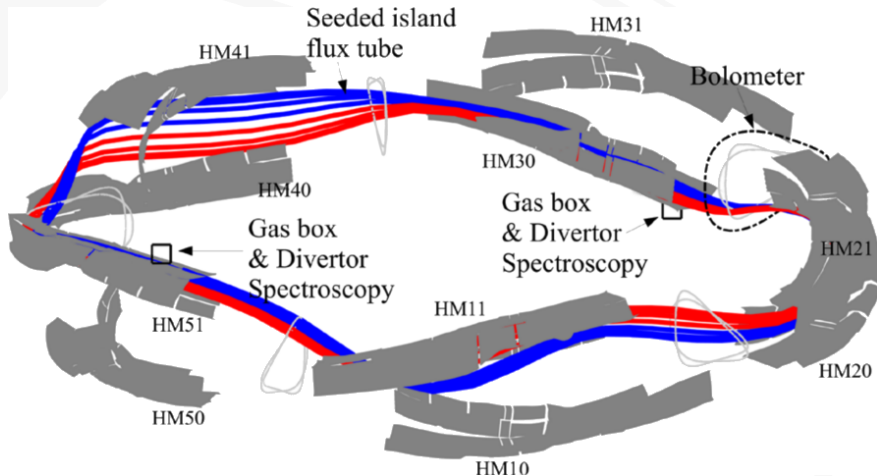

FEEDBACK SYSTEM

Architecture:

- Integrated data acquisition hardware & optimized control software
- Twin proxies and dedicated signal outputs
- Thermal gas valve actuation with multi-diagnostic PID controller

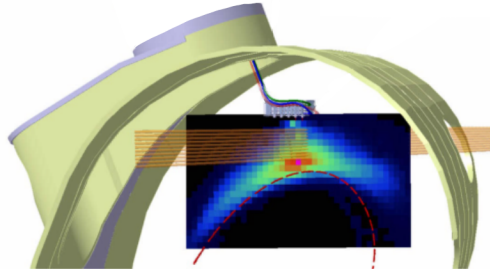

FEEDBACK SYSTEM

Architecture:

- Integrated data acquisition hardware & optimized control software
- Twin proxies and dedicated signal outputs
- Thermal gas valve actuation with multi-diagnostic PID controller

Radiation Prediction Proxies:

A: Channel selection S

$$P_{\text{pred}}^{(1)} = \frac{V_{\text{P,tor}}}{V_S} \sum_M^S \frac{P_M V_M}{K_M}$$

(e.g. $S_{\text{VBC}} = \{61, 86, 78, 73, 70, 65\}$)

B: Single channel


$$P_{\text{pred}}^{(2)} \propto \Delta \widetilde{U}_M$$

(dimensionless, minimal overhead)

FEEDBACK SYSTEM

Architecture:


- Integrated data acquisition hardware & optimized control software
- Twin proxies and dedicated signal outputs
- Thermal gas valve actuation with multi-diagnostic PID controller

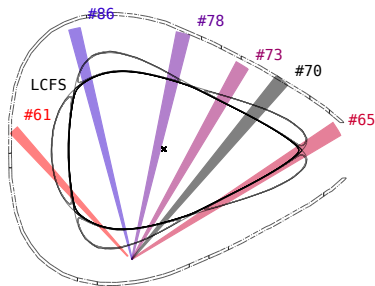

FEEDBACK SYSTEM

System Performance:

- FIFO smoothing in $P_{\text{pred}}^{(1)}$: $\sim M \cdot \Delta t / 2$ ($M=10$, $\Delta t=1.6$ ms)
- Minimum acquisition latency 13.6 ms
- Total system latency: 150-400 ms (dominated by plasma response)

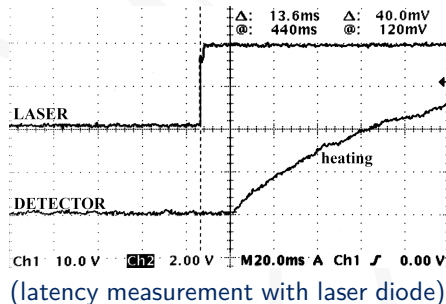


EXPERIMENTAL ACHIEVEMENTS

EXPERIMENTAL ACHIEVEMENTS

XP20181010.32


- Duration 9.2 s
 $P_{\text{ECRH}}^{\text{max}} = 6.23 \text{ MW}$ (O2-mode)
- Total input energy 55 MJ
- Radiation fraction PID
 setpoint $f_{\text{rad}} \sim 90\%$ off $P_{\text{pred}}^{(1)}$
- 5-channel VBC subset
 $S = \{65, 78, 61, 73, 86\}$

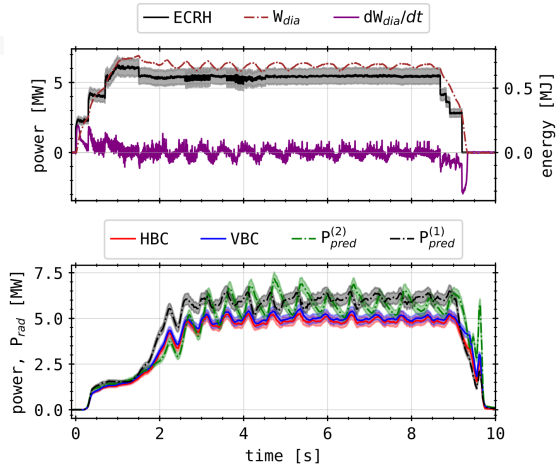

EXPERIMENTAL ACHIEVEMENTS

XP20181010.32


- Duration 9.2 s
 $P_{\text{ECRH}}^{\text{max}} = 6.23 \text{ MW (O2-mode)}$
- Total input energy 55 MJ
- Radiation fraction PID
 setpoint $f_{\text{rad}} \sim 90\%$ off $P_{\text{pred}}^{(1)}$
- 5-channel VBC subset
 $S = \{65, 78, 61, 73, 86\}$

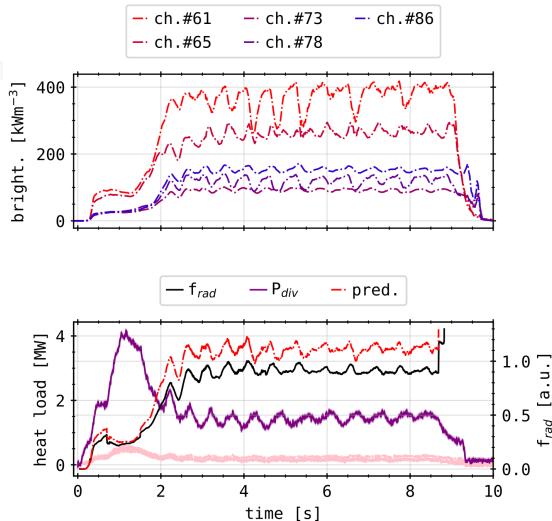

EXPERIMENTAL ACHIEVEMENTS

XP20181010.32


- Duration 9.2 s
 $P_{\text{ECRH}}^{\text{max}} = 6.23 \text{ MW (O2-mode)}$
- Total input energy 55 MJ
- Radiation fraction PID
 setpoint $f_{\text{rad}} \sim 90\%$ off $P_{\text{pred}}^{(1)}$
- 5-channel VBC subset
 $S = \{65, 78, 61, 73, 86\}$

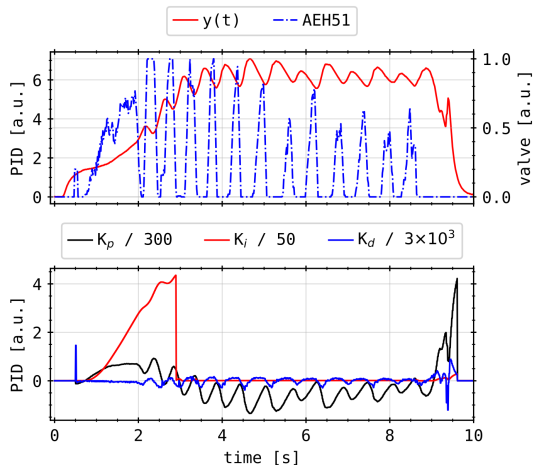

EXPERIMENTAL ACHIEVEMENTS

XP20181010.32

- Duration 9.2 s
 $P_{\text{ECRH}}^{\text{max}} = 6.23 \text{ MW (O2-mode)}$
- Total input energy 55 MJ
- Radiation fraction PID
 setpoint $f_{\text{rad}} \sim 90\%$ off $P_{\text{pred}}^{(1)}$
- 5-channel VBC subset
 $S = \{65, 78, 61, 73, 86\}$

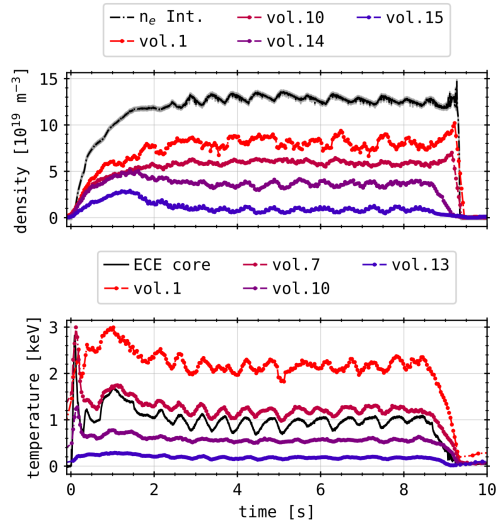


EXPERIMENTAL ACHIEVEMENTS

- Peak $f_{\text{rad}} \gtrsim 100\%$, cycling with gas inlet
- Target heat load reduction factor ≥ 2
- C^{2+} detachment visible at $f_{\text{rad}} \sim 50\%$

Key Result

Demonstrated stable, real-time feedback-controlled radiative cooling with $f_{\text{rad}} \geq 85\%$ without terminal plasma disruption and significant target heat load reduction

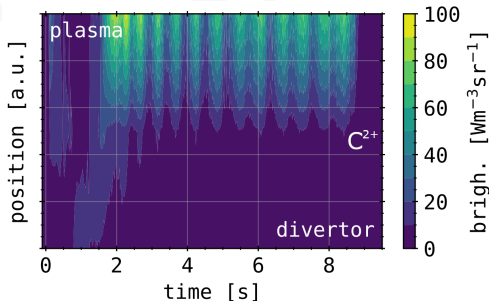

LINE-OF-SIGHT SENSITIVITY

CHANNEL SELECTION SENSITIVITY


- Evaluate LOS/channel efficacy for feedback (generalised local radiation sensitivity)
- Data set of all feedback discharges from OP1.2b
- Applied 5 different metric (linear & weighted deviation, FFT, ...)

Weighted deviation:

$$\varphi(t) = 1 - \frac{\|P_{\text{pred}} - P_{\text{rad}}\|(t)}{P_{\text{rad}}(t)}$$
$$\vartheta = \frac{1}{T} \int_T \varphi(t) dt$$

CHANNEL SELECTION SENSITIVITY

- Evaluate LOS/channel efficacy for feedback (generalised local radiation sensitivity)
- Data set of all feedback discharges from OP1.2b
- Applied 5 different metric (linear & weighted deviation, FFT, ...)

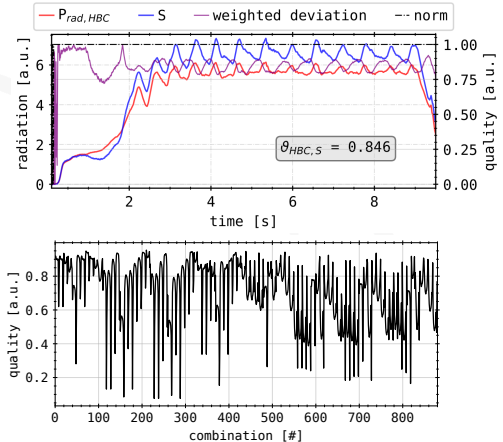


CHANNEL SELECTION SENSITIVITY

Optimal Channel Selection:

- No single "best" set exists
- Robust selection achieves $\geq 85\%$ prediction accuracy
- VBC channels generally outperform HBC for edge sensitivity
- 3-5 channels sufficient for reliable P_{pred}

Takeaway

Detectors viewing close to separatrix and SOL most viable for feedback purposes

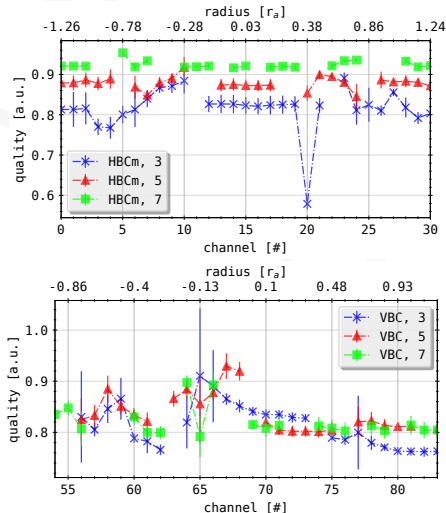

TOMOGRAPHY

MINIMUM FISHER REGULARIZATION

Measurement:

$$\mathbf{T} \vec{x} = \vec{b}$$

Bolometer tomography:

- 61 line-integrated measurements $\vec{b}$
- 2D emissivity $\vec{x}$: ~ 4500 pixels
- *Geometry* $\mathbf{T}$ has high condition

MINIMUM FISHER REGULARIZATION

Measurement:

$$\mathbf{T} \vec{x} = \vec{b}$$

Bolometer tomography:

- 61 line-integrated measurements $\vec{b}$
- 2D emissivity $\vec{x}$: ~ 4500 pixels
- *Geometry* $\mathbf{T}$ has high condition
- **ill-posed, requires regularization**

Problem:

$$\min_{\eta} \left\| \left(\mathbf{T}^T \mathbf{T} + \mu^{-1} \mathbf{H} \right)^{-1} \mathbf{T}^T \vec{b} \right\| \rightarrow \vec{x}$$

Fisher Information:

$$I_F = \int \frac{1}{x} \left(\frac{\partial x}{\partial \vec{r}} \right)^2 d\vec{r} \leftrightarrow \mathbf{H} \sim \frac{1}{x} \Delta^T \Delta$$

limiting error on reconstruction:

$$\sigma_x \leq \frac{1}{I_F}$$

MINIMUM FISHER REGULARIZATION

MFR + RDA Advantages

- Robust to noisy data
- Incorporates a priori knowledge
- Stable convergence

Radially Dependent Anisotropy:

- Tailored weighting to poloidal gradient
- $k_{\text{ani}} < 1$: favours anisotropy
- $k_{\text{ani}} > 1$: favours smooth emissivity

$$\mathbf{H} \rightarrow \mathbf{H}_{\text{ani}}$$


$$\Delta = \nabla_r^T(\cdot)\nabla_r + \nabla_\vartheta^T(\cdot)\nabla_\vartheta$$

$$\nabla_\vartheta \rightarrow \tilde{\nabla}_\vartheta = \frac{1}{k_{\text{ani}}\Delta r} \mathbf{D}_{\text{dia}}^{(0)} \nabla_\vartheta$$

MINIMUM FISHER REGULARIZATION

MFR + RDA Advantages

- Robust to noisy data
- Incorporates a priori knowledge
- Stable convergence

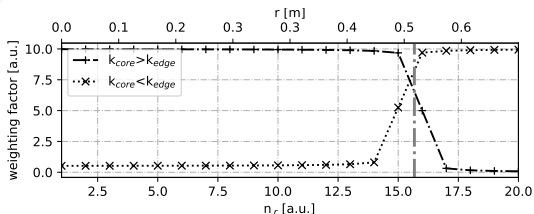

Radially Dependent Anisotropy:

- Tailored weighting to poloidal gradient
- $k_{\text{ani}} < 1$: favours anisotropy
- $k_{\text{ani}} > 1$: favours smooth emissivity

$$\mathbf{H} \rightarrow \mathbf{H}_{\text{ani}}$$


$$\Delta = \nabla_r^T(\cdot)\nabla_r + \nabla_\vartheta^T(\cdot)\nabla_\vartheta$$

$$\nabla_\vartheta \rightarrow \tilde{\nabla}_\vartheta = \frac{1}{k_{\text{ani}}\Delta r} \mathbf{D}_{\text{dia}}^{(0)} \nabla_\vartheta$$


BENCHMARKING

Geometry Perturbation Test:


- Previous and future calculations based on as-designed geometry

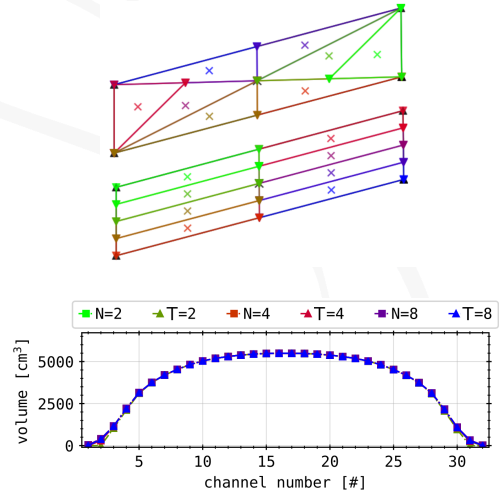

BENCHMARKING

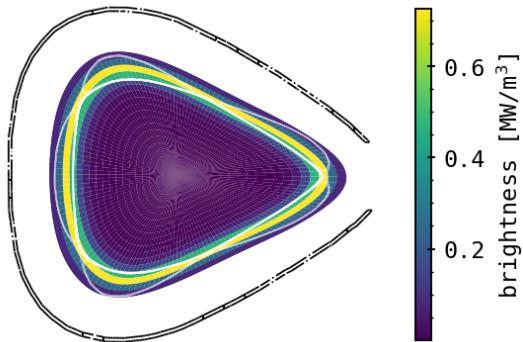

($f_{\text{rad}} \sim 100\%$)


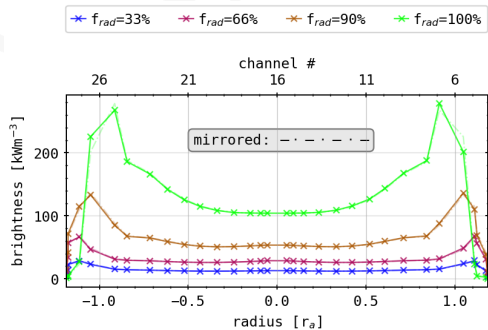


BENCHMARKING

Geometry Perturbation Test:



- Previous and future calculations based on as-designed geometry
- Forward calculation of synthetic 2D emissivity show asymmetry (STRAHL)
- Tests for symmetrical chord profile yield artificial camera geometry

BENCHMARKING

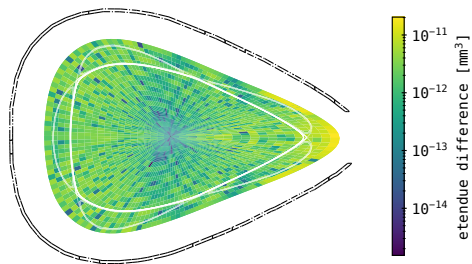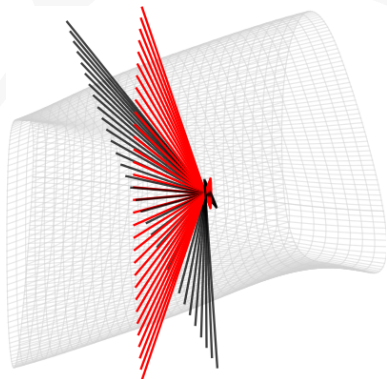

$$\|T - T_{\text{sym}}\|$$

BENCHMARKING

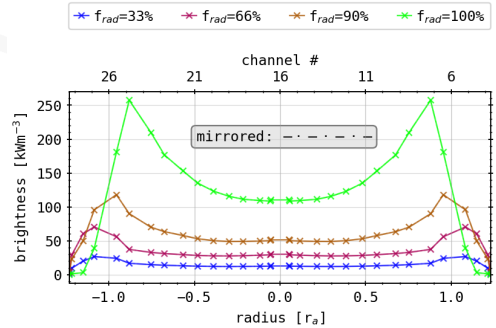
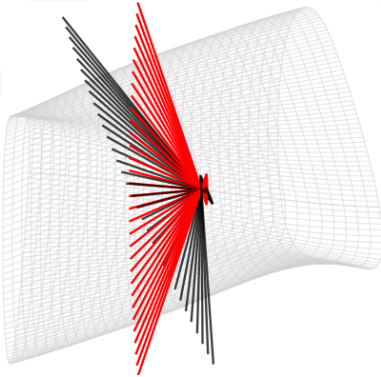


BENCHMARKING


Geometry Perturbation Test:

- Previous and future calculations based on as-designed geometry
- Forward calculation of synthetic 2D emissivity show asymmetry (STRAHL)
- Tests for symmetrical chord profile yield artificial camera geometry
- Perturbation study from measured machine stresses


BENCHMARKING

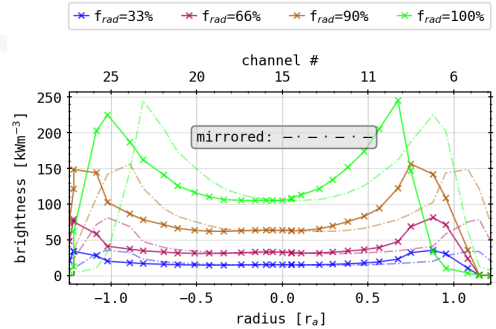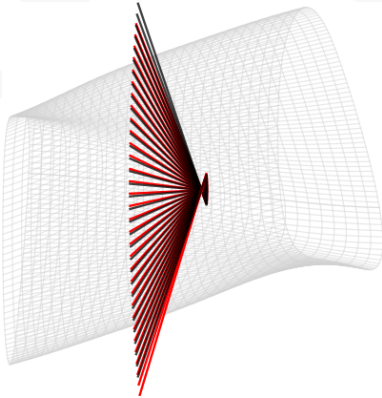

BENCHMARKING

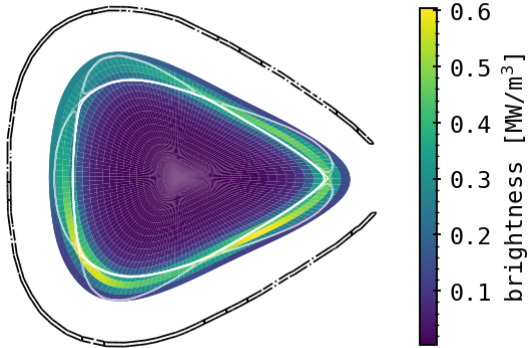

using T_{sym}

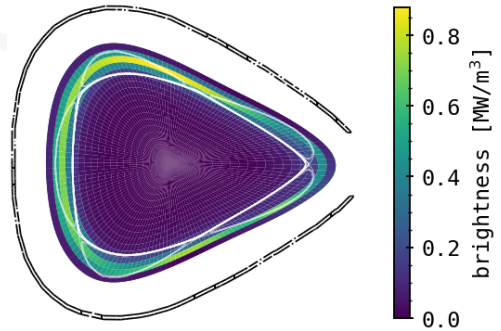

using T_{ilt}

BENCHMARKING

Geometry Perturbation Test:

- Previous and future calculations based on as-designed geometry
- Forward calculation of synthetic 2D emissivity show asymmetry (STRAHL)
- Tests for symmetrical chord profile yield artificial camera geometry
- Perturbation study from measured machine stresses

Results

- Discretization of system is computationally stable
- Intrinsic asymmetry of same order of magnitude as potential, unknown geometric perturbation - non-negligible
- Worst case machine warp scenario $\sim 0.2r_a$ shift

PHANTOM RECONSTRUCTIONS

Purpose

Regularized, parametric inversions need experienced tailoring for their respective application.

PHANTOM RECONSTRUCTIONS

Purpose

Regularized, parametric inversions need experienced tailoring for their respective application.

Benchmarks:

- 12+ synthetic emissivities: Gaussian, rings, anisotropies, convolutions...
- k_{ani} & phantom variations studies (radius, intensity etc.)
- Performed for only one magnetic grid configuration & LOS geometry

PHANTOM RECONSTRUCTIONS

Purpose

Regularized, parametric inversions need experienced tailoring for their respective application.

Benchmarks:

- 12+ synthetic emissivities: Gaussian, rings, anisotropies, convolutions...
- k_{ani} & phantom variations studies (radius, intensity etc.)
- Performed for only one magnetic grid configuration & LOS geometry

Metrics:

$$\chi^2 = \frac{1}{N_{\text{ch}}} \left\| \left(\vec{b}_{\text{phan}} - \vec{b}_{\text{tom}} \right) \vec{\sigma}_{\text{bol}}^{-1} \right\|$$

$$\rho_c = \frac{1}{\sigma_{\text{pha}} \sigma_{\text{tom}}} \text{cov}(\vec{x}_{\text{phan}}, \vec{x}_{\text{tom}})$$

$$M_{\text{SD}} \sim \left\| \frac{\vec{x}_{\text{tom}} - \vec{x}_{\text{phan}}}{\|\vec{x}_{\text{phan}}\|} \cdot \vec{A}^{\text{T}} \right\|$$

$$P_{\text{rad},X}^{2\text{D}} = \vec{x}_X^{\text{T}} \cdot \vec{A}, \quad X = \{\text{phan}, \text{tom}\}$$

PHANTOM RECONSTRUCTIONS

Purpose

Regularized, parametric inversions need experienced tailoring for their respective application.

Benchmarks:

- 12+ synthetic emissivities: Gaussian, rings, anisotropies, convolutions...
- k_{ani} & phantom variations studies (radius, intensity etc.)
- Performed for only one magnetic grid configuration & LOS geometry

Metrics:


$$\chi^2 = \frac{1}{N_{\text{ch}}} \left\| \left(\vec{b}_{\text{phan}} - \vec{b}_{\text{tom}} \right) \vec{\sigma}_{\text{bol}}^{-1} \right\|$$

$$\rho_c = \frac{1}{\sigma_{\text{pha}} \sigma_{\text{tom}}} \text{cov} \left(\vec{b}_{\text{phan}}, \vec{b}_{\text{tom}} \right)$$


$$\text{MSD} \sim \left\| \frac{\vec{x}_{\text{tom}} - \vec{x}_{\text{phan}}}{\|x_{\text{phan}}\|} \cdot \vec{A}^T \right\|$$

$$P_X^{2D} = \vec{x}_X^T \cdot \vec{A}, \quad X = \{\text{phan}, \text{tom}\}$$


PHANTOMS: EXAMPLE

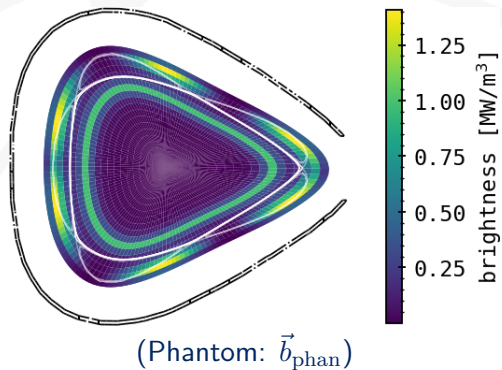

PHANTOMS: EXAMPLE

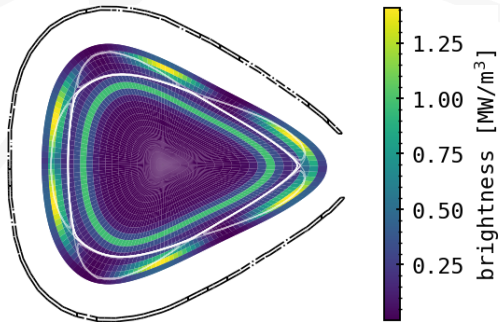


(Phantom: $\vec{b}_{\text{phan}}$)

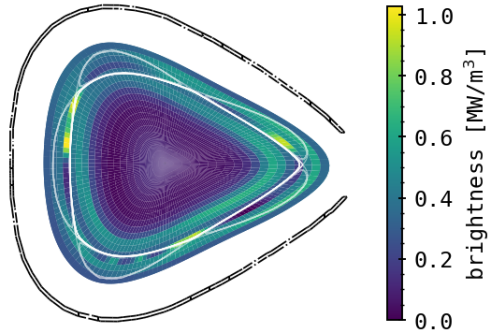


$k_{\text{core}}, k_{\text{edge}} = \{2, 0.1\}$

PHANTOMS: EXAMPLE

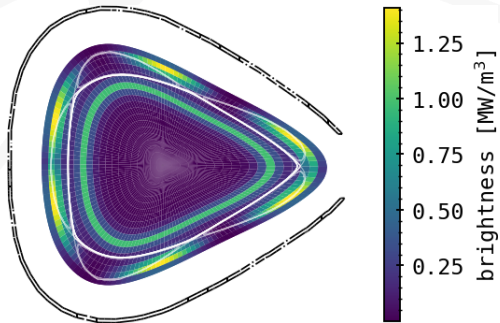


(Phantom: $\vec{b}_{\text{phan}}$)

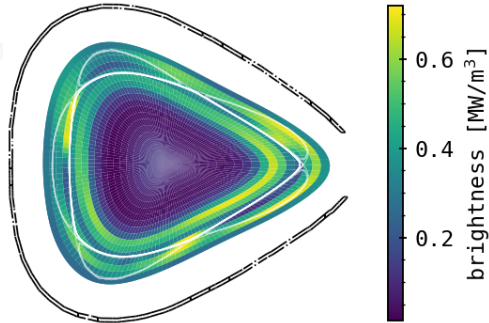


$k_{\text{core}}, k_{\text{edge}} = \{2, 0.3\}$

PHANTOMS: EXAMPLE

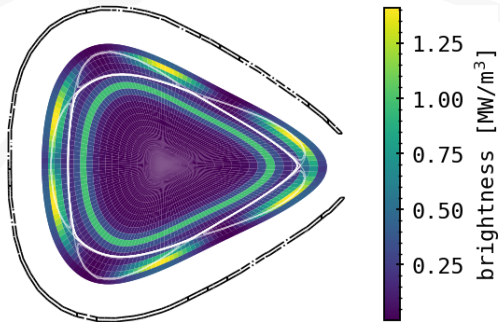


(Phantom: $\vec{b}_{\text{phan}}$)

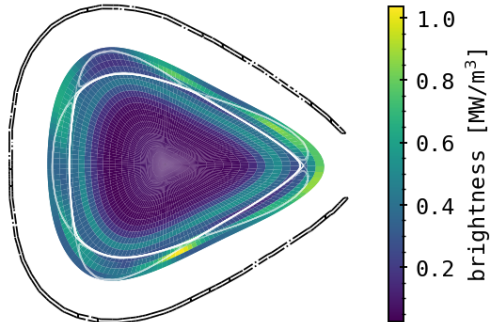


$k_{\text{core}}, k_{\text{edge}} = \{2, 0.6\}$

PHANTOMS: EXAMPLE


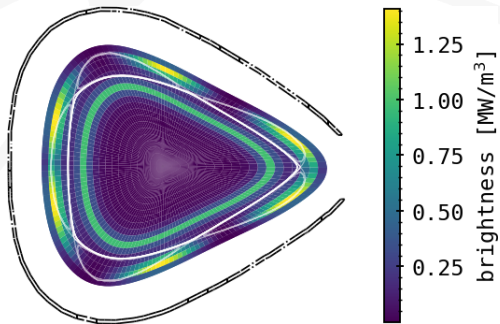


(Phantom: $\vec{b}_{\text{phan}}$)


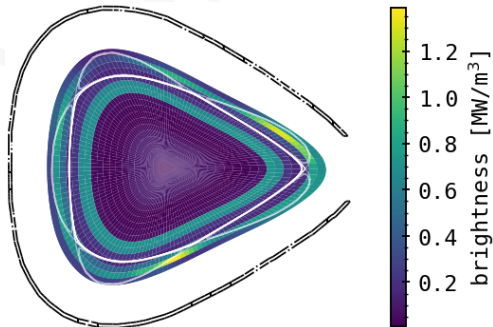


$k_{\text{core}}, k_{\text{edge}} = \{20, 3.0\}$

PHANTOMS: EXAMPLE

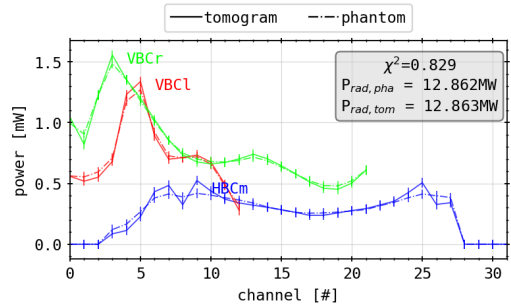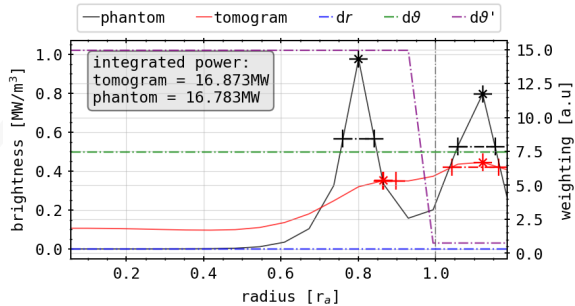


PHANTOMS: EXAMPLE

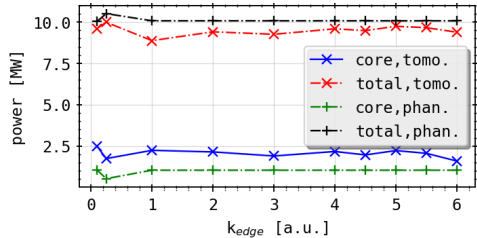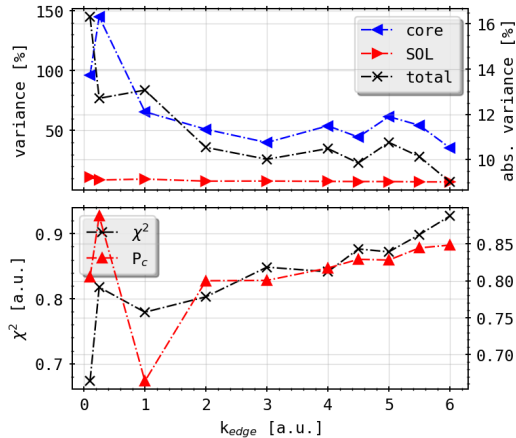


PHANTOMS: STATISTICS

Isotropic Rings: k_{ani} scan

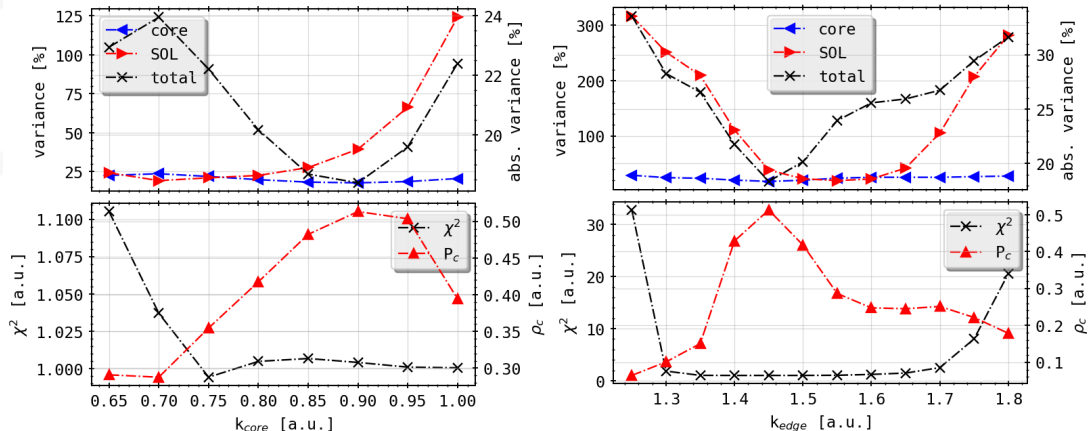


PHANTOMS: STATISTICS

Isotropic Rings: Radial Scan

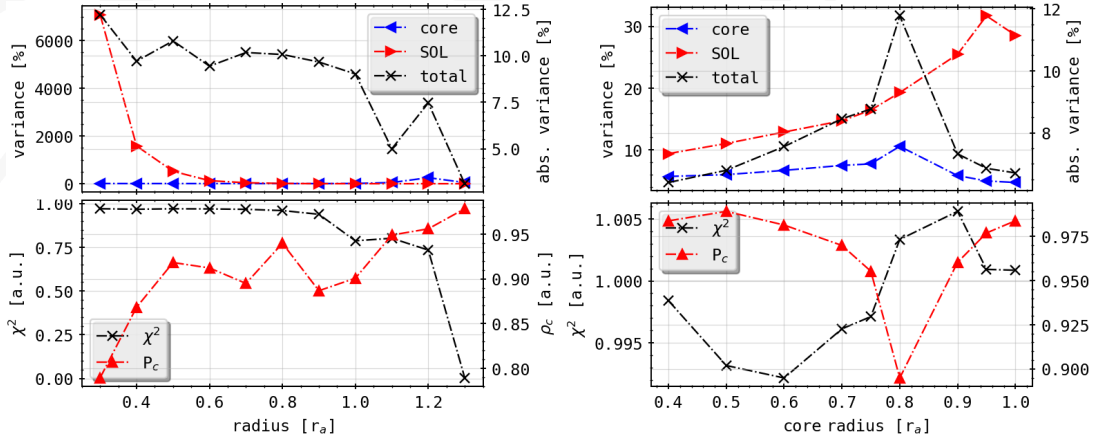



PHANTOMS: STATISTICS

Composite Distributions

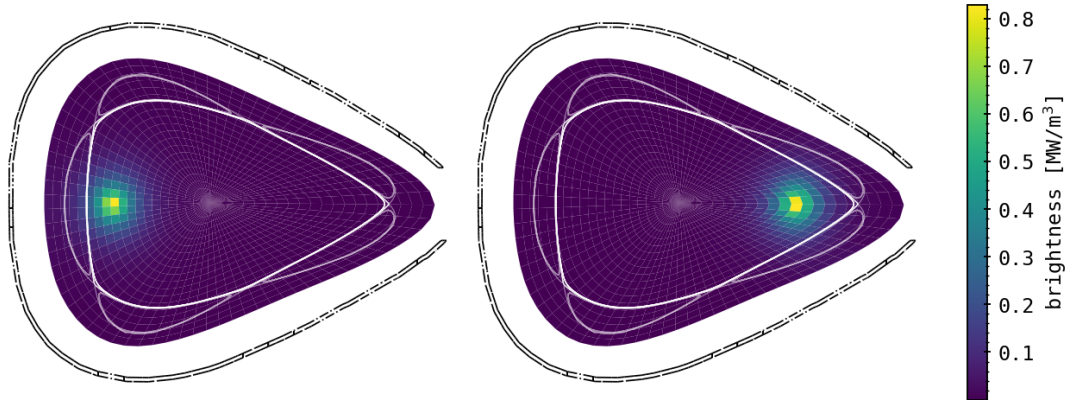





PHANTOMS: STATISTICS

Composite Distributions

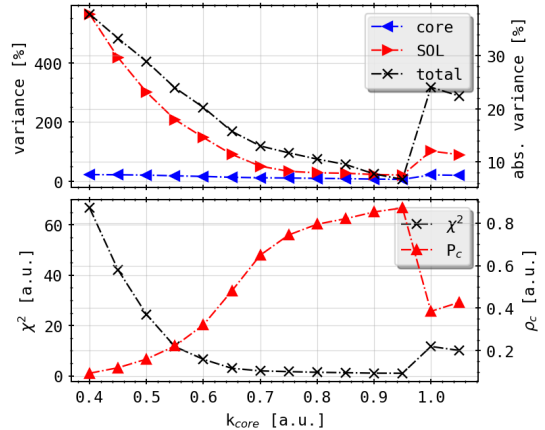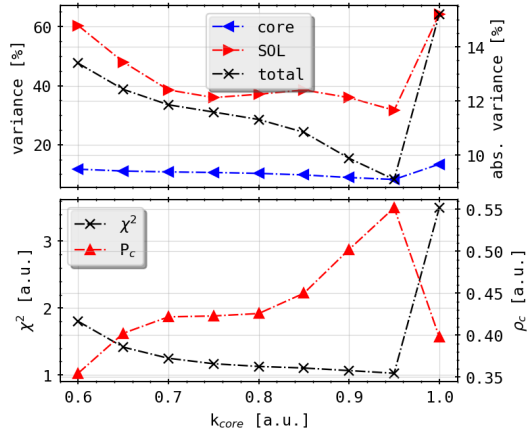



PHANTOMS: STATISTICS

Full Set

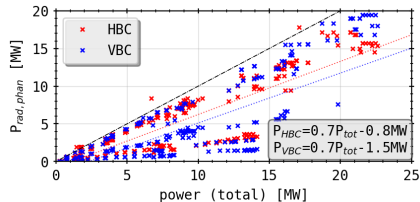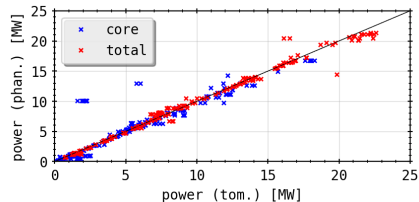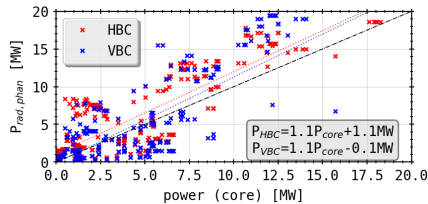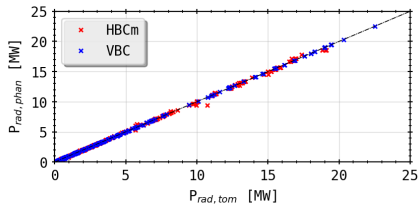

PHANTOMS: STATISTICS

Full Set

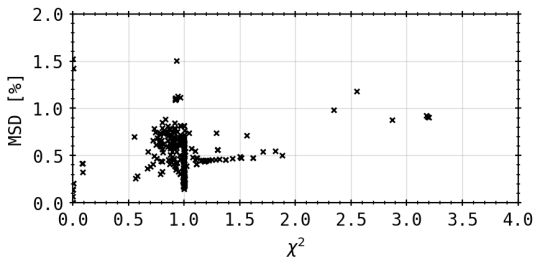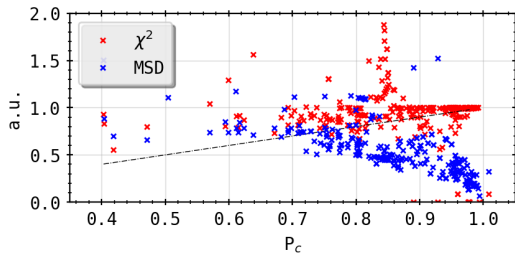

- **Reconstruction Accuracy:** P_{rad} consistently underestimates total 2D integrated power by amount equal to SOL radiation
- **Quality Metrics:** χ^2 and correlation coefficient ρ_c not always congruent - optimal tomogram may not have $\chi^2 = 1$
- **Anisotropy Optimization:** Ideal k_{ani} set exists for each profile but dimensionality makes finding it impractical
- **Experimental Validation:** Results agree well with phantom benchmarks, supporting algorithm reliability


- **Reconstruction Accuracy:** P_{rad} consistently underestimates total 2D integrated power by amount equal to SOL radiation
- **Quality Metrics:** χ^2 and correlation coefficient ρ_c not always congruent - optimal tomogram may not have $\chi^2 = 1$
- **Anisotropy Optimization:** Ideal k_{ani} set exists for each profile but dimensionality makes finding it impractical
- **Experimental Validation:** Results agree well with phantom benchmarks, supporting algorithm reliability

Conclusion

MFR with RDA weighting provides robust, reliable 2D radiation reconstructions suitable for physics analysis and power balance calculations, though computational limitations prevent continuous real-time operation



EXPERIMENTAL RECONSTRUCTIONS

Example: XP20180809.13

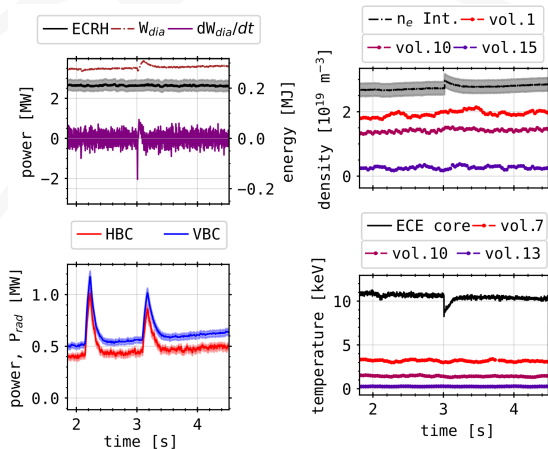



EXPERIMENTAL RECONSTRUCTIONS

Example: XP20180809.13

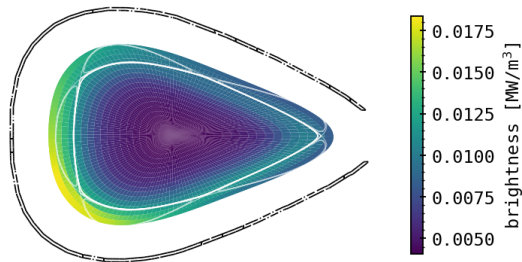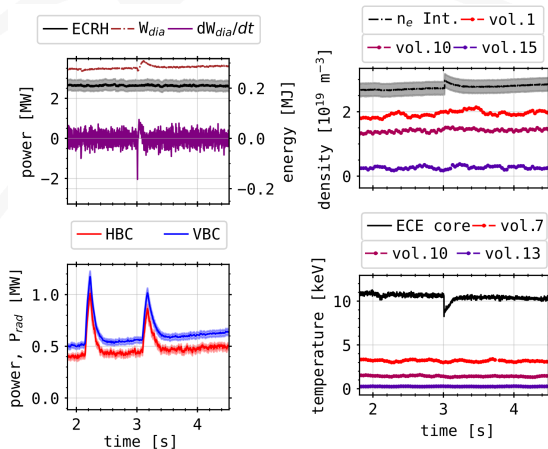


EXPERIMENTAL RECONSTRUCTIONS

Example: XP20180809.13

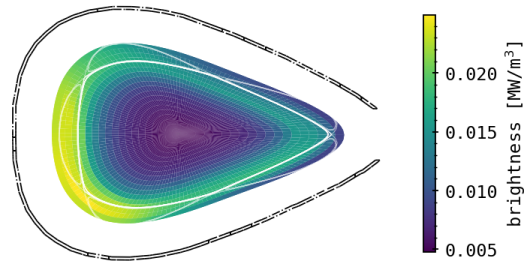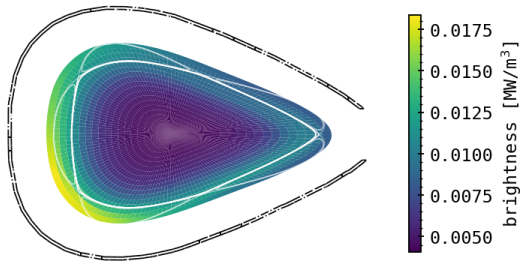



EXPERIMENTAL RECONSTRUCTIONS

Example: XP20180809.13

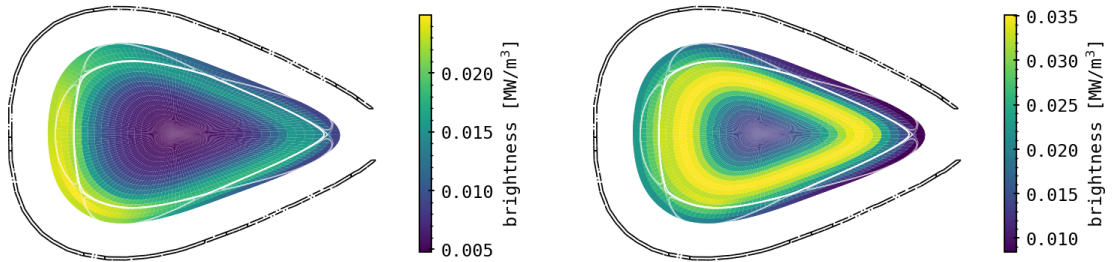


EXPERIMENTAL RECONSTRUCTIONS

Example: XP20180809.13

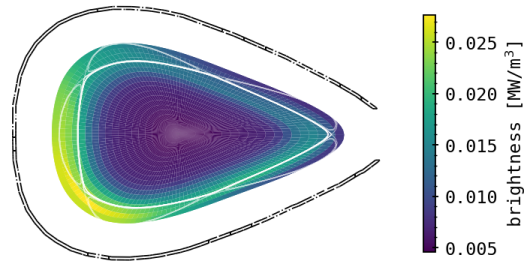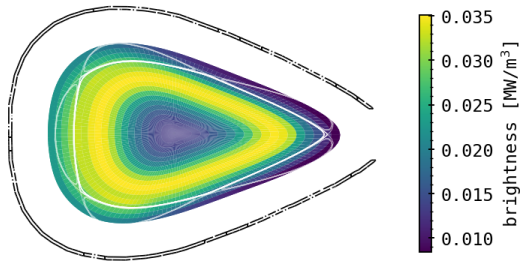

EXPERIMENTAL RECONSTRUCTIONS

Statistics: Full Set

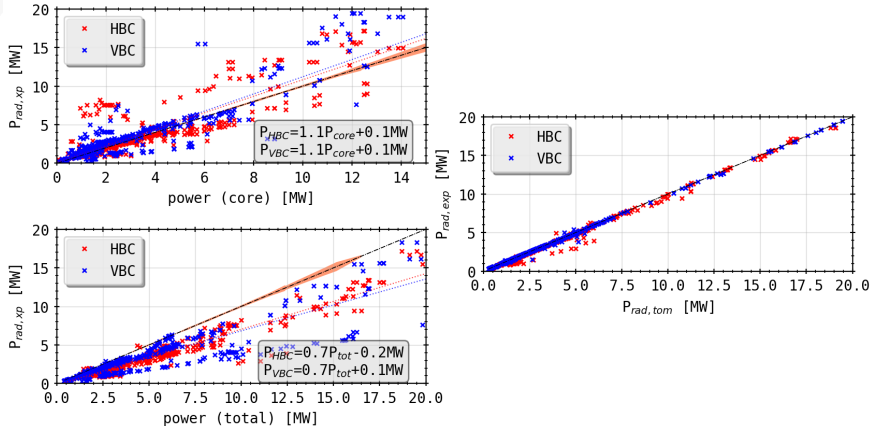

GLOBAL POWER BALANCE


Simplified 0D Ansatz:

$$\begin{aligned}
 0 &\stackrel{!}{=} S + \frac{1}{V_P} \int \frac{3}{2} \left(\frac{\partial p}{\partial t} \right) + p \nabla \vec{v} + \nabla \vec{q} d\vec{r} \\
 &= -P_H + P_{\text{rad}} + P_{\text{div}} + \frac{dW}{dt} \\
 &= P_{\text{bal}}
 \end{aligned}$$



GLOBAL POWER BALANCE

Simplified 0D Ansatz:

$$\begin{aligned}
 0 &\stackrel{!}{=} S + \frac{1}{V_P} \int \frac{3}{2} \left(\frac{\partial p}{\partial t} \right) + p \nabla \vec{v} + \nabla \vec{q} d\vec{r} \\
 &= -P_H + P_{\text{rad}} + P_{\text{div}} + \frac{dW}{dt} \\
 &= P_{\text{bal}}
 \end{aligned}$$

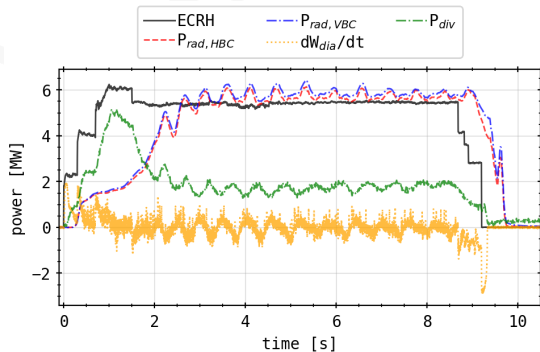

GLOBAL POWER BALANCE

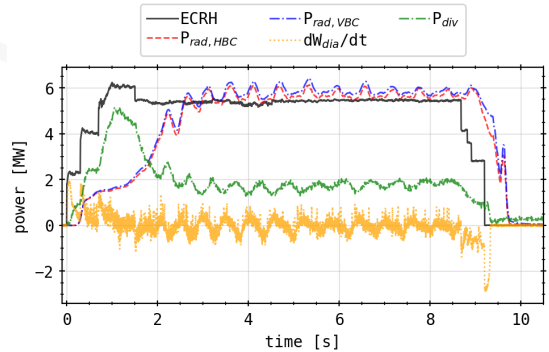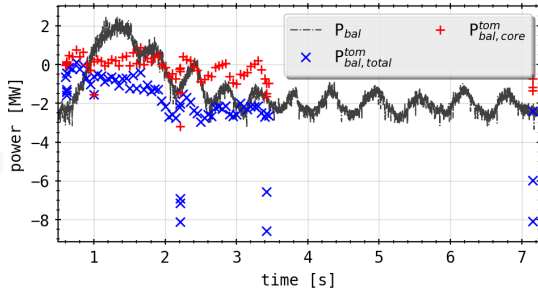

Statistical Analysis:

- Forward vs backward P_{rad} correlation
- Tomographic integral:
$$P_{\text{rad,tomo}} = \iiint \epsilon(\mathbf{r}) dV$$
- Agreement with bolometer sum within 10-20%
- Core radiation slightly overestimated
- Reveals SOL radiation underestimation in some cases
- Consistent with phantom benchmarks

Statistical Analysis:

- Forward vs backward P_{rad} correlation
- Tomographic integral:
$$P_{\text{rad,tomo}} = \iiint \epsilon(\mathbf{r}) dV$$
- Agreement with bolometer sum within 10-20%
- Core radiation slightly overestimated
- Reveals SOL radiation underestimation in some cases
- Consistent with phantom benchmarks

Power Balance Application:

- P_{2D}^{core} improves balance accuracy
- More stable than P_{rad} alone
- Alternative for quasi-steady-state analysis

CONCLUSIONS AND OUTLOOK

KEY ACHIEVEMENTS

1. **Real-Time Feedback System:** Successfully implemented, tested and operated first bolometer radiation feedback at W7-X
2. **Line of Sight Optimization:** Systematic sensitivity analysis identified optimal detector configurations
3. **Tomographic Reconstruction:** Developed and benchmarked tailored MFR algorithm with RDA weighting

KEY ACHIEVEMENTS

1. **Real-Time Feedback System:** Successfully implemented, tested and operated first bolometer radiation feedback at W7-X
 - Achieved stable detachment with $f_{\text{rad}} \geq 85\%$, peaks up to 100%
 - Reduced target heat loads by factor >2
 - Minimum system latency: 13.6 ms + 200 – 400 ms plasma response
 - Validated 3-5 channel LOS subsets for fast prediction (85% accuracy)
2. **Line of Sight Optimization:** Systematic sensitivity analysis identified optimal detector configurations
3. **Tomographic Reconstruction:** Developed and benchmarked tailored MFR algorithm with RDA weighting

KEY ACHIEVEMENTS

- 1. Real-Time Feedback System:** Successfully implemented, tested and operated first bolometer radiation feedback at W7-X
 - Achieved stable detachment with $f_{\text{rad}} \geq 85\%$, peaks up to 100%
 - Reduced target heat loads by factor >2
 - Minimum system latency: 13.6 ms + 200 – 400 ms plasma response
 - Validated 3-5 channel LOS subsets for fast prediction (85% accuracy)
- 2. Line of Sight Optimization:** Systematic sensitivity analysis identified optimal detector configurations
 - Separatrix and SOL viewing channels most effective
 - Robust selection achieves $\geq 85\%$ prediction accuracy
 - No single "best" set - multiple viable configurations
- 3. Tomographic Reconstruction:** Developed and benchmarked tailored MFR algorithm with RDA weighting

KEY ACHIEVEMENTS

1. **Real-Time Feedback System:** Successfully implemented, tested and operated first bolometer radiation feedback at W7-X
 - Achieved stable detachment with $f_{\text{rad}} \geq 85\%$, peaks up to 100%
 - Reduced target heat loads by factor >2
 - Minimum system latency: 13.6 ms + 200 – 400 ms plasma response
 - Validated 3-5 channel LOS subsets for fast prediction (85% accuracy)
2. **Line of Sight Optimization:** Systematic sensitivity analysis identified optimal detector configurations
 - Separatrix and SOL viewing channels most effective
 - Robust selection achieves $\geq 85\%$ prediction accuracy
 - No single "best" set - multiple viable configurations
3. **Tomographic Reconstruction:** Developed and benchmarked tailored MFR algorithm with RDA weighting
 - Robust to geometry perturbations ($\pm 1^\circ$) and noise (10%)
 - Successfully applied to experimental data (OP1.2b)
 - Reconstruction quality $>90\%$ for well-constrained phantoms

SCIENTIFIC INSIGHTS

Detachment Physics:

- C^{3+} detachment visible at $f_{\text{rad}} \sim 50\%$
- Stable detachment achievable at $f_{\text{rad}} > 90\%$
- Radiation shifts inward as $f_{\text{rad}} \Rightarrow 1$
- X-point and island radiation concentration

SCIENTIFIC INSIGHTS

Detachment Physics:

- C^{3+} detachment visible at $f_{\text{rad}} \sim 50\%$
- Stable detachment achievable at $f_{\text{rad}} > 90\%$
- Radiation shifts inward as $f_{\text{rad}} \Rightarrow 1$
- X-point and island radiation concentration

Impurity Transport:

- Carbon dominates SOL emissivity
- Reduced diffusivity near separatrix
- Complex 3D effects in stellarator geometry

SCIENTIFIC INSIGHTS

Detachment Physics:

- C^{3+} detachment visible at $f_{\text{rad}} \sim 50\%$
- Stable detachment achievable at $f_{\text{rad}} > 90\%$
- Radiation shifts inward as $f_{\text{rad}} \Rightarrow 1$
- X-point and island radiation concentration

Impurity Transport:

- Carbon dominates SOL emissivity
- Reduced diffusivity near separatrix
- Complex 3D effects in stellarator geometry

Feedback Control:

- Moderate gas puffs most effective
- No simple scaling law found
- Intrinsic connection to detachment essential
- System latency limits performance

SCIENTIFIC INSIGHTS

Detachment Physics:

- C^{3+} detachment visible at $f_{\text{rad}} \sim 50\%$
- Stable detachment achievable at $f_{\text{rad}} > 90\%$
- Radiation shifts inward as $f_{\text{rad}} \Rightarrow 1$
- X-point and island radiation concentration

Impurity Transport:

- Carbon dominates SOL emissivity
- Reduced diffusivity near separatrix
- Complex 3D effects in stellarator geometry

Feedback Control:

- Moderate gas puffs most effective
- No simple scaling law found
- Intrinsic connection to detachment essential
- System latency limits performance

Diagnostic Performance:

- Multicamera system provides comprehensive coverage
- Geometry uncertainties affect results
- Tomography reveals SOL radiation underestimation

FUTURE OUTLOOK AND RECOMMENDATIONS

System Upgrades:

- Reduce feedback latency: target <10 ms
- Implement more complex P_{pred} models (machine learning)
- Per-experiment configurability and auto-tuning
- Develop predictive scaling laws for gas injection
- Integration with plasma control system (PCS)

FUTURE OUTLOOK AND RECOMMENDATIONS

System Upgrades:

- Reduce feedback latency: target <10 ms
- Implement more complex P_{pred} models (machine learning)
- Per-experiment configurability and auto-tuning
- Develop predictive scaling laws for gas injection
- Integration with plasma control system (PCS)

Modeling Improvements:

- Refine multi-chamber models with

FUTURE OUTLOOK AND RECOMMENDATIONS

System Upgrades:

- Reduce feedback latency: target <10 ms
- Implement more complex P_{pred} models (machine learning)
- Per-experiment configurability and auto-tuning
- Develop predictive scaling laws for gas injection
- Integration with plasma control system (PCS)

Modeling Improvements:

- Refine multi-chamber models with

Tomography Extensions:

- Larger phantom benchmark set (>50 cases)
- Additional virtual camera arrays (test future upgrades)
- Real-time capable algorithms (GPU acceleration)
- Automated parameter optimization (grid search, ML)

FUTURE OUTLOOK AND RECOMMENDATIONS

System Upgrades:

- Reduce feedback latency: target <10 ms
- Implement more complex P_{pred} models (machine learning)
- Per-experiment configurability and auto-tuning
- Develop predictive scaling laws for gas injection
- Integration with plasma control system (PCS)

Modeling Improvements:

- Refine multi-chamber models with

Tomography Extensions:

- Larger phantom benchmark set (>50 cases)
- Additional virtual camera arrays (test future upgrades)
- Real-time capable algorithms (GPU acceleration)
- Automated parameter optimization (grid search, ML)
- Integration with synthetic diagnostics

Reactor Relevance:

- Essential for DEMO power plant operation ($P_{\text{net}} > 500$ MW)

BROADER IMPACT

Contribution to Fusion Energy Research

This thesis advances the state-of-the-art in plasma diagnostics and control for stellarator fusion devices, providing essential tools and knowledge for achieving reactor-relevant operating scenarios with controlled radiative cooling and stable detachment.

BROADER IMPACT

Contribution to Fusion Energy Research

This thesis advances the state-of-the-art in plasma diagnostics and control for stellarator fusion devices, providing essential tools and knowledge for achieving reactor-relevant operating scenarios with controlled radiative cooling and stable detachment.

Technical Contributions:

- First real-time bolometer feedback at W7-X
- Validated diagnostic optimization methods
- Benchmarked tomography algorithm
- Demonstrated stable high- f_{rad} operation

BROADER IMPACT

Contribution to Fusion Energy Research

This thesis advances the state-of-the-art in plasma diagnostics and control for stellarator fusion devices, providing essential tools and knowledge for achieving reactor-relevant operating scenarios with controlled radiative cooling and stable detachment.

Technical Contributions:

- First real-time bolometer feedback at W7-X
- Validated diagnostic optimization methods
- Benchmarked tomography algorithm
- Demonstrated stable high- f_{rad} operation

Scientific Contributions:

- Detachment physics understanding
- Impurity transport insights
- Radiation distribution characterization
- Power balance methodology

SUMMARY

- Developed and operated first real-time bolometer radiation feedback system at W7-X stellarator
- Achieved stable, controlled detachment with radiation fractions $f_{\text{rad}} \geq 85\%$ and peaks up to 100%
- Reduced divertor target heat loads by factor of 2 through controlled impurity seeding
- Validated 3-channel bolometer subset for fast radiation power prediction with $\geq 85\%$ accuracy
- Systematic line of sight sensitivity analysis identified optimal detector configurations for feedback

SUMMARY

- Developed and operated first real-time bolometer radiation feedback system at W7-X stellarator
- Achieved stable, controlled detachment with radiation fractions $f_{\text{rad}} \geq 85\%$ and peaks up to 100%
- Reduced divertor target heat loads by factor of 2 through controlled impurity seeding
- Validated 3-channel bolometer subset for fast radiation power prediction with $\geq 85\%$ accuracy
- Systematic line of sight sensitivity analysis identified optimal detector configurations for feedback
- STRAHL modeling revealed carbon dominance in SOL radiation and inward shift at high f_{rad}
- Developed and benchmarked Minimum Fisher Regularization tomography with radially dependent anisotropy
- Demonstrated robust 2D radiation reconstruction from experimental data
- Provided alternative power balance methodology using tomographic integrals

COLLABORATIONS

Acknowledgement

This work has been carried out within the framework of the EUROfusion Consortium and has received funding from the Euratom research and training programme 2014-2018 under grant agreement No. 633053. The views and opinions expressed herein do not necessarily reflect those of the European Commission.

Collaborators:



HELMHOLTZ
RESEARCH FOR GRAND CHALLENGES



EUROfusion

Thank You


REFERENCES I



STRAHL IMPURITY TRANSPORT MODELING

STRAHL Code:

- 1D impurity transport and radiation simulation
- Solves radial continuity for each ionisation stage
- Experimental input data: perturbation study in transport coefficients, profile smoothing, source model etc.
- Valid in confinement, simple ansatz outside LCFS

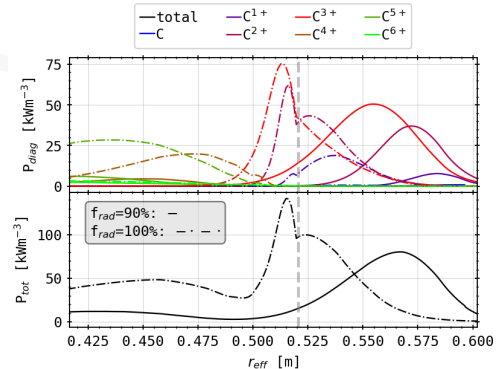

STRAHL IMPURITY TRANSPORT MODELING


STRAHL Code:

- 1D impurity transport and radiation simulation
- Solves radial continuity for each ionisation stage
- Experimental input data: perturbation study in transport coefficients, profile smoothing, source model etc.
- Valid in confinement, simple ansatz outside LCFS

Key Results:

- Carbon dominates emissivity ($C^{2/3+}$, $\times 10^2+$ of Oxygen levels)
- Inward shift of radiation for $f_{\text{rad}} \rightarrow 1$ toward $r \sim 0.95r_a$
- Radiation moves from outside to inside separatrix

STRAHL IMPURITY TRANSPORT MODELING

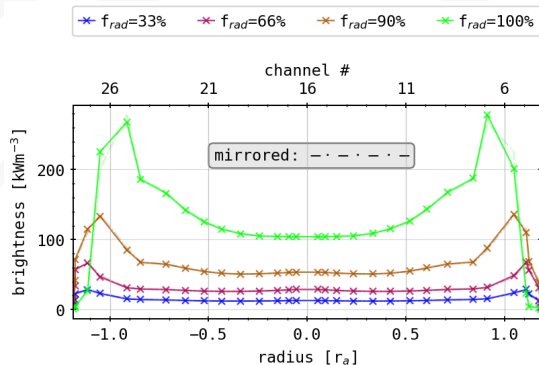

Forward Modeling:

- Chord brightness from STRAHL results
- Compare with experimental measurements
- Validate assumptions about impurity radiation and transport

Discrepancy

Forward calculations show asymmetry - less than experiments - in confinement, suggesting intrinsic geometry effects

STRAHL IMPURITY TRANSPORT MODELING

