




MK-CS1 Electronic Crane scale

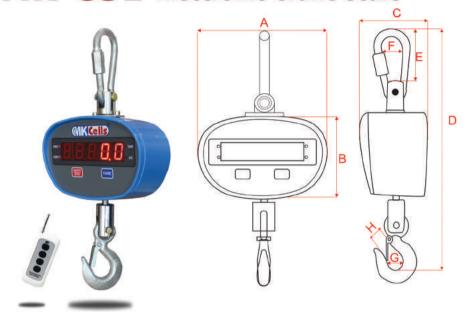

Aluminium

	Max. Capacity kg	Division g	Crane scale size mm								Weight
Model			Α	В	С	D	E	F	G	Н	kg
MK-CS1-100kg	100	50	155	111	88	330	90	30	25	23	1.63
MK-CS1-200kg	200	100	155	111	88	330	90	30	25	23	1.63
MK-CS1-300kg	300	100	155	111	88	330	90	30	25	23	1.63
MK-CS1-500kg	500	200	155	111	88	330	90	30	25	23	1.63
MK-CS1-1000kg	1000	500	155	111	88	360	90	30	30	28	1.90

Specifications						
Accuracy class	Accuracy class OIML III					
Tare range	Tare range 100%F.S.					
Settling Time	Settling Time 5-8s					
Safe Overload	Safe Overload 125%F.S.					
Limited Load	150%F.S.					
Overload alarm	Overload alarm 100%F.S.					
Battery	Lithium Rechargeable batter 6v 200mA					
Work Temperature	Work Temperature -10°C~40°C					
Battery life	74 hours continuous operation					

Features

- High-strength Aluminum Case (RED font)
- · S style sensor design
- 360° Swivel hook
- Red LED display, digital height 25mm
- · Build-in Lithium rechargeable battery
- · Water splash proof design
- Remote control
- · Capacity: 100kg-1t
- Heavy duty
- Easy to use

Functions:

- Zero
- Tare
- · Hold
- Battery Supervision
- · Overload Alarm/ Record
- Digital Calibration
- 3-point Linearity Correction
- · lb/kg Switch
- Division Switch
- Gravity Acceleration Set



360° Swivel hook

Included Acessory















