



TECHNISCHE HOCHSCHULE NÜRNBERG
GEORG SIMON OHM

Fakultät Elektrotechnik Feinwerktechnik Informatik

Conceptual design and realization of a graphical tool for determining the test coverage of digital circuit diagrams

Masterarbeit im Studiengang Softwareengineering und
Informationstechnik

vorgelegt von

Razvan Matis

Matrikelnummer 2403005

Sommersemester 2021

Sperrvermerk: Darf nicht vor 01.09.2026 öffentlich zugänglich gemacht werden!

Erstgutachter: Prof. Dr. Flaviu Popp-Nowak

Zweitgutachter: Prof. Dr. Claus Kuntzsch

© 2021

Dieses Werk einschließlic seiner Teile ist **urheberrechtlich geschützt**. Jede Verwertung auSSerhalb der engen Grenzen des Urheberrechtgesetzes ist ohne Zustimmung des Autors unzulässig und strafbar. Das gilt insbesondere für Vervielfältigungen, Übersetzungen, Mikroverfilmungen sowie die Einspeicherung und Verarbeitung in elektronischen Systemen.

Prüfungsrechtliche Erklärung der/des Studierenden

Angaben des bzw. der Studierenden:

Name: Matis

Vorname: Razvan

Matrikel-Nr.: 2403005

Fakultät: Elektro-, Feinwerk-, Informationstechnik

Studiengang: Software Engineering

Semester: Sommersemester 2021

Titel der Abschlussarbeit:

Conceptual design and realization of a graphical tool for determining the test coverage of digital circuit diagrams

Ich versichere, dass ich die Arbeit selbständig verfasst, nicht anderweitig für Prüfungszwecke vorgelegt, alle benutzten Quellen und Hilfsmittel angegeben sowie wörtliche und sinngemäße Zitate als solche gekennzeichnet habe.

Nürnberg, 07.06.21, Reef

Ort, Datum, Unterschrift Studierende/Studierender

Erklärung zur Veröffentlichung der vorstehend bezeichneten Abschlussarbeit

Die Entscheidung über die vollständige oder auszugsweise Veröffentlichung der Abschlussarbeit liegt grundsätzlich erst einmal allein in der Zuständigkeit der/des studentischen Verfasserin/Verfassers. Nach dem Urheberrechtsgesetz (UrhG) erwirbt die Verfasserin/der Verfasser einer Abschlussarbeit mit Anfertigung ihrer/seiner Arbeit das alleinige Urheberrecht und grundsätzlich auch die hieraus resultierenden Nutzungsrechte wie z.B. Erstveröffentlichung (§ 12 UrhG), Verbreitung (§ 17 UrhG), Vervielfältigung (§ 16 UrhG), Online-Nutzung usw., also alle Rechte, die die nicht-kommerzielle oder kommerzielle Verwertung betreffen.

Die Hochschule und deren Beschäftigte werden Abschlussarbeiten oder Teile davon nicht ohne Zustimmung der/des studentischen Verfasserin/Verfassers veröffentlichen, insbesondere nicht öffentlich zugänglich in die Bibliothek der Hochschule einstellen.

Hiermit ☒ genehmige ich, wenn und soweit keine entgegenstehenden Vereinbarungen mit Dritten getroffen worden sind,
☐ genehmige ich nicht,

dass die oben genannte Abschlussarbeit durch die Technische Hochschule Nürnberg Georg Simon Ohm, ggf. nach Ablauf einer mittels eines auf der Abschlussarbeit aufgebrachten Sperrvermerks kenntlich gemachten Sperrfrist

von 5 Jahren (0 - 5 Jahren ab Datum der Abgabe der Arbeit),

der Öffentlichkeit zugänglich gemacht wird. Im Falle der Genehmigung erfolgt diese unwiderruflich; hierzu wird der Abschlussarbeit ein Exemplar im digitalisierten PDF-Format auf einem Datenträger beigelegt. Bestimmungen der jeweils geltenden Studien- und Prüfungsordnung über Art und Umfang der im Rahmen der Arbeit abzugebenden Exemplare und Materialien werden hierdurch nicht berührt.

Nürnberg, 07.06.21, Reef

Ort, Datum, Unterschrift Studierende/Studierender

Datenschutz: Die Antragstellung ist regelmäßig mit der Speicherung und Verarbeitung der von Ihnen mitgeteilten Daten durch die Technische Hochschule Nürnberg Georg Simon Ohm verbunden. Weitere Informationen zum Umgang der Technischen Hochschule Nürnberg mit Ihren personenbezogenen Daten sind unter nachfolgendem Link abrufbar: <https://www.th-nuernberg.de/datenschutz/>

Abstract

According to Printed Circuit Board (PCB)s and their digital circuits, which are getting more complex all the time there is the requirement of being able to determine the test coverage of it. In dependency on these determined values then automatic boundary scan test chains could be performed, or the need of changing something on the layout will be visible. This thesis describes the way of the conceptual design and the realization of a graphical tool for loading, showing different digital circuit diagrams projects, which need to be in the Open Database (ODB)++ format and the determination of test coverage parameters as well as the creation of Serial Vector Format (SVF) files for being able to run the boundary scan test chains on these special devices, which contains at least one Joint Test Action Group (JTAG) device. Furthermore there will be described detailed information about the frameworks, programming patterns and best practices, which were used for creating this Model-View-ViewModel (MVVM) C# project and the project structure itself which was created for making sure to have the following key features available:

- Opening any ODB++ project by connecting to a stand alone Google Remote Procedure Calls (GRPC) server and using the PCB-Investigator API
- Exporting any opened projects to Java Script Object Notation (JSON) file for later usage and importing of that created files
- Creation and loading of project files, which contains a manifest file for information about the project structure itself
- Modifying, exporting and importing of different kind of settings according the connection to the GRPC server, the appearance and the test coverage values
- Determination of different test coverage values according to the boundary scan mechanism
- Creation of SVF files for run the boundary scan test chain with a programmer from ProMik GmbH on a JTAG containing device

Contents

Abstract	iii
1. Introduction	2
1.1. Motivation	2
1.2. Requirements	2
1.3. Programming language and operating system	4
2. Fundamentals	5
2.1. ODB++ project format	5
2.2. PCB-Investigator	6
2.3. JTAG interface	7
2.4. Boundary Scan	9
2.5. Boundary scan description language	10
2.6. SVF file format	11
2.7. Model-View-ViewModel	12
2.8. PRISM framework	12
2.9. Dependency injection framework	13
2.10. Material design framework	13
2.11. JSON format	13
2.12. GRPC	14
2.13. Bill of materials	15
3. Conceptual design	17
3.1. Programming language to use	17
3.2. Integrated development environment to choose	17
3.3. Application structure to consider	18
3.4. Target frameworks to use	19
3.5. Analyzing the structure of PCB-Investigator API	20
3.6. Converted class structures of objects of interest	21
3.7. Frameworks and patterns to use	22
4. Architecture	24
4.1. Overview	24
4.2. Interfaces	26

4.3. Grpc Server for using the PCB Investigator API	27
4.4. Grpc Client for connecting to the Server and parsing all objects	28
4.5. GUI	31
4.5.1. MainView and MainViewModel	31
4.5.2. Events	32
4.5.3. Helper	33
4.5.4. Interfaces	35
4.5.5. Implementations	36
4.5.6. Model	38
4.5.7. ViewModels	38
4.5.8. Views	39
4.6. Test coverage determination of loaded project	42
4.7. Pin information extraction	45
4.8. SVF file generator	46
4.9. Unit tests	50
4.10. Pipeline configuration	51
4.11. Overview of provided features	53
5. Analysis	55
5.1. Performance of loading ODB++ projects by using the PCBInvestigator API	55
5.2. Performance of loading projects by importing JSON formatted files	56
5.3. Performance of exporting projects into JSON format	56
5.4. Performance of showing connections of components	56
5.5. Performance of determination of test coverage values	57
5.6. Validation of test coverage values	58
6. Conclusion	59
Credits	61
A. User manual for working with the smart Inter Circuit Tests (ICT) analyzer tool	1
A.1. Overview	1
A.2. Settings	2
A.2.1. Show settings	2
A.2.2. Import / Export settings file	7
A.3. Project file	7
A.4. Miscellaneous	8
A.5. Creation of new project	9
A.6. Working with the components view	12
A.6.1. Toggle visibility	13

A.6.2. Toggle visibility of all objects with the same type	14
A.6.3. Toggle display of connections	15
A.7. Test coverage	16
A.7.1. Determine all boundary scan objects	17
A.7.2. Performing any test coverage of objects	17
A.7.3. Export PIN connection information into file	18
A.7.4. Generate SVF data files	19
A.8. Log panel	19
A.9. Drag and drop within the application	20
List of Figures	21
List of Tables	23
List of Listings	24
Bibliography	25

List of abbreviations

etc. et cetera

PCB Printed Circuit Board

ODB Open Database

JTAG Joint Test Action Group

SVF Serial Vector Format

GRPC Google Remote Procedure Calls

JSON Java Script Object Notation

MVVM Model-View-ViewModel

MCU Micro Controller

GUI Graphical User Interface

CSV Comma Separated Values

CAD Computer-Aided Design

API Application Interface

BSDL Boundary Scan Description Language

WPF Windows Presentation Foundation

XAML Extensible Application Markup Language

IDE Integrated Development Environment

YML Yet Another Markup Language

BOM Bill Of Materials

IC Integrated Circuit

Chapter 1.

Introduction

Within this chapter the motivation will be described, the requirements, the used programming language and operating system for creation of the whole project. All these aspects were previously discussed with the company to make sure to create a most valuable software for them.

1.1. Motivation

As the company ProMik GmbH is already providing programmers for being able to write data into different Micro Controller (MCU)s now there came up the requirement, in dependency on customer demands, to perform boundary scan tests on JTAG devices.[\[1\]](#) For being able to perform these kind of tests there should be a software available which allows to determine first the test coverage parameters in dependency on the boundary scan mechanism and create such SVF files for playing them with the programmer. This software should be provided as a complex framework where the opportunity is given to extend it in the future, in elementary way by using much interfaces within the MVVM pattern.

1.2. Requirements

In order to provide all features as needed there were a couple of requirements which came up at the very beginning of the conceptual design and during the implementation of the software:

- There should be the possibility of opening ODB++ project folders and display the result of circuit diagram in a useful way
 - There should be the possibility of moving the visible area by mouse movement and zooming in and out of the visible area
 - The visibility of each component should be settable
 - All connections of one component to the others should be displayable
 - The whole view of all components could be mirrorable along both axes
 - The net names should be settable to visible and hidden
- An export mechanism of an opened project into JSON file for later usage should be available as an according import mechanism to be independent from the PCB-Investigator Application Interface (API) as this requires a separate license for usage
- There should be the option of creating and loading ZIP compressed project files containing all necessary information
 - If the project file mode is being used then all exports and opening of components should be done and saved within that project file
 - If the project file contains settings, a JSON exported project then these files should be imported automatically on loading
- Settings should be available, exportable and importable
 - General settings according the appearance of the loaded project view
 - Server related connection settings
 - General settings according the request of PCB-Investigator API
 - Test coverage related settings for determining all components for the boundary scan test chain
 - SVF related settings according the programmer connection parameters to use
- Determination of test coverage parameters using the boundary scan mechanism
- Export of a file containing all pin information of all JTAG devices
- Creation of SVF files containing all instructions to be performed by the programmer while playing the boundary scan test chain on a JTAG compatible device

- In order to create an extended-friendly framework there was furthermore the need of usage of company internal libraries instead of creating complete new ones
 - The usage of log panel was required
 - The usage of setting panel was required
 - The usage of SVF player was required

1.3. Programming language and operating system

The whole project was implemented with the software development environment called **Microsoft Visual Studio 2019** and the programming language **C#**. This is a quite powerful and modern language for creation of different desktop applications. The developer environment is really helpful too, as it provides a NuGet package manager for organizing all external included libraries. Furthermore the whole project was created on a operating system **Windows 10 Professional x64**, using a central processing unit of type **Intel(R)Xeon(R) E3-1240 v6 @ 3.70 GHz** and a total amount of random access memory of **16 gigabyte**. This system makes sure to be able to implement without any delays of waiting for background processes at all and ensures to be able to run the developed software almost immediately without any delay times.

Chapter 2.

Fundamentals

Within this chapter the fundamentals regarding the later usage for implementation of the project is being described.

2.1. ODB++ project format

The ODB++ format is a de facto standard format for creation of Computer-Aided Design (CAD) related projects within the circuit board industry.[2] This format itself was released in 1995 and after the component names were added then the suffix ++ was added in 1997. It hierarchically contains all necessary information about the digital circuit diagram in detail:

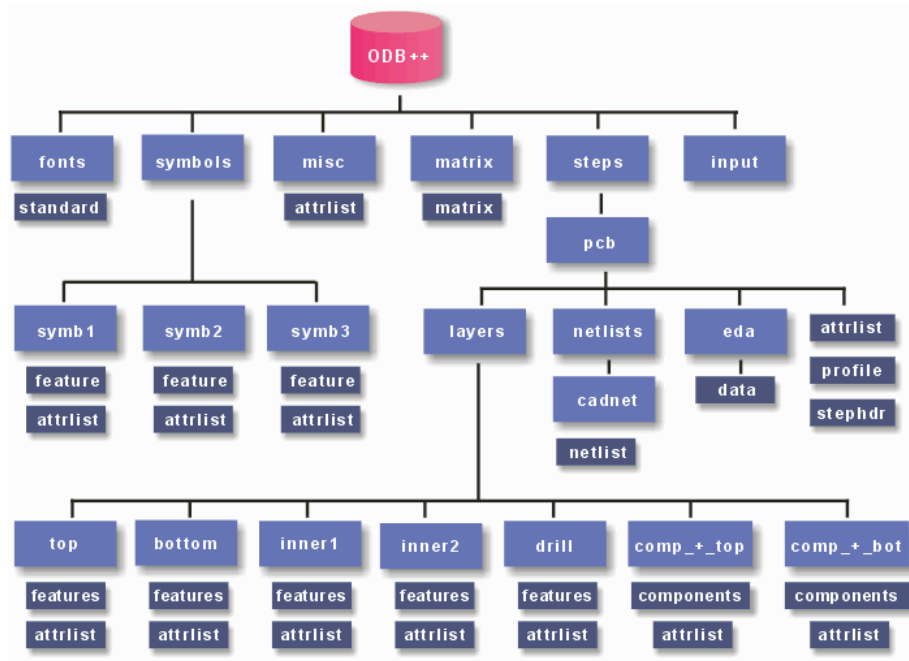


Figure 2.1.: ODB++ project structure[3]

As shown in figure 2.1 it is clear that this format contains all necessary components, net lists and attribute lists which are necessary for later determination of the test coverage of the circuit diagrams. These data will give detailed information regarding the placed components, their names, positions, sizes and connection to all nets. In dependency on the net connection the connected components could then be determined.

2.2. PCB-Investigator

The PCB-Investigator is a software provided by EasyLogix also known as Schindler & Schill GmbH and provides many functionality regarding the opening, viewing and measuring of different kind of CAD related project files of digital circuit diagrams:[\[4\]](#)

- ODB++
- Gerber 274x
- Gen Cad 1.4
- Eagle files
- IDF files
- DXF files
- DPF files
- IPC2581 files
- IPC356 files
- PDF

It is a quite powerful tool which further provides the possibility to export almost all project types into another one and generate different kind of lists containing component relevant information as the component name and its pin information. Further the executable file application itself provides different public functions which are accessible by adding the **PCB-Investigator.exe** as a reference to the project.

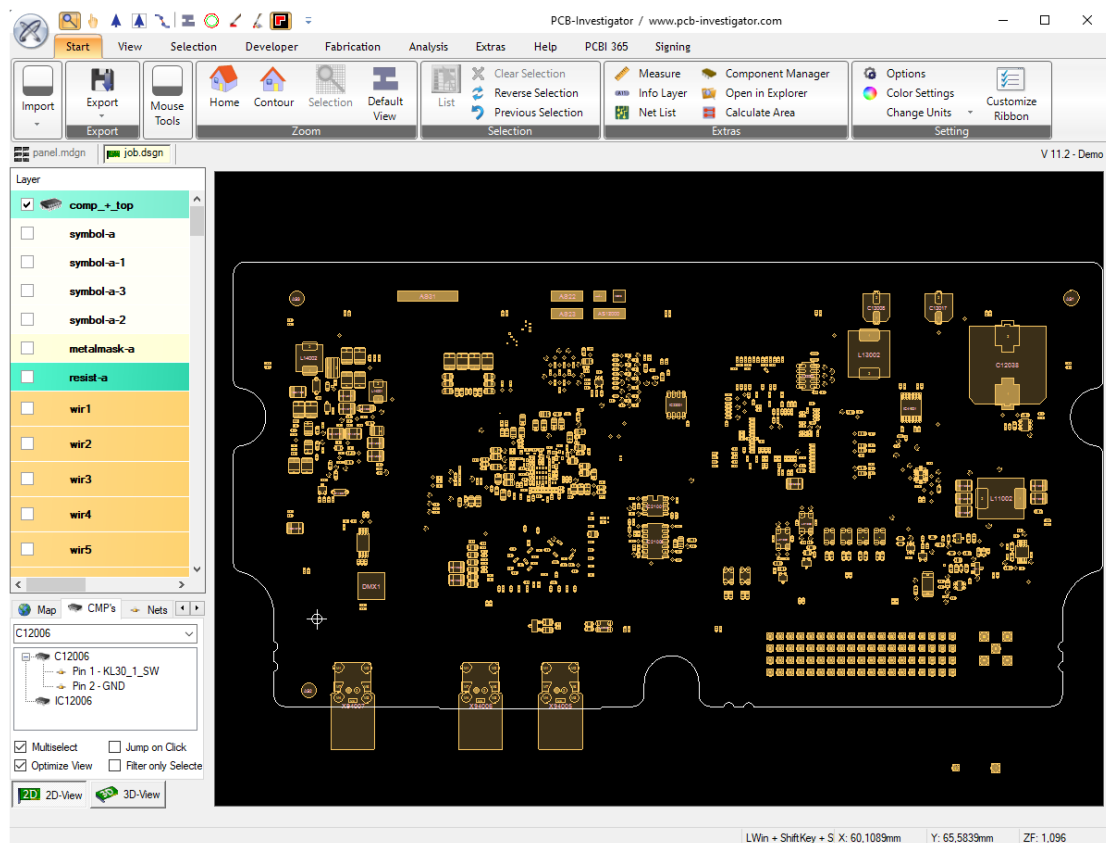


Figure 2.2.: PCB-Investigator overview

As pictured in figure 2.2 it can be seen that there are many possibilities of taking action with a loaded project. For verification purposes the most important feature was the **CMPs** tab where it is possible to search for any specific component in dependency on its name and to have a closer look in its consisting pins.

2.3. JTAG interface

The JTAG is a serial interface, which is widely used for different field programmable gate arrays, complex programmable logic device configurations, the programming and debugging of different micro controllers.

It is usually operating within the voltage range of 1.8V - 6V and consists of the following components in general:

- Test access port
 - Pin TDI - data in
 - Pin TDO - data out
 - Pin TMS - control
 - Pin TCK - clock
 - Pin TRST - test reset
- Instruction register
- Data register
- TAP controller

This standard established within 1985/1986 and is being normed by IEEE 1149.1-1990. Later on by the overworked norm IEEE 1149.1-1994 the Boundary Scan Description Language (BSDL) was considered as a default feature. The most actual version of the norm is IEEE 1149.1-2001. If there are more TAPs connected together then it will be called a scan chain in general.

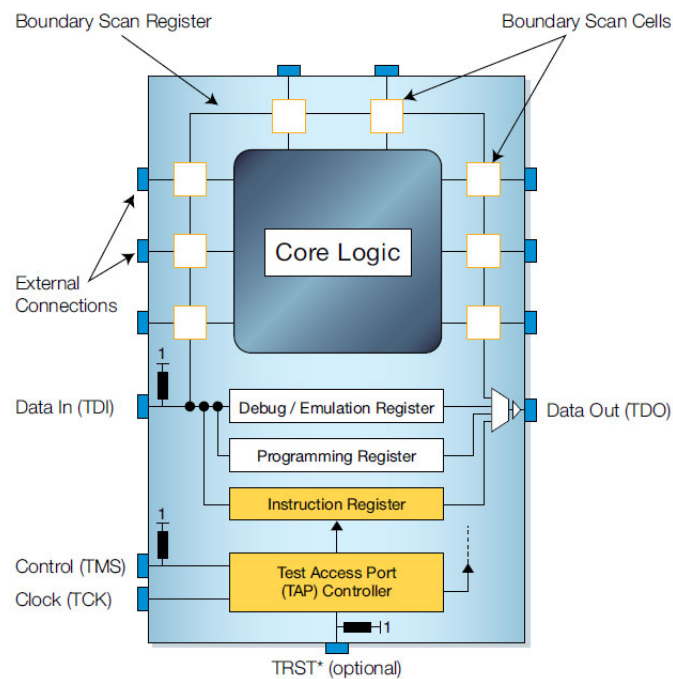


Figure 2.3.: JTAG interface in detail[5]

As shown in figure 2.3 it can be seen that the JTAG device itself already contains some additional core logic for being able to perform different kinds of test-debugging functions. The boundary scan register itself contains a various amount of boundary scan cells which could be used for the testing logic.

The TAP controller is a state machine which could take in six valid different states.[6]

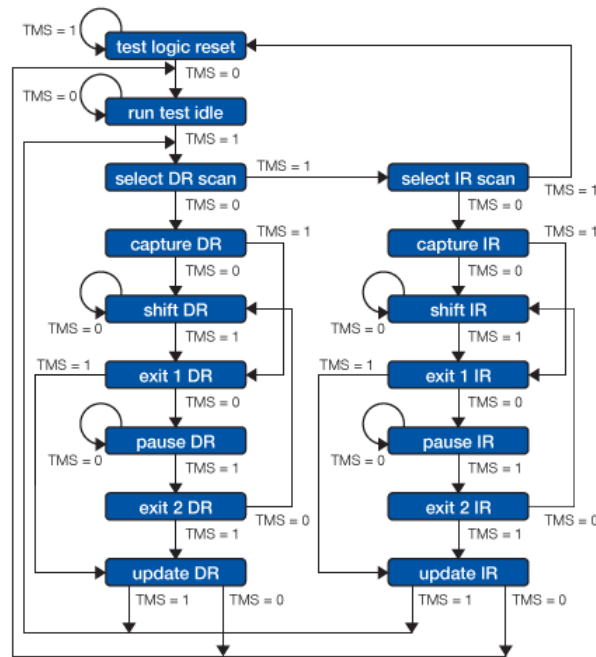


Figure 2.4.: State machine of the TAP controller[7]

As shown in figure 2.4 it will be clear that the transitions of each state are being controlled mainly by the TMS signal. Every state has two outgoing transitions to make sure that just by one TMS step the condition could be set. The both main paths allow reading out data from the data register or the instruction register.

2.4. Boundary Scan

The main idea of the boundary scan is the purpose of ensuring that every component is mounted correctly in a physical way as described within the circuit diagram.[8] First of all according to IEEE 1149.1 an JTAG device needs to have the possibility of performing the following instructions to be a really boundary scan compatible device:[7]

- **BYPASS** - this instruction ensures that the TDI and TDO connections are connected by a one bit register and makes possible to save time during the operation
- **EXTEST** - this instruction makes sure that the TDI and TDO are connected with the boundary scan registers by providing functions to write values into the cells
- **SAMPLE/PRELOAD** - this instruction ensures that the TDI and TDO are connected with the boundary scan while operating in usual mode. within this mode the data could be read out

In detail that means that according to each external pin connection there is in general the possibility to set any value to high or low and read back the physically present value of wiring. So if it is known for example that on a specific pin position an according pull down resistor is being connected then the further knowledge is that in every case the read back value should be low. Additionally there can be assumed that if a pull up resistor is being connected to a pin independently on the set value the read back value should be high. Finally the fact can be accepted that if some other components are connected to any pin which are not belonging to the pull down nor the pull up resistors then the read back value should be that one which was previously set. To perform a complete test of a device the following steps must be followed:

1. The clock rate must be triggered as long as the complete boundary scan register length totally is^[9]
2. During that time the TDI data will be forwarded into each boundary scan cell
3. If all cells are covered by a value then the TMS pin should be triggered for passing all read values into the connected pins
4. The clock rate must be triggered again for the total length of the boundary scan register
5. During that time all values from the external pins are being read out and transmitted into the TDO
6. Now the read out values could be compared with some expected values to detect differences

2.5. Boundary scan description language

The boundary scan description language is a language for describing the boundary scan test ability of different JTAG compatible devices. It is based on the very high speed integrated circuit hardware description language and normed with IEEE 1149.1-2001.

Typically these information are being provided by the manufacturer of the devices in a .bsdl file for each component.^[10] The files themselves are usually containing the following sections:

- port - the information about all pins and their usage mode (in, out, inout, linkage...)
- attribute PIN_MAP - the mapping from the used names within the port section to the real pin names used within the ODB++ project (position is important for later usage)
- attribute INSTRUCTION_LENGTH - instruction register length
- attribute BOUNDARY_REGISTER - all boundary scan compatible pins and their functionality (control, bidirectional, observe_only, output2)
- attribute BOUNDARY_LENGTH - the amount of boundary scan cells

2.6. SVF file format

The serial vector format is a format for communication with boundary scan compatible test vectors. It was introduced by Texas Instruments in 1991. The main purpose of the format is to ensure that independently on the used JTAG device different test operations could be performed successfully.^[11] The format contains a couple of different instructions, which could be performed by the boundary scan logic. The most important one according to this project is the

SDR length [TDI (tdi)] [TDO (tdo)] [MASK (mask)] [SMASK (smask)];

SDR means scan data register and tells the test to test all data register cells. The TDI is the data which should be passed into the registers.^[12] TDO is the expected data to be read back from the data registers. And the MASK is the information about the positions of interest, which should be considered. A valid instruction example is

SDR 24 TDI(000010) TDO(818181) MASK(FFFFFF);

In that specific example we have a total length of boundary scan cells of 24 and therefore the amount of passed hexadecimal coded byte values is 3 (24 bits / 8 bits/byte) -> 0x00 0x00 0x10 and 0x81 0x81 0x81 and 0xFF 0xFF 0xFF. Further the TDI value 000010₁₆ means that only on position 5 the value should be set to high (10₁₆ -> 00010000₂, counted from right to left). The TDO value 818181₁₆ gives the information about the expected positions to be high after read back the data (818181₁₆ -> 100000011000000110000001₂). That signifies only the positions 1, 8, 9, 16, 17 and 24 (read from right to left) should be set to high as the needed result. Finally the MASK value FFFFFFF₁₆ shows that all positions of the 24 bit register should be considered.

2.7. Model-View-ViewModel

The Model-view-ViewModel pattern came up with the introduction of the Windows Presentation Foundation (WPF) framework from Microsoft and is designed for loose coupling programming with different components which are working together at the final stage. It could be seen as an enhancement of the model view controller pattern from JAVA programming language.[\[13\]](#)

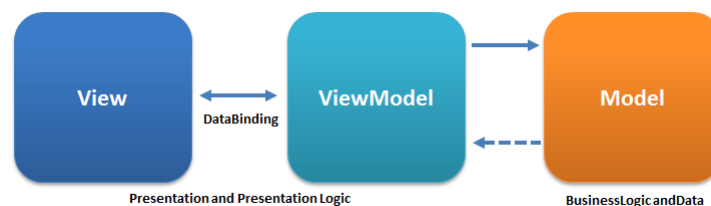


Figure 2.5.: MVVM structure[\[14\]](#)

As shown in figure 2.5 there are the three main components involved:

- View - the graphical representation form typically created in Extensible Application Markup Language (XAML) code
- Model - content of all data to be used and business logic for it
- ViewModel - the connection layer to the view and contains representation logic

Typically there will be defined a various amount of data bindings in the view to the ViewModel. Further the view model itself informs the view about happened changes of values to be displayed by using the `INotifyPropertyChanged` event. Onward it is responsible for the connection to the data of any model and controls the function sequence to be performed in dependency on the user inputs which are being forwarded as `ICommand` objects. Finally the view should contain as less behind code as possible to make sure a high loose coupling is being ensured. The looser the coupling the easier it is to switch between new implementations of different components and replace them by others. In that way it should be quite easy possible to work on all three component types separately, without having to know of each others and finally connect them together.

2.8. PRISM framework

This framework is made for creation of louse coupled MVVM projects and allows to use predefined services as `EventAggregator`, the composite commands and dependency

injection in a quite easy way.[15] Further it provides different project templates which could be used as start point of implementation.

2.9. Dependency injection framework

The **dependency injection framework** provides the possibility of registering interfaces by their implementations at some main points and being able to inject them directly in constructors of others classes, without managing the creation of objects manually in background.[16] It can use further the **singleton pattern** for making sure just to work with a single instance of a class project wide.

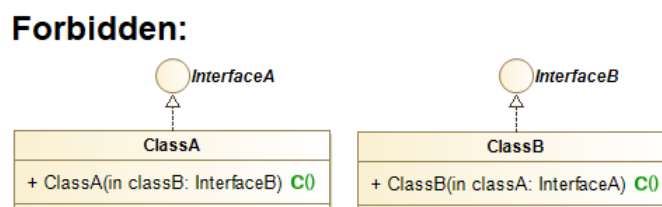


Figure 2.6.: Forbidden circular dependency

One important thing to consider while working with that framework is the fact that, as shown in figure 2.6, it's not possible to use circular dependencies. As a common work around there is the best practice to introduce more interfaces for referencing and outsourcing logic.

2.10. Material design framework

The material design framework is a view orientated framework where the options are given to use many predefined components in a pretty and easy way.[17] Further it ensures a quite modern look and feel and will be used per default in many actual software implementations as in web design.

2.11. JSON format

The java script object notation is a serialized form of data output in textual form.[18] It is widely used where it could be necessary to understand and maybe modify data

manually in an easy way. To work with that specific data format each programming language provides different kind of external libraries for parsing the information from objects into JSON and back from JSON to object. A valid JSON formatted text could like like:

```
1 {
2   "Pins": [
3     {
4       "Nets": [
5         0
6       ],
7       "Geometrics": {
8         "Bounds": {
9           "X": -1459,
10          "Y": 286,
11        },
12        "UseRotation": true
13      },
14      "PinType": 2,
15      "PinNumber": "Pin1"
16    }
17  ]
18 }
```

Listing 2.1: JSON formatted content

As shown in listing 2.1 the format is highly structured and build in hierarchical way. Further it is clear that the curly brackets are being used for defining an object instance, the square brackets are being used for identifying an array of instances and the double quotes are describing a string value. With that quite simple format is is possible to represent just any Boolean, number or string value of objects where the requirement comes up either to use serializable or plain object structures.

2.12. GRPC

GRPC is a modern open source way for performing remote procedure calls independently on the programming language used for a specific program and works as a client-server structure.^[19] That means in detail to use this protocol there is the need first of defining a specific service file using the interface definition language. By using this language there is no need to consider programming language specific dependencies. Afterward

by using protoc compiler there is the possibility of automated creation of the source code for a specific programming language which could then be included to finalize the communication work. Finally on one side there should be defined the logic for being a server by additionally defining a specific port to be used and on the other there needs to be defined the logic for being the client with considering the IP address of the server and the port. Using GRPC ensures bidirectional streaming possibilities and passes all object related data as a auto serialized stream in the JSON format. Further it can communicate through complex networks without having the challenge of defining more complex code for it. To define the service file there are many of elementary data types available, the possibility of defining object structures, functions and parameters or return values. A valid example of such a definition could be:

```

1 syntax = "proto3";
2
3 service PcbInvestigatorService {
4     // Gets all objects
5     rpc GetConvertedObjects(Request) returns (Result) {};
6 }
7
8 message Request {
9     int32 requestNumber = 1;
10    ComponentTypeGrpc type = 2;
11 }
12
13 message Result {
14     bool status = 1;
15 }
16
17 enum ComponentTypeGrpc {
18     UnknownComponentType = 0;
19     Arc = 1;
20 }

```

Listing 2.2: Interface definition of GRPC exchange

As shown in listing 2.2 there are all necessary values defined in structured and easy understandable way. Typically the auto generated code contains new classes which must be inherited for adding customized logic.

2.13. Bill of materials

As Bill Of Materials (BOM) file is a list which contains all necessary information about components of a CAD project in structured way.^[20] Often they are provided as Comma

Separated Values (CSV) file where the separator of usage could be randomly defined and the amount of totally provided columns could be various as well. But at least one column for identifying the component must be available.

Chapter 3.

Conceptual design

Within this chapter all thoughts and decisions which were made according the completion of the whole project are being pointed out in detail

3.1. Programming language to use

First of all there has been reflected, which programming language to use for creating the new software. As there are many different languages available the following table shows the resulting advantages of three compared languages:

Programming language	Benefits	Disadvantages
C#	modern GUI applications possible, powerful, knowledge already available, already being used at ProMik GmbH	-
Java Swing	GUI applications possible	no loose coupling available, just little knowledge available, not modern and powerful
Java FX	modern GUI applications possible, powerful	no knowledge available, not being used at all at ProMik GmbH

Table 3.1.: Programming languages comparison

As stated in table 3.1 it will be clear that the choice of the programming language to use finally turned into C# as the advantages convinced.

3.2. Integrated development environment to choose

Now there should be chosen an Integrated Development Environment (IDE) for creating the software with the previously concluded programming language as well:

IDE	Benefits	Disadvantages
JetBrains Rider	powerful	not for free available
Visual Studio Code	for free available	no NuGet package manager available
Visual Studio 2019	powerful, for free available, already being used within ProMik GmbH	-

Table 3.2.: IDE comparison

As compared in table 3.2 it protrudes that Visual Studio 2019 will be the choice for creating the new software as it's benefits are overbalanced.

3.3. Application structure to consider

Regarding the application structure there was the deliberation about how to use the PCB-Investigator API as efficient as possible without having the need of installing it on every machine, which runs the new tool as there is the requirement of having a valid license for using it. The idea came up to provide on one side a stand alone application, which uses the PCB-Investigator API as a server and on the other side the Graphical User Interface (GUI) application as client software that is possible to connect to the server. In that case this server could potentially run just on one machine and would be available for all other clients, which are in the same network.

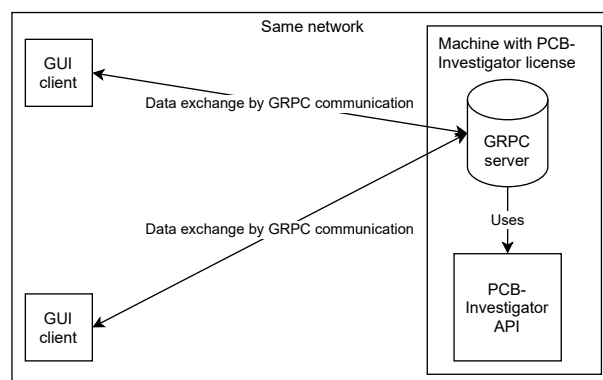


Figure 3.1.: Client-server structure of the planned software

As shown in figure 3.1 it is clear that following that idea a most flexible solution with as less restrictions as possible could be created. To make sure that the clients are able to communicate with the server the decision was made to use the GRPC protocol for data

exchange as it is already known within the company as a reliable protocol and could be used independently on the used programming languages or target frameworks of the projects.

3.4. Target frameworks to use

After the programming language, the IDE are selected and the application structure itself was defined, now there should be decided, which target frameworks to use for all projects:

Framework	Benefits	Disadvantages
.NET framework	the only compatible one for using the PCB-Investigator API	not fully compatible with all provided NuGet packages, no longer support
.NET standard	compatible to be included in .NET framework and .NET core applications	no graphical components available
.NET core	all modern graphical components available, all NuGet packages compatible	graphical components included even if not used

Table 3.3.: Framework comparison

As shown in table 3.3 each available framework has some advantages, which makes it worth to use. So after thinking about it more in detail the following project structure came out to use:

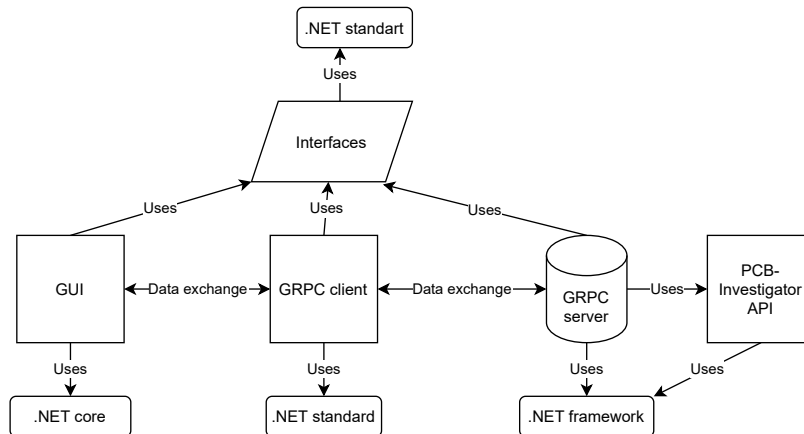


Figure 3.2.: Frameworks used within the project

The reason why to use .NET framework 4.72 for the server side is the fact that the provided API was created with that target framework (see figure 3.2). On the client side the reflection was considered to create a modern software as possible by using as

much useful frameworks for it as available and so the .NET core 3.1 has been chosen as target framework. To make sure finally that each project are able to use the common interfaces, which should be created the target framework .NET standard 2.0 was used for it.

3.5. Analyzing the structure of PCB-Investigator API

Of course the structure of the PCB-Investigator API itself regarding the received objects needs to be analyzed more in detail, which are being provided by the **PCB-Investigator.exe**:

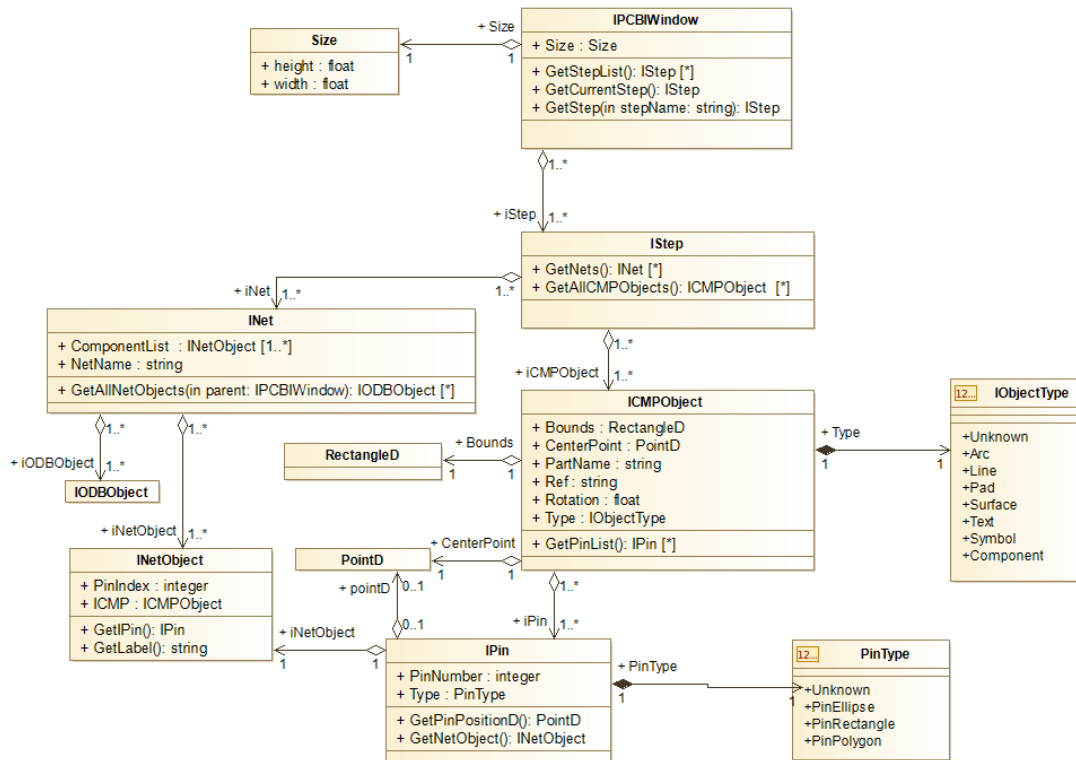


Figure 3.3.: Class diagram of the PCB-Investigator objects of interest

As shown within figure 3.3 there could be seen that the very first class is the IPCBI-Window, which contains a various amount of IStep objects. Within this IStep objects there are many INet objects and ICMPObjets.

As ProMik GmbH is just interested in extracting all relevant information from any ODB++ related projects the following public functions of the **PCB-Investigator.exe** where used by the created software to extract all INet and ICMPObjets:[21]

- `IAutomation.IAutomationInit()` - initialization of the API
- `IAutomation.CreateNewPCBIWindow(bool visible)` - creates the base window
- `IPCBIWindow.LoadData(string path)` - loads a specific project into the window
- `IPCBIWindow.GetStepList()` - getter for all steps of the window
- `IStep.GetNets()` - getter for all nets of a step
- `IStep.GetAllLayerNames()` - getter for all layer names of a step
- `IStep.GetLayer(string layerName)` - getter for a layer in dependency on the layer name from a step
- `ILayer.GetAllLayerObjects()` - getter for all objects, which are located on a specific layer within a step

3.6. Converted class structures of objects of interest

After knowing what kind of functions to be used and, which structures are available within the PCB-Investigator API the goal was to provide as simple new structures as possible containing all relevant information for later usage:

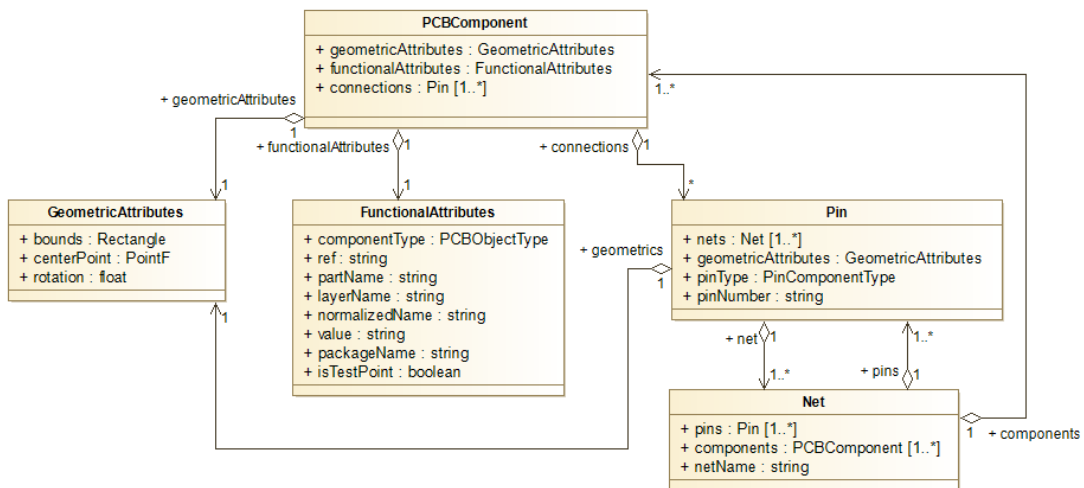


Figure 3.4.: Class structure after conversion

As shown in figure 3.4 it will be clear that the new object structure just contains five main components

- PCBComponent - the main component of interest containing further objects with information about their geometric, functional attributes and connection pins
- Pin - the connection component of a PCBComponent, which contains net objects and information about the pin name and its type
- Net - the net component containing the net name, information about all pins and components, which are included
- GeometricAttributes - an object for holding all information regarding the position and size of any object
- FunctionalAttributes - an object for having all information regarding the functionality of one component (type and names)

To make sure for having a highest level on flexibility of course as top level objects there should be interfaces introduced, which then will be implemented for later usage.

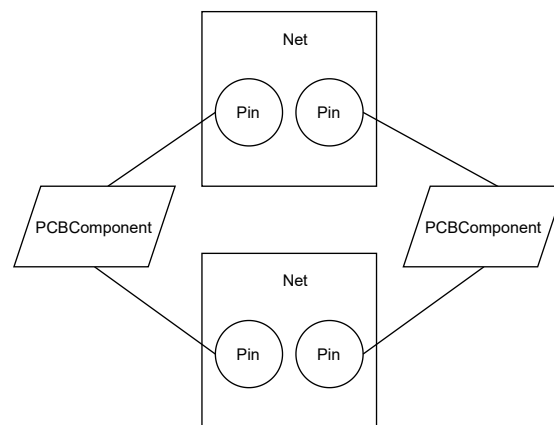


Figure 3.5.: Physical object dependencies

As shown in figure 3.5 it is possible to map all physical existing objects easily in complete way into the object orientation, which is used by the programming language by using this class structure.

3.7. Frameworks and patterns to use

To enure a modern, loose coupled appearance of the whole application where it is quite easy possible to build in different kind of extensions there was made the decision of using the **PRISM framework** for referencing a template as an empty new project.

Within that framework already the possibility of using the **dependency injection framework** is given, which should be used as well to make sure to be flexible in changing the implementations used for different interfaces. Further PRISM makes possible to use the modern appearance style from the **material design framework**, which should be used as well to make sure the software looks modern and pretty. To ensure creation of different implementations of interfaces within just one method there was additionally the need of using the **factory pattern** at some points.[\[22\]](#) Next there should be used the **command pattern** to make sure that a loose coupling between views and view-models could be established without any code behind in the views. Finally for being able to work with as many interfaces as possible to ensure easy change of implementations there should be used the **strategy pattern**, which exactly means that there are many implementations of interfaces available.[\[23\]](#)

Chapter 4.

Architecture

Within this chapter the realized architecture of the implemented software will be described in detail according to the used project structure of the visual studio solution.

4.1. Overview

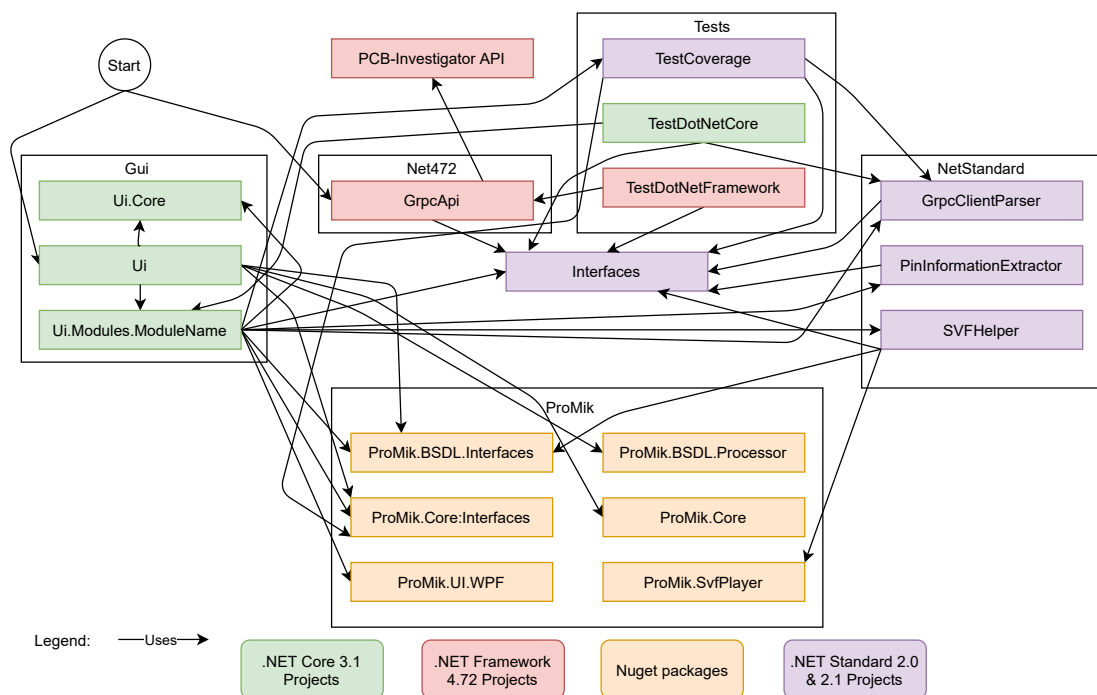


Figure 4.1.: Project overview

As shown in figure 4.1 it will be clear that the whole project is organized in different kind of folders which contain C# projects. On one side there is the **Gui** folder containing the following projects:

- Ui.Core - this project contains the region names and the view model bases which should be inherited and was provided by the PRISM framework.
- Ui - within the project the mainView and mainViewModel could be found (Was initially created by the PRISM framework)
- Ui.Modules.ModuleName - this project was basically created by the PRISM framework and contains all necessary events, interfaces, models, ViewModels and views for operating with all other referenced projects

On the other side there is the **Net472** folder with the project GrpcApi, which contains the standalone software for referencing the PCB-Investigator API and runs as a GRPC server. Next the **NetStandard** folder contains the following projects:

- GrpcClientParser - the GRPC client project for communicating with the GrpcApi project for getting all parsed objects by the PCB-Investigator API
- PinInformationExtractor - this project is being used for creation of text files in JSON format containing all pin information of all JTAG devices of one project.
- SVFHelper - this project is needed for creation of SVF files in dependency on BSDL files which should be referenced for JTAG devices. Further it could play SVF files with a programmer from ProMik GmbH which is connected to a boundary scan compatible JTAG device

The **Tests** folder consists of the following projects:

- TestCoverage - this project contains all boundary scan test according logic to be performed
- TestDotNetCore - here there can be found different unit tests for the parser logic of the GrpcClientParser project
- TestDotNetFramework - this project contains unit tests to be performed using the GrpcApi project

Finally there were different **ProMik GmbH** related projects included by the NuGet package manager of visual studio:

- ProMik.BSDL.Interfaces - contains all interfaces regarding the BSDL handling
- ProMik.BSDL-Processor - contains the implementations regarding the BSDL processor
- ProMik.Core.Interfaces - the interfaces of core logic
- ProMik.Core - the implementations of core logic

- ProMik.UI.WPF - contains different user interface elements which could be included (settings panel, log panel et cetera (etc.))
- ProMik.SvfPlayer - contains the logic for reading out the default vector and playing of SVF files

4.2. Interfaces

The Interfaces project was created as a .NET standard 2.0 project to make sure it could be referenced by any other projects which needs it. It has the following content:

- Gui - within this folder are just interfaces located which are related to the GUI logic
 - IDialogSelector - it could be used for the handling of dialogs which should be shown either for file opening, saving or folder opening or saving
 - ILogger - the system wide used interface for logging purposes which additionally will be written into a local logfile
- Helper - a folder which contains objects which were necessary for the two unit test related projects
 - PcbTestObject - this is a helper class for unit test purposes
 - PinTestObject - it is a helper class which is been included in the PcbTestObjects class and provides more detailed pin information
- PcbInvestigator - that folder contains all PCB-Investigator related interfaces and their implementations of the received objects
 - IFunctionalAttributes - the interface which contains all functional related attributes
 - IGeometricAttributes - a interface which contains all geometric and position related information
 - INetComponent - this is the interface for representing a net object
 - IPinComponent - that is a interface for describing a pin object
 - IPCBComponent - an interface which contains all information about a PCB-Component

- Enums - within that folder are the enumerations placed which were used within the IPCBComponent and IPinComponent for defining the componentType and pinType
- Implementations - in that folder are all implementations of the predefined interfaces of the PCBInvestigator objects located

4.3. Grpc Server for using the PCB Investigator API

This project is responsible for using the PCB-Investigator API which is being created using the .NET Framework and was created as a console application using the .NET Framework 4.72 as well. It further derives a service which was provided by a GRPC auto code generation as a server. The proto file itself which was used for the code generation contains three functions:

- GetConvertedObjects(Request) returns (Result) - within this function all objects of a specific project could be determined using the location to the project
- GetConvertedObjectsByZip(RequestZip) returns (Result) - that method obtains all objects by using the received project as zip file in bytes
- ClientAvailable(Empty) returns (StatusResult) - this function is being used to detect whether the client has a valid connection to the server using the settings or not

To make sure that the server itself knows which data it has to open actually only the GetConvertedObjectsByZip method is being used where the project to be opened will be transferred as a byte array containing the a single zip file.

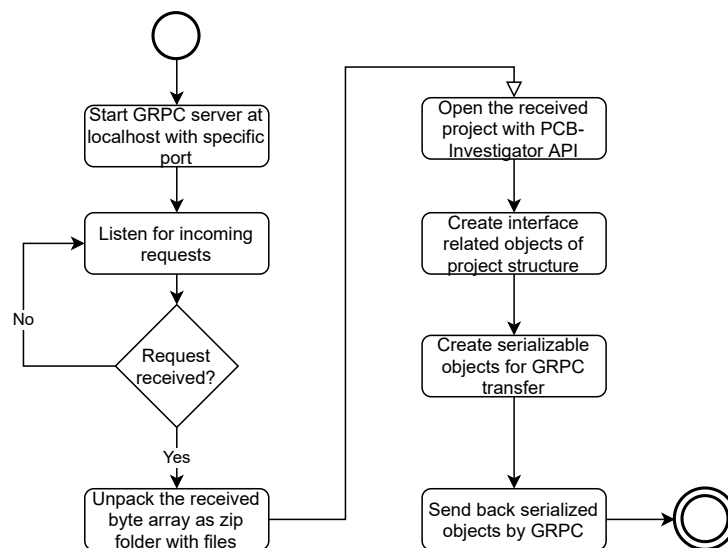


Figure 4.2.: Program schedule of the Grpc server project

As shown in figure 4.2 it will be clear that the program schedule ends with the serialization of all objects. To be able to do that in background there were created a couple of lists containing each new element to be saved. Finally only the index from the list according an object is being used for referencing it.

```

1      public IList<PinGrpc> GetPinsGrpc(IList<IPinComponent>
      allPins, IList<INetComponent> allNets)
2      {
3          List<PinGrpc> pins = new List<PinGrpc>();
4          foreach (IPinComponent pin in allPins)
5          {
6              IList<int> nets = GetNetIdsGrpc(pin.Nets, allNets);
7              PinGrpc pinGrpc = new PinGrpc()
8              {
9                  Geometrics =
10                     GetGeometricsGrpc(pin.GeometricAttributes),
11                     PinType = GetPinTypeGrpc(pin.PinType),
12                     PinNumber = pin.PinNumber,
13             };
14             pinGrpc.Nets.AddRange(nets);
15             pins.Add(pinGrpc);
16         }
17
18         return pins;
19     }

```

Listing 4.1: GetPinsGrpc

As described in listing 4.1 there could be seen that for creation of the serialized objects there were a couple of helper methods used to ensure a structured way of working. Further it will be clear that working with a list containing just int objects for referencing the net objects was necessary.

4.4. Grpc Client for connecting to the Server and parsing all objects

For being able to request all objects within a ODB++ project there is the GrpcClient-Parser project available which was introduced as a .NET standard 2.1 project for making sure to be able to include it in as many other projects as possible. That means in detail

that this whole project, which is being provided as a GRPC client project, could also be included just as a dynamic link library file within other projects to be able to handle the requests in most flexible way. The functionality of this project will be automatically be called by clicking on the menu item **Open ODB project folder**

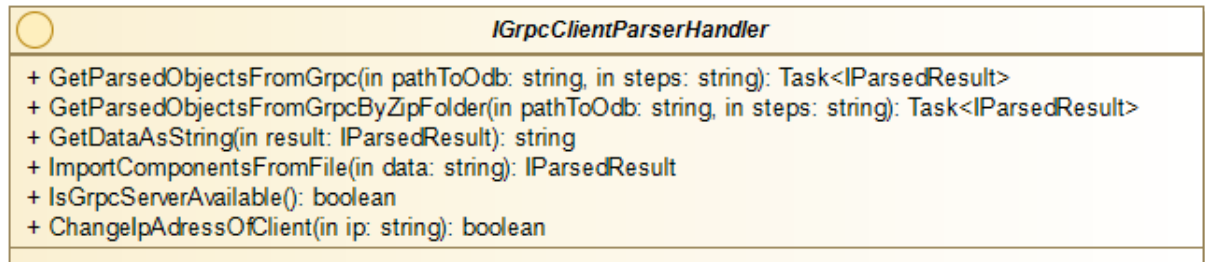


Figure 4.3.: IGrpcClientParserHandler class diagram

As shown in figure 4.3 the main interface of this project provides functions for being able to request all objects just by passing one path, by passing one path and using its zip content as well as the functionality of being able to import data from a JSON formatted file. Further it has some functions regarding the connection state of the server availability. The IParsedResult interface is a model holding all necessary data of interests. It contains all pins, nets and components of one project.

```

1  public static IPCBComponent GetComponentByType(
2      IGeometricAttributes geometricAttributes,
3      IFunctionalAttributes functionalAttributes,
4      IList<IPinComponent> connections,
5      IList<string> rDef = null,
6      ...)
7  {
8      ...
9      string beginPartName =
10         functionalAttributes.PartName.ToLower(System.Globalization.
11         CultureInfo.CurrentCulture);
12     string beginRef =
13         functionalAttributes.Ref.ToLower(System.Globalization.CultureInfo.
14         CultureInfo.CurrentCulture);
15     if (!useContains)
16     {
17         if (MatchesType(rDef, beginPartName, beginRef, false))
18         {
19             return new PCBResistor(geometricAttributes,
20             functionalAttributes, connections);
21         }
22         else if (MatchesType(cDef, beginPartName, beginRef,
23             false))
24         {
25             return new PCBCapacitor(geometricAttributes,
26             functionalAttributes, connections);
27         }
28         else if (MatchesType(iDef, beginPartName, beginRef,
29             false))
30         {
31             return new PCBInduction(geometricAttributes,
32             functionalAttributes, connections);
33         }
34         else if (MatchesType(icDef, beginPartName, beginRef,
35             false))
36         {
37             return new PCBIC(geometricAttributes,
38             functionalAttributes, connections);
39         }
40         ...
41     }
42     ...

```

Listing 4.2: GetComponentByType

As stated within listing 4.2 this is one of the main **factory pattern** using functions as there will be generated different kind of implementations of one interface, in dependency on input variables passed which are defining the object identifier. Further there is the possibility provided of using a CsvReader helper class for being able to read in CSV files which contain all values of the objects of one project in dependency on their **Ref** attribute.

4.5. GUI

Within this section the **Gui** folder and its project related contents which are all implemented using the .NET Core 3.1 framework will be described more in detail.

4.5.1. MainView and MainViewModel

The MainView and MainViewModel are responsible for creation of the view to be started and showed to the user. It consists of many regions which could be used by the PRISM framework for dynamically assignment of views during the run time:

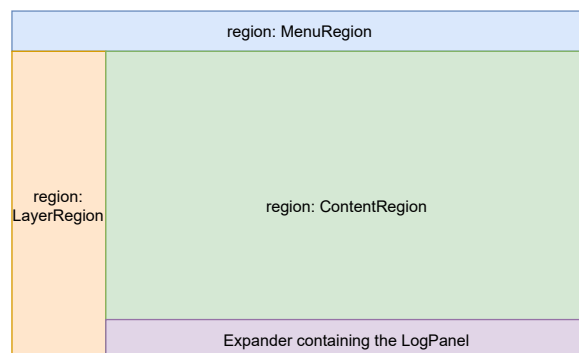


Figure 4.4.: The mainView with its regions

As shown in figure 4.4 there are some regions defined which are implemented at another project place and will be included dynamically during the software life cycle for having the maximum amount of loose coupling and the opportunity of changing templates to be used. The detailed content of each region are:

- **MenuRegion** - contains all menu items which could be clicked by the user for interaction with the software (importing, exporting of data, showing all settings, etc.)

- LayerRegion - this region contains on one side all received layers and its objects which can be shown by the PCB-Investigator API and on the other side all test coverage related object types which could be selected to be shown (pull down resistors, ics, pull up resistors, etc.)
- ContentRegion - that region contains all objects which should be displayed after there were some layers or object types selected within the LayerRegion. Further it provides the possibility of component specific actions by the context menu of the right mouse (toggle visibility, show connections, etc.)
- Expander containing the LogPanel - here the Expander object is being used which contains the ProMik.UI.WPF.LogPanel object by the NuGet package manager for displaying all logged messages of the whole application considering each log category for defining the display style

4.5.2. Events

For being able to interact project wide with different classes within different projects without having the need always to reference directly a object of class of interest, there was used a general event handling by using the ProMik.Core.Services.EventService.PrismEvent Service which is based on the PRISM event service as a NuGet referenced package. In general the event handling works on one side by subscribing to any event type and on the other by publishing that specific event. To specify an event which could use by this service it was necessary to inherit from the class EventPayload. The following events are being specified within the Gui project itself:

- AddPcbObjectsEvent - this event occurs when the importing of objects from the PCB-Investigator API has been finished
- ChangeExportMenuItemEnabledStateEvent - will be created to toggle the enabled states of menu items for exporting data into file
- CloseAllSettingsEvent - event which will be called if the settings page will be closed
- ComponentsImportFinishedEvent - that event will be generated if the import of JSON related data was finished
- HandleDropEvent - an event which will be called if something was dropped my mouse into the tool
- ResetLayersSelectionEvent - is being created to trigger the reset of all layers which will be shown within the view section
- ResetViewEvent - if the whole view needs to be reset then this event is being called

- `SelectBomFinishEvent` - after a BOM file was successfully selected then this event will be created
- `SendLayersEvent` - to send all created layers after the read out from PCB-Investigator API to the view this event is needed
- `SetBusyEvent` - for being able to set the state of the is busy animation of the application this event could be used
- `SetCoverageValuesEvent` - in order to update all test coverage determined values of objects this event needs to be used
- `ShowObjectsEvent` - showing of different kind of objects which are located in specific layers could be performed by using that event
- `UpdateBomDataEvent` - updating all BOM related data of objects could be performed by using this event

```
1 eventService.Subscribe<SetBusyEvent>(HandleIsBusyEvent ,
    ThreadOption.UIThread);
```

Listing 4.3: Subscribing to an event

As presented in listing 4.3 there further could be specified some thread options to be considered at subscribing to an event. In most cases there was just the thread option `UIThread` necessary.

```
1 eventService.Publish(new SetBusyEvent(true));
```

Listing 4.4: Publishing of an event

As shown in listing 4.4 publishing could be realized just by passing a constructor of the event of interest containing all necessary parameters for it.

4.5.3. Helper

Now for being able to perform different kind of additional work for finishing tasks there was the need of providing some helper classes which could be used for that:

- `AttributeList` - a class which just contains all necessary identifier for the different kind of objects received by the PCB-Investigator API
- `ComponentAttributes` - contains all relevant binding attributes from the `ComponentViewModel` which is mainly responsible for drawing all objects into the area

- BomSettings - this class holds all BOM related settings (separator, column number of ref and column number of value)
- CustomCollectionException - that customized exception class was necessary for avoiding the IDE to gripe about the catching of general exception types
- DropFilesBehaviorExtension - within that class all the behavior regarding the drop mechanism into the application are defined
- DummyDataHandler - to use a dummy data handler for testing purposes this class has been provided
- LogMessage - for being able to handle a logging message and it's logging category this class was used
- Manifest - the class which contains all necessary properties of working with the manifest project mode
- PositionHelper - to determine all necessary positions of the points of a connection line between several objects, this class was necessary to be introduced
- StorageColor - as it was necessary to work with serializable color information that class was needed
- ViewModelFactory - another **factory pattern** using class for creation of wrapping ViewModels for rendering in dependency on the specific object type

```

1  private static void OnPropertyChanged(DependencyObject d,
    DependencyPropertyChangedEventArgs e)
2  {
3      if (!(d is FrameworkElement fe))
4      {
5          return;
6      }
7      if ((bool)e.NewValue)
8      {
9          fe.AllowDrop = true;
10         fe.Drop += OnDrop;
11         fe.PreviewDragOver += OnPreviewDragOver;
12     }
13     else
14     ...
15 }

```

Listing 4.5: OnPropertyChanged

As shown in listing 4.5 within the function for registering the drop mechanism there will be added specific methods to be called when the Drop or PreviewDragOver event occur of any rendered object.

4.5.4. Interfaces

To be able to work as flexible as possible with the used logic of course there was the need of providing several interfaces, which could be used by different implementations to be registered:

- IBomDataModel - interface for storing all BOM related data and modifying it
- IBomHandler - the interface for handling all BOM related actions to be performed
- IComponentHandler - this interface is being used for defining the ComponentView-Model related actions as toggling the visibility or showing all connections of it
- IDataSourceProvider - that interface is being created for defining the different data sources of project loading
- IDropHandler - an interface for defining the drop event handling
- IFilesDropped - one interface for specifying the action to be performed on multiple files dropped
- IManifestHandler - specific interface which is responsible for all actions regarding the manifest project handling
- IProjectFileHandler - how the project file handling is defined in general could be set by using this interface
- IProjectHandler - for being able to define the data source flow regarding the import and export of project related data could be found here
- IProjectLoadHandler - all flow handling related functions regarding the import and export functionality of the project could be used by this interface
- IResultModel - as there should be the possibility of holding all received data by the PCB-Investigator within one model there was this interface introduced
- ISettingsData - to be able to work with all settings in generic way there was this interface provided
- ISettingsHandler - importing and exporting of all settings data could be specified by using this interface

- ISettingsStorageManager - saving and getting all settings content could be defined by implementing that interface
- ISettingsStorageModel - model interface for defining the serialized content of all settings could be found within here

```

1 public interface IComponentViewModel
2 {
3     Task ToggleCompleteVisibility(Type typeToHide);
4
5     Task ToggleShowConnections(ViewModelPCBComponentBase comp,
6         bool shouldShow);
7
8     Task ShowLayerObjects(IList<string> layersToShow);
9 }

```

Listing 4.6: IComponentViewModel

As shown in listing 4.6 there were Task objects used for being able to work with the async await operations to make sure not to block the Gui while operation is running.[\[24\]](#)

4.5.5. Implementations

As there were previously many interfaces introduced of course there should be as many implementations for usage provided:

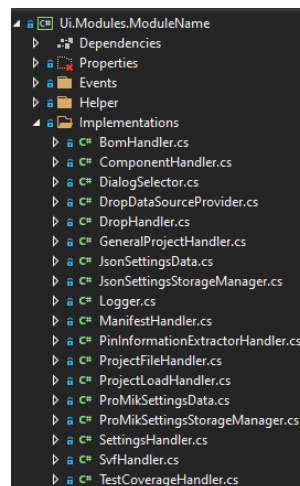


Figure 4.5.: All implementations within the Ui.Modules.ModuleName project

As displayed in figure 4.5 there are more implementations available as predefined before within the Interfaces section. That comes from the fact that there are much more interfaces available in other projects, which needs to be considered on that place as the main sequences are all being triggered from that project.

```
1 public bool OpenGenericDialog(DialogType dialogType, string
   title, string errorMessage, out string selectedTarget, string
   filter = "")
2 {
3     string content = string.Empty;
4     if (dialogType == DialogType.OPENFILE)
5     {
6         VistaOpenFileDialog openDialog = new
           VistaOpenFileDialog() { Title = title, Filter =
           filter };
7         openDialog.ShowDialog();
8         content = openDialog.FileName;
9     }
10    else if (dialogType == DialogType.SAVEFILE)
11    {
12        VistaSaveFileDialog saveDialog = new
           VistaSaveFileDialog
13        {
14            Title = title,
15            Filter = filter,
16        };
17        saveDialog.ShowDialog();
18        content = saveDialog.FileName;
19    }
20    ...
```

Listing 4.7: OpenGenericDialog method of IDialogSelector implementation

As stated in listing 4.7 there was used the VistaOpenFileDialog and VistaSaveFileDialog from an external library used by the NuGet package manager for handling the path selection within a dialog. If needed just by using another implementation of this interface the complete handling and used packages for it could be easily changed.

4.5.6. Model

To be able to hold different kind of data project wide and access it by dependency injection in easy way there are some models been defined:

- BomDataModel - the model for holding all BOM related data
- ResultModel - this model saves all object related results after requesting the PCB-Investigator API
- SettingsStorageModel - that model is responsible for having all setting related data available
- TestCoverageDataModel - a model for saving all test coverage related objects of interest for determination of it

```
1 public class ResultModel : IResultModel
2 {
3     public IParsedResult Result { get; set; }
4
5     public bool CheckIfValuesAreBeingUsed()
6     {
7         foreach (var comp in Result.Components)
8         {
9             if (!string.IsNullOrEmpty(comp.
10                 FunctionalAttributes.Value))
11             {
12                 return true;
13             }
14         }
15
16         return false;
17     }
18 }
```

Listing 4.8: ResultModel

As stated in listing 4.8 there was additionally to the property a helper function defined for being able to determine whether all values from BOM import should be considered or not. In dependency on that check later the logic is able to highlight all objects which have no valid value received.

4.5.7. ViewModels

Within that folder are all necessary ViewModels for that project are defined:

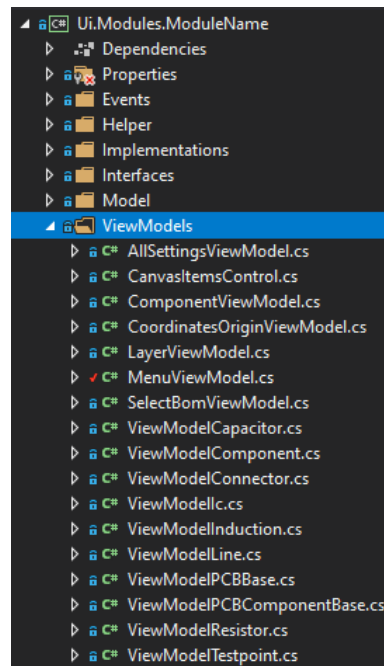


Figure 4.6.: All ViewModels within the Ui.Modules.ModuleName project

As shown in figure 4.6 there were used the following main types of ViewModels:

- Gui related ViewModels, which are necessary to provide functionality for visible and click able content by the user within the main view
- A helper ViewModel for representation of the origin of the coordinate system
- Object related ViewModels for representation of all available object types from the read out ODB++ project (resistor, capacitor, induction...)

4.5.8. Views

That folder contains all views for representation of specific regions of the mainView or components to be rendered:

- AllSettingsView - this view contains all settings of the software by using the ProMik.UI.WPF.SettingsPanel which was included as a NuGet package
- ComponentView - that view contains all necessary appearance settings for displaying all objects to be rendered within the mainView region
- CoordinatesOrigin - within that view just the representation form of the origin of the coordinate system is defined

- LayerView - the view for showing all received layers from PCB-Investigator API which is been included in a region of the mainView
- MenuView - all menu items which are accessible by the user are defined in that view
- PCBComponentBaseDataTemplate - to render any received object from a ODB++ project this template will be used
- PCBLineDataTemplate - for being able to show connections between objects that view will be considered as template for drawing the lines
- PCBTstpointDataTemplate - as the test point itself is not a rectangle but a circle it has it's own template defined in that view
- SelectBomView - to make sure to display a window containing all BOM related settings before importing any CSV file this view was provided

```

1  ...
2  <DataTemplate DataType="{x:Type if:ViewModelLine}">
3      <Canvas Visibility="{Binding LineVisibility}">
4          <Canvas.ToolTip>
5              <ToolTip Visibility="Visible"
6                  Content="{Binding ObjectNames}"
7                  Placement="MousePoint" />
8          </Canvas.ToolTip>
9          <Canvas.ContextMenu>
10             <ContextMenu>
11                 <MenuItem Header="Hide"
12                     Command="{Binding Hide}" />
13             </ContextMenu>
14         </Canvas.ContextMenu>
15         <Path Data="{Binding Points}" Opacity="{Binding
16             Opacity}" StrokeThickness="3"
17             Stroke="{Binding LineColor}"/>
18         <Label Content="{Binding NetName}"
19             Opacity="{Binding Opacity}">
20             <Label.RenderTransform>
21                 <TranslateTransform X="{Binding
22                     XPositionNetName}" Y="{Binding
23                     YPositionNetName}"/>
24             </Label.RenderTransform>
25         </Label>
26     </Canvas>
27 </DataTemplate>
28 ...

```

Listing 4.9: PCBLineDataTemplate

As shown in listing 4.9 there could be seen that to ensure a loose coupling implementation there are being used many bindings to values and commands. Further it will be clear that this template should only be used if the representative object type is a `ViewModelLine`. By using the command `Hide` it will be possible to hide any rendered line completely by choosing the action within the context menu of the right mouse button click.

4.6. Test coverage determination of loaded project

The **TestCoverage** project, which was implemented using the .NET Standard 2.1 framework is responsible for determining all test related objects and different kind of test coverage results to be displayed within the application as plain text. It consists of the following sub folders and content:

- Events - here are the test coverage related events are placed which could be used for triggering some actions
- Helper - that folder contains some helper classes, which are necessary to work with the other interfaces of this project in a helpful way
- Interfaces - this folder consists of all interfaces, which are being used by other projects to perform test coverage related actions and could be easily extended by providing new implementations for them
- Implementations - within that folder are actually just boundary scan related implementations of the interfaces to be used

Actually there is just been provided the possibility of determining boundary scan related values according the following sequence:

1. Define the settings for general identifying the ICs within the tool
2. Define the test coverage related settings within the tool
 - Ground nets related identifier
 - Ground nets related blacklist
 - Power nets related identifier
 - Power nets related blacklist
 - JTAG nets related identifier
 - JTAG nets related blacklist
3. Load a ODB++ project into the tool
4. Perform the function **Determine all boundary scan objects** by menu item
5. Perform the test coverage determination for at least one of the following values by clicking the according menu item within the **Test coverage -> Boundary scan test** menu item group:

- Determine test coverage for JTAGs - the amount of all JTAG devices / amount of total pins of all JTAG devices
 - Determine test coverage for all PullUps - the amount of totally connected power nets of all JTAG devices / amount of total pins of all JTAG devices
 - Determine test coverage for all PullDowns - the amount of totally connected ground nets of all JTAG devices / amount of total pins of all JTAG devices
 - Determine test coverage for all PullUps and PullDowns - (the amount of totally connected ground nets + power nets of all JTAG devices) / amount of total pins of all JTAG devices
 - Determine test coverage for all other components - the amount of totally connected nets, which are neither ground nor power nets of all JTAG devices / amount of total pins of all JTAG devices
 - Determine complete test coverage of boundary scan - (the amount of totally connected nets, which are neither ground nor power nets + connected ground + connected power nets of all JTAG devices) / amount of total pins of all JTAG devices
6. Finally the determined value will be updated and visible as textual representation at the bottom of the tool

Next there are some code snippets presented to have a closer look into the implementation of background logic:

```

1  public interface ITestCoverageDeterminer
2  {
3      bool
4          IsTestResultAvailableForComponentsAndType(IPCBComponent
5              comp, IPCBComponent second);
6
7      void ClearAllObjects();
8
9      Task<TestCoverageItems> GetTestCoverage(TestCoverageItems
10         items, TestCoverageType type);
11
12     TestCoverageItems DetermineTestCoverageRelatedObjects(
13         IList<INetComponent> nets,
14         IdentifierBlacklistContainer content,
15         TestCoverageItems items);
16 }

```

Listing 4.10: ITestCoverageDeterminer

As stated in listing 4.10 it is clear that for being able to perform any `GetTestCoverage` function there will be used a enumeration type of `TestCoverageType`, which could be easily extended for future purposes. Next in dependency on two received objects its possible to detect whether any test coverage is available or not to decide later on whether to draw the connection lines between objects in green color or just black.

```

1  public TestCoverageItems
    DetermineTestCoverageRelatedObjects (IList<INetComponent> nets,
        IdentifierBlacklistContainer content,
2      TestCoverageItems items)
3  {
4      if (nets != null && nets.Count > 0)
5      {
6          DefineGndNets(nets, content.GndNetIdentifier,
            content.GndNetBlacklist);
7          ...
8          Dictionary<TestCoverageObject, IList<IPCBCComponent>>
            mapObjects = new Dictionary<TestCoverageObject,
                IList<IPCBCComponent>>();
9          testCoverageDataModel.Ics = DefineIcs();
10         ...
11         mapObjects.Add(TestCoverageObject.PULLUP,
            testCoverageDataModel.PullUps);
12         ...
13         LogTestCoverageObjects(mapObjects);
14         ...
15         eventService.Publish(new
16             TestCoverageForDeterminingObjectsPerformedEvent(
17                 TESTCOVERAGEOBJECTS.ToList()));
18         items.ItemTestCoverageObjects =
            TestCoverageBoundaryScanDeterminer.ITEMSELECTED;
19         ...
20         CheckDoubleMatching(testCoverageDataModel.PullDowns,
            testCoverageDataModel.PullUps);
21         LogResults();
22     }
23     else
24     {
25         items.ItemTestCoverageObjects =
            TestCoverageBoundaryScanDeterminer.ITEMNOTSELECTED;
26     }
27     return items;
28 }

```

Listing 4.11: DetermineTestCoverageRelatedObjects

As shown in listing 4.11 there are first of all within the function of defining all test coverage related objects, the nets are being defined before then all test coverage related objects are being determined. Finally a dictionary containing all objects in relation to a test coverage object type is being filled and send by an event to be filled within the LayerRegion for providing the user the possibility of selecting them to be showed. As a feature there will be checked additionally if some components were detected being more than one test coverage related object. If this is the case then some logging output as a warning category will be performed to inform the user about settings to be adapted in case of improving the identifier or blacklist of specific object types.

4.7. Pin information extraction

To be able to extract all pin information of all JTAG related devices of any ODB++ project into separate files to be created there is the project **PinInformationExtractor** available, which was created using the .NET standard 2.1 framework as well. It contains the following sub folders with the specific content and will be used by clicking on the menu item **Test coverage -> Export PIN connection information into file:**

- Interfaces - this folder contains all interfaces, which could be used for performing actions of this project
- Implementations - within that folder are the implementation of the interface could be found
- Helper - that folder consists of some helper classes, which are being used within the implementation class of this project

```

1  public interface IPinInformationExtractor
2  {
3      List<JtagConnectionInfo> CreatePinInformationFile(string
4          filePath, IList<IPCBCComponent> ics, IList<IPCBCComponent>
5          pullUps, IList<IPCBCComponent> pullDowns, string
6          tdiIdentifier = "tdi", string tdoIdentifier = "tdo",
7          string tckIdentifier = "tck", string tmsIdentifier
8          = "tms");
9      ...
10 }
```

Listing 4.12: IPinInformationExtractor

As shown in listing 4.12 there are much of the passed parameters for creation of the pin information file set per default to a specific value, which is being used by the main routine actually. By preallocation of parameters the user does not have to exclusively define them

manually when calling that specific method, which leads to a more independent way of working.

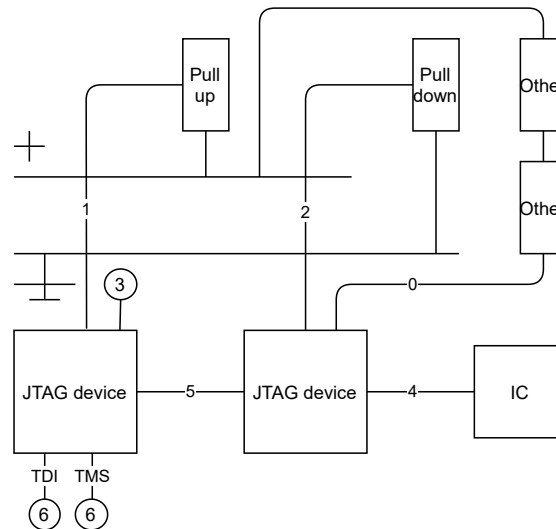


Figure 4.7.: The determined pin types of interest

As shown in figure 4.7 there will be determined a couple of different pin types for consideration within the exported JSON text file of all JTAG devices:

0. A pin which is connected to an unknown component
1. A pin which is connected to a pull up resistor
2. A pin which is connected to a pull down resistor
3. A pin which is not connected to anything
4. A pin which is connected to another IC component
5. A pin which is connected to another JTAG device
6. A pin which is directly a JTAG control pin (TDI, TDO, TMS, TCK)

4.8. SVF file generator

Now for being able to create SVF files with all specific commands needed for being able to be played with a programmer by ProMik GmbH there is the **SVFHelper** project been provided using as well the .NET Standard 2.1 framework. This project will be used if the user clicks on the menu item **Test coverage -> Generate SVF data files**

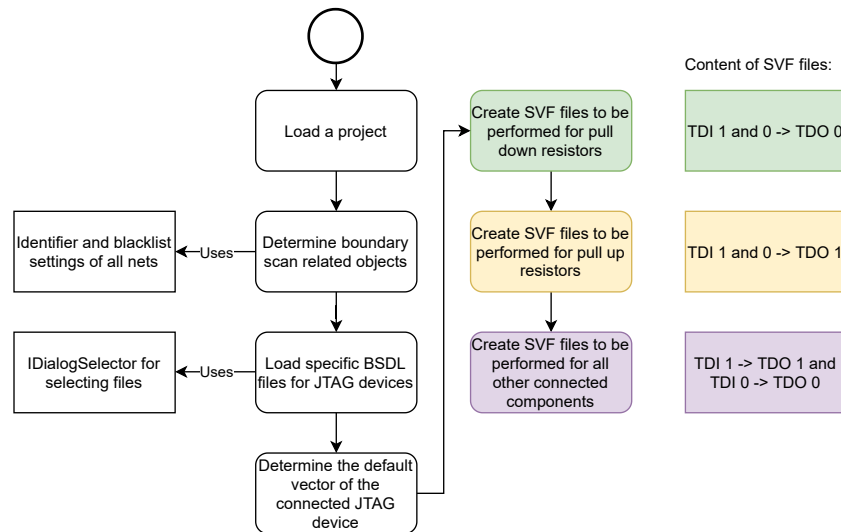


Figure 4.8.: The program schedule for creation of SVF files

As shown within figure 4.8 there is the need of selecting manually all BSDL files for all JTAG devices in order to get all pin information regarding their boundary scan compatibility and position within the SVF test vector to be generated. To provide all necessary functionality to be able to perform that steps the project consists of the following sub folders and classes:

- Interfaces - within that folder all interfaces, which are available located at
- Implementations - all implementations of the interfaces are placed within that folder
- Helper - in that folder an exception helper class could be found, which was necessary to avoid the IDE complaining about catching an general exception

```
1 public class PullDownSvfWriter : ISvfWriter
2 {
3     private readonly ISVFHelper svfHelper;
4     public PullDownSvfWriter(ISVFHelper svfHelper)
5     {
6         this.svfHelper = svfHelper;
7     }
8     public List<ISvfData> GetSVFFiles(string basePath, string
9         jtagName, List<string> pinLabel, IBSDLOutput bsdlOutput,
10        byte[] defaultVector)
11    {
12        List<ISvfData> data = new List<ISvfData>();
13        foreach (var pin in pinLabel)
14        {
15            data.Add(svfHelper.GetSvfContent(basePath,
16                jtagName,
17                pin, bsdlOutput, false, false, defaultVector));
18        }
19        foreach (var pin in pinLabel)
20        {
21            data.Add(svfHelper.GetSvfContent(basePath,
22                jtagName,
23                pin, bsdlOutput, true, false, defaultVector));
24        }
25        return data;
26    }
27 }
```

Listing 4.13: PullDownSvfWriter

As shown in listing 4.13 it will be clear that there is being a ISvfData model used for collecting all necessary information about one SVF file. Next as the logic for the pull down resistors is being shown it could be seen that passing on the one side false and on the other side true within the GetSvfContent function means that this is the TDI value to be used.

```

1 private string GenerateNewVector(string pinLabel, bool value,
   Dictionary<int, IBoundaryCell> boundaryCells, ref int
   position, byte[] defaultVector)
2 {
3     var index = 0;
4     foreach (var cell in boundaryCells)
5     {
6         if (cell.Value.Port.Equals(pinLabel))
7         {
8             index = cell.Key;
9             position = index;
10            break;
11        }
12    }
13    if (index == 0)
14    {
15        return string.Empty;
16    }
17    var vectorArray = new BitArray(defaultVector);
18    try
19    {
20        vectorArray.Set(index, value);
21    }
22    catch (ArgumentOutOfRangeException e)
23    {
24        logger.LogMessage(e.Message, LogCategory.ERROR);
25    }
26    byte[] resultBytes = new byte[((vectorArray.Length - 1) /
   8) + 1];
27    vectorArray.CopyTo(resultBytes, 0);
28    Array.Reverse(resultBytes, 0, resultBytes.Length);
29    return ByteArrayToString(resultBytes);
30 }

```

Listing 4.14: GenerateNewVector of SVFHelper

As shown in listing 4.14 there will be first searched after the pin label within the dictionary received by the BSDL file. If a valid index was found then the default vector will be converted into a bit array and the specific index of the pin will be set to the requested value. Finally the bit array will be converted back to a hexadecimal representation. If there was no index found at all just an empty string will be returned to trigger the logging of missing pin information within the BSDL file. The default vector must be read out directly before creation of SVF files and contains all actual states of pins in a hexadecimal representation.

4.9. Unit tests

As unit tests are highly recommended for guaranteeing a high quality of software logic of course this solution also contains some unit tests, which are separated in the **TestDotNetCore** project that was created using the .NET Core 3.1 framework and the **TestDotNetFramework** project which was implemented using the .NET Framework 4.72.[25]

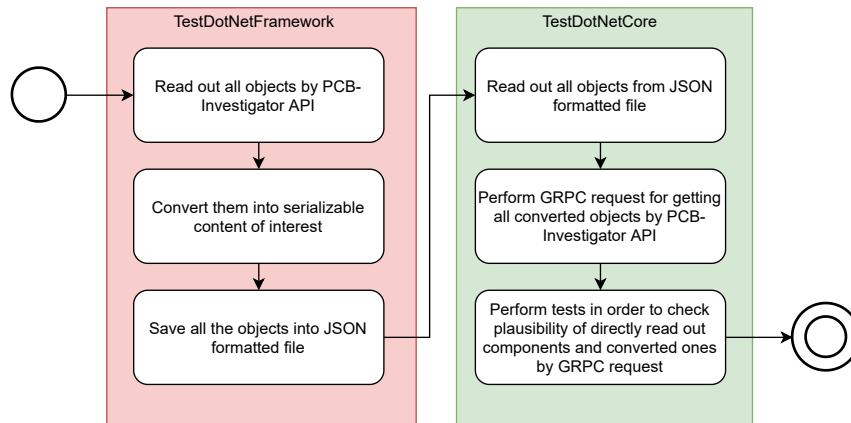


Figure 4.9.: The sequence for a complete test of parsing validation of objects received by PCB-Investigator API

As shown in figure 4.9 there was the need of exporting test related data into a local file, which could be read in later for finalizing the tests as the usage of two different GRPC related frameworks of project creation made it impossible to test everything just within one test. For that purpose there was introduced the helper class `PcbTestObject` to provide the following information:

- Name - the name of a component
- TotalAmountOfPins - the total amount of connected pins
- Pins - a list containing `PinTestObjects`

The included `PinTestObject` contains the following information of interest:

- PinNumber - the pin number
- Nets - a list containing all net names, which are connected to this pin

```

1 [Fact]
2 public void TestParsingFromApi()
3 {
4     IGrpcClientParserHandler grpcHandler = new
5         GrpcClientParserHandler(new DebugLogger());
6     List<PcbTestObject> resultData = GetSerializedData(FILEPATH);
7     Assert.NotNull(resultData);
8     Assert.True(resultData.Count > 0);
9     var result =
10         grpcHandler.GetParsedObjectsFromGrpc(PATHTOODB,
11             "-1").Result;
12     Assert.NotNull(result);
13     Assert.True(result.Components.Count > 0);
14     Assert.True(result.Nets.Count > 0);
15     TestContent(resultData, result);
16     Debug.WriteLine("Tests finished successfully!");
17 }

```

Listing 4.15: TestParsingFromApi from TestDotNetCore

As stated in listing 4.15 there first of all will be asserted that the received objects by the GRPC API is not null and the read out content from the JSON formatted file contains some objects. Finally there will be called the TestContent function to make sure that all objects equals the necessary information. Further it can be seen that for testing purposes a DebugLogger was generated, which implements the ILogger interface in that way that all messages are just being forwarded to the debug line as no other objects are available running this sequence. The -1 parameter within the GetParsedObjectsFromGrpc method defines at the API to check for all available steps within the ODB++ project as there is the possibility to define specific ones to be considered by using a semicolon separated string.

4.10. Pipeline configuration

The company ProMik GmbH uses gitlab as their internal continuous integration system, which is a open source software and provides the possibility of performing different kind of scripts after the build process.^[26] According to that fact their was additionally the need of providing a specific Yet Another Markup Language (YML) file to make sure that the whole project will be build as executable files in the correct destination folders. The YML itself contains different associated lists and scalars, which could be performed by the system that reads its statements out.^[27]

```
1 stages:
2   - build
3   - staging
4   - deploy
5 build_win32:
6   stage: build
7   ...
8 build_win64:
9   stage: build
10  ...
11 build_docs:
12   stage: build
13   ...
14 artifacts:
15   ...
16 staging:
17   stage: staging
18   ...
19 dependencies:
20   - build_win32
21   - build_win64
22   - build_docs
23   ...
24 deploy:
25   stage: deploy
26   ...
27 dependencies:
28   - build_win32
29   - build_win64
30   - build_docs
31   ...
```

Listing 4.16: YML file for pipeline

As shown in listing 4.16 the whole file describes the different stages to be performed sequentially. In detail that means first the build process for the x86 and x64 architecture will be performed. If succeeded then the staging process and finally the deploy process will be triggered. Within the staging process all relevant files of the build process including the documentation will be copied to a specified path in dependency on the branch

name of the project. The deploy process will only be triggered if a new tag was created to specify accordingly a new version, which could potentially be delivered.

4.11. Overview of provided features

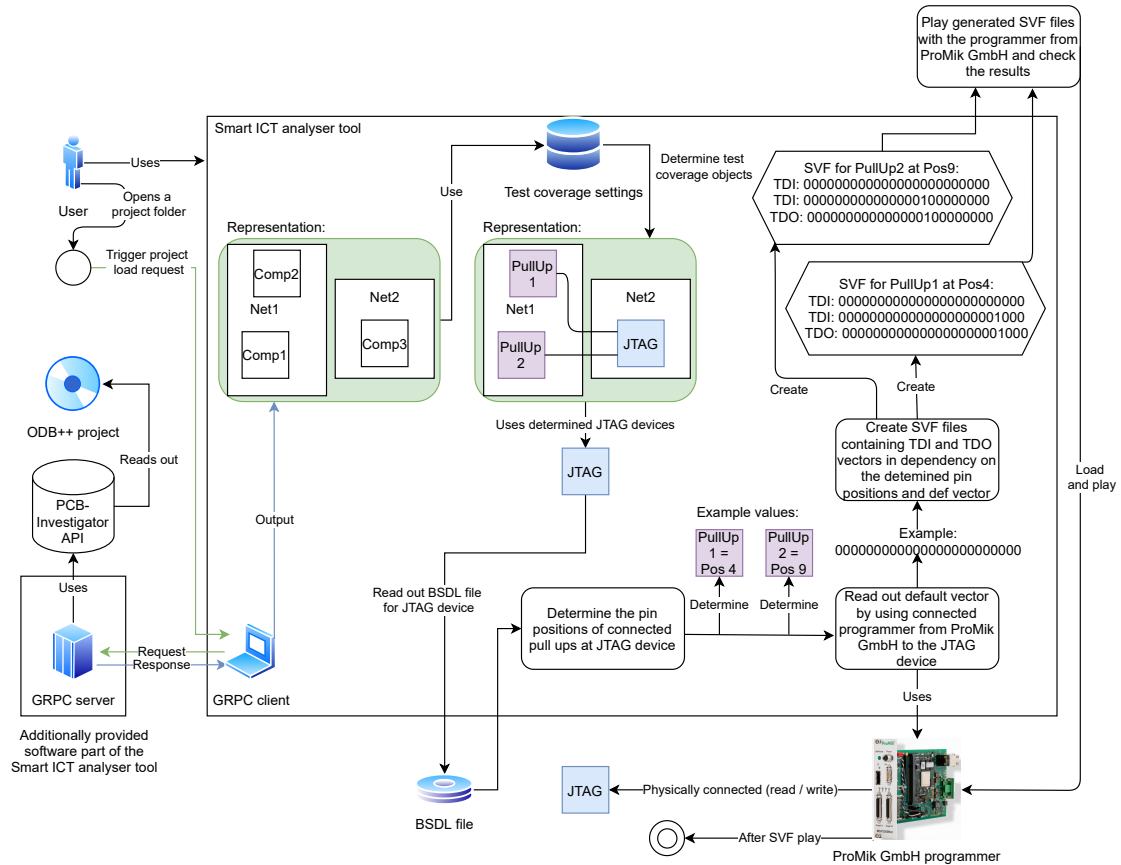


Figure 4.10.: Overview of the whole software usage

As shown in figure 4.10 the used architecture of the software makes sure to provide a software, which is able to communicate to a stand alone GRPC server that uses the PCB-Investigator API for reading out all components of a ODB++ project. Then first all elements will be rendered in plain way. After the user then specified the test coverage related settings and performs the determination of all test coverage related objects of the boundary scan mechanism then the objects will be classified in different groups. Next using all identified JTAG devices the user is possible to include a BSDL file for gathering the pin information and considering them for the creation of SVF files, which requires the default vector that further will be read out by a connected programmer from

ProMik GmbH. These created files finally could be played for determining all mismatches between the TDI and TDO vectors.

Chapter 5.

Analysis

This chapter will analyze the consumption of time of different kind of processes, which are being performed by the created tool using a various amount of project sizes. It should just point out that the software itself does not take too long time for performing actions and if used larger projects of course the time consumption rises as well. Further a validation mechanism of test coverage determination is being explained

5.1. Performance of loading ODB++ projects by using the PCBInvestigator API

First of all we have a closer look into the loading request of a ODB++ project into the tool. As shown in 4.2 the following steps of procedure could be considered one by one:

1. Compress project as zip file and send it via GRPC to the server (Stage 1)
2. Decompress the zipped project file (Stage 2)
3. Perform read out of the project by using the PCB-Investigator API (Stage 3)
4. Parse all objects in serializable form and send it back via GRPC (Stage 4)
5. Parse all received serialized objects into class objects of interest (Stage 5)

To be able for capturing the time consumption of course there was the need of adding some more debug related statements into the code, which afterward were saved as they are not visible for the user at later usage of the tool. By proceeding in that way it was possible to capture as detailed and realistic time values as possible.

As shown in table 5.1 it will be clear that the PCB-Investigator needs the most time for performing its work where no possibility of improvement was possible as no source code was available.

Project size in MB	Total amount of PcbObjects, nets and pins	Stage 1 time in ms	Stage 2 time in ms	Stage 3 time in ms	Stage 4 time in ms	Stage 5 time in ms	Total time consumption in ms
25,7	1822, 1241, 2239	791,02	1357,44	3949,28	274,71	238,86	6611,31
1,81	239, 80, 186	108,81	215,10	1086,14	3,42	7,20	1420,67

Table 5.1.: Time consumption for loading a ODB++ project

5.2. Performance of loading projects by importing JSON formatted files

Project size in MB	Total amount of PcbObjects, nets and pins	Total time consumption in ms
25,7	1822, 1241, 2239	439,52
1,81	239, 80, 186	26,97

Table 5.2.: Time consumption for importing a ODB++ project from JSON file

As stated in table 5.2 it will be clear that the time consumption in general is really low as it depends only on the working mechanism of the external library **Newtonsoft.Json**, which is quite fast in performing its parsing work.

5.3. Performance of exporting projects into JSON format

Project size in MB	Total amount of PcbObjects, nets and pins	Total time consumption in ms
25,7	1822, 1241, 2239	2,88
1,81	239, 80, 186	0,97

Table 5.3.: Time consumption for exporting a ODB++ project as JSON file

As stated in table 5.3 it will be clear that again the time consumption in general is really low as it depends only on the working mechanism of the external library **Newtonsoft.Json**, which is really fast in acting.

5.4. Performance of showing connections of components

As shown in table 5.4 the time consumption is not really linear but it definitely increases in dependency on the amount of lines to be drawn.

Total amount of connected PcbObjects	Total time consumption in ms
991	323,90
1285	444,59
3	4,46
13	5,72
90	28,87

Table 5.4.: Time consumption for showing connections between components

5.5. Performance of determination of test coverage values

Test type	Affected components to consider	Base amount as divider	Total time consumption in ms
JTAGs	2	1014	38,34
Pull ups	68	1014	39,89
Pull downs	122	1014	244,64
Pull ups + Pull downs	159	1014	297,87
Others	352	1014	23,46
Pull ups + Pull downs + JTAGs + Others	511	1014	355,08

Table 5.5.: Time consumption for performing test coverage determination

As shown in table 5.5 there rises the time consumption in dependency on the amount of determined objects to be considered for the test coverage determination.

```

1  public async Task<TestCoverageItems>
    GetTestCoverage(TestCoverageItems items, TestCoverageType type)
2  {
3      Stopwatch sw = Stopwatch.StartNew();
4      TestCoverageItems result = null;
5      if (type == TestCoverageType.BOUNDARY_SCAN_ALL)
6      {
7          result = await
            GetCompleteTestCoverageOfAllJtags(items).ConfigureAwait(false);
8      }
9      ...
10
11     sw.Stop();
12     Debug.WriteLine("Test performed: " + type.ToString() + "
        {0}ms", sw.Elapsed.TotalMilliseconds);
13     return result;
14 }

```

Listing 5.1: GetTestCoverage with time measurement

As stated in listing 5.1 it will be visible that using of the `StopWatch` class, which is being provided by the `System.Diagnostics` package is a pretty good choice as its handling is quite easy. Further there is being shown that the calling of `Debug.WriteLine` function only is visible for debugging purposes within the IDE

5.6. Validation of test coverage values

To ensure that the software determines correct values there was made the assumption that comparing the gathered results to that ones, which were determined by using a third party tool named XJTAG. It provides the possibility of determining such specific values in dependency on considered settings.[\[28\]](#) Comparing the results for the test coverage of pull down resistors led to a really small difference (12,8 % from XJTAG - 12,03 % from the created tool = 0,77 %), which could be explained by the settings mismatch which were used.

Chapter 6.

Conclusion

As a conclusion of the creation of the requested tool there could be definitely held that in dependency on all requirements, which were communicated by ProMik GmbH and the software developer a quite powerful and feature rich software was provided according to figure 4.1. All at the beginning requested requirements from the enumerated list 1.2 were successfully implemented. Further there were provided the following features as bonus content:

- Mirroring of the whole rendered project across the x and y axis is possible
- Defining of steps to be considered at read out from PCB-Investigator could be defined within settings
- Coloring of all components independently is possible by changing the settings
- An coordinates origin is being placed
- The actual mouse position is being shown at the bottom of the tool by providing the x and y coordinate

As potential extensions or improvements there could be considered the following point in the view of the developer:

- Inclusion of SVF player for being able to perform SVF files by the tool directly
- Tracing of the SVF results (comparison between TDI and TDO values) and detailed logging about the detected differences
- Usage of other API for gathering information from ODB++ related projects than just the PCB-Investigator
- Provide drag & drop possibility of rendered components for being able to classify directly as blacklist component for the test coverage determination
- Provide more test coverage determination methods than just the boundary scan ones

- Usage of decryption & encryption of exported data files to avoid manipulation of it

At the beginning already the need was discussed to be able to work with that whole created project as structured and helpful as possible for being able to integrate such extensions. The developer is of the opinion that especially by usage of all requested frameworks, patterns and integration of as much interfaces as possible this requirement was satisfied. Further there were kept a highly structured way of creation of different independent projects which leads to the possibility of using them stand alone or even as a NuGet package within the intranet of the company.

Credits

Within this small chapter I would like to thank a couple of people who made this work possible by supporting me in many different areas of my life.

First of all I want to thank my parents **Gabriela** and **Nicolae Matis** who have born, raised and supported me in every single minute of my life. I know I unfortunately didn't always make you proud of my actions but I hope that I am still working on it successfully by milestones like this one. Mum I really hope for you that you will solve your physical constraints successfully and dad I hope that you stay as young as you are for a really long time

Afterward I would like to thank my brother **Nik Matis** and my sister **Michelle Matis** who have supported me in that way as a brother just could expect it to be perfect. Michelle I wish you all the best with your study and Nik I hope you will find your destiny in choosing a new job soon.

And finally I would like to thank a couple of my best friends who have supported me in investing much free time with myself and were successfully responsible for being able to forget all the stress about the work and enjoy my life.

Andreas Korkenländer I already know you now about for 20 years and really hope that this will continue until my death. I wish you all the best with your new job and your intention of traveling around the world.

Dominik Müller you were my first best friend after I moved to Nürnberg and I really hope that connection persists for a longer time although you are sometimes really a hardheaded person :) I wish you all the best with your new challenge of doing a new apprenticeship.

Rene Biedermann you are one of that guys I'm able to speak about philosophic and esoteric topics and of course medical topics about my own health in a detailed way as I'm really impressed of it. I wish you all the best in accomplishing your exam for being an alternative practitioner and I really think that this will satisfy your life in complete way.

Willi Fritz I would really like to thank you especially for the last year where you

permitted me to do my training within your own flat and visited me almost every weekend for just hanging around and playing PlayStation 4 or for cooking some real tasty meals. I wish you all the best at finishing your tax consultant state examination and am really looking forward of traveling around the world with your person soon.

Appendix A.

User manual for working with the smart Inter Circuit Tests (ICT) analyzer tool

This document describes the way of handling the tool for determining the test coverage of different ODB++ related projects.

A.1. Overview

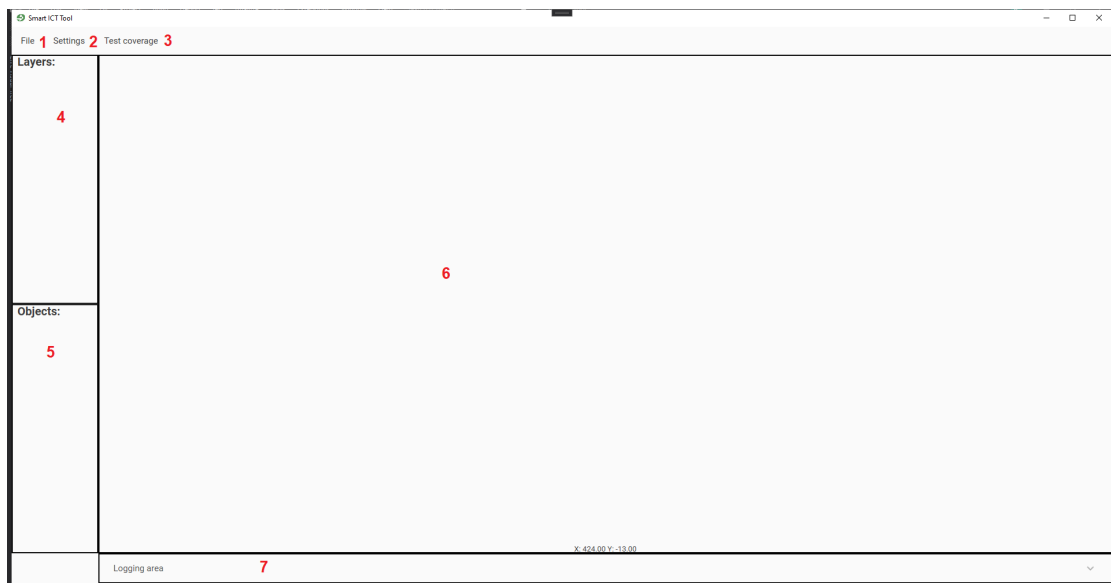


Figure A.1.: Tool overview

As shown in A.1 the tool itself consists of seven different areas of interest:

1. File menu group - performing actions regarding the opening of project files, ...
2. Settings - selection of settings, importing and exporting them

3. Test coverage - all test coverage related actions
4. Layers - the layers overview
5. Objects - the test coverage objects list
6. the rendered component view
7. The logging area

A.2. Settings




Figure A.2.: Settings overview

As shown in A.2 there are the following three menu items available:

1. Show settings - opens the settings page for all settings
2. Import settings file - a file chooser will pop up for selecting a settings database file to be imported
3. Export settings file - a file chooser will pop up for selecting the target file where the settings database should be exported to

A.2.1. Show settings

After clicking on the menu item All settings a new window will be shown containing all setting pages.

A.2.1.1. PCB Investigator API settings

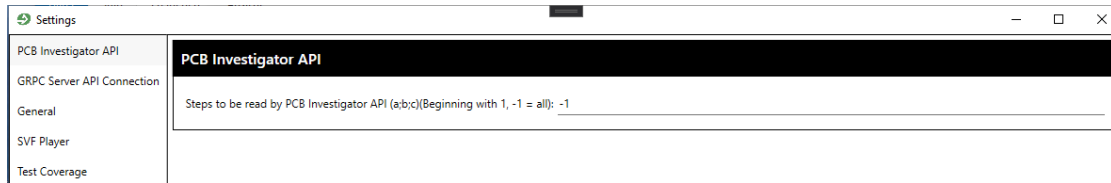


Figure A.3.: PCB Investigator API settings

As shown in A.3 there is the possibility of changing the steps which should be considered for read out from the API. -1 means all steps should be read out. Other values could be defined semicolon separated

A.2.1.2. GRPC server API connection settings

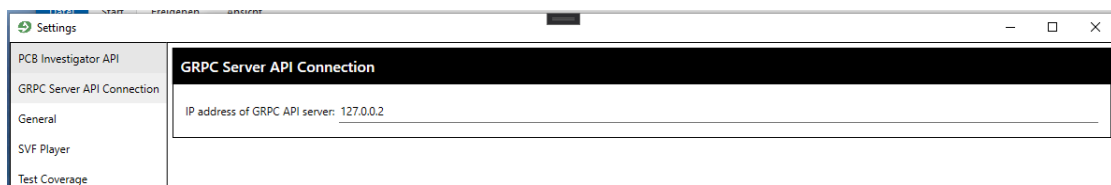


Figure A.4.: GRPC server API connection settings

As shown in A.4 there is the possibility of changing the ip address of the GRPC server to connect to

A.2.1.3. General settings

The screenshot shows the 'Settings' window of the smart Inter Circuit Tests (ICT) analyzer tool. The window is titled 'Settings' and has a sidebar on the left with options: PCB Investigator API, GRPC Server API Connection, General (selected), SVF Player, and Test Coverage. The main area is divided into several sections: 'Capacitor settings' with fields for 'Capacitor identifier (a;b;c):' (value: c), 'Show names' (checkbox), and 'Capacitor color:' (color picker); 'All other components settings' with 'Show names' (checkbox) and 'Color of all other components:' (color picker); 'Connector settings' with 'Connector identifier (a;b;c):' (value: x), 'Show names' (checkbox), and 'Connector color:' (color picker); 'General appearance' with 'Fontsize of names:' (value: 12), 'Show zoom and mirroring buttons' (checkbox), and 'Show net names' (checkbox); 'IC settings' with 'IC identifier (a;b;c):' (value: jic), 'Show names' (checkbox), and 'IC color:' (color picker); and 'Induction settings' (empty). At the bottom right are 'Save' and 'Revert Changes' buttons.

Figure A.5.: General settings 1

Within the first part of the general settings (A.5) there are the following settings available (identifier, show names and the color):

- Capacitor
- Other components
- Connector
- Integrated Circuit (IC)

Furthermore there are the following settings available:

- General appearance
 - Fontsize of names
 - Show zoom and mirroring buttons

- Show net names

The screenshot shows a 'Settings' window with a sidebar on the left containing the following menu items: PCB Investigator API, GRPC Server API Connection, General, SVF Player, and Test Coverage. The main area is divided into five sections:

- General appearance**:
 - Connector color: (purple color swatch)
 - Fontsize of names: 12
 - Show zoom and mirroring buttons: ☒
 - Show net names: ☐
- IC settings**:
 - IC identifier (a;b;c): jic
 - Show names: ☐
 - IC color: (cyan color swatch)
- Induction settings**:
 - Induction identifier (a;b;c): l
 - Show names: ☐
 - Induction color: (yellow color swatch)
- Resistors settings**:
 - Resistor identifier (a;b;c): r
 - Show names: ☐
 - Resistor color: (light yellow color swatch)
- Testpoint settings**:
 - Testpoint identifier (a;b;c): tp:testpoint
 - Show names: ☐
 - Testpoint color: (green color swatch)

At the bottom right, there are two buttons: 'Save' and 'Revert Changes'.

Figure A.6.: General settings 2

Within the second part of the general settings (A.6) there are the following settings available (identifier, show names and the color):

- Induction
- Resistor
- Testpoint

A.2.1.4. SVF Player settings

The screenshot shows a window titled 'Settings' with a sidebar on the left containing the following items: 'PCB Investigator API', 'GRPC Server API Connection', 'General', 'SVF Player' (which is highlighted), and 'Test Coverage'. The main area of the window is titled 'Programmer Connection' and contains four input fields with the following values: 'IO Voltage in mv: 5000', 'Programmer IP: 192.168.3.11', 'Programmer Port: 15504', and 'Supply Voltage in mv: 12000'.

Figure A.7.: SVF Player settings

As shown in A.7 there are the following settings available:

- IO Voltage in mv
- Programmer IP
- Programmer Port
- Supply Voltage in mv

A.2.1.5. Test Coverage settings

The screenshot shows a window titled 'Settings' with a sidebar on the left containing the following items: 'PCB Investigator API', 'GRPC Server API Connection', 'General', 'SVF Player', and 'Test Coverage' (which is highlighted). The main area of the window is divided into three sections: 'GND nets settings', 'JTAG settings', and 'Power nets settings'. Each section contains a 'Blacklist of nets (a;b;c):' field and a corresponding identifier field. For 'GND nets settings', the identifier is 'gnd'. For 'JTAG settings', the pin identifier is 'td;tdo;tkctms;AGBT_TX0_N' and the nets identifier is 'jtag;agbt_tx0_ptxcik'. For 'Power nets settings', the identifier is '3v5v;vdd'.

Figure A.8.: Test Coverage settings

As shown in A.8 there are the following settings available (blacklist of nets and net identifier):

- Ground
- JTAG
- Power

Further more there is the possibility of defining the JTAG pin identifier for making sure being able to use not just the default values **TMS**, **TDI**, **TDO**, **TCK**. That means in detail for correctly determining a JTAG device there should be the following requirements accomplished:

1. Set up the **IC identifier** setting from general settings in that way that the JTAG device is being recognized correctly as an IC component
2. Set up the **JTAG nets identifier** from the test coverage settings in that way that the JTAG device is correctly being recognized within a corresponding net
3. Set up the **JTAG pin identifier** setting from the test coverage settings in that way that the JTAG device is correctly being recognized by its pins

A.2.2. Import / Export settings file

By clicking on one of the menu items Settings -> Import settings file or Settings -> Export settings file afterward a new file selection dialog will be shown where to select the source / target file to be imported / exported. Further if the project file handling is enabled the settings file will automatically be stored within the project file and be loaded automatically on next opening of project file

A.3. Project file

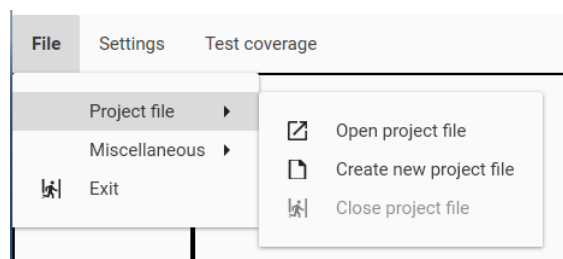


Figure A.9.: Project file handling

As shown in A.9 there is the possibility of choosing the following menu items within the File -> Project file group:

- Open project file
- Create new project file

A.4. Miscellaneous

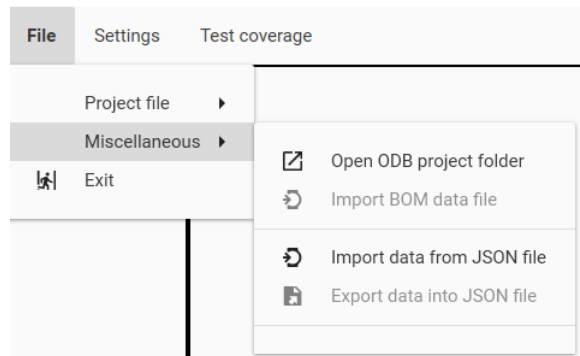


Figure A.10.: Miscellaneous menu items

As shown in A.10 there are the following menu items available at File -> Miscellaneous:

- Open ODB project folder - after choosing that action a new dialog appears to select the folder which should be transferred to the GRPC server as zipped content for read out by using the PCB-Investigator API
- Import BOM data file - After any project was successfully loaded then the import of a valid bill of materials file will be available. After choosing this a new window appears where to set up all relevant settings for import
- Import data from JSON file - a new dialog appears where you are able to select any JSON formatted file containing previously exported data of this application
- Export data into JSON file - after any project was loaded successfully then this item will be accessible. After choosing it a new dialog appears where you could select the target for creation of a valid JSON formatted file containing all data

A.5. Creation of new project

To create a new project just first click on File -> Project file -> Create new project file. After ward there will be a dialog shown for selecting the target file to be saved at:

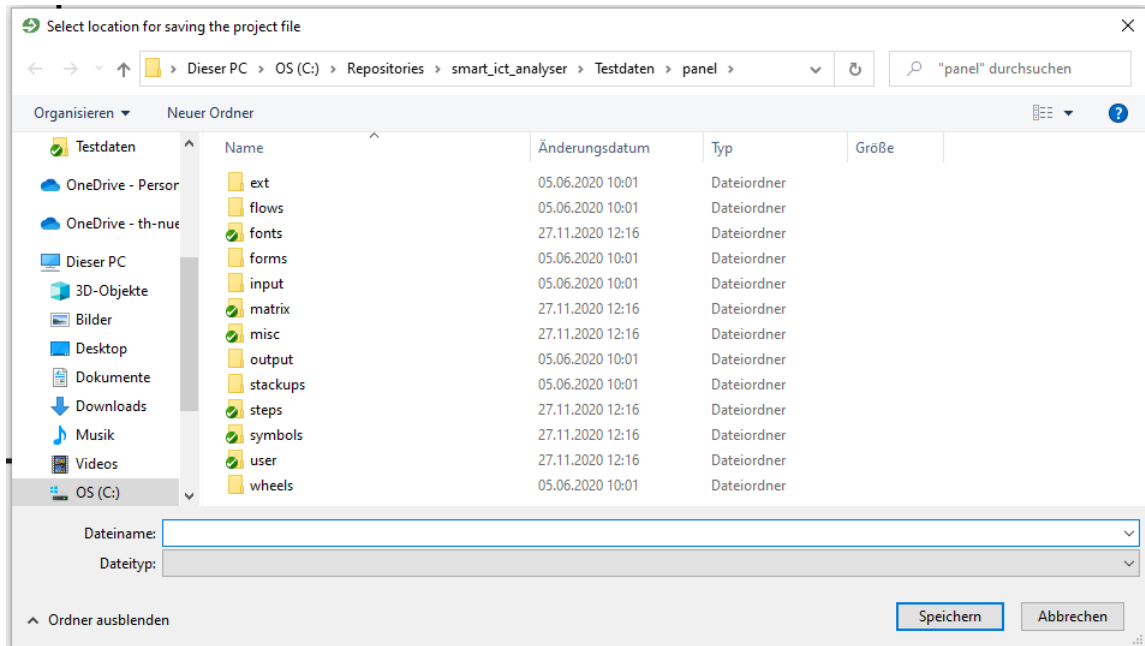


Figure A.11.: Project file creation dialog

After you confirmed your target within the dialog (A.11) then you could proceed to open a new project. For that make sure to have a valid connection to the GRPC server and click then File -> Miscellaneous -> Open ODB project folder. After you chose a program during the communication and parsing from the GRPC server there will be shown an animation:

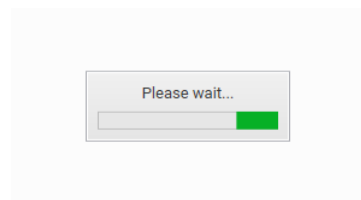


Figure A.12.: Please wait animation

After the process finished then if no values are defined for that components received a new dialog should be visible where to select the BOM file for importing:

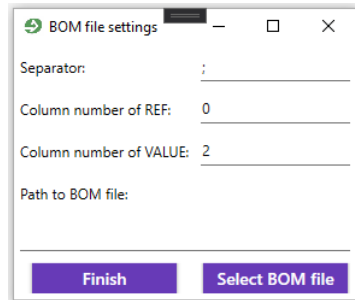


Figure A.13.: Select BOM file dialog

After you set up the settings:

- Separator
- Column number of REF
- Column number of VALUE
- Path to BOM file - could be set by clicking on Select BOM file where then a new dialog for selecting any file will be opened

within that dialog and selected a valid CSV file to be imported then proceed by clicking on finish.

After the process finished then on within the layers list there should be some layers available and the control buttons at the right bottom place will be visible:

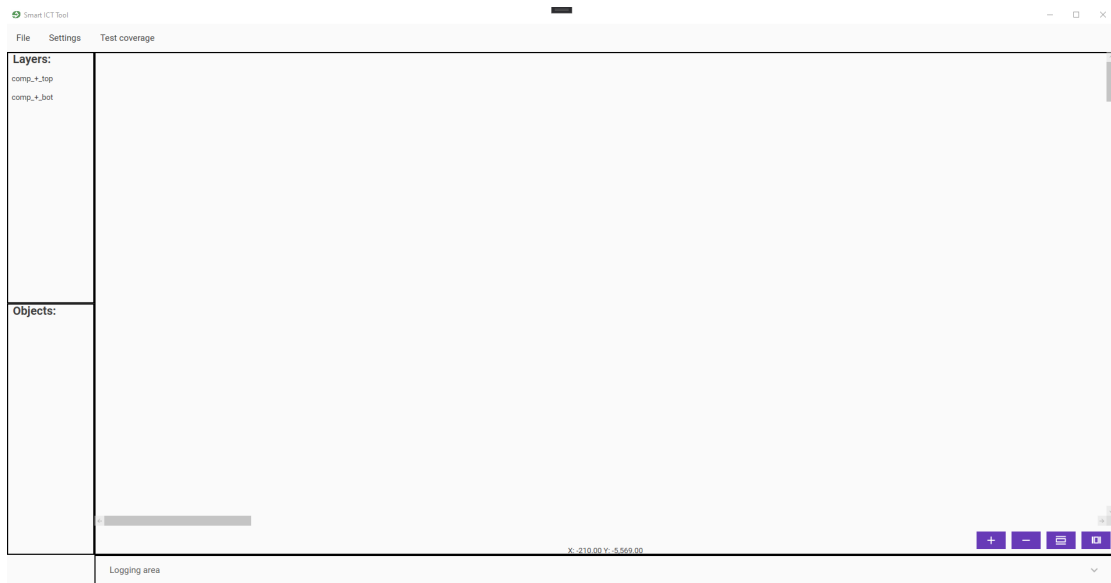


Figure A.14.: Loaded project view

After selecting for example the first layer then all components which are included within that layer should be rendered within the component view.

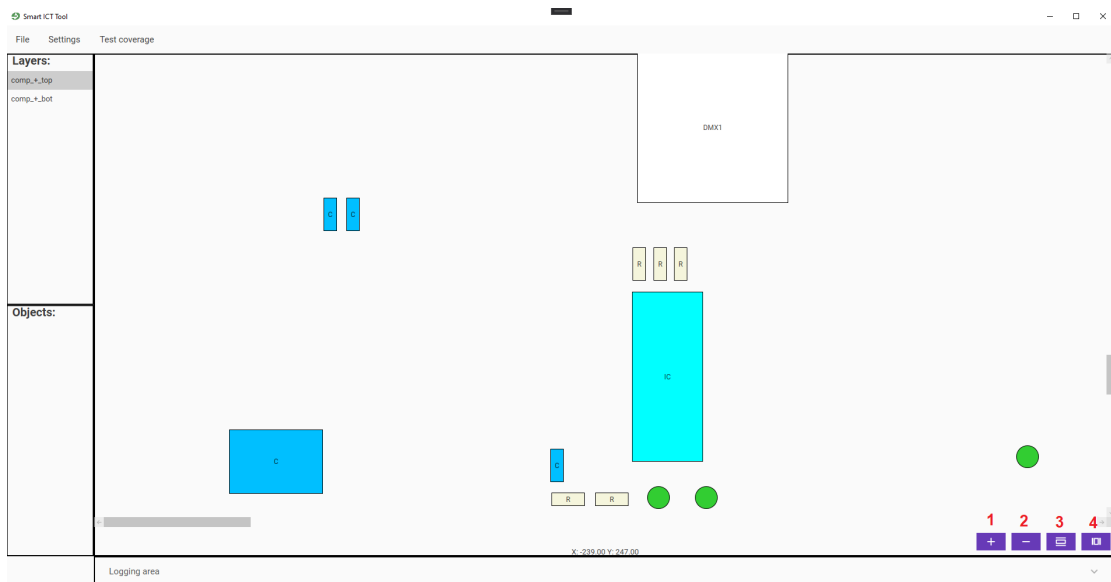


Figure A.15.: Components view for selected layer

As shown in A.15 there is the possibility of scrolling with the mouse to move the whole view or just by clicking and dragging the whole content. Further there is the possibility of zooming in by pressing STRG and scrolling in or just by clicking on the zoom in button **1** and to zoom out by pressing STRG and scrolling out with the mouse or just by clicking the zoom out button **2**. Finally there is the possibility to mirror the whole view across the y axis **3** and the x axis **4**. Now to ensure not to have to use the GRPC server again the next time you will open this project click File -> Miscellaneous -> Export data into JSON file. After you chose it a new dialog will appear where you could type in just the name as the file itself will be stored within the project file as you are working within the project file mode. (Also all other project related data was automatically saved in the project file). Finally you should also export your current made settings by Settings -> Export settings file to make sure that the settings file is also included in the project file for later loading

A.6. Working with the components view

By right clicking on any object within the components view there will be a context menu visible:

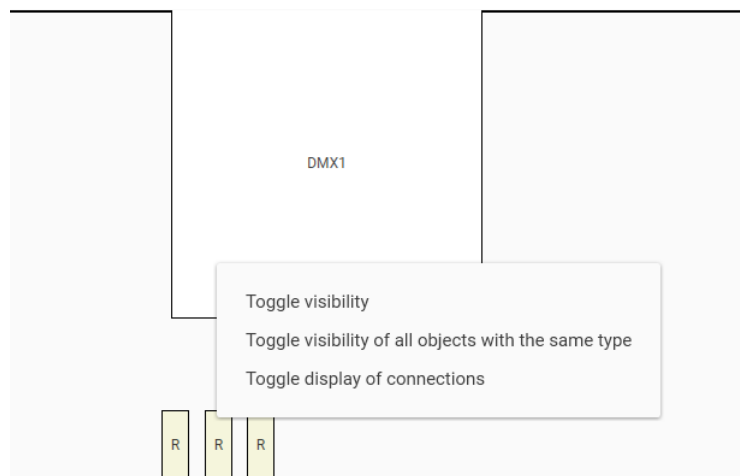


Figure A.16.: Context menu of right click on component

As shown at A.16 you have the possibility of:

- Toggle visibility - if clicked then the according components transparency will be set to high

- Toggle visibility of all objects with the same type - if clicked then all the according components which have the same type as the selected ones transparency will be set to high
- Toggle display of connections - if clicked then all connections of the component will be shown as plain lines

A.6.1. Toggle visibility

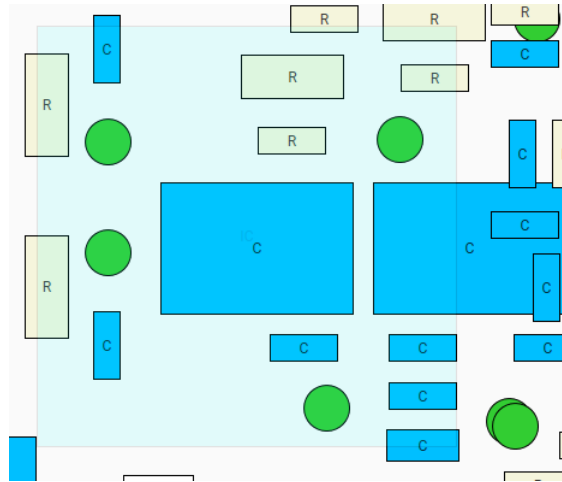


Figure A.17.: Toggle visibility

As shown in A.17 after the visibility was toggled then the underlining objects could be determined

A.6.2. Toggle visibility of all objects with the same type

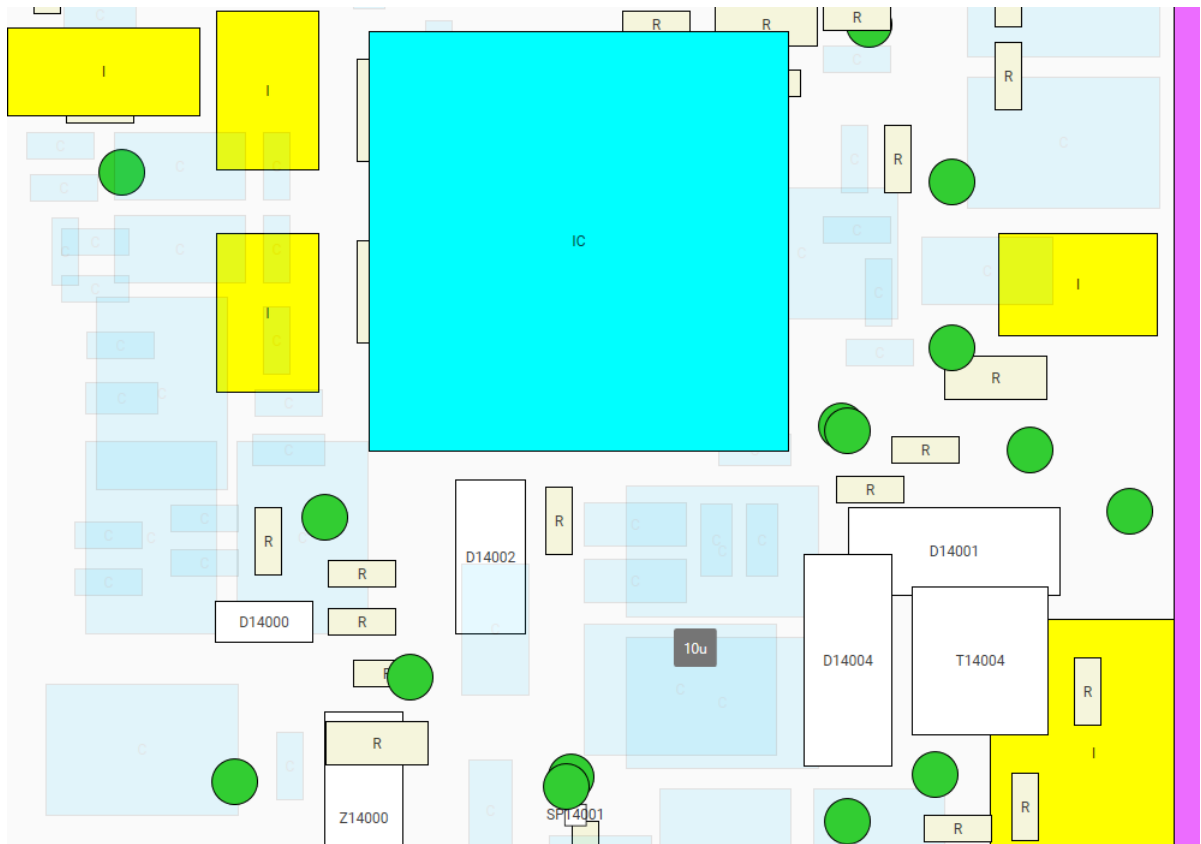


Figure A.18.: Toggle visibility of all objects with the same type

As shown in A.17 after the visibility was toggled then the underlining objects of all toggled objects of the same type could be determined

A.6.3. Toggle display of connections

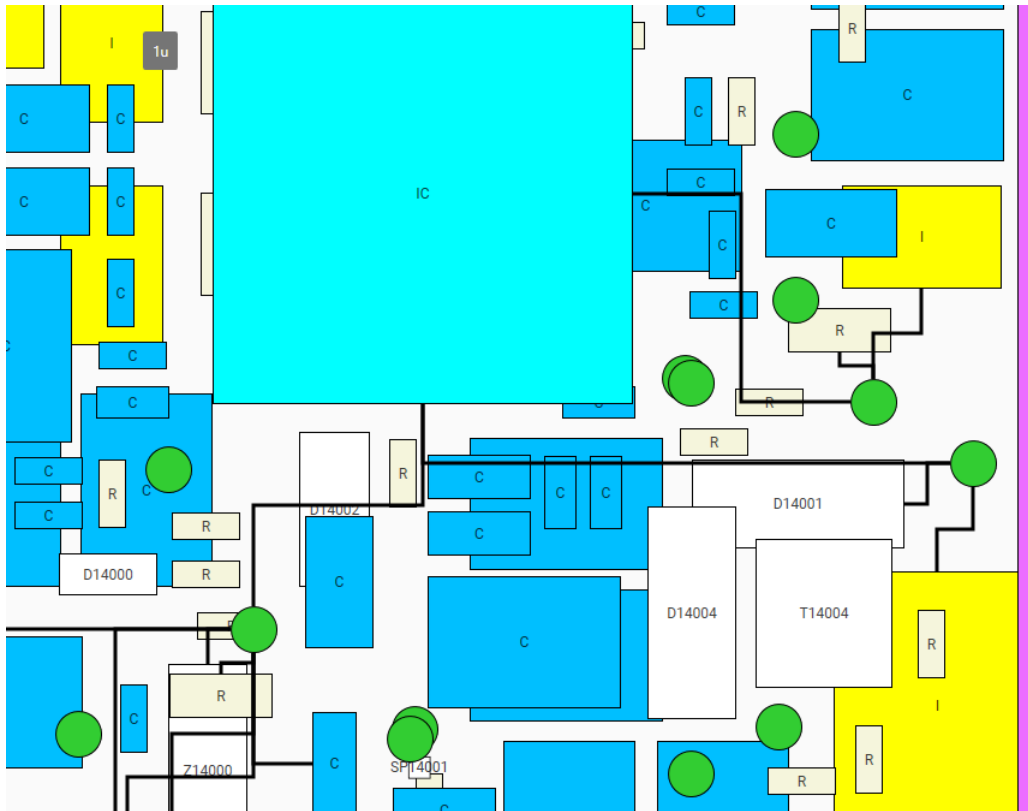


Figure A.19.: Toggle display of connections

As shown in A.19 after the connections were toggled then all lines will be drawn between the connecting objects. Further there is the possibility to hover over any connection to see the following information:




Figure A.20.: Legend of connection

As shown in A.20 there will be the following information available:

- Net name
- Selected component for toggling the connections

- Connected component by this line to the selected component

A.7. Test coverage

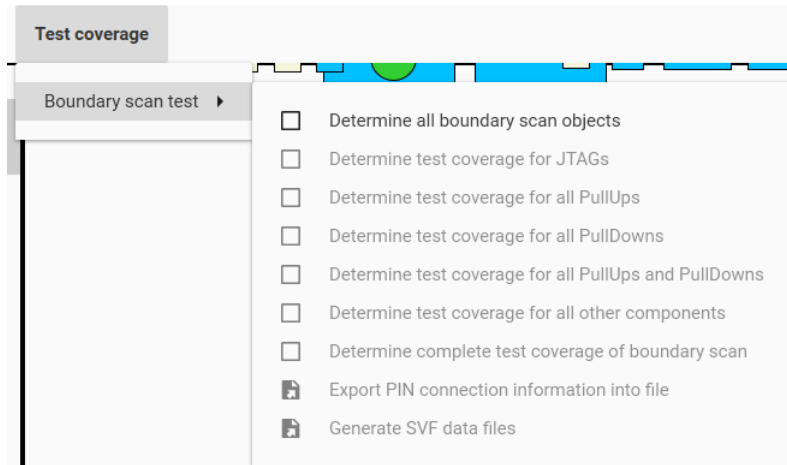


Figure A.21.: Test coverage menu group

As shown in A.21 within the Test coverage -> Boundary scan test -> menu group there are the following menu items available:

- Determine all boundary scan objects - before being able to perform any other test related action you have first to choose this one. (Settings will be considered)
- Determine test coverage for JTAGs
- Determine test coverage for all PullUps
- Determine test coverage for all PullDowns
- Determine test coverage for all PullUps and PullDowns
- Determine test coverage for all other components
- Determine complete test coverage of boundary scan
- Export PIN connection information into file
- Generate SVF data files

A.7.1. Determine all boundary scan objects

After you selected Test coverage -> Boundary scan test -> Determine all boundary scan objects then the objects list should be filled with new selection possibilities:

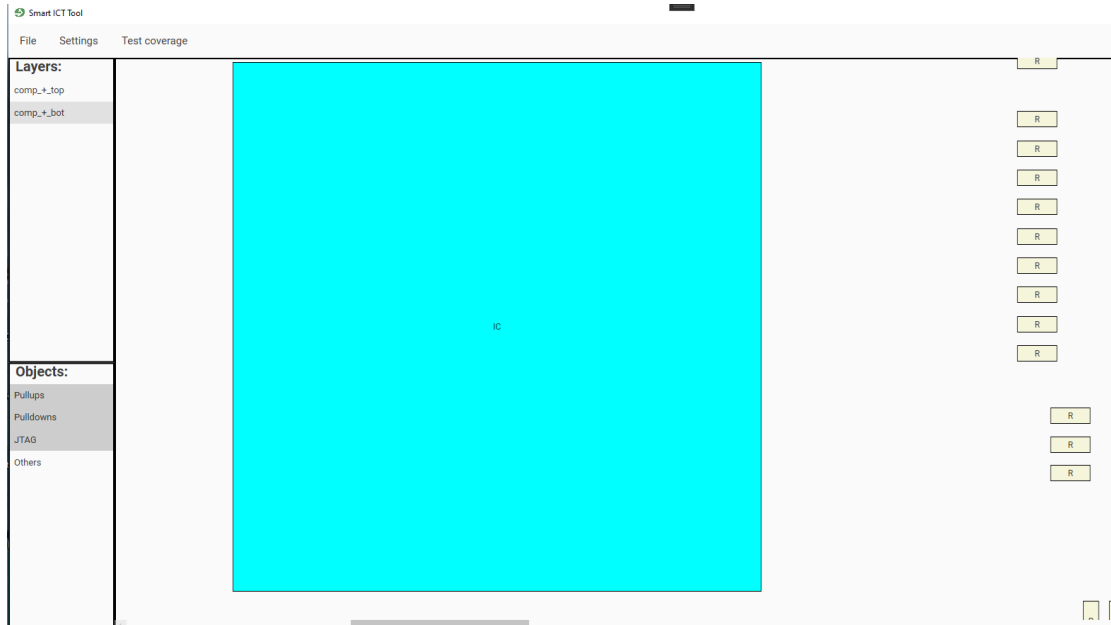


Figure A.22.: Determine all boundary scan objects

Now you could (A.22) select just the test coverage related objects of interest to be shown within the component view.

A.7.2. Performing any test coverage of objects

After you click for example on Test coverage -> Boundary scan test -> Determine test coverage for all PullUps then the calculated value will be shown as text and further more each connection to a according pull up resistor will be shown in green color:

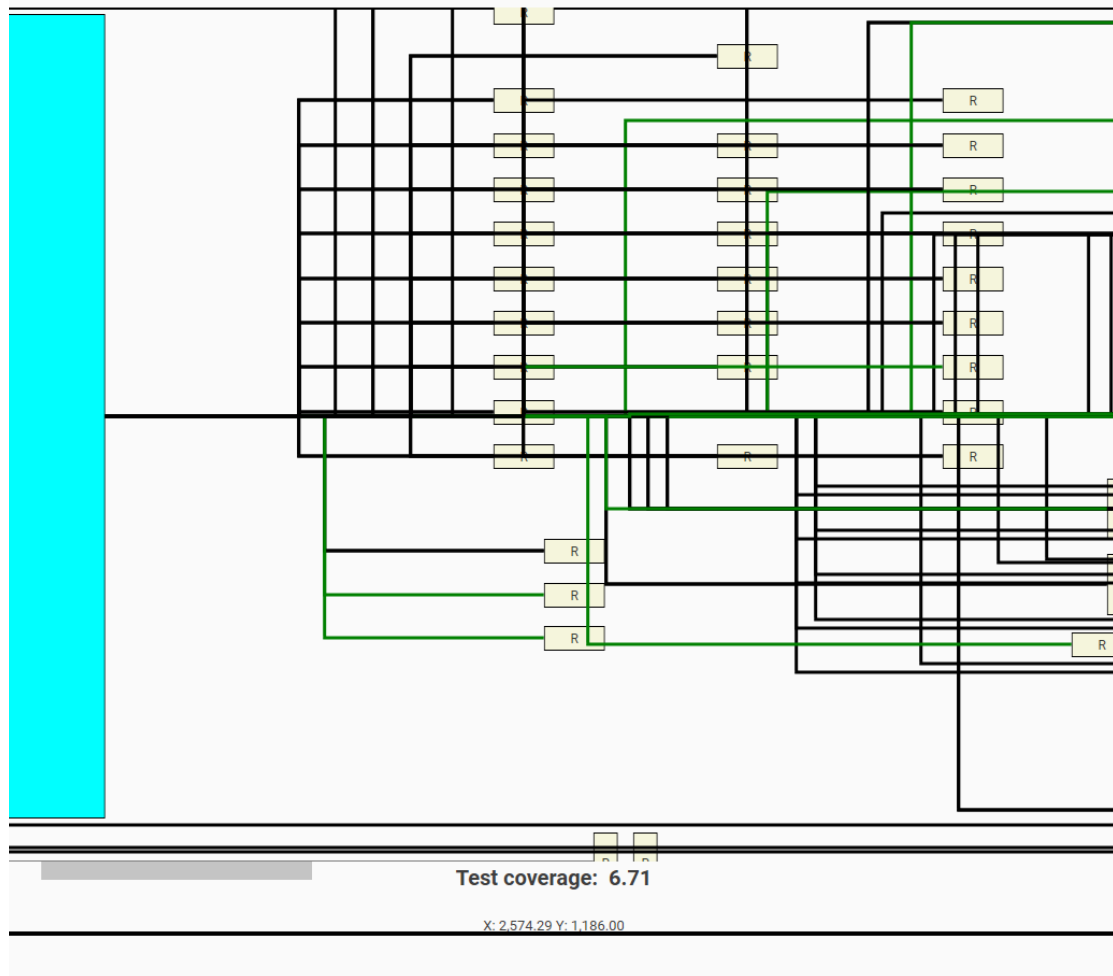


Figure A.23.: Determine test coverage for all PullUps

If you click again on Test coverage -> Boundary scan test -> Determine test coverage for all PullUps then the according check box will be unchecked and every connection is been showed just in black color again. This kind of procedure is also available for all other operations to detect the test coverage.

A.7.3. Export PIN connection information into file

After you click on Test coverage -> Boundary scan test -> Export PIN connection information into file a new dialog should appear where you can select the destination of file saving. After you selected that then the according file should be generate containing all pin information of interest of all JTAG devices of the loaded project.

A.7.4. Generate SVF data files

If you click on Test coverage -> Boundary scan test -> Generate SVF data files then first a dialog will be shown to select the target folder where to save the created files at. This folder will only be considered if you are not working in the project file mode. If so the files will be automatically been saved within the project file. Afterward you will be asked for selecting the according BSDL file for all JTAG devices found. After you selected the BSDL file you will be informed about to make sure that the programmer is correctly connected to the JTAG device as the default vector first needs to be read out:

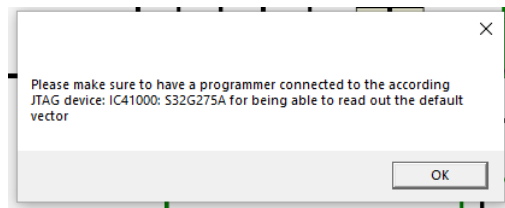


Figure A.24.: Make sure to have a programmer connected

After you confirmed the dialog A.24 then the read out will be performed and the according SVF files for playing the pull down and pull up resistors will be generated.

A.8. Log panel

By clicking on the expander which is located at the very bottom of the application the log panel will be visible. It contains every single message logged during the working with the tool:

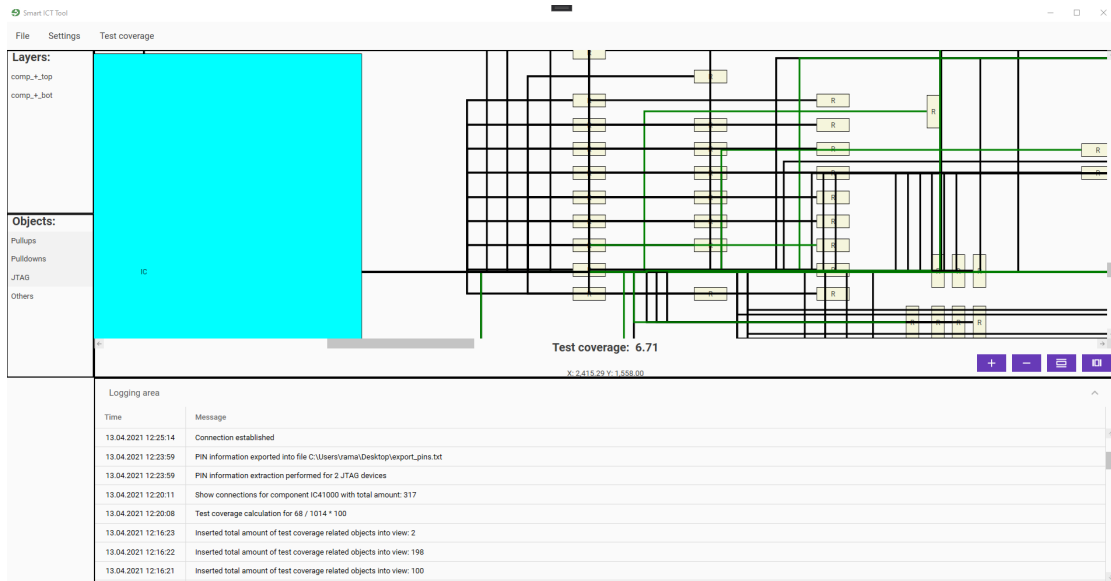


Figure A.25.: Logging area

A.9. Drag and drop within the application

You are further able to drag and drop directly files or folders to the application area. If something valid was dropped then it automatically should be opened or imported and if project mode is enabled saved further within the project file

List of Figures

2.1.	ODB++ project structure[3]	5
2.2.	PCB-Investigator overview	7
2.3.	JTAG interface in detail[5]	8
2.4.	State machine of the TAP controller[7]	9
2.5.	MVVM structure[14]	12
2.6.	Forbidden circular dependency	13
3.1.	Client-server structure of the planned software	18
3.2.	Frameworks used within the project	19
3.3.	Class diagram of the PCB-Investigator objects of interest	20
3.4.	Class structure after conversion	21
3.5.	Physical object dependencies	22
4.1.	Project overview	24
4.2.	Program schedule of the Grpc server project	28
4.3.	IGrpcClientParserHandler class diagram	29
4.4.	The mainView with its regions	31
4.5.	All implementations within the Ui.Modules.ModuleName project	36
4.6.	All ViewModels within the Ui.Modules.ModuleName project	39
4.7.	The determined pin types of interest	46
4.8.	The program schedule for creation of SVF files	47
4.9.	The sequence for a complete test of parsing validation of objects received by PCB-Investigator API	50
4.10.	Overview of the whole software usage	53
A.1.	Tool overview	1
A.2.	Settings overview	2
A.3.	PCB Investigator API settings	3
A.4.	GRPC server API connection settings	3
A.5.	General settings 1	4
A.6.	General settings 2	5
A.7.	SVF Player settings	6
A.8.	Test Coverage settings	6
A.9.	Project file handling	7

A.10. Miscellaneous menu items	8
A.11. Project file creation dialog	9
A.12. Please wait animation	9
A.13. Select BOM file dialog	10
A.14. Loaded project view	11
A.15. Compontens view for selected layer	11
A.16. Context menu of right click on component	12
A.17. Toggle visibility	13
A.18. Toggle visibility of all objects with the same type	14
A.19. Toggle display of connections	15
A.20. Legend of connection	15
A.21. Test coverage menu group	16
A.22. Determine all boundary scan objects	17
A.23. Determine test coverage for all PullUps	18
A.24. Make sure to have a programmer connected	19
A.25. Logging area	20

List of Tables

3.1. Programming languages comparison	17
3.2. IDE comparison	18
3.3. Framework comparison	19
5.1. Time consumption for loading a ODB++ project	56
5.2. Time consumption for importing a ODB++ project from JSON file	56
5.3. Time consumption for exporting a ODB++ project as JSON file	56
5.4. Time consumption for showing connections between components	57
5.5. Time consumption for performing test coverage determination	57

List of Listings

2.1.	JSON formatted content	14
2.2.	Interface definition of GRPC exchange	15
4.1.	GetPinsGrpc	28
4.2.	GetComponentByType	30
4.3.	Subscribing to an event	33
4.4.	Publishing of an event	33
4.5.	OnPropChanged	34
4.6.	IComponentViewModel	36
4.7.	OpenGenericDialog method of IDialogSelector implementation	37
4.8.	ResultModel	38
4.9.	PCBLineDataTemplate	41
4.10.	ITestCoverageDeterminer	43
4.11.	DetermineTestCoverageRelatedObjects	44
4.12.	IPinInformationExtractor	45
4.13.	PullDownSvfWriter	48
4.14.	GenerateNewVector of SVFHelper	49
4.15.	TestParsingFromApi from TestDotNetCore	51
4.16.	YML file for pipeline	52
5.1.	GetTestCoverage with time measurement	57

Bibliography

- [1] “Promik | components,” 4/13/2021. [Online]. Available: <https://promik.com/products-solutions/components>
- [2] ODB++Design, “Why odb++design - odb++design,” 5/18/2020. [Online]. Available: <https://odbplusplus.com/design/why-odb-d/>
- [3] “What is odb++,” 2/5/2019. [Online]. Available: https://www.artwork.com/odb++/odb++_overview.htm
- [4] “Pcb-investigator,” 4/7/2021. [Online]. Available: <https://www.pcb-investigator.com/de/functions>
- [5] XJTAG, “Was ist jtag und wie kann ich es nutzen? - xjtag tutorial,” 8/27/2020. [Online]. Available: <https://www.xjtag.com/de/about-jtag/what-is-jtag/>
- [6] “Joint test action group – wikipedia,” 3/25/2021. [Online]. Available: https://de.wikipedia.org/wiki/Joint_Test_Action_Group
- [7] XJTAG, “Technischer leitfaden für jtag boundary-scan - xjtag tutorial,” 13.03.2020. [Online]. Available: <https://www.xjtag.com/de/about-jtag/jtag-a-technical-overview/>
- [8] Harry Bleeker, *Boundary-Scan Test: A Practical Approach*. Springer Science+Business Media Dordrecht, 1993.
- [9] R.C. Cofer and Benjamin F. Harding, *Rapid System Prototyping with FPGAs*. Elsevier Inc., 2006.
- [10] “Boundary scan description language – wikipedia,” 3/25/2021. [Online]. Available: https://de.wikipedia.org/wiki/Boundary_Scan_Description_Language
- [11] “Serial vector format – wikipedia,” 3/25/2021. [Online]. Available: https://de.wikipedia.org/wiki/Serial_Vector_Format
- [12] TEXAS INSTRUMENTS, ASSET InterTech, Inc., *SVF SERIAL VECTOR FORMAT SPECIFICATION JTAGBOUNDARY SCAN*, 2013.
- [13] Norbert Eder, “Mvvm: Das viewmodel,” 2010. [Online]. Available: <https://www.norberteder.com/MVVM-Das-ViewModel/>

- [14] “Model–view–viewmodel,” 2021. [Online]. Available: <https://en.wikipedia.org/w/index.php?title=Modelviewviewmodel&oldid=1012221294>
- [15] “Introduction to prism | prism,” 4/5/2021. [Online]. Available: <https://prismlibrary.com/docs/>
- [16] S. Augsten, “Was ist dependency injection?” 4/9/2021. [Online]. Available: <https://www.dev-insider.de/was-ist-dependency-injection-a-814452/>
- [17] “Components - material design,” 1/1/1980. [Online]. Available: <https://material.io/components>
- [18] “Json,” 29.03.2021. [Online]. Available: <https://www.json.org/json-en.html>
- [19] gRPC, “><meta property,” 4/8/2021. [Online]. Available: <https://grpc.io/>
- [20] “Bill of materials,” 2021. [Online]. Available: https://en.wikipedia.org/w/index.php?title=Bill_of_materials&oldid=1016373247
- [21] “Pcb-investigator interface documentation - table of content,” 4/7/2021. [Online]. Available: <https://manual.pcb-investigator.com/InterfaceDocumentation/index.php>
- [22] JAXenter, “Mit factory-pattern designprobleme lösen - jaxenter,” 2012. [Online]. Available: <https://jaxenter.de/mit-factory-pattern-designprobleme-loesen-5040>
- [23] “Strategie (entwurfsmuster),” 2021. [Online]. Available: [https://de.wikipedia.org/w/index.php?title=Strategie_\(Entwurfsmuster\)&oldid=207453256](https://de.wikipedia.org/w/index.php?title=Strategie_(Entwurfsmuster)&oldid=207453256)
- [24] BillWagner, “Asynchrone programmierung in c#,” 4/12/2021. [Online]. Available: <https://docs.microsoft.com/de-de/dotnet/csharp/programming-guide/concepts/async/>
- [25] Udemy, “Unit testing in .net,” 4/12/2021. [Online]. Available: https://www.udemy.com/course/unit-testing-in-net/?utm_source=adwords-learn&utm_medium=udemyads&utm_campaign=INTL-AW-PROS-ALL-DE-DSA-DE-GER_._ci_._sl_GER_._vi_ALL_._sd_All_._la_DE_._&utm_content=deal4584&utm_term=._ag_61564678013_._ad_372874095721_._de_c_._dm_._pl_._ti_dsa-560803889966_._li_9060719_._pd_._&gclid=Cj0KCQjw38-DBhDpARIsADJ3kjk98ZhnUUxudjCct9kpdSkHacXHamNdZgQfViizecgd0P8L8ooYspwcB
- [26] “Set up automated ci systems with gitlab | gitlab,” 3/22/2021. [Online]. Available: <https://about.gitlab.com/stages-devops-lifecycle/continuous-integration/>
- [27] “Yaml,” 2021. [Online]. Available: <https://de.wikipedia.org/w/index.php?title=YAML&oldid=209342470>

- [28] XJTAG, “Xjanalyser - interactive visual analyser & jtag debugger tool,” 4/9/2021.
[Online]. Available: <https://www.xjtag.com/products/software/xjanalyser/>