

Online PCB Quote

Re-Upload Gerber Viewer





Detected 4 layer board of 99.23×119.58mm(3.907×4.708 inches).

Base Material: FR-4 | Flex | Aluminum | Copper Core | Rogers | PTFE Teflon | HDI

Layers: 1 | 2 | 4 | Precision PCB | 6 | 8 | 10 | 12 | 14 | 16 | More

Dimensions: 119.58 * 99.23 mm

PCB Qty: 10

Product Type: Industrial/Consumer electronics | Aerospace | Medical

PCB Specifications

Different Design: 1 | 2 | 3 | 4

Delivery Format: Single PCB | Panel by Customer | Panel by JLCPCB

PCB Thickness: 0.4mm | 0.6mm | 0.8mm | 1.0mm | 1.2mm | 1.6mm | 2.0mm

PCB Color: Green | Purple | Red | Yellow | Blue | White | Black

Silkscreen: White

Material Type: FR4 TG135 | FR4 TG155 | Nan Ya NP-140F | KB6164 - TG135 | Nan Ya NP-155F | KB-6165 - TG155

Surface Finish: OSP (New) | HASL(with lead) | LeadFree HASL | ENIG

High-spec Options

Outer Copper Weight: 1 oz | 2 oz

Inner Copper Weight: 0.5 oz | 1 oz | 2 oz

Specify Layer Sequence: No | Yes

Specify Stackup: No | Yes | Impedance calculator >

Via Covering: Plugged | Untented | Epoxy Filled & Capped | Copper paste Filled & Capped | Tented

Via Plating Method: Not Specified | Conductive Adhesive | Horizontal Electroless Copper Plating


Min via hole size/diameter	0.3mm/(0.4/0.45mm)	0.25mm/(0.35/0.4mm)	0.2mm/(0.3/0.35mm)	0.15mm/(0.25/0.3mm)
	0.1mm/(0.2/0.25mm)			
Board Outline Tolerance	±0.2mm(Regular)	±0.1mm(Precision)		
Confirm Production file	No	Yes		
Mark on PCB	Remove Mark	2D barcode (Serial Number)		
Electrical Test	Flying Probe Fully Test			
Gold Fingers	No	Yes		
Castellated Holes	No	Yes		
Press-Fit Hole	No	Yes (Tolerance +/-0.05mm)		
Edge Plating	No	Yes		
Blind Slots	No	Yes		
UL Marking	No	Yes (Any Position)	Yes (Specify Position)	
Backdrill	No	Yes		
Humidity Indicator Card	No	Yes		

Advanced Options


PCB Remark

PCB Assembly

COUPON Assembly cost starting from $0 with coupon>

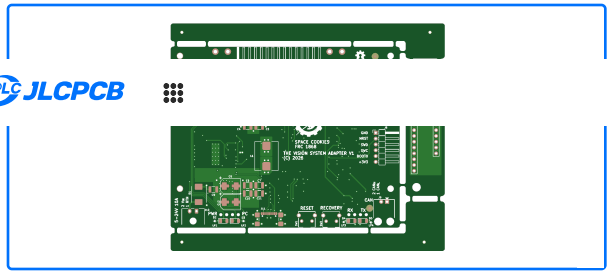

Assemble top side

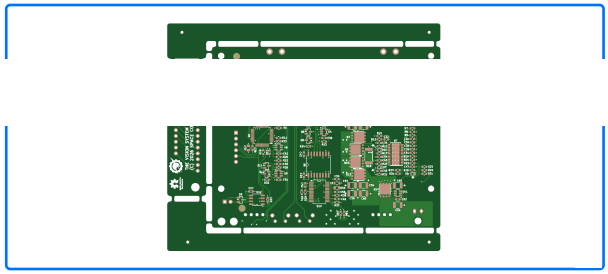

Assemble bottom side

PCBA Type	Economic	Standard	What's the difference?	
Assembly Side	Top Side	Bottom Side	Both Sides	
PCBA Qty	10	Custom Qty	Qty from 2 to 10	
Edge Rails/Fiducials	Added by JLCPCB	Added by Customer		
Confirm Parts Placement	No	Yes	We recommend you also confirm the production file of your PCB.	
Stencil Storage	No	Yes		
Fixture Storage	No	Yes		

Charge Detai

Engineering f

Board

Via Plating M

Standard PCI

Components

Feeders Loac

SMT Assemb

Hand-solderi

Manual Asser

PCB Build Tir

3-4 days

3 days

2-3 days

Calculated

Additional charg

$48

Parts Selection | By Customer (Self-Service) | By JLCPCB (Manual Match)

Web F

Advanced Options

Bake Components	No	Photo Confirmation	No
Board Cleaning	No	Conformal Coating (cleaning included)	No
Packaging	Antistatic bubble fil	Special stencil	No
Depanel boards & edge rail before delivery	No	Solder Paste	High temp.
Flying Probe Test	No	Nitrogen reflow soldering	No
Function test	No	Assembly remark	No

Shipping Esti

UPS Expre

Weight

Coupons

I agree to the Terms and Conditions of JLCPCB assembly Service .

Stencil Order together with PCB Stencil Order Guide>

© 2026 JLCPCB.COM All Rights Reserved. Privacy Policy Terms & Conditions Cookies Policy Do Not Sell or Share My Personal Information