



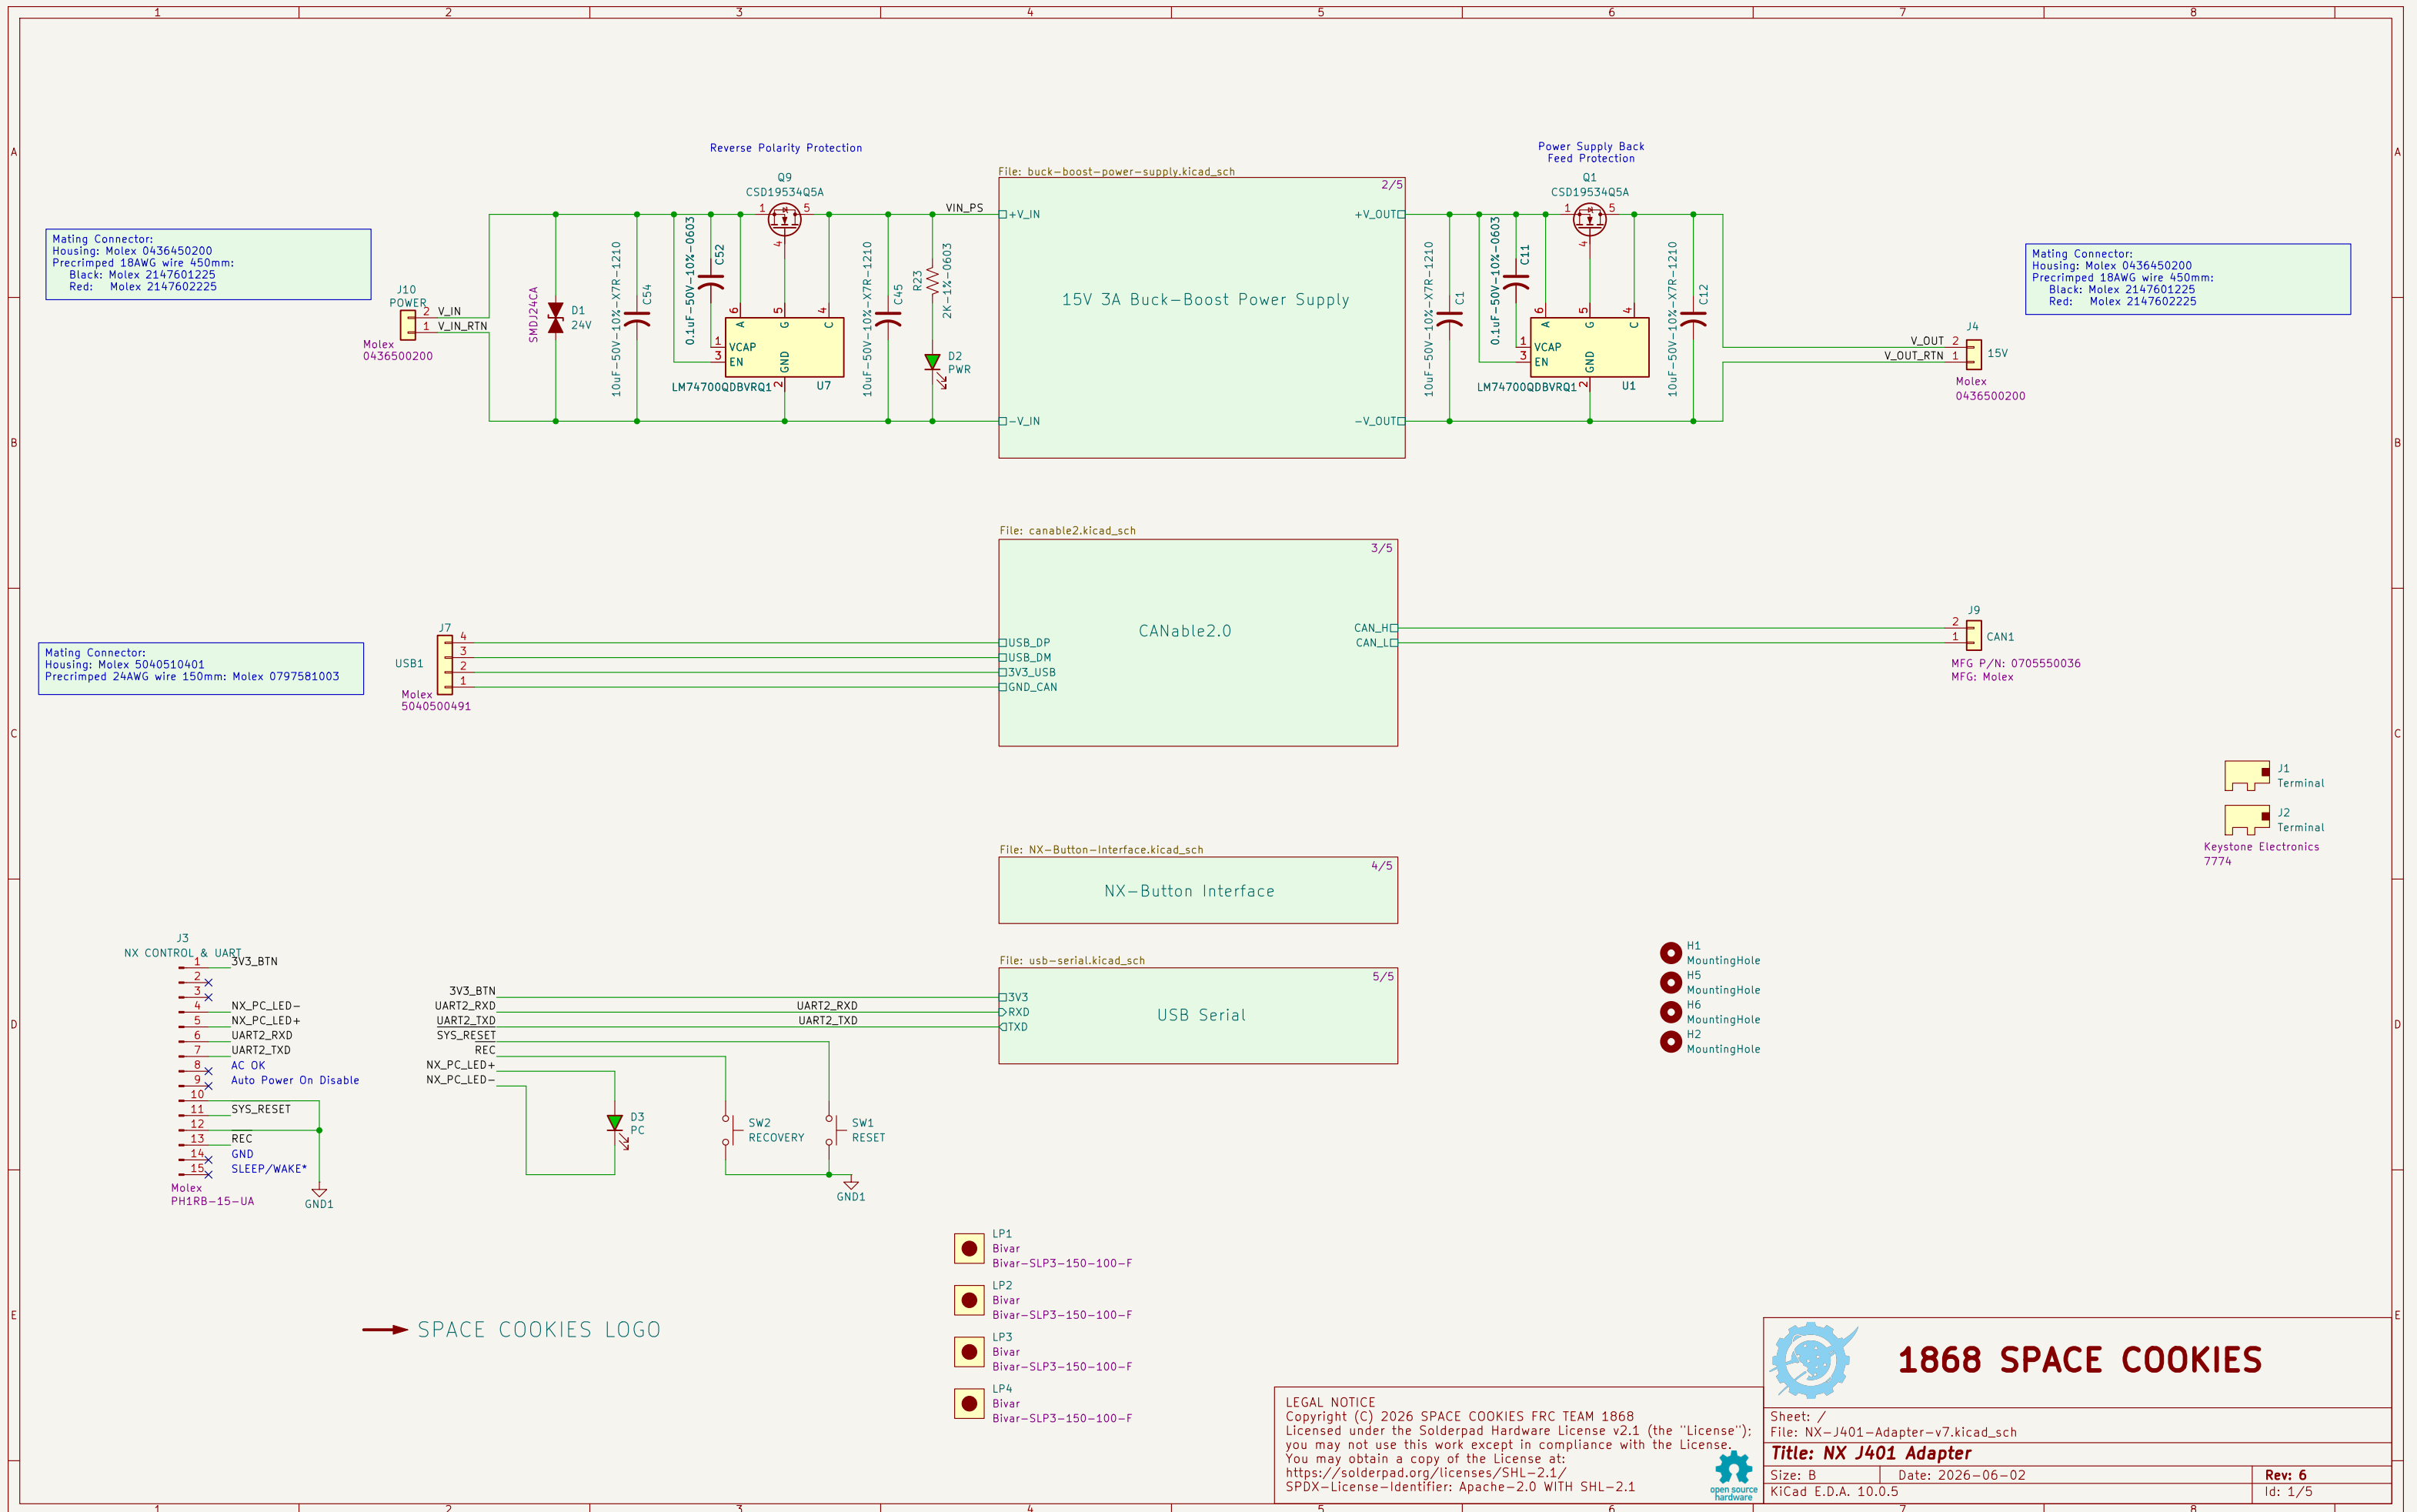

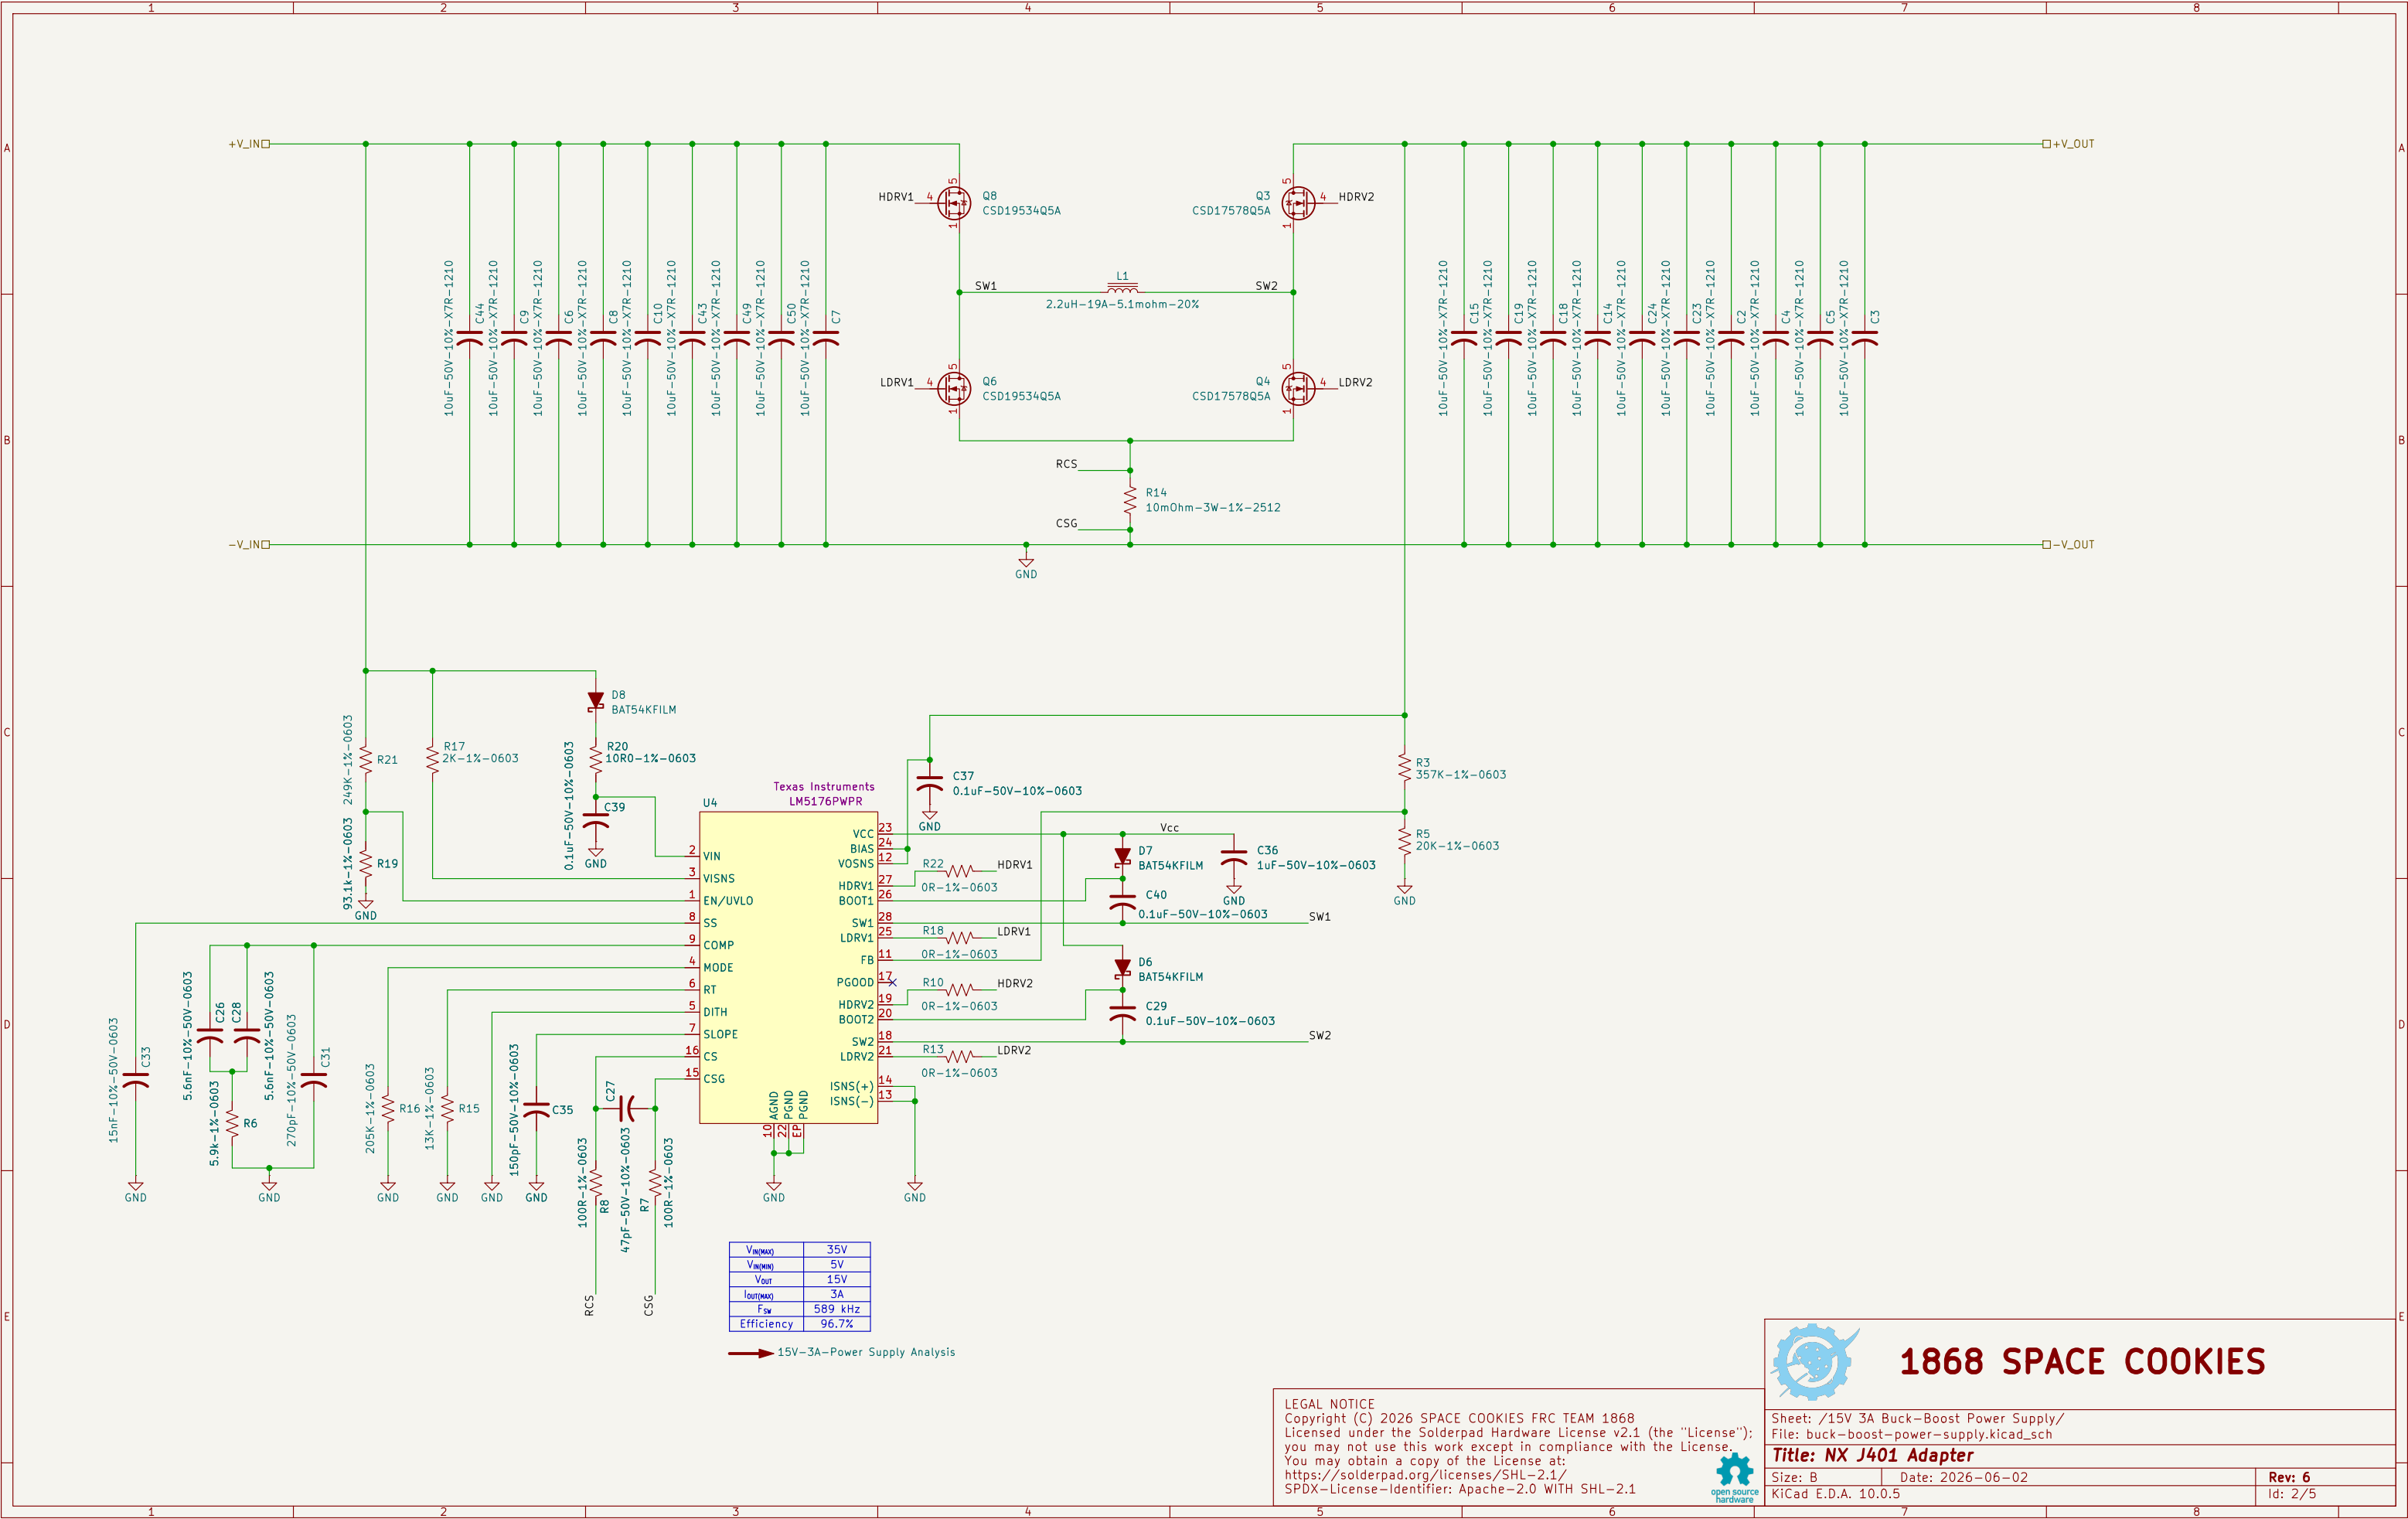

V _{IN(max)}	35V
V _{IN(min)}	5V
V _{OUT}	15V
I _{OUT(max)}	3A
F _{SW}	589 kHz
Efficiency	96.7%

→ 15V-3A-Power Supply Analysis

LEGAL NOTICE
Copyright (C) 2026 SPACE COOKIES FRC TEAM 1868
Licensed under the Solderpad Hardware License v2.1 (the "License");
you may not use this work except in compliance with the License.
You may obtain a copy of the License at:
<https://solderpad.org/licenses/SHL-2.1/>
SPDX-License-Identifier: Apache-2.0 WITH SHL-2.1







1868 SPACE COOKIES






Sheet: /15V 3A Buck-Boost Power Supply/
File: buck-boost-power-supply.kicad_sch

Title: NX J401 Adapter

Size: B	Date: 2026-06-02	Rev: 6
KiCad E.D.A. 10.0.5		Id: 2/5

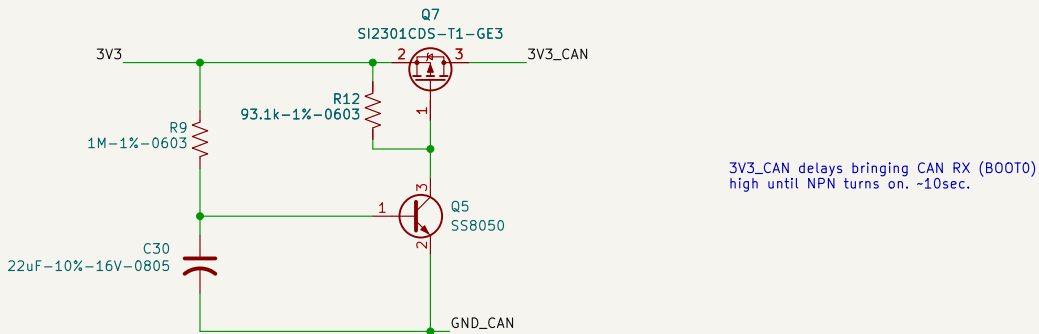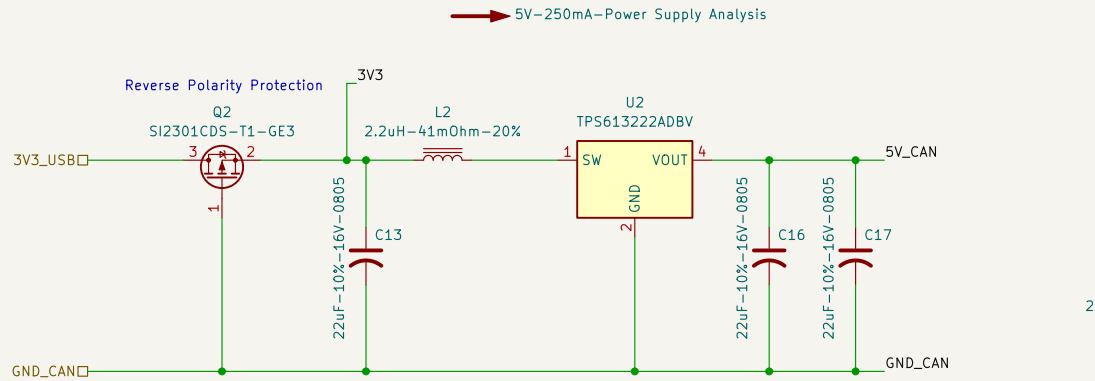

3V3_CAN delays bringing CAN RX (BOOT0) high until NPN turns on. ~10sec.

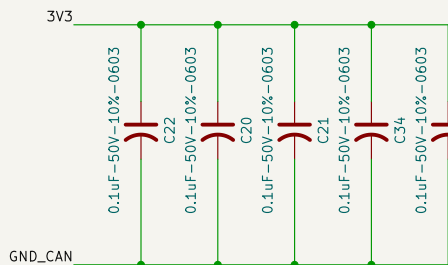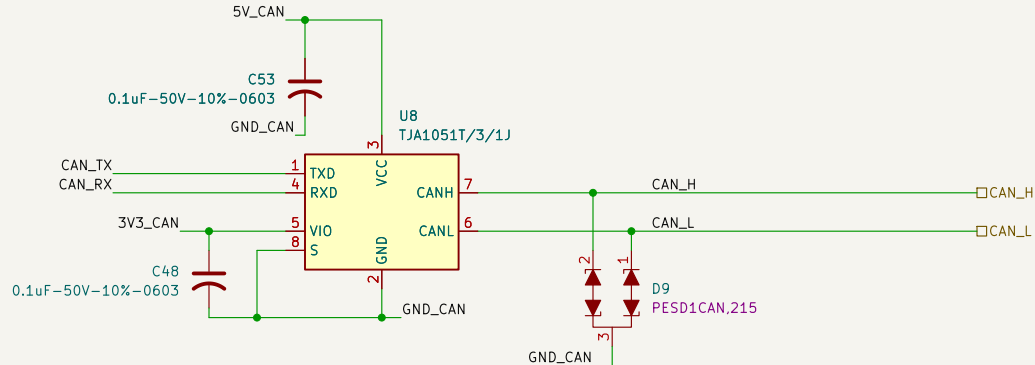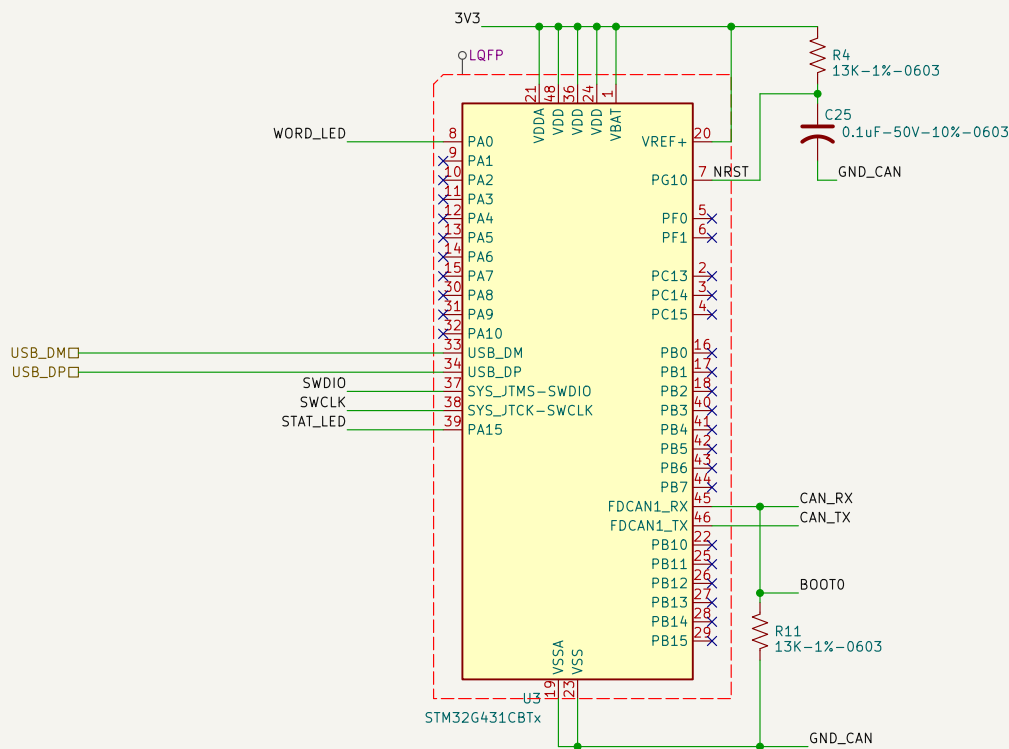

CANable 2.0 Schematic

LEGAL NOTICE
Copyright (C) 2026 SPACE COOKIES FRC TEAM 1868
Licensed under the Solderpad Hardware License v2.1 (the "License");
you may not use this work except in compliance with the License.
You may obtain a copy of the License at:
<https://solderpad.org/licenses/SHL-2.1/>
SPDX-License-Identifier: Apache-2.0 WITH SHL-2.1




1868 SPACE COOKIES

Sheet: /CANable2.0/
File: canable2.kicad_sch

Title: NX J401 Adapter

Size: B Date: 2026-06-02
KiCad E.D.A. 10.0.5

Rev: 6
Id: 3/5

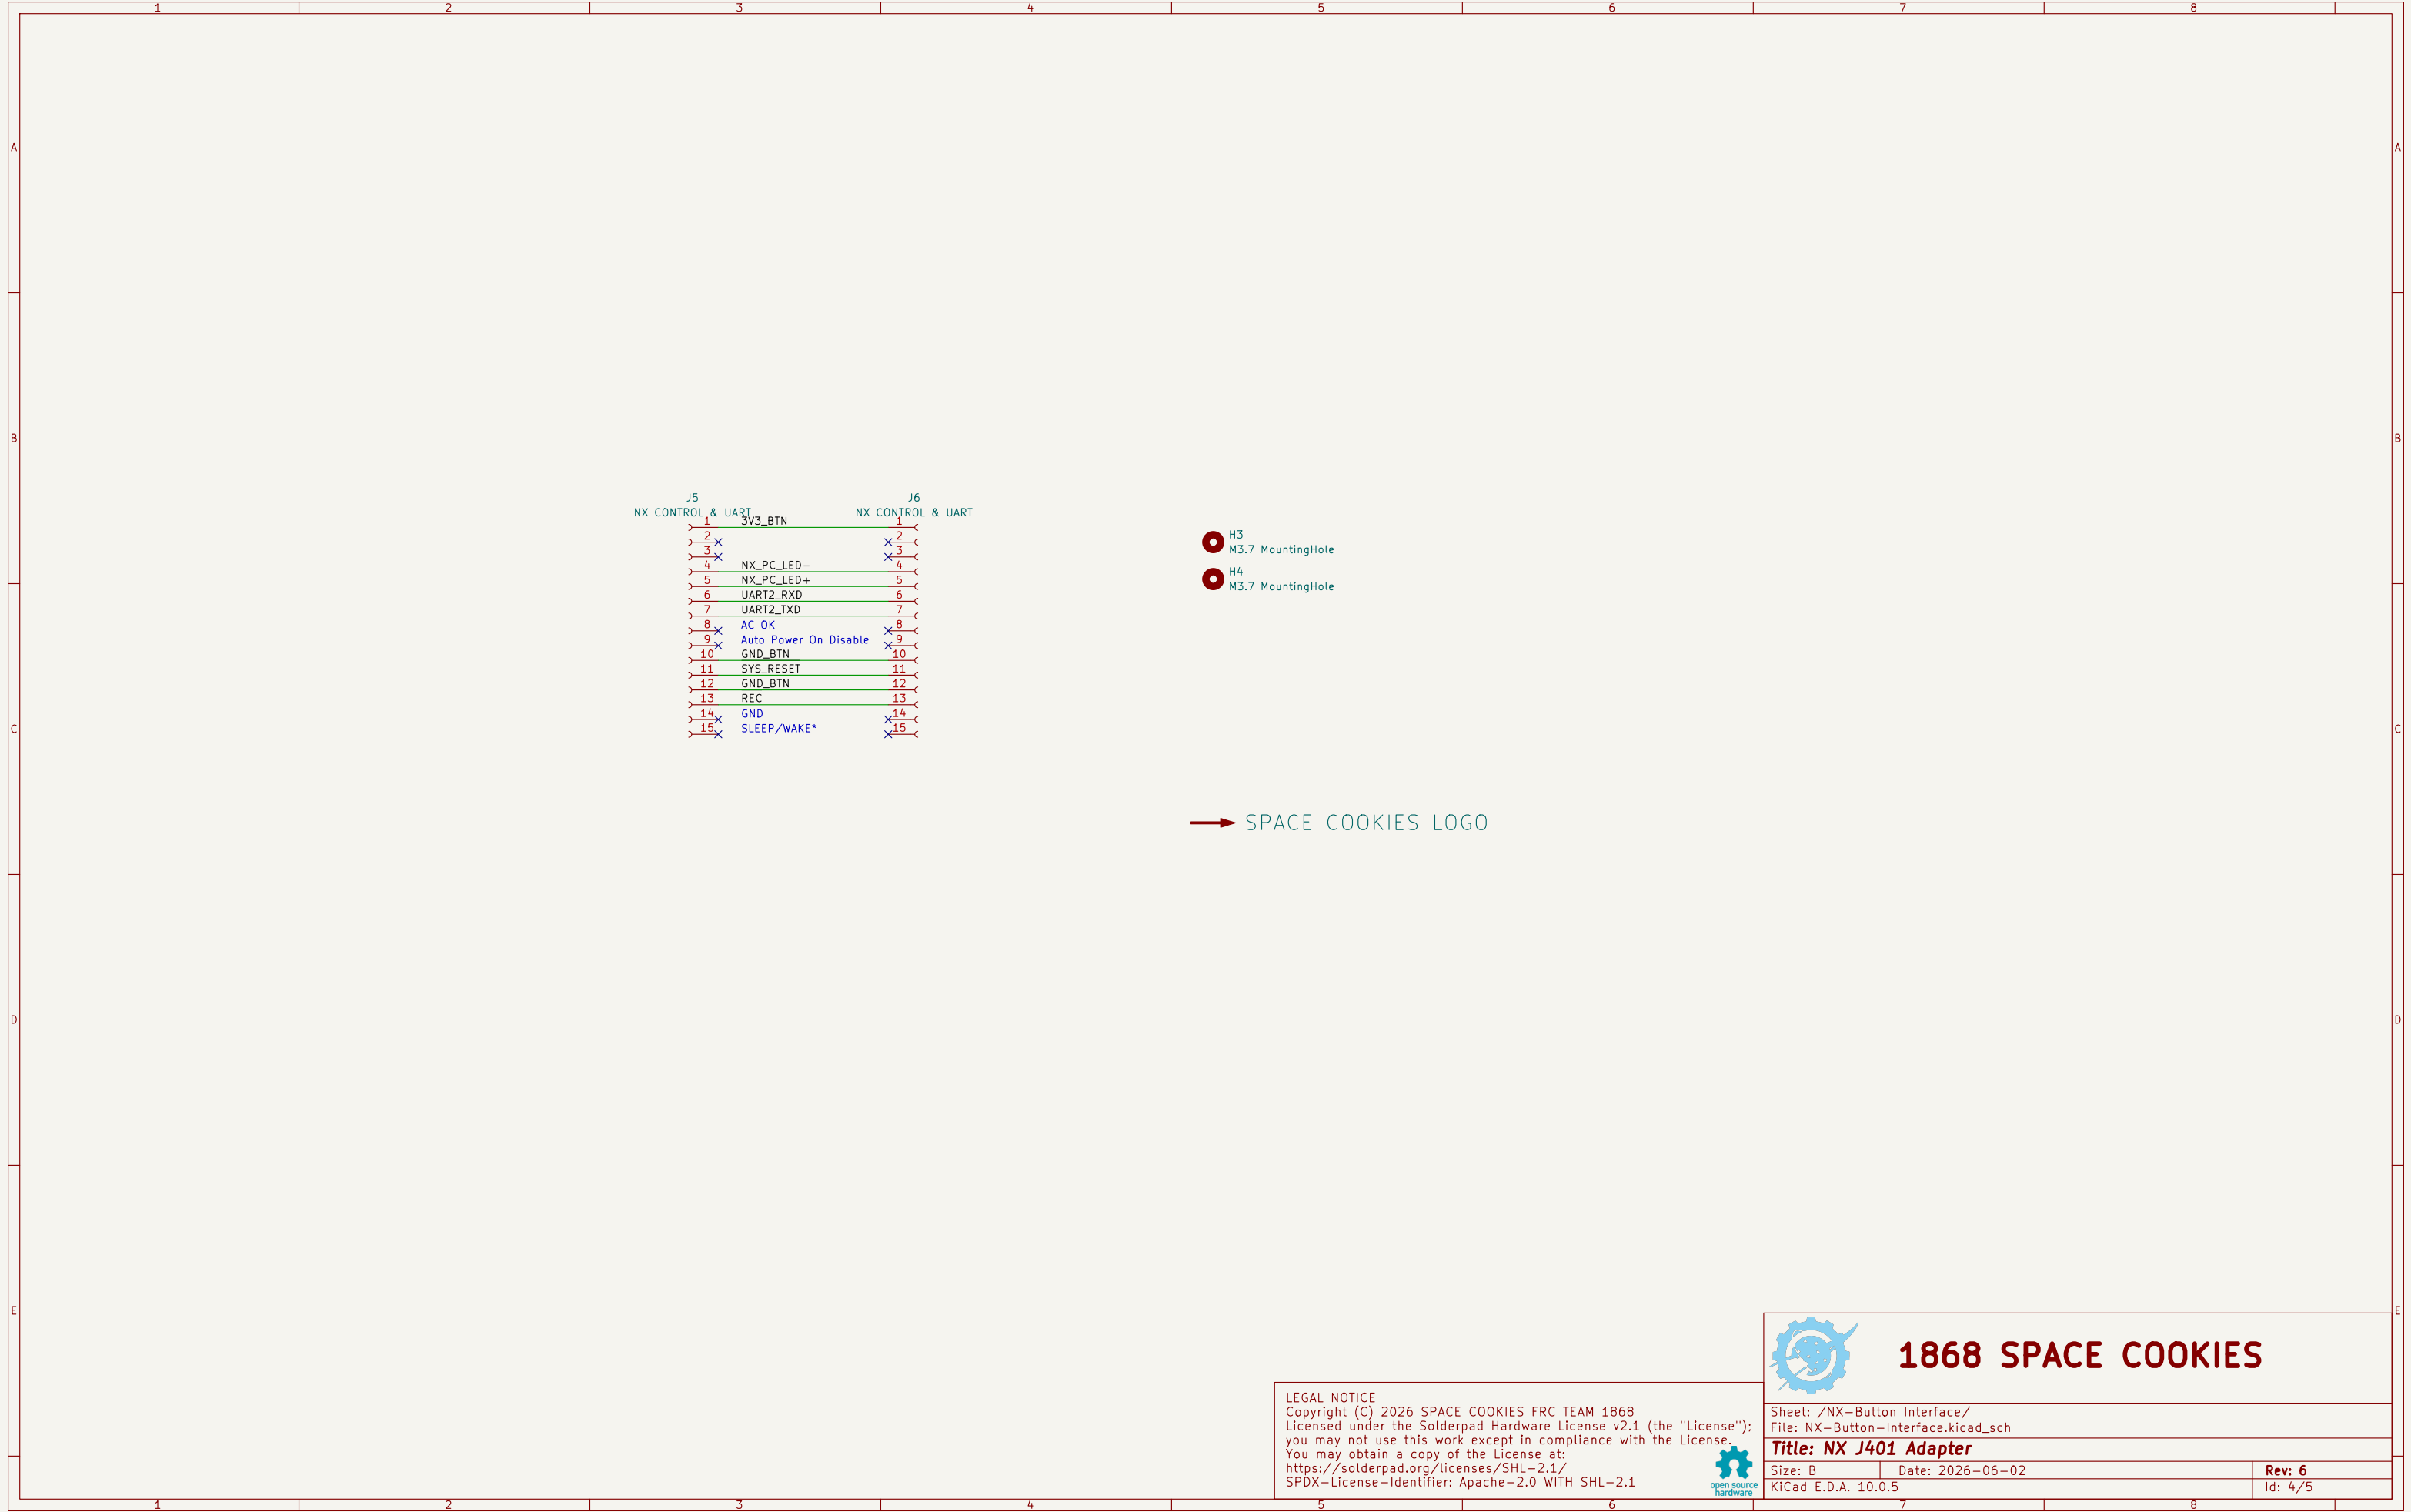



open source
hardware



KiCad E.D.A. 10.0.5

Rev: 6

d: 5/5