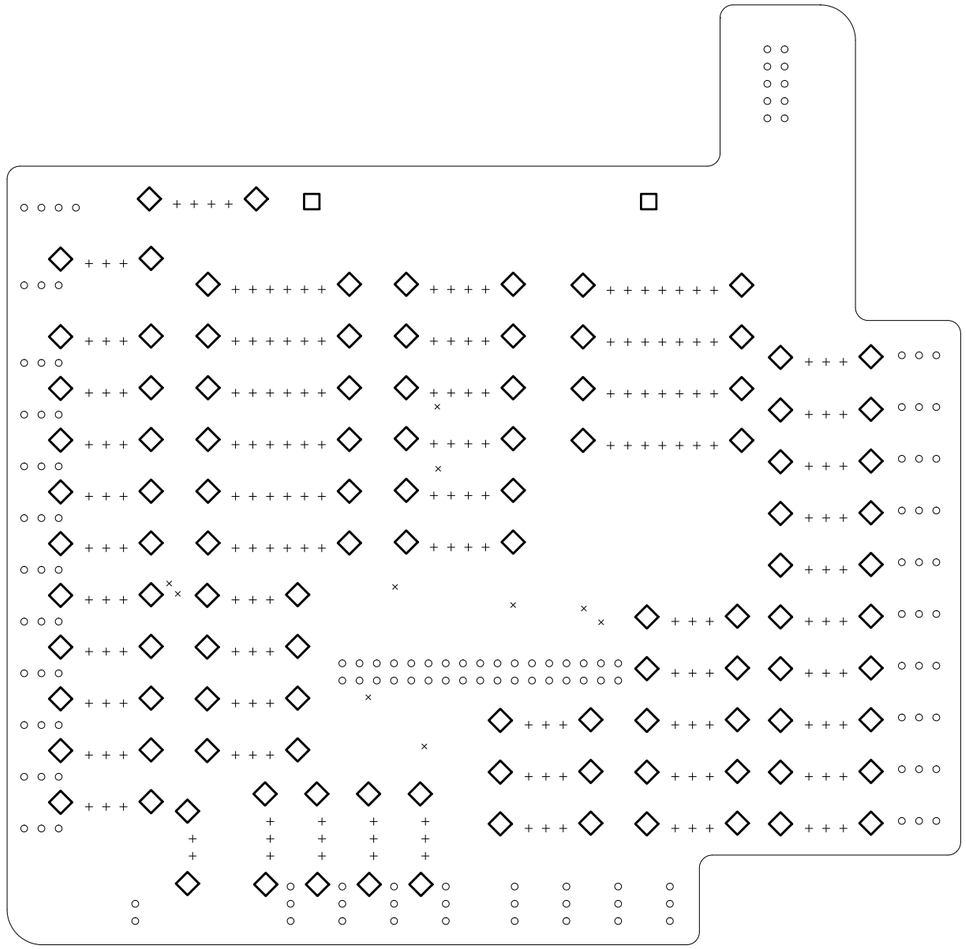

Drill Map:

× 0.711mm / 0.0280" (10 holes)
○ 1.000mm / 0.0394" (137 holes)
+ 1.092mm / 0.0430" (205 holes)
□ 3.200mm / 0.1260" (2 holes) (not plated)
◇ 3.404mm / 0.1340" (110 holes) (not plated)

## BOARD CHARACTERISTICS

| | | | |
|---|---|---|---|
| Copper Layer Count: | 4 | Board Thickness: | 66.30 mils |
| Board overall dimensions: | 5530.00 mils x 5450.00 mils | | |
| Min track/spacing: | 12.00 mils / 12.00 mils | Min hole diameter: | 11.81 mils |
| Copper Finish: | None | Impedance Control: | No |
| Castellated pads: | No | Plated Board Edge: | No |
| Edge card connectors: | No | | |

| Layer Name | Type | Material | Thickness (mils) | Color | Epsilon R | Loss Tangent |
|---|---|---|---|---|---|---|
| F.Silkscreen | Top Silk Screen | Not specified | 0 mils | Not specified | 1 | 0 |
| F.Paste | Top Solder Paste | | 0 mils | | 1 | 0 |
| F.Mask | Top Solder Mask | Not specified | 0.3937 mils | Not specified | 3.3 | 0 |
| F.Cu | copper | | 1.37795 mils | | 1 | 0 |
| Dielectric | core | FR4 | 20 mils | Not specified | 4.5 | 0.02 |
| In1.Cu | copper | | 1.37795 mils | | 1 | 0 |
| Dielectric | prepreg | FR4 | 20 mils | Not specified | 4.5 | 0.02 |
| In2.Cu | copper | | 1.37795 mils | | 1 | 0 |
| Dielectric | core | FR4 | 20 mils | Not specified | 4.5 | 0.02 |
| B.Cu | copper | | 1.37795 mils | | 1 | 0 |
| B.Mask | Bottom Solder Mask | Not specified | 0.3937 mils | Not specified | 3.3 | 0 |
| B.Paste | Bottom Solder Paste | | 0 mils | | 1 | 0 |
| B.Silkscreen | Bottom Silk Screen | Not specified | 0 mils | Not specified | 1 | 0 |

# 1868 SPACE COOKIES

Sheet:
File: roboRIO-interface-v3.kicad_pcb

***Title: roboRIO Interface***

| | | |
|---|---|---|
| Size: USLedger | Date: 2025-12-31 | **Rev: 3** |
| KiCad E.D.A. 9.0.7 | | Id: 1/1 |