


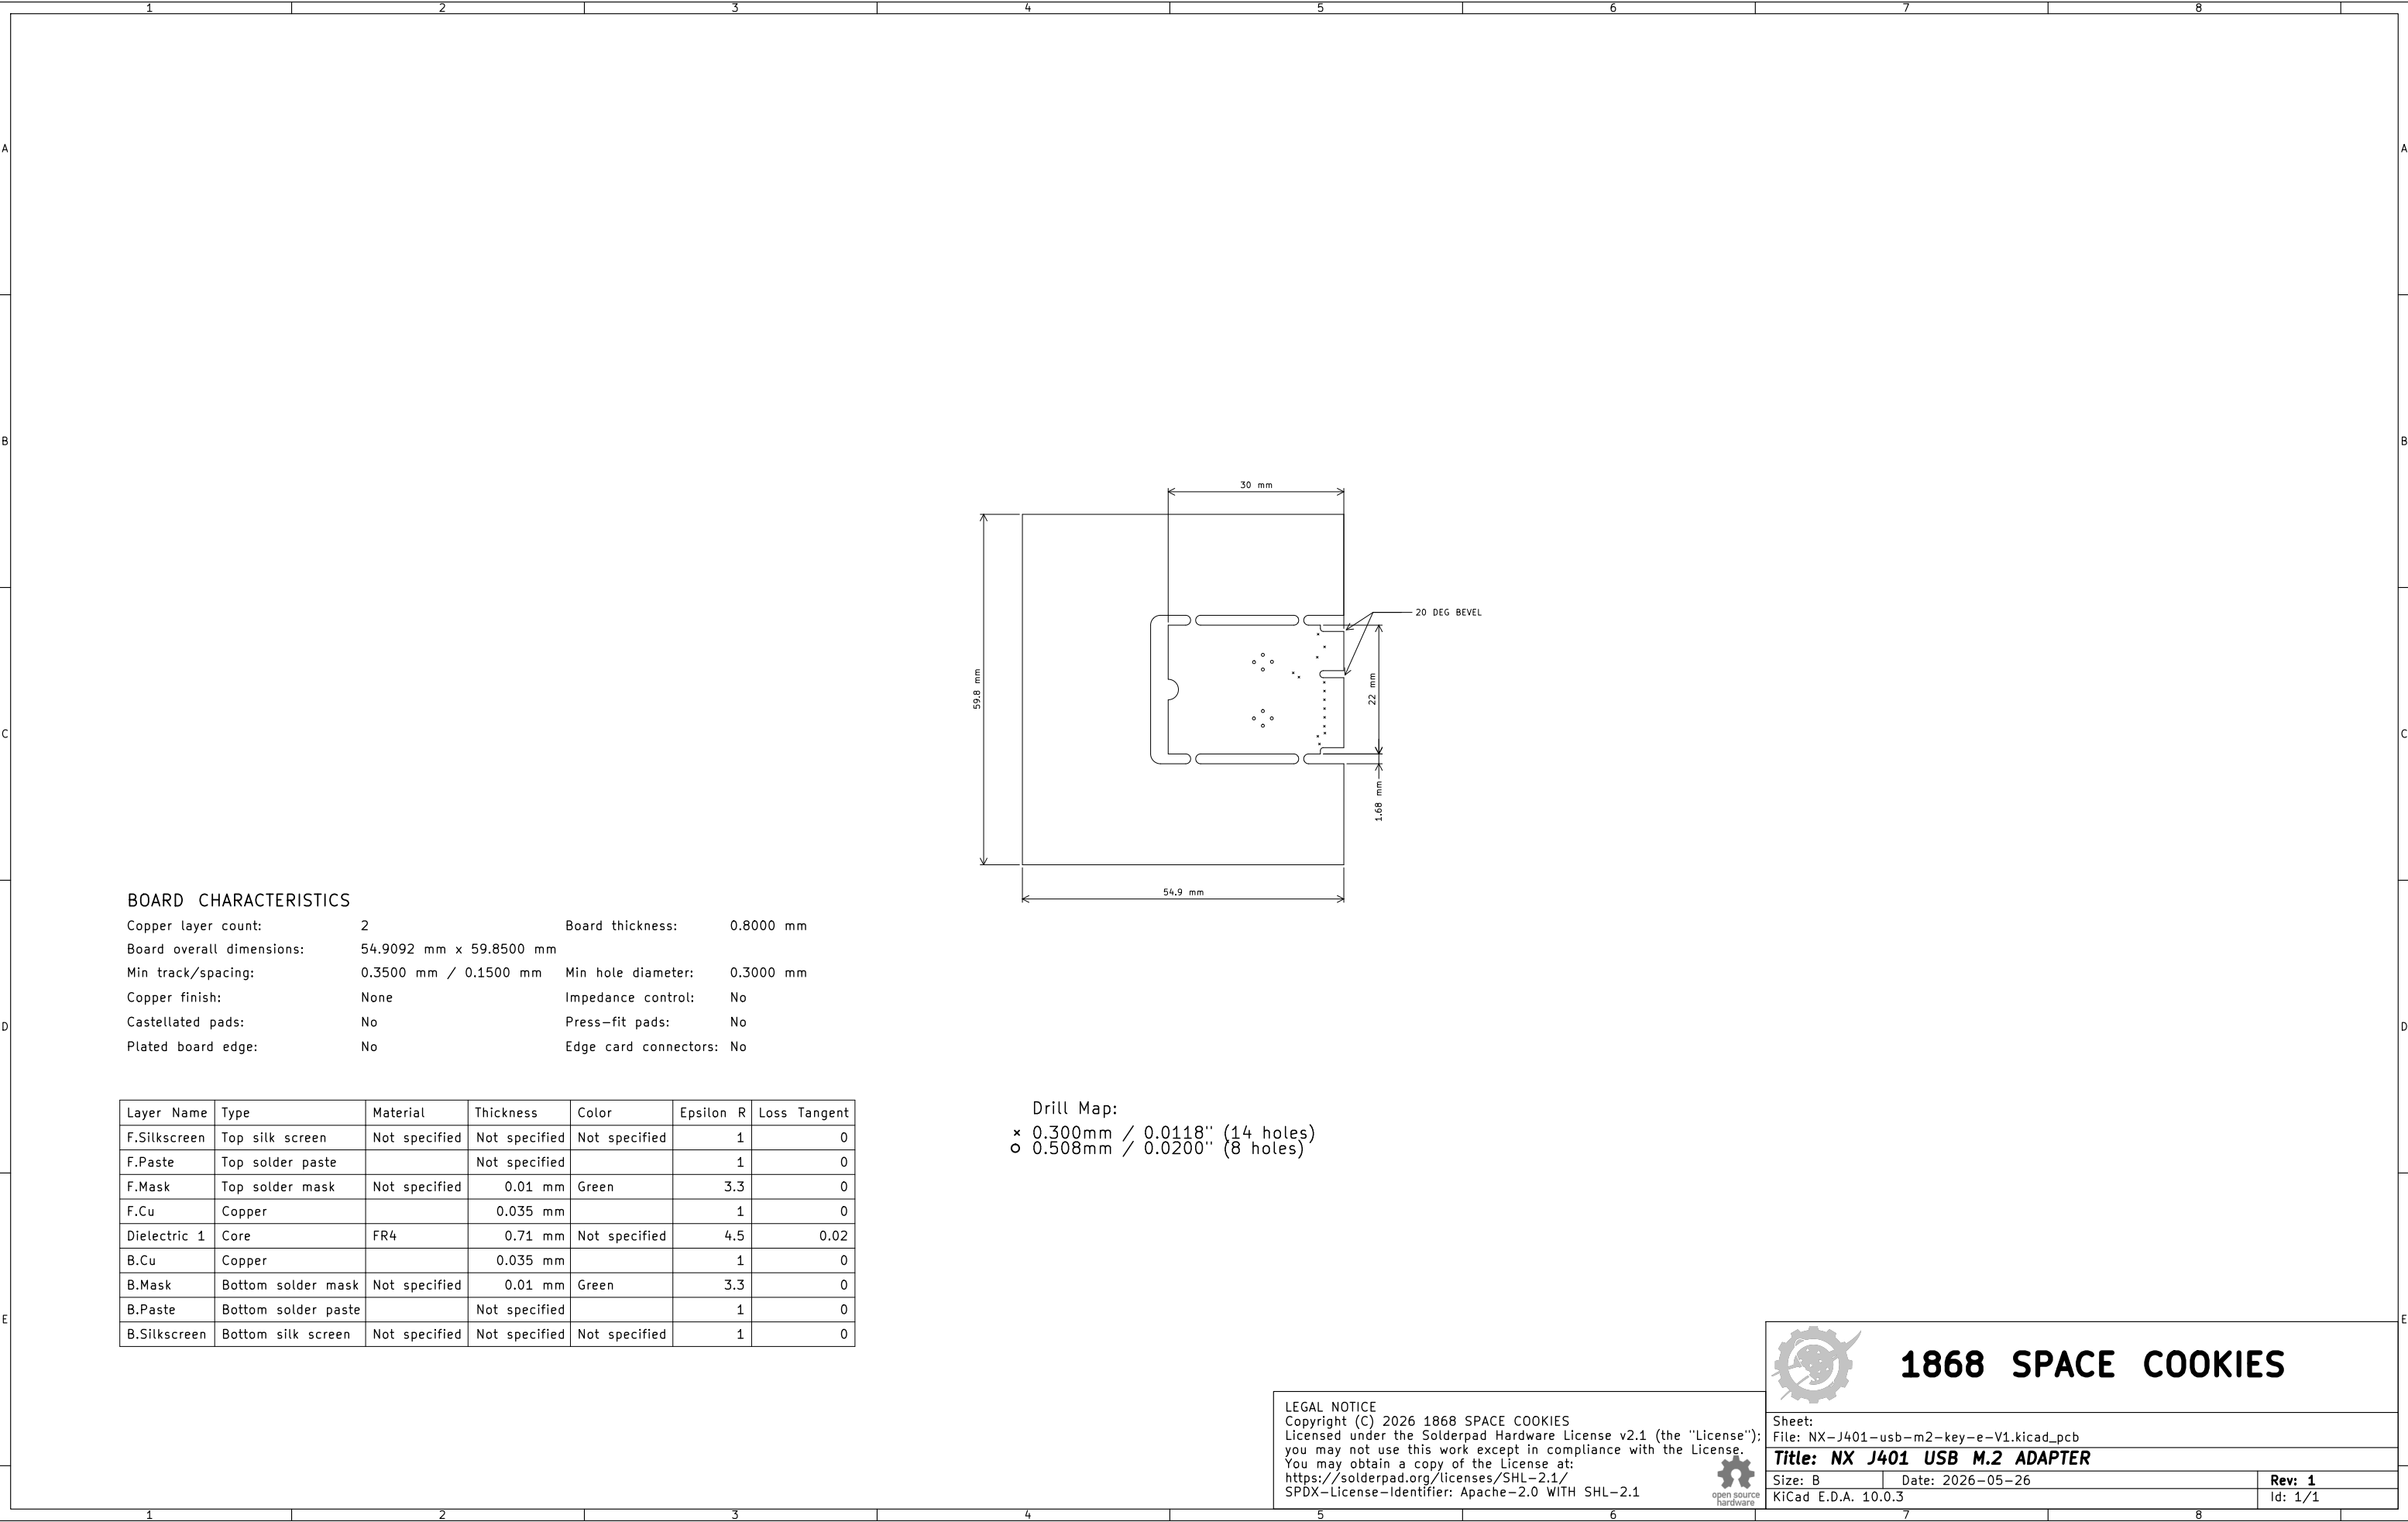

BOARD CHARACTERISTICS

Copper layer count:	2	Board thickness:	0.8000 mm
Board overall dimensions:	54.9092 mm x 59.8500 mm		
Min track/spacing:	0.3500 mm / 0.1500 mm	Min hole diameter:	0.3000 mm
Copper finish:	None	Impedance control:	No
Castellated pads:	No	Press-fit pads:	No
Plated board edge:	No	Edge card connectors:	No

Layer Name	Type	Material	Thickness	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top silk screen	Not specified	Not specified	Not specified	1	0
F.Paste	Top solder paste		Not specified		1	0
F.Mask	Top solder mask	Not specified	0.01 mm	Green	3.3	0
F.Cu	Copper		0.035 mm		1	0
Dielectric 1	Core	FR4	0.71 mm	Not specified	4.5	0.02
B.Cu	Copper		0.035 mm		1	0
B.Mask	Bottom solder mask	Not specified	0.01 mm	Green	3.3	0
B.Paste	Bottom solder paste		Not specified		1	0
B.Silkscreen	Bottom silk screen	Not specified	Not specified	Not specified	1	0

Drill Map:
× 0.300mm / 0.0118" (14 holes)
○ 0.508mm / 0.0200" (8 holes)



1868 SPACE COOKIES

LEGAL NOTICE
Copyright (C) 2026 1868 SPACE COOKIES
Licensed under the Solderpad Hardware License v2.1 (the "License");
you may not use this work except in compliance with the License.
You may obtain a copy of the License at:
<https://solderpad.org/licenses/SHL-2.1/>
SPDX-License-Identifier: Apache-2.0 WITH SHL-2.1



Sheet: File: NX-J401-usb-m2-key-e-V1.kicad_pcb		
Title: NX J401 USB M.2 ADAPTER		
Size: B	Date: 2026-05-26	Rev: 1
KiCad E.D.A. 10.0.3		Id: 1/1