





KONGSBERG

Reference Manual

M3 Sonar®

Multibeam sonar

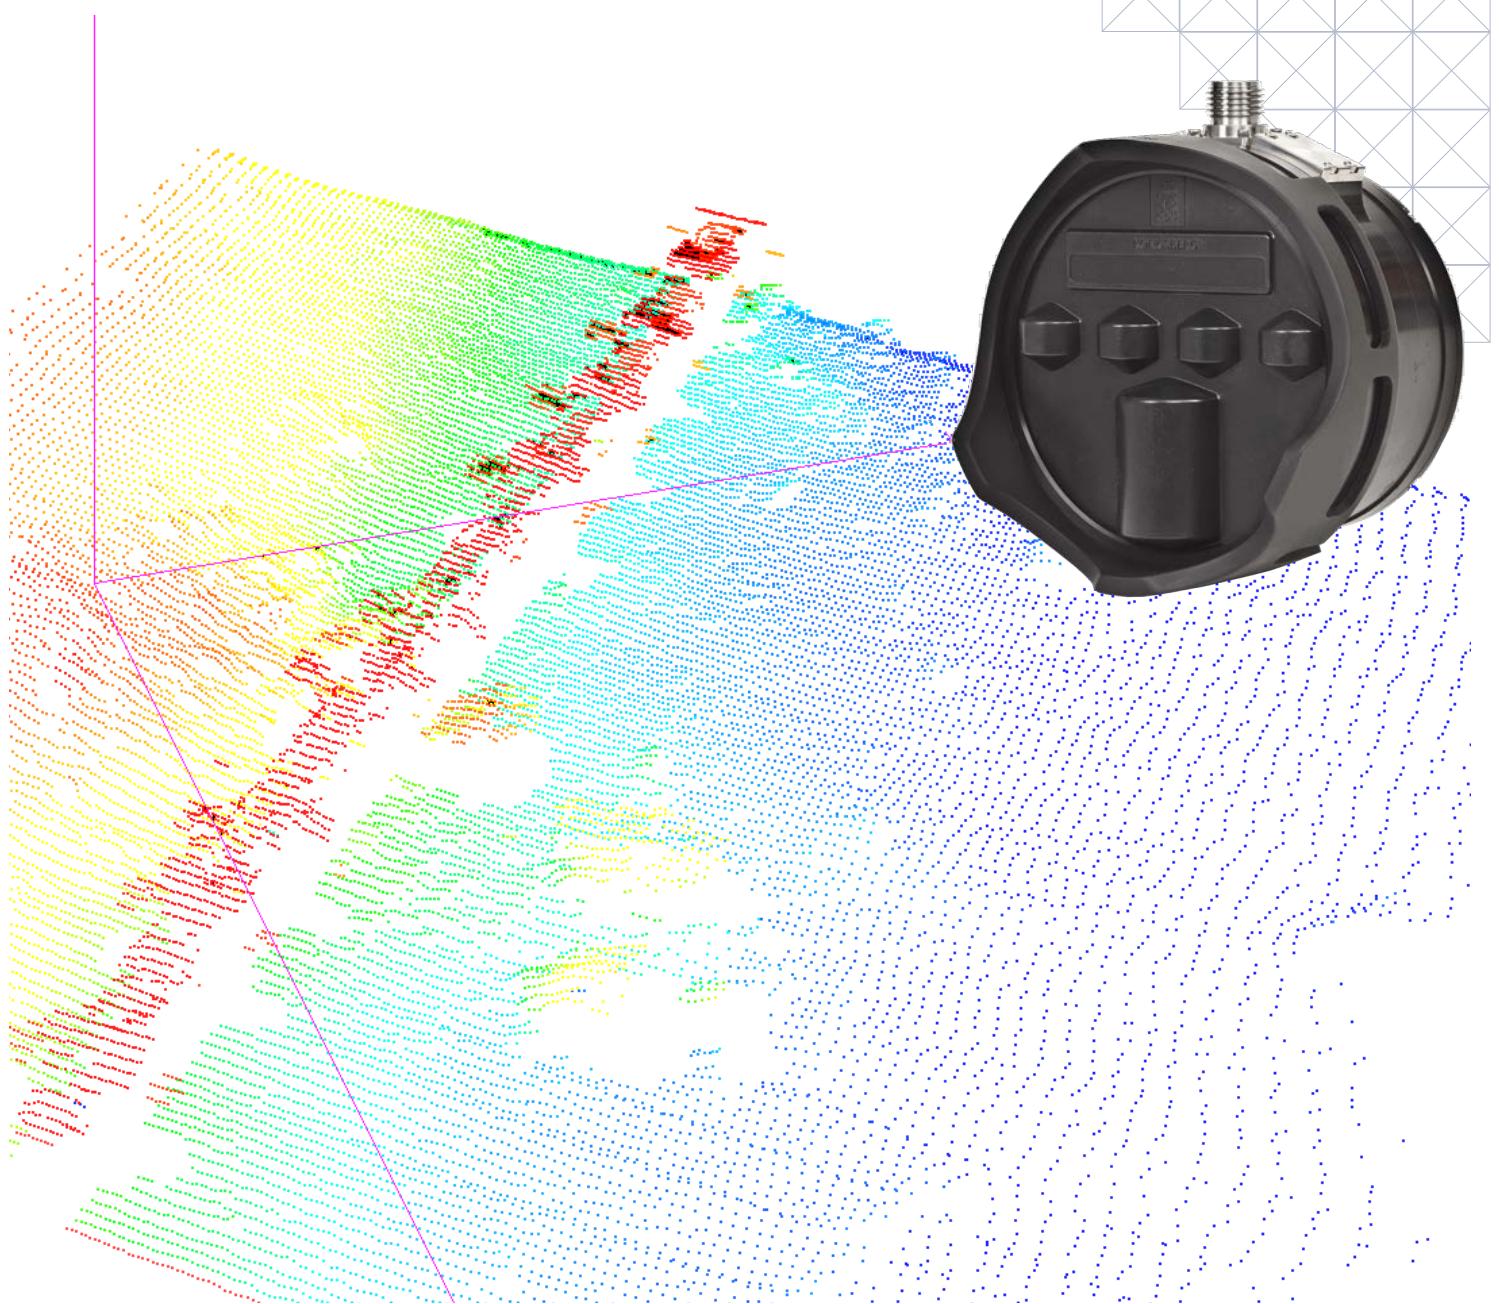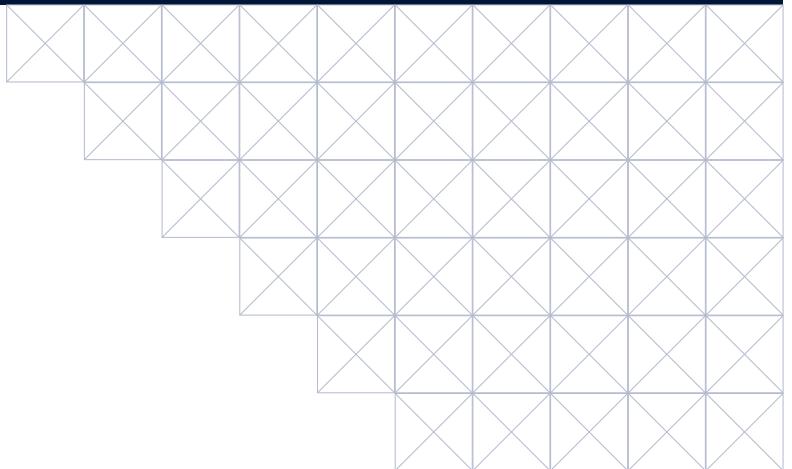



KONGSBERG

M3 Sonar
Multibeam sonar
Reference Manual
Release 1.8

This manual provides you with reference information required to operate and fully understand the commands, menus, modes and options provided by the Kongsberg M3 Sonar Multibeam sonar.

Document information

- **Product:** Kongsberg M3 Sonar
- **Document:** Reference Manual
- **Document number:** 922-10017001
- **Revision:** 1.8
- **Date of issue:** 14 December 2022

Copyright

The information contained in this document remains the sole property of Kongsberg Maritime Canada Limited. No part of this document may be copied or reproduced in any form or by any means, and the information contained within it is not to be communicated to a third party, without the prior written consent of Kongsberg Maritime Canada Limited.

Warning

The equipment to which this manual applies must only be used for the purpose for which it was designed. Improper use or maintenance may cause damage to the equipment and/or injury to personnel. You must be familiar with the contents of the appropriate manuals before attempting to operate or work on the equipment.

Kongsberg Mesotech disclaims any responsibility for damage or injury caused by improper installation, use or maintenance of the equipment.

Disclaimer

Kongsberg Maritime Canada Limited endeavours to ensure that all information in this document is correct and fairly stated, but does not accept liability for any errors or omissions.

Support information

If you require maintenance or repair, contact your local dealer. You can contact us by phone at +1 604 464 8144, or by email at: km.support.vancouver@km.kongsberg.com. If you need information about our other products, visit <http://www.km.kongsberg.com/mesotech>. On our website you will also find a list of our dealers and distributors.

Table of contents

ABOUT THIS MANUAL	7
M3 SONAR	9
System description	10
System diagram	11
System units	12
Sonar Processor	13
Power supply	13
Sonar Head	14
Support information	15
GETTING STARTED	16
Turning the M3 Sonar system on and off	17
Turning on the M3 Sonar system	17
Turning off the M3 Sonar system	18
Starting normal operation	19
Introduction to the basic procedures	19
Setting the Sonar Processor to High Performance	20
Installing the M3 software	21
Defining the IP address on the computer's network adapter	22
Changing the frequency	23
Testing operation of the Sonar Head	23
Testing the Sonar Head telemetry	26
Testing 1PPS Time Sync Mode	29
OPERATING PROCEDURES	31
Setting up and running the sonar	32
Starting operation of the Sonar Head	33
Configuring your preferences	34
Choosing the sonar range	35
Choosing a sonar application	36
Adjusting the sonar view	38
Applying filters	41
Adjusting the TVG (Time Variable Gain) setting	41
Setting up external sensors	42
Defining a custom sensor	45
Controlling the rotator	48

Saving and recalling screen captures	53
Saving and retrieving images	54
Recording sonar data	54
Playing back a recording	55
Converting your recording format.....	56
Converting your recordings to video.....	58
Saving GeoTiff files.....	60
Using sonar view overlays.....	63
Measuring distances	64
Measuring angles.....	65
Defining an area.....	66
Placing text labels.....	66
Placing reference cursors.....	67
Placing target markers	68
Configuring the Sonar Head.....	70
Upgrading the Sonar Head	71
Changing the Sonar Head IP Address	73
USER INTERFACE.....	76
Presentation overview	77
The M3 software menu system	79
Sonar view	80
Interpreting the sonar view.....	81
Noise and interference.....	82
3D Point Cloud	83
Tool bar description	85
Status bar.....	87
MENU SYSTEM	89
File menu	90
Display menu	91
Setup menu	94
Sonar Applications menu.....	96
Advanced menu	100
Help menu	101
FUNCTIONS AND DIALOG BOXES.....	102
File menu	103
Recording Format.....	104

Exporting Format	105
Convert to Video Format dialog box	105
Display menu	111
Target Marker Export dialog box	113
Playback Console	115
Profiling Settings dialog box	116
Setup menu	120
Define Custom Sensor dialog box	121
Geo Projection dialog box	124
Preferences dialog box	126
Head Network Setup dialog box	130
Head Firmware Configuration dialog box	133
System Configuration dialog box - Sonar Setup page	134
System Configuration dialog box - Sensors Setup page	138
System Configuration dialog box - Rotators Setup page	141
System Configuration dialog box - Master Reference page	148
System Configuration dialog box - Mounting Offsets page	151
Sonar Applications menu	155
Enhanced Image Quality (EIQ)	159
Imaging	159
Profiling	160
ROV Navigation	161
Advanced menu	163
Power User Settings dialog box	164
Program Head dialog box - Production Config page	167
Program Head dialog box - Head Corrections page	169
Program Head dialog box - TX Pulse page	171
Profile Batch Conversion dialog box	172
Raw Data Spectrum window	174
Power User Settings XML file	175
Help menu	178
Tool bar description	179
Arrow	181
Wiper	181
Zoom windows	182
Tape Measure	183
Protractor	183

String Measure	183
Text Label.....	184
Reference cursors	184
Image Quality Analysis System	185
Save image with or without overlays	186
TVG Setup dialog box.....	187
Filters.....	190
TECHNICAL SPECIFICATIONS.....	191
Introduction to technical specifications	192
Interface specifications.....	193
Performance specifications	196
Mechanical specifications	200
Power requirements	202
Environmental requirements.....	203
Minimum computer requirements.....	204

About this manual

The purpose of this publication is to provide the descriptions, procedures and detailed parameter explanations required to allow for safe and efficient use of the M3 Sonar system. The publication also provides you with a thorough understanding of the parameters and adjustments provided by the M3 Sonar system.

Target audience

This publication is intended for all users of the M3 Sonar system. Due to the nature of the descriptions and the level of detail provided by this publication, it is well suited for those who are - or wish to be - expert users.

A good understanding of system functions and controls is essential to fully take advantage of the functionality provided. A careful study of the information in this manual is highly recommended, preferably while exploring the functionality offered by the M3 Sonar system.

We assume that you are familiar with the basic acoustic principles of sound in water. We also expect that you have some experience with sonar operation.

License information

The M3 Software is included with the M3 Sonar system and updates are available free of charge and can be downloaded from: <http://www.kongsberg.com/mesotechsoftware>.

Software version

This M3 Sonar Reference Manual complies with M3 software version 2.5.3.

Registered trademarks

Observe the registered trademarks that apply.

Windows® is a registered trademark of Microsoft Corporation in the United States and other countries.

M3 Sonar® is a registered trademark of Kongsberg Maritime Canada Limited in the United States and other countries.

We want your feedback

We always want to improve our products. We also want our end-user documentation to be comprehensive and relevant. You can help. Please provide comments, suggestions or constructive criticism to our support office. You can contact us by phone at +1 604 464 8144, or by email at: km.support.vancouver@km.kongsberg.com.

M3 Sonar

Topics

- [System description, page 10](#)
- [System diagram, page 11](#)
- [System units, page 12](#)
- [Support information, page 15](#)

System description

The Kongsberg Mesotech M3 Sonar is a compact, versatile multibeam sonar.

Multibeam sonars have an array of transducers that simultaneously transmits pings (sound pulses) at a specified frequency to cover a large area in less time than a single-beam transducer. To generate data, computer software assigns a colour range corresponding to the amount of sound reflected off a target. The distance to the target is determined by the length of time it took to receive the transmitted acoustic pulse.




By combining the high refresh rate of a conventional multibeam sonar with an image quality comparable to a single-beam sonar, the M3 Sonar provides high-resolution images that are easy to interpret. The M3 Sonar detects objects out to 150 metres and has a 120° to 140° field of view, allowing you to see the full underwater picture in real-time.

The M3 Sonar provides wide-angle full-range situational awareness and concurrent ultra-short range imaging with dynamic focusing. For optimized obstacle avoidance, the M3 Sonar uses variable vertical beamwidth.

System diagram

The system diagram identifies the main components of a basic M3 Sonar system. Only the main connections between the units are shown. Detailed interface capabilities and power cables are not shown.

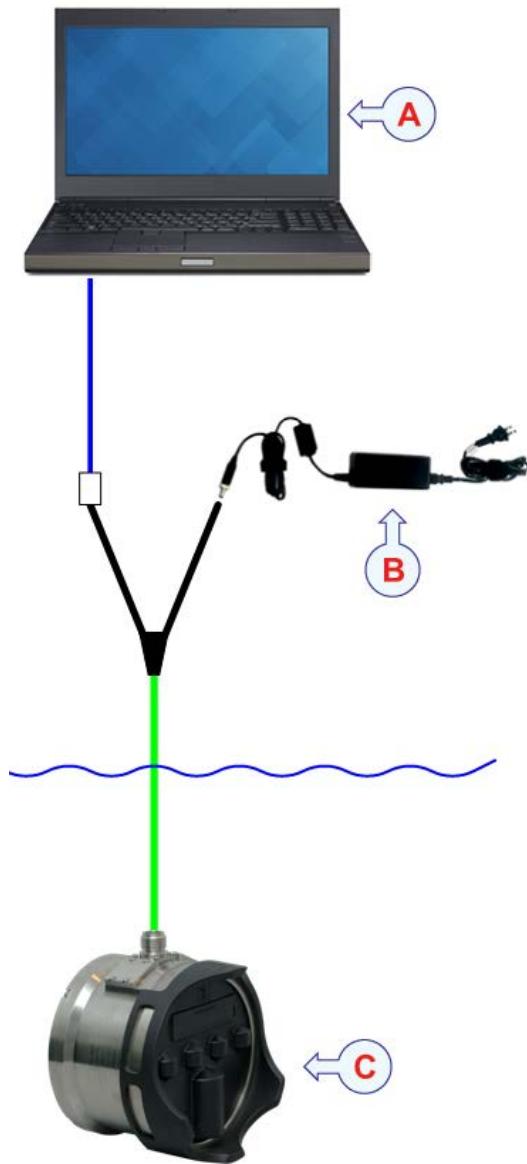

A *Sonar Processor*

B *Power supply*

C *M3 Sonar Head*

System units

Topics

[Sonar Processor, page 13](#)

[Power supply, page 13](#)

[Sonar Head, page 14](#)

Sonar Processor

In this publication, the computer can also be referred to as the *Processor Unit*, and vice versa. The Sonar Processor contains the operational software, and offers the user interface that allows you to control the M3 Sonar. It is a vital part of the M3 Sonar system.

The Sonar Processor runs the M3 software that manages communication with the Sonar Head, performs all beamforming and image processing and presents the sonar imagery. The Sonar Processor communicates with the sonar through a standard Ethernet cable.

If you purchase a computer locally, make sure that the chosen model meets the functional and technical requirements. The computer must be designed for rugged use. The construction must be able to withstand the vibrations and movements of a vessel.



Related topics

[Minimum computer requirements, page 204](#)

Power supply

The Sonar Head requires a DC power supply to run.



Normally, the DC voltage is supplied in the location where the Sonar Head is mounted, such as on a remotely operated vehicle (ROV). A test cable and power supply is available for order as an accessory. The test power supply uses a 24 VDC switching power supply.

Related topics

[Power requirements, page 202](#)

Sonar Head

The Sonar Head transmits and receives an acoustic pulse when deployed underwater.



The Sonar Head includes transmit and receive transducers and the electronics to generate the transmit pulse and digitize the received signal. The sonar data is sent to the Sonar Processor using a standard Ethernet link.

Note

The M3 Sonar Head's black polyurethane transducer is delicate. Always keep the Guard Ring and protective cover over the transducer during installation and storage.

Several different M3 Sonar models are available – your model may differ from the one shown here. For example, there are models with different depth ratings and materials, as well as models that include an integrated sound velocity sensor or high-frequency transducer.

Related topics

- [Performance specifications, page 196](#)
- [Mechanical specifications, page 200](#)

Support information

If you need technical support for your M3 Sonar you must contact your local dealer, or our support department.

If you require maintenance or repair, contact your local dealer. You can contact us by phone at +1 604 464 8144, or by email at: km.support.vancouver@km.kongsberg.com. If you need information about our other products, visit <http://www.km.kongsberg.com/mesotech>. On our website you will also find a list of our dealers and distributors.

Getting started

Topics

[Turning the M3 Sonar system on and off, page 17](#)

[Starting normal operation, page 19](#)

Turning the M3 Sonar system on and off

Topics

[Turning on the M3 Sonar system, page 17](#)

[Turning off the M3 Sonar system, page 18](#)

Turning on the M3 Sonar system

To use the M3 Sonar system, you must turn it on. You must first turn on the display and the computer. After this you can start the M3 software.

Prerequisites

- The system units have all been installed according to the instructions provided.
- All cable connections have been made and checked.
- All system units have been inspected.

Context

The program is not automatically started when the computer is turned on. On the Sonar Processor desktop, double-click the M3 Sonar icon to start the software.

Note

The M3 Sonar is not provided with an on/off switch.

Procedure

- 1 Power up the Sonar Head using the power supply.

Note

It may take up to 60 seconds for the M3 software to connect to the Sonar Head once the power is applied.

- 2 Turn on the computer.

Wait while the operating system loads.

- 3 Log in to Windows.

- 4 On the Sonar Processor desktop, double-click the M3 Sonar icon to start the software.

- 5 Once the program has started, observe that the display presentation fills the entire screen.

The software starts up using many of the same settings as the last time you used it. If these settings are acceptable, continue operation. If you wish to alter any of the settings, see the relevant procedures.

- 6 Click **Setup**→**Connect** to start the Sonar Head.

The sonar will start pinging automatically once the connection is complete. Observe that the text “Active” appears in the lower-right corner of the status bar.

Turning off the M3 Sonar system

The M3 Sonar is not provided with an on/off switch.

Context

When you do not use the M3 Sonar system, turn it off.

Procedure

- 1 If you are running the sonar, click **Setup**→**Disconnect** in the M3 software.
- 2 Switch off the Sonar Processor.
 - a Close the M3 software and any third-party software.
 - b Shut down Windows.
- 3 Disconnect the power cord leading to the power supply.
Alternatively, switch off the breaker supplying power to the M3 Sonar.
- 4 Switch off any additional items, such as a sound velocity profiler or display.
If required, refer to the instructions provided by the product’s manufacturer.

Starting normal operation

Topics

- [Introduction to the basic procedures, page 19](#)
- [Setting the Sonar Processor to High Performance, page 20](#)
- [Installing the M3 software, page 21](#)
- [Defining the IP address on the computer's network adapter, page 22](#)
- [Changing the frequency, page 23](#)
- [Testing operation of the Sonar Head, page 23](#)
- [Testing the Sonar Head telemetry, page 26](#)
- [Testing 1PPS Time Sync Mode, page 29](#)

Introduction to the basic procedures

Once you have powered up the complete M3 Sonar system, and started the M3 Sonar program, you are ready to start the actual operation.

Observe these brief procedures to familiarize yourself with the basic operation.

When starting up, the M3 Sonar will automatically apply its previous settings. The procedures are partly provided to get you acquainted with the basic functionality offered by the M3 Sonar, and partly to set up the M3 Sonar for normal use. If you already know the current operational settings are acceptable, you may not need to do any of these procedures.

Setting the Sonar Processor to High Performance

To avoid slowdowns or disruptions while running the sonar, ensure your Sonar Processor is using all of its processing power and does not go to sleep.

Prerequisites

This procedure is made for the Microsoft® 64-bit Windows 10 operating system.

Procedure

- 1 In the bottom-left corner of your desktop, select the Windows® **Start** button.
- 2 On the menu, select **Settings**.
Observe that the **Settings** window opens.
- 3 Select **System**.
- 4 In the menu on the left, select **Power & sleep**.
- 5 Make sure that the Sonar Processor will never go to sleep when plugged in.
 - a Click the **Additional power settings** link on the right side of the window.
Observe that the **Power Options** dialog box opens.
 - b In the menu on the left, select **Create a power plan**.
 - c Select the **High performance** radio button.
 - d Give your new custom plan a name, then click **Next**.
 - e Select *Never* for both **Turn off the display** and **Put the computer to sleep** when plugged in.
 - f Click **Create**.

Tip

*Once you have created a custom plan, you can adjust some more advanced settings. You may, for example, wish to keep any secondary displays on when the laptop lid is closed. Click **Change plan settings** next to your custom plan. Click the **Change advanced power settings** link. Observe that the **Power Options** dialog box opens. Click the “+” to expand the submenus, then select the desired options from the drop-down lists. At the bottom of the dialog box, select **Apply** to save your settings.*

Installing the M3 software

If your system is provided with a Sonar Processor, the M3 software has already been installed. If you intend to use your own computer, you must install the software yourself. We recommended installing the latest M3 software on your Sonar Processor.

Prerequisites

- You will need the Kongsberg USB drive included with the system or download the latest M3 software release from: <http://www.kongsberg.com/mesotechsoftware>.
- If you are installing a new software version, uninstall the previous version of the M3 software before proceeding.

Note

When running the M3 software for the first time, a Windows Firewall dialog box may appear. Allow access for all networks.

Procedure

- 1 Launch the installer **M3_V0253 Setup.exe**.
- 2 Follow the installation wizard's instructions and select *Standard Installation*.

Note

Use the Dual-M3 on Same PC option only if you are using two M3 Sonars. Selecting this option will install two separate copies of the software, with each copy having its own settings. You can identify which copy you are using by observing the top header of the software presentation. The header will read either "M3 - Master Head" or "M3 - Slave Head".

- 3 Use the default folder location and check **Create a desktop icon**, then click **Next**.
- 4 Click **Yes** to install the **KML USB Converter** when prompted and follow the instructions to finish the installation process.
- 5 Pin the M3 software icon to the Windows Taskbar.
 - a Right click on the M3 software icon.
 - b Click **Pin to taskbar**.
- 6 Test the M3 software startup.
 - a Double click the M3 icon on the desktop to run the M3 software.
 - b Confirm the software finishes launching without any error windows appearing.

Defining the IP address on the computer's network adapter

The communication between the Sonar Processor and the Sonar Head is made using a high-speed Ethernet cable. If a Sonar Processor is not configured to connect to the sonar, you must define which IP Address and Subnet mask the Ethernet adapter in the Sonar Processor shall use for this communication.

Prerequisites

This procedure is made for the Microsoft® 64-bit Windows 10 operating system. It is assumed that you are familiar with the Windows® operating systems, computer technology, and interface principles.

Context

As long as you do not change the Sonar Processor to another computer, or replace the serial adapter in your Sonar Processor, you will only need to do this once.

Procedure

- 1 On the computer, close the M3 software.
- 2 Open the **Network Connections** dialog box.
 - a In the bottom-left corner of your desktop, select the Windows® search function.
 - b In the search box, type "Network Connections", and open the **Network Connections** dialog box.
 - c Right-click the network adapter you are going to use and select **Properties** on the shortcut menu.
 - d On the list of connections, select **Internet Protocol 4 (TCP/IPv4)**, and then **Properties**.
- 3 Select **Use the following IP address**, and type the IP address and network mask.
IP Address: **192.168.001.N** ("N" can be any number from 1 to 254, except 234, which is the Sonar Head default.)
Subnet mask: **255.255.255.0**
You can leave **Default Gateway** blank.
- 4 Select **OK** to save the settings, then close all the dialog boxes.

Changing the frequency

If you have a high-frequency M3 Sonar transducer, you can change the frequency using the **Display Widget**.

Context

Note


The frequency buttons will not appear if you are using a 500 kHz transducer. In addition, these buttons will not appear in playback mode.

Procedure

- 1 Click **Setup**→**Connect** to start the Sonar Head.
- 2 Click the **Display Widget** icon.
This icon is located in the lower-right corner of the sonar view.
- 3 Click one of the buttons to select a frequency (in kHz).
- 4 Click the **Display Widget** icon to hide the widget.

Note

*The selection of sonar applications presented in the **Sonar Applications** menu depends on the current Sonar Head frequency.*

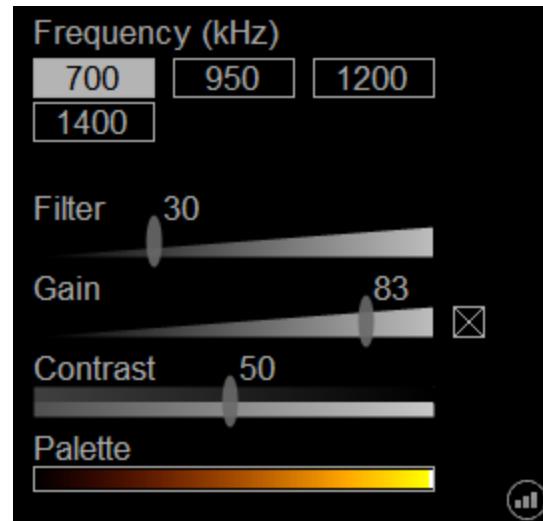

Testing operation of the Sonar Head

You can test the operation of the Sonar Head by confirming that sonar data is being correctly displayed in the **Information Widget**, sonar view, and **3D Point Cloud** window. In addition, any errors will be displayed in the **Output Messages** or **Head Status** windows.

Prerequisites

The M3 software must be running.


Tip _____

Make sure there is sufficient disk space available to complete the survey.

Procedure

- 1 Click **Setup**→**Connect** to start the Sonar Head.

Make sure that a sonar image appears in the sonar view window.

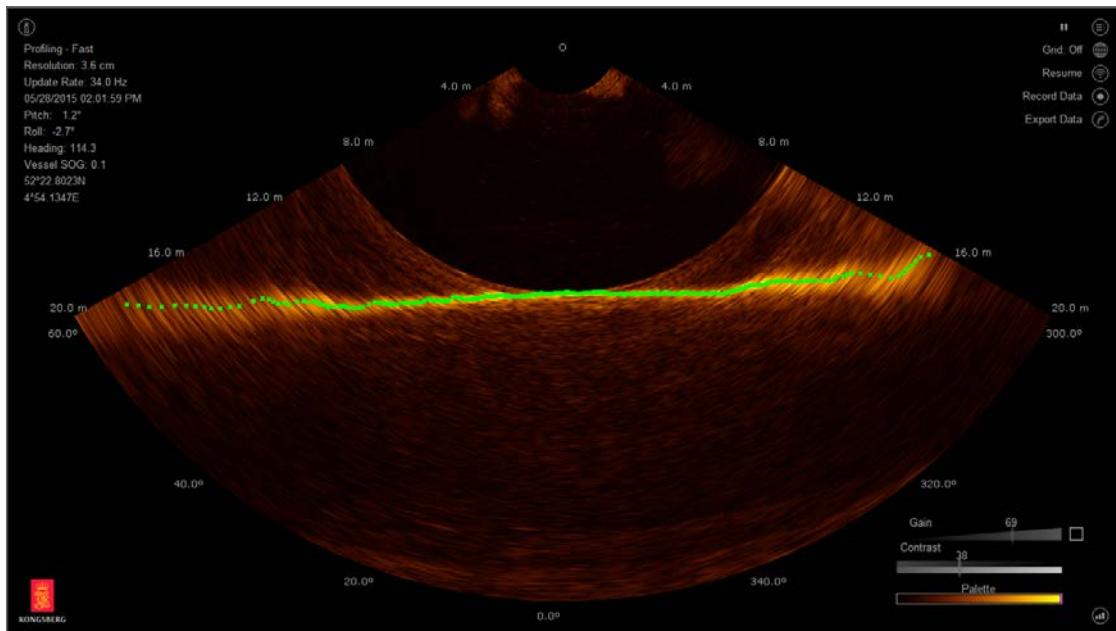


- 2 Click the “i” icon in the top-left corner of the sonar view to open the **Information Widget**.
Make sure that the sensor data is updating in the **Information Widget**.
- 3 Select *Profiling* from the **Sonar Apps** menu.


Note _____

The selection of sonar applications presented in the Sonar Applications menu depends on the current Sonar Head frequency.

- 4 If the profiling settings are not visible, click **Display→Profiling Settings** to open the **Profiling Settings** dialog box.
- 5 Check the **Depth Tracking** box to automatically adjust the range according to the current depth.
- 6 Make sure that data is displayed and being updated in the **3D Point Cloud** window.
- 7 Make sure that no errors are displayed in the **Output Messages** window.
 - a Click **Display→Output Messages Window**.
 - b Make sure there are no errors shown in the **Output Messages** window under the **Host Messages** or **Head Messages** tab.
- 8 Make sure there are no errors in the **Connection Status** and **Head Status** windows.
 - a Click on the text “Active” located in the lower-right corner of the status bar.
Observe that the **Connection Status** window opens.
 - b Make sure that all items listed under the M3 Sonar show check marks.
If any items are shown with an “X” in a red circle, it usually means the device has failed to connect. Disconnect and make sure that no sensors have failed.
 - c Click on the top line in the **Connection Status** window.
Observe that the **Head Status** window opens.
 - d Make sure that all parameters in the list are shown with a check mark inside a green circle.

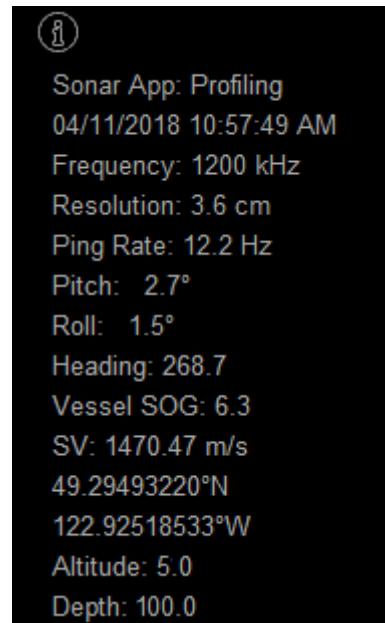

9 Make sure there is no acoustic or electrical interference in the sonar view.

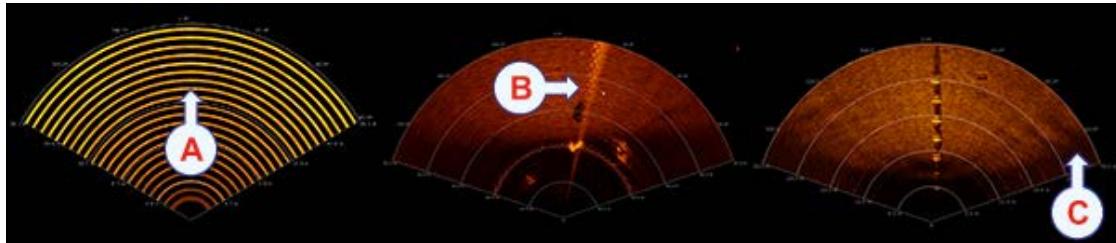

- A** Make sure that no concentric rings appear. These rings could be caused by other acoustic devices or power-line noise. Rings with black gaps between them could also be due to excess Ethernet traffic when using a shared network.
- B** Make sure that there isn't a bright radial line originating from the Sonar Head. This line could be caused by thruster noise. If the radial line appears with the Sonar Head out of water, it could indicate noise in the power line or a fault in the Sonar Head.
- C** Make sure that the bottom appears across the entire width of the sonar view. If the edges appear weak, and profile points are not detected at the edges, make sure there are no obstructions preventing the Sonar Head's receive. (i.e. improperly installed guard ring or proximity to the vessel hull/keel).

Related topics

[System Configuration dialog box - Sonar Setup page, page 134](#)

Testing the Sonar Head telemetry

You can run a telemetry test to make sure the link between the Sonar Head and the M3 software is working correctly.

Prerequisites

- For this test you will need the Sonar Head connected to the Sonar Processor and powered on.
- The M3 software must be running.
- This procedure is made for the Microsoft® 64-bit Windows 10 operating system. It is assumed that you are familiar with the Windows® operating systems, computer technology, and interface principles.

Context

This procedure explains how to measure the available bandwidth on a 100Base-TX (100 Mbps) Ethernet link. The same procedure can be used for 10BaseT and 1000BaseT links

by selecting the appropriate sonar application and adjusting the Ethernet adapter settings to the corresponding link speed.

Note _____

There are no standard sonar applications with a telemetry-link speed requirement higher than 100 Mbps.

The ping rate is normally taken from the sonar application or range setting. If the estimated available bandwidth is less than the bandwidth required by the sonar application/range, the M3 software reduces the ping rate to compensate.

Note _____


The update rate is the number of times the sonar view is updated per second. The displayed ping rate may be different from the update rate because the system might be impacted by other processes.

The **Override Network Link Speed** function allows you to use the telemetry bandwidth value (in Mbps) entered into the box instead of the default speed. If the applied override telemetry bandwidth is less than the telemetry bandwidth required by the sonar application/range, the ping rate is reduced.

Procedure

- 1 Click **Setup**→**Connect** to start the Sonar Head.
- 2 Add the Ethernet Test application to your list of favourite applications.
 - a Open the **Sonar Apps** menu on the top bar, then select **Customize Apps**.
 - b Double click on *Ethernet Test - 100Mbps* shown under **Other Apps**.
 - c Click **OK**.
- 3 Open the **Sonar Apps** menu on the top bar, then select **Ethernet Test - 100Mbps**.
- 4 Click **Setup**→**Connect** to start the Sonar Head.
- 5 Open the **Task Manager** and find your Local Area Connection.
 - a Press the **<CTRL> + <ALT> + ** keys.
 - b Click **Task Manager**.
 - c Click on the **Performance** tab.
 - d Click on the Ethernet connection for the Sonar Head.
- 6 Make sure the activity on your local network is as expected.
 - a Allow the system to run for a few minutes to plot the *Throughput* graph.

- b Observe the graph to determine the average network link speed.

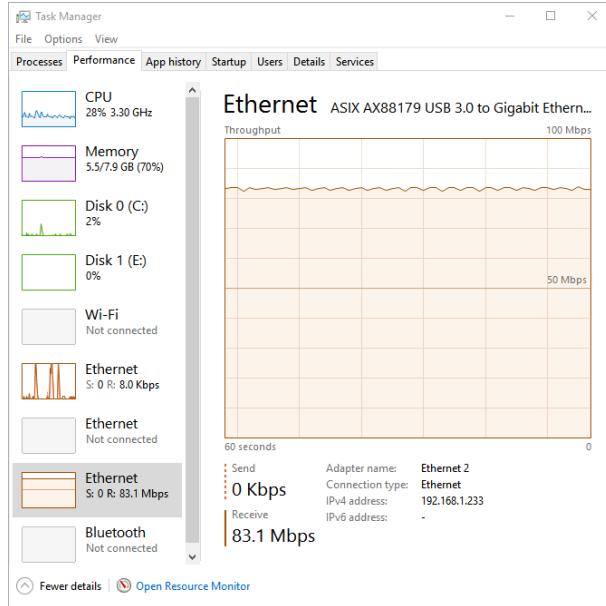

An average link speed of at least 80 Mbps is required by most sonar applications (some applications and range scales will use less). A link speed of less than 80 Mbps may result in a slower than expected ping rate.

- c Right-click in the *Throughput* graph and select **View network details**.
 Observe that the **Network Details** window opens.
 d Confirm that the *Network utilization* is at least 80%.

Note _____

If the Network utilization is less than 80%, disconnect the sonar, close all other programs, then reconnect the sonar. In general, make sure that your network environment supports the required link speed.

- e In the M3 software, look for any messages in the **Output Messages** window.
 Make sure there are no lost packets.

Tip _____

*The contents of the **Output Messages** window are also saved to a file in the folder C:\KML\M3_V0253\LOGS.*

- f If you see missing pings, try reduce the value in the **Override Network Link Speed** box to improve the performance.

Testing 1PPS Time Sync Mode

If you have an M3 Sonar Head with a 1PPS connector, you can synchronize the Sonar Head clock with an external 1PPS source. After you have enabled the 1PPS Time Sync Mode, you can make sure it is working by reading through the **Output Messages** log file.

Prerequisites

- The Sonar Head must be upgraded to the latest firmware version (version 1.5 or later).
- 1PPS synchronization requires ZDA input over UDP to the Sonar Head (not to the M3 software) on UDP port 31100 at 1Hz.
- The 1PPS signal must be sent to the Sonar Head using the 1PPS input on one of the following cables.
 - 10-pin SEA CON® MINK-10-CCPL cable used with M3 Sonar model 922-20220000.
 - 4-pin SEA CON® MIND-4-FCR cable used with M3 Sonar model 922-20050000.

Procedure

- 1 Click **Setup**→**System Configuration**→**Devices**→**Sonar Setup**.
- 2 In the **Device Properties** table, select *1PPS* from the **Time Sync Mode** drop-down list.
- 3 Click **Close**.
- 4 Click **Setup**→**Connect** to start the Sonar Head.
- 5 Click **Display**→**Output Messages Window**.
Observe that the **Output Messages** window opens.
- 6 Select the **Head Messages** tab in the **Output Messages** window.
Alternatively, navigate to C:\KML\M3_V0253\LOGS. Open the latest HEAD log file in a text editor.
- 7 Read through the **Output Messages** log and look for errors.

Example

The following is an example of some 1PPS log entries, including an explanation of what each entry means.

- **INF System Time 1518282830 s 653 ms 734 us**
A response to host cmd for the sonar head's current timestamp.
- **INF 1PPS: 10 pulses received in 10s**
The number of 1PPS pulses received in ten seconds. If you are seeing less than ten pulses received, then 1PPS is not working as expected.

- **INF SNSUDP IP Addr 192.168.1.233:13685, len=39**
INF \$GPZDA,171355.432,10,02,2018,00,00*5F

The sensor data string received. The ZDA string will be displayed if valid, otherwise bytes of the received string will be displayed.

- **INF PPS preLD**
INF ZDA: 1518282835 2018/02/10/ 15:32:17.910

If valid ZDA data is being received, it will be displayed here in units of Epoch seconds GMT. This value will be rounded up to the next integer second and pre-loaded in an FPGA staging register. This register will reset the timestamp clock at the next 1PPS pulse.

- **INF PPS 1518282835.999s 20000000**

The timestamp latched at the 1PPS leading edge. This timestamp should be close to the most recent ZDA data received.

Related topics

[Upgrading the Sonar Head, page 71](#)
[Interface specifications, page 193](#)

Operating procedures

Topics

[Setting up and running the sonar, page 32](#)

[Saving and recalling screen captures, page 53](#)

[Using sonar view overlays, page 63](#)

[Configuring the Sonar Head, page 70](#)

Setting up and running the sonar

Topics

- [Starting operation of the Sonar Head, page 33](#)
- [Configuring your preferences, page 34](#)
- [Choosing the sonar range, page 35](#)
- [Choosing a sonar application, page 36](#)
- [Adjusting the sonar view, page 38](#)
- [Applying filters, page 41](#)
- [Adjusting the TVG \(Time Variable Gain\) setting, page 41](#)
- [Setting up external sensors, page 42](#)
- [Defining a custom sensor, page 45](#)
- [Controlling the rotator, page 48](#)

Starting operation of the Sonar Head

To start operation of the M3 Sonar sonar, you may need to make sure that the Sonar Head has been discovered.

Prerequisites

- The M3 software must be running.
- The sound speed has been configured in **Setup**→**System Configuration**→**Deployment**→**Master Reference**.

Procedure

- 1 Click **Setup**→**Connect** to start the Sonar Head.


Wait for “Sync OK” to appear on the status bar before collecting data. It takes two minutes to synchronize the Sonar Head clock.

Tip

*By default, the M3 software uses the computer’s time to set the Sonar Head clock (Host mode). You can change the time synchronization settings by clicking **Setup**→**System Configuration**→**Sonar Setup**→**Time Sync Mode**.*

- 2 If you see an error in the **Output Messages** window, make sure that the Sonar Head has been discovered.

- a Click **Setup**→**System Configuration**→**Devices**→**Sonar Setup**.
- b Click **Discover Sonar Heads** to search for the sonar on the network.

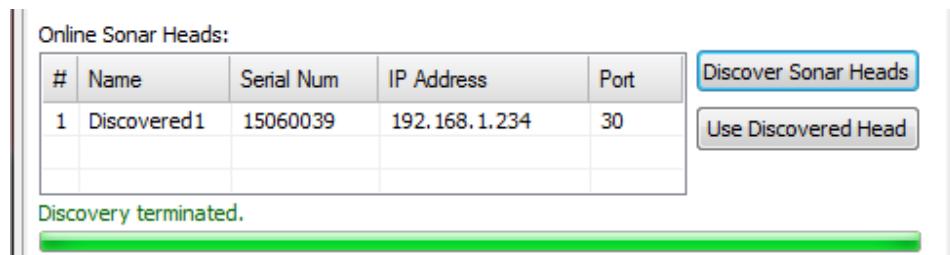

- c If the Sonar Head is found, select it, then click **Use Discovered Head**.

A discovered Sonar Head appears in the **Online Sonar Heads** list. If the Sonar Head does not appear, the Ethernet connection between the Sonar Processor and Sonar Head has not been established.

- d Click **Close**.

Related topics

[Status bar, page 87](#)

[System Configuration dialog box - Sonar Setup page, page 134](#)

Configuring your preferences

You may wish to set up the system preferences to use measurement units appropriate to your location, or to choose a preferred save location for your recorded sonar data.

Context

The **Preferences** dialog box is used to set up system preferences such as units of measure, time format, etc. This dialog box also allows you to select the save location for screenshot images and recorded sonar data files.

Procedure

- 1 Click **Setup**→**Preferences**.
- 2 Choose the unit of measurement for all the readouts related to range and distances in the M3 Sonar system user interface.
- 3 Choose whether you would like to display the range and bearing or X and Y coordinates of your mouse cursor position.
- 4 Fill out the **Overlay Text** boxes if you wish to display information on your screenshots and data recordings.
- 5 Choose your desired **File Saving** settings.
- 6 Select **Close** to save the chosen settings and close the dialog box.

Related topics

[Preferences dialog box, page 126](#)

Choosing the sonar range

The **Range** function allows you to specify the maximum theoretical vertical depth and horizontal distance covered by the M3 Sonar.

Context

The M3 Sonar Sonar Head can operate at different predefined near and far ranges. The range values you can select vary depending on the current frequency and selected sonar application.

The range value is defined from the Sonar Head.


Note

You cannot change the range until the Sonar Head is connected. Right-clicking in the sonar view and the range slider bar will both be disabled until the sonar is running.

Even though you can choose a large range value, that does not mean that you can detect your targets on the same range. The range value only defines the range that is shown in the views. Actual target detection will always depend on the operational environment, such as water temperature, salinity, interference and layers in the water column.

Procedure

- 1 Click **Setup**→**Connect** to start the Sonar Head.
- 2 Right-click inside the sonar view to display the range menu.

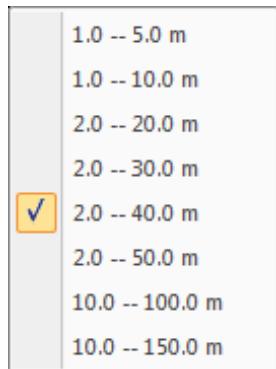

- 3 Select the desired near and far range from the menu.

Note _____

*You can change the units of measurement in the **Preferences** dialog box.*

- 4 You can increase or decrease the range using the range slider bar to the left of the sonar view.

Click the top arrows to increase or decrease the far range.

Note _____

*To change the depth range settings in the **3D Point Cloud** window, click **Depth**, uncheck the **Adaptive Palette** box, enter the top and bottom depth, then click **Apply**.*

Result

The range is displayed with measured intervals in the sonar view. The current range will be updated when the Sonar Head is running.

Tip _____

*Enabling Depth Tracking will automatically adjust the range according to the current depth when the head is running. To enable this feature, select the **Depth Tracking** checkbox in the **Profiling Settings** dialog box.*

Choosing a sonar application

Choosing an appropriate sonar application can improve the quality of your data. As the M3 Sonar has both imaging and profiling capabilities, you will also need to choose either a Profiling, or an Imaging application.

Context

Note _____

*You cannot select a sonar application until the Sonar Head is connected. All **Sonar Applications** menu items will be greyed out until the sonar is running.*

*The selection of sonar applications presented in the **Sonar Applications** menu depends on the current Sonar Head frequency.*

The **Sonar Applications** menu lists various operating modes used for different applications. Each mode has its own pre-defined characteristics, such as differing ranges, angular resolutions, and pulse types.

If you don't see the sonar application that you need in the menu, you may need to add it to the list. You can configure which applications will appear by opening the **Customize Apps** dialog box, which is the last item in this list.

Tip

*Each sonar application has its own TVG profile. Before changing the TVG settings, select the sonar application you want to configure from the **Sonar applications list**. Click the **TVG** button. This button is located on the tool bar.*

Procedure

- 1 Click **Setup**—**Connect** to start the Sonar Head.
- 2 Select **Sonar Apps** from the menu on the top bar.
- 3 Select an appropriate sonar application from the list.
 - a If you wish to gather imaging data, select an imaging sonar application from the list.

We recommend a maximum vessel speed of five knots for imaging applications.

Tip

For high-quality images at a short range, use one of the EIQ modes (500-kHz transducer only) or Imaging Enhanced (available on frequencies from 700-kHz to 1400-kHz). We recommend a maximum vessel speed of two knots for EIQ mode and 0.5 knots for EIQ - Fine mode.

- b If you wish to gather profiling data, select a profiling sonar application from the list.
Use this sonar application for the automated point extraction of the sea bottom or structures to create a real-time 3D Point Cloud.
- c Select one of the test apps to troubleshoot performance issues.

Related topics

[Sonar Applications menu, page 96](#)

Adjusting the sonar view

All echo information offered by the M3 Sonar is shown in the sonar view.

Context

The **Display Widget** allows you to adjust the filter strength, change the display gain, and choose your echo colours. You can drag sliders with the mouse to increase or decrease parameter values. For fine adjustments, use the mouse scroll wheel to move the slider by one increment.

Note

*If you have a high-frequency M3 Sonar transducer, you can change the frequency using the **Display Widget**.*

The **Display** menu allows you to configure a number of options in the sonar view, including making the sonar view full screen and adjusting the annotations, palette, or sector orientation. Functions to improve image quality, such as a speckle filter and automatic sidelobe reduction, are also available in the **Display** menu.


Tip

*You can change the physical size of the sonar view by clicking on the left view border, then dragging it to create a smaller or larger window. You can also make the sonar view full screen by clicking **Display**—>**Full Screen** or by clicking the **Show Full Screen** button in the tool bar.*

Procedure

- 1 Use the **Display Widget** to adjust the sonar view according to your preferences.

- Click the **Display Widget** icon. This icon is located in the lower-right corner of the sonar view.
- If you have a high-frequency transducer, click one of the buttons to select a frequency (in kHz). The frequency buttons will not appear if you are using a 500 kHz transducer.
- To adjust the strength of an enabled filter in the sonar view (such as Average Filter or Edge Enhancement), drag the **Filter** slider to increase or decrease the filter effect.

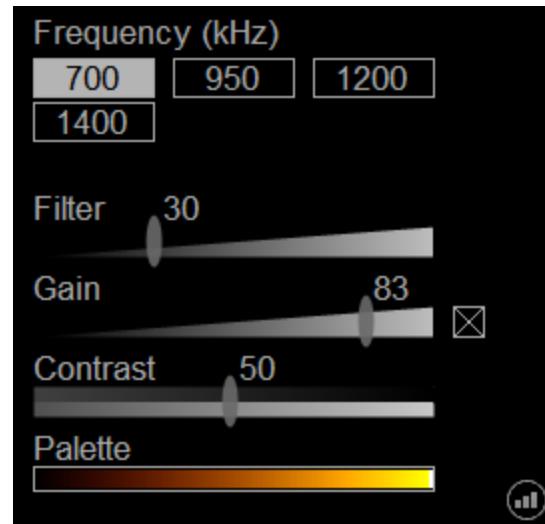

Note

*The **Filter** slider will not appear if no filters are enabled. Note that filter settings will not be saved when the software is closed.*


- To adjust the display gain manually, check the box and drag the **Gain** slider to increase or decrease the gain. **Display Gain** controls the "amount" of echo that is displayed, in other words the "strength" or "intensity" of the echo presentation. Uncheck the box if you want the software to adjust the gain automatically.

Note

*Adjusting the display gain manually will disable the **Sidelobe Reduction** function (found in the **Display** menu).*

- Drag the **Contrast** slider to increase or decrease the sonar view display contrast.
- To choose your echo colours, right-click on the **Palette** bar to cycle through the colour scale options. Which colour scale to use is mainly a personal preference based on ambient light conditions, the nature of the echoes and your own experience.
- Click the **Display Widget** icon to hide the widget.

- 2 Use the **Display** menu to control the visual aspects of the system, and to show or hide various elements in the presentation.
- Click **Full Screen** to make the sonar view full screen.
Press the **Esc** key to exit full-screen mode.
 - Click **Annotations** to enable or disable the bearing and range annotations in the sonar view.
 - Select **Font Size** to increase or decrease the size of the annotations in the sonar view.
 - Select **Palette** to choose your preferred echo colours. Which colour scale to use is mainly a personal preference based on ambient light conditions, the nature of the echoes and your own experience.
 - Select **Sector Orientation** to choose a different angle of orientation for the sonar view. Enter an angle (in degrees) into the **Orientation** dialog box, then click **Apply** to rotate the sonar view to your chosen angle.
 - If your Sonar Head is forward looking, click **Heading Overlay** to enable or disable this feature. When this feature is enabled, the degree annotations in the sonar view will change to reflect the current sonar heading.
 - Click **Speckle Filter** to enable or disable this function. This filter reduces noise (the grainy “salt-and-pepper” pattern) in uniform areas of the sonar view. Distinguishable details in features and targets will be retained.
 - Click **Sidelobe Reduction** to enable or disable automatic sidelobe reduction. This function improves overall image quality by reducing the sidelobes of strong targets.

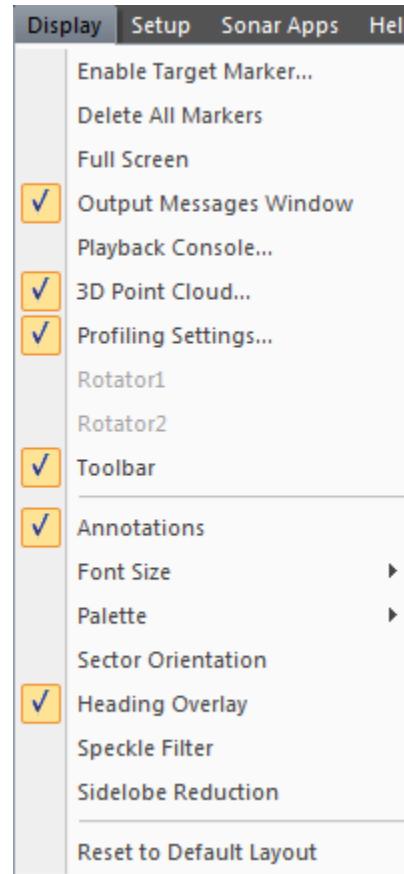

Tip

*To change the colour scale of the 3D Point Cloud, click **Depth**, check the **Adaptive Palette** box, then click **Apply**.*

Applying filters

You can apply an averaging, background removal, or an edge enhancement filter to the sonar view.

Context

These buttons are located on the tool bar.



Procedure

- 1 Click one of the filter buttons.
Observe the changes in the sonar view.
- 2 Increase or decrease the filter effect.
 - a Click the **Display Widget** icon.
This icon is located in the lower-right corner of the sonar view.
 - b Drag the **Filter** slider to adjust the strength of the filter.
- 3 Click the **No Filter** button to turn off all filters.

Related topics

[Filters, page 190](#)

Adjusting the TVG (Time Variable Gain) setting

You can adjust the time variable gain for each sonar application in the **TVG Setup** dialog box.

Context

TVG (Time Variable Gain) compensates for the loss of acoustic energy due to geometric spread and absorption.

Procedure

- 1 Click **Setup**—**Connect** to start the Sonar Head.
- 2 Select the sonar application you wish to configure from the **Sonar applications list** on the top bar.

Note

Each sonar application has its own TVG profile.

- 3 Click the TVG button.

This button is located on the tool bar.



- 4 Drag the sliders to adjust the A, B, C, and L Factors.

Click the arrow buttons to make small adjustments.

- 5 Click **Apply** to save the settings.

Note

If you are using a high-frequency M3 Sonar, the TVG profiles will not be saved when closing the software — default values will apply when switching to a new frequency or when starting up the M3 software.

Related topics

[TVG Setup dialog box, page 187](#)

Setting up external sensors

If you wish to add external sensors (such as a GPS to provide navigation information) to your system, you will need to add them on the **Sensors Setup** page. You will also need to set the sensor properties so that the M3 software communicates properly with your sensor.

Prerequisites

Make sure that your external sensors are installed and physically connected to the M3 Sonar system with the proper cables.


Procedure

- 1 On the Sonar Processor desktop, double-click the M3 Sonar icon to start the software.
- 2 Click **Setup**→**System Configuration**→**Devices**→**Sensors Setup**.
- 3 Configure your external sensors in the dialog box.
 - a Click **Add Device**.
 - b Select the type of sensor you are using from the **Protocol** drop-down list.

Note

In most cases, you can select a standard NMEA datagram for your sensor type. For example, select HDT for your vessel heading sensor, or GGA for your GPS position sensor.

 - c Click in the **Name** field and enter a label for the sensor (for example, *Hemisphere VS330*).
 - d Configure the serial port settings for the sensor by selecting the correct values from the drop-down lists.
- 4 Test each sensor to make sure that the NMEA string is being received by the M3 software.
 - a Select each sensor device and click the **Test Device** button.
 - b Make sure that the NMEA sensor string is being displayed in the **Port Monitor** box.

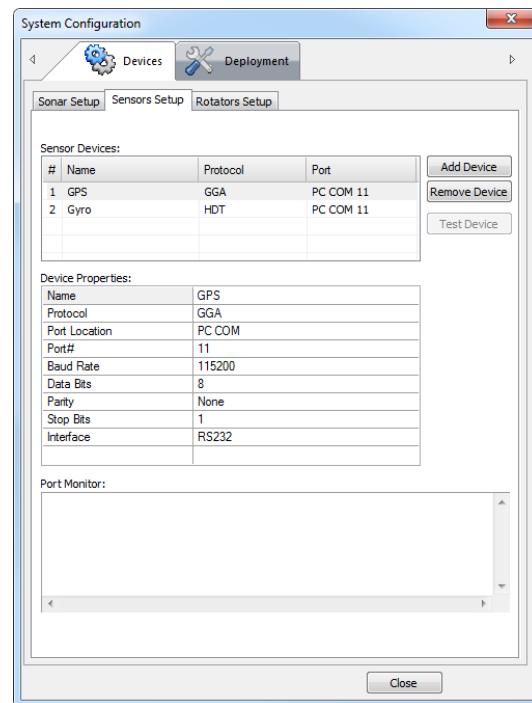


- c Click **Stop Test** when done.
- 5 Make your external sensors a Master Reference.
 - a Select the **Deployment**→**Master Reference** tab.

On the **Master Reference** page, you can assign any external sensors you have set up as the primary source for various types of navigational data.

- b Select the sensor that you set up earlier from the drop-down list beside the appropriate Master Reference parameter.

You should see the name in the drop-down list that you assigned earlier (in the **Name** field on the **Sensors Setup** page).

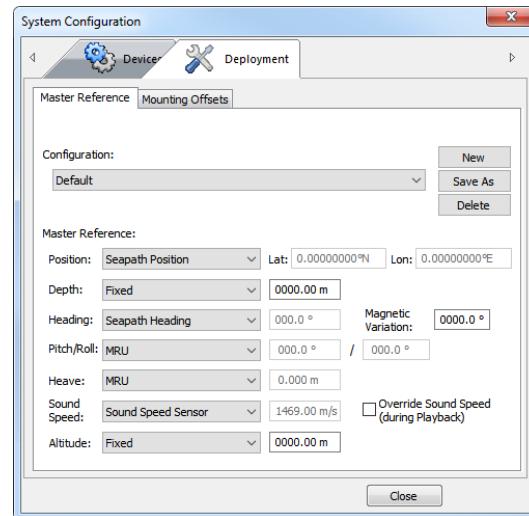


Tip

*When using the M3 Sonar for imaging, set up sensors for **Position** and **Heading** if you want to create GeoTiff files or create a real-time mosaic. When using the M3 Sonar for Bathymetry or Profiling, set up sensors for **Position**, **Heading**, **Pitch/Roll**, and **Heave** as a minimum.*

- 6 If necessary, configure the Mounting Offsets.

Note

You will only need to configure the Mounting Offsets if you set up a position sensor (such as a GPS antenna) in the previous steps. Inaccurate mounting offsets will display your sonar data incorrectly in the 3D Point Cloud and sonar view.

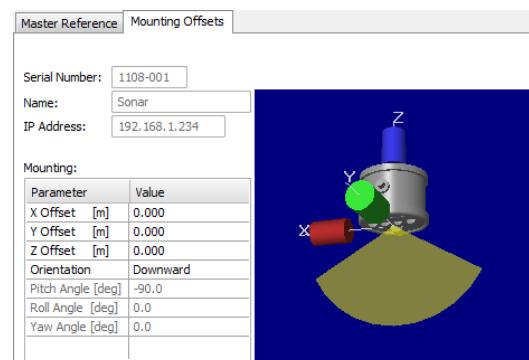

- a Select the **Deployment**→**Mounting Offsets** tab.
- b Measure and record the position and angle of the Sonar Head transducer (centre of the face) relative to your position sensor.
- c Enter the X, Y, and Z offsets, as well as the Pitch Roll, and Yaw angles that you measured earlier into the **Value** fields.

- d Select the correct **Orientation** from the drop-down list.

Match the orientation to the physical installation of your Sonar Head. For example, if the transducer face is pointing down towards the sea bottom for a bathymetry application, select *Downward*.

Defining a custom sensor

You will find many supported sensor formats in the **Protocol** drop-down list found on the **Sensors Setup** page in the **System Configuration** dialog box. However, if a particular third-party sensor format is not listed there, you can create it (using the third-party sensor specification as your guide).

Context


The **Define Custom Sensor** dialog box allows you to import sensor strings from third-party sensors or ROV systems. The configuration wizard in this dialog box will guide you through the process.

This dialog box is opened from the **Setup** menu.

Procedure

- 1 Click **Setup**—>**Define Custom Sensor**.

Observe that the **Define Custom Sensor** dialog box opens.

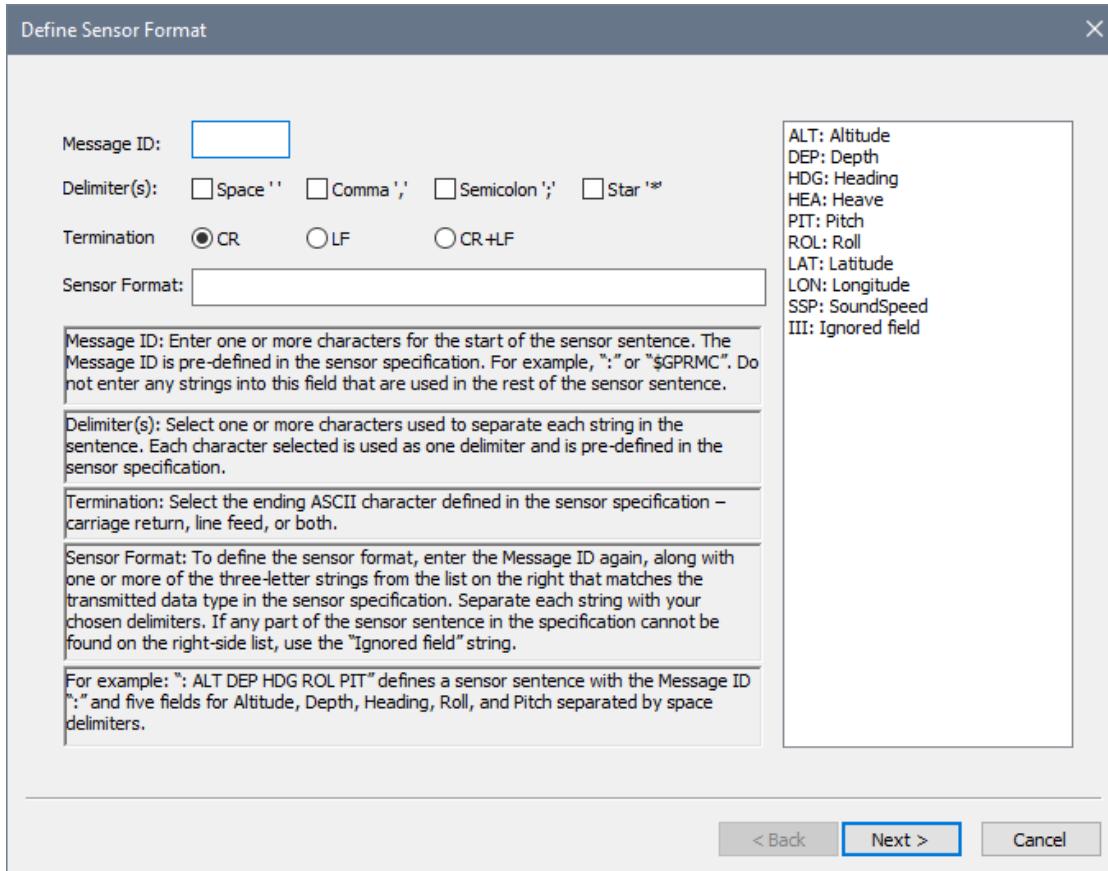

2 Enter in the Message ID.

The start (prefix) of the sensor sentence. Refer to the manufacturer's sensor specification to determine what to use. For example, ":" or "\$GPRMC".

3 Select one or more delimiters.

The character used to separate each string in the sentence. You can select more than one if necessary - each character will be treated as one delimiter. Refer to the manufacturer's sensor specification to determine what to use.

4 Select the correct termination character.

The ASCII character that tells the software where the sensor string ends. Options include a carriage return (CR), line feed (LF), or both. Refer to the manufacturer's sensor specification to determine what to use.

5 Enter in the sensor format.

For example: ":" ALT DEP HDG ROL PIT defines a sensor sentence with the Message ID ":" and five fields for Altitude, Depth, Heading, Roll, and Pitch separated by space delimiters.

- a Enter the Message ID, followed by the chosen delimiter.
- b Enter in one or more of the three-letter definition strings from the list on the right side of the dialog box.


Match each three-letter string with the data type in the sensor specification.

For example, enter "ALT" for the part of the sensor sentence corresponding to Altitude, and so on.

- c Separate each string with the chosen delimiters.
- d If you can't find any part of the sensor sentence on the right-side list, then enter the "Ignored field" string (III).

This will tell the software to skip over this part of the sensor sentence when parsing the string.

- 6 Select Next to continue.

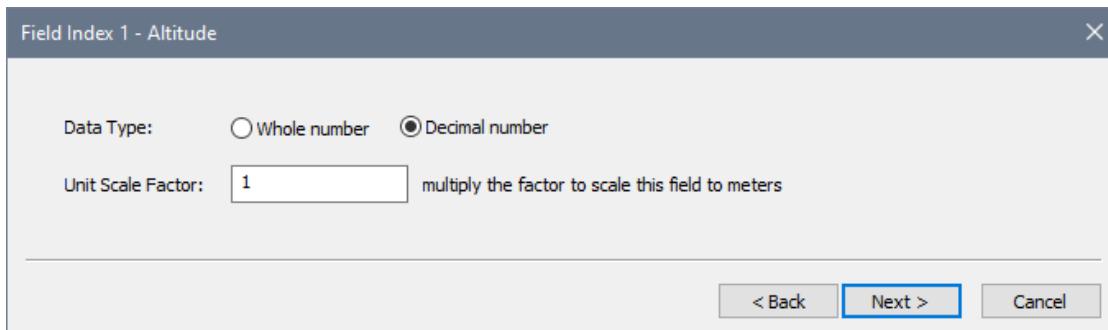

- 7 Provide specifications for each three-letter definition string you entered into the **Sensor Format** field.
 - a If applicable, select a data type.

If the data type in the sensor sentence is an integer (for example, 1002), then select *Whole number*. If the data type in the sensor sentence is a float (for example, 10.02), then select *Decimal number*. Refer to the manufacturer's sensor specification to determine what to use.
 - b If applicable, select a Latitude/Longitude Format.

Choose whether to display the latitude/longitude format in degrees, degrees and minutes, or degrees, minutes, and seconds.
 - c If necessary, enter in a unit scale factor.

The dialog box will tell you what unit scale the software expects (meters, degrees, meters per second, and so on). If the data type in the specification does not match the required unit scale, you must enter an appropriate scaling factor. For example, if the Depth data type is in feet, then you must enter 0.3048 to scale the depth value to meters.

- 8 Select **Next** to continue.



- 9 Enter in a unique name for your custom sensor.

This name will appear in the **Protocol** drop-down list found on the **Sensors Setup** page in the **System Configuration** dialog box.

- 10 Select **Finish** to close the wizard.

- 11 Set up the custom sensor in the software to start using it.

- a Click **Setup**→**System Configuration**→**Devices**→**Sensors Setup**.
- b Click **Add Device**.
- c Give the sensor a name, then select the custom sensor from the **Protocol** drop-down list.
- d Select the **Deployment**→**Master Reference** tab.
- e Select the sensor that you set up earlier from the drop-down list beside the appropriate Master Reference parameter.

Tip

To change or remove the custom sensor, edit or delete the custom sensor XML file. You can find the custom sensor XML file in C:\KML\M3_V0253\BIN\DefinedSensors.

Related topics

[Define Custom Sensor dialog box, page 121](#)

Controlling the rotator

You can control your rotator(s) with the **Rotator Control** dialog box.

Prerequisites

- You must set up your rotator(s) by clicking **Setup**→**System Configuration**→**Devices**→**Rotators Setup**.


- If you have a single-axis rotator, choose the type of control you would like in the **Rotator Test** dialog box. On the **Rotators Setup** page, select your single-axis rotator in the **Rotators** table, click the **Test Device** button, then select either *3D Scan* or *Pan/Tilt Control* from the **Rotator Control Dialog Type** drop-down list.
- If necessary, configure your rotator axis offsets relative to the sonar by clicking **Setup**→**System Configuration**→**Deployment**→**Mounting Offsets**.
- This dialog box will only appear if the sonar is running.

Context


If you have more than one rotator installed, then one dialog box for each rotator will appear.

The controls you see will depend on the type of rotator you have and which control type you have selected.


Single-axis rotator with Pan/Tilt controls:

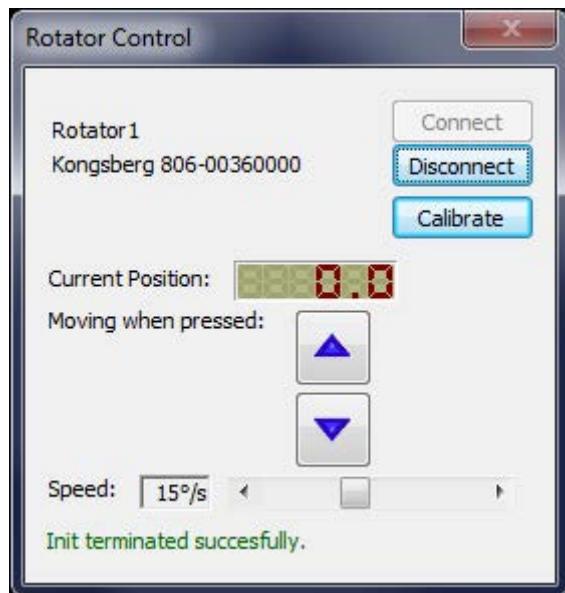

Single-axis rotator with 3D Scan controls:

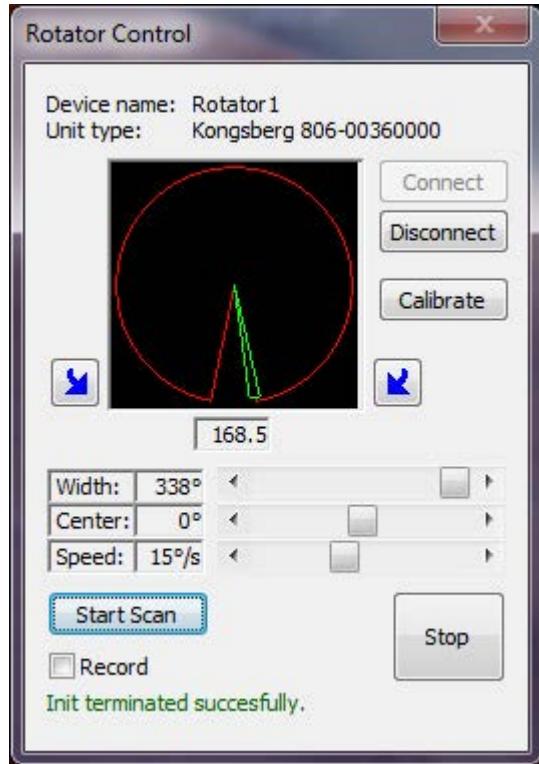

Dual-axes rotator:

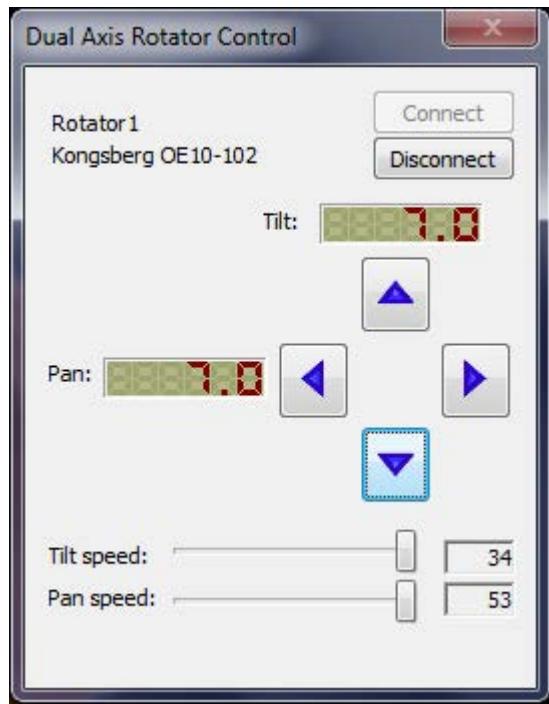

Procedure

- 1 Click **Setup**—>**Connect** to start the Sonar Head.
Observe that the **Rotator Control** dialog box opens.
- 2 Click **Connect** to enable the rotator controls or **Disconnect** to disable the rotator controls.
- 3 If you have a Kongsberg 806-00360000 rotator, click the **Calibrate** button.
- 4 If you are using Pan and Tilt controls, click the arrow buttons to move the Sonar Head.
If you have a single-axis rotator, the arrow buttons will either pan or tilt, depending on the orientation of the rotator installation.

Tip

Drag the slider to control the rotator speed.

- 5 If you are performing a 3D scan, then set up the scan sector before starting the scan.

Note

The green wedge in the dialog box graphic represents the sector to be scanned.

- a Drag the **Width** slider to define the scan coverage.

- b Drag the **Center** slider to define the centre of the scan coverage.
- c Drag the **Speed** slider to set the rotator speed. Slower speeds will result in higher angular resolutions.
- d Check the **Record** box to record data during the scan.
- e Click **Start Scan**.

The rotator will move to one side of the sector, start the scan, then stop the scan at the other side of the sector.

Tip

*To export the 3D scan into third-party software, ensure either **Image and Profile** or **Profile Only** is selected in the **Profiling Settings** dialog box. Click the circular icon in the top-right corner of the sonar view to open the **Menu Widget**. Click **Export Data**.*

Related topics

- [Rotator Test dialog box, page 144](#)
[System Configuration dialog box - Mounting Offsets page, page 151](#)
[System Configuration dialog box - Rotators Setup page, page 141](#)

Saving and recalling screen captures

Topics

- [Saving and retrieving images, page 54](#)
- [Recording sonar data, page 54](#)
- [Playing back a recording, page 55](#)
- [Converting your recording format, page 56](#)
- [Converting your recordings to video, page 58](#)
- [Saving GeoTiff files, page 60](#)

Saving and retrieving images

With one click, you can capture an image of the sonar view — either with overlays or without overlays.

Prerequisites

Open the **Preferences** dialog box to change the default save location, choose your own filename, and add overlay text.

Procedure

- 1 Click the **Save image with overlay** button.

If you want to save the sonar view without overlays, click the **Save image without overlay** button instead.



These buttons are located on the tool bar.

Note

*A “Save As” dialog box will appear if you have checked the **Prompt User for Filename** box in the **Preferences** dialog box.*

- 2 Retrieve your images and view them.

a On the Windows Taskbar, click the **File Explorer** shortcut.

Alternatively, press **Win + E** to open the **File Explorer**.

b Click **This PC**.

c Navigate to C:\KML\M3_V0253\Images.

Alternatively, navigate to where you saved your images earlier.

d Open the images with your preferred image viewer..

Recording sonar data

You can record a sonar data sequence and save it in a time-stamped digital format. You can also re-record data during playback to capture a smaller clip of the data set.


Prerequisites

- Open the **Preferences** dialog box to change the default save location, choose your own filename, and add overlay text.
- Click **File→Recording Format** to choose between recording raw sonar data (to a “.mmb” file) or recording beamformed sonar data (to a “.imb” file).

Procedure

- 1 Click the circular icon in the top-right corner of the sonar view to open the **Menu Widget**.
- 2 Click **Record Data** or press **F4** to start recording.

When recording is in progress, a flashing recording icon will appear in the top-right corner of the sonar view. The recording filename will also appear here. Observe the percentage of disk space free for recording on the far right of status bar.

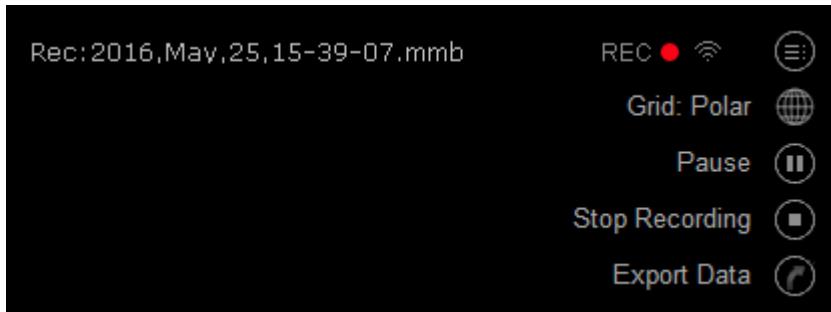

Note

*A “Save As” dialog box will appear if you have checked the **Prompt User for Filename** box in the **Preferences** dialog box.*

- 3 Click **Stop Recording** or press **F4** when you are done.

Your recording will be saved under the folder “C:\KML\M3_V0253\Recordings” by default. You can change this save location in the **Preferences** dialog box.

Related topics

[Recording Format, page 104](#)

Playing back a recording

You can play back a previously recorded data file to view the sonar image sequence captured during operation of the Sonar Head.

Prerequisites

Open the **Preferences** dialog box to change the default save location, choose your own filename, and add overlay text.

Tip

When the M3 software isn't running, double-click on a recording file to open the software and begin playback automatically.

Procedure

- 1 Click **File→Playback**.

A file browser dialog box opens to let you choose which file to play back.

- 2 Select the file you want to play back and click **Open**.

Playback will begin. The **Playback Console** will automatically open to offer you additional functionality.

- 3 Control playback using the **Playback Console**.

You can stop, pause, fast forward, or advance through the recording one ping at a time. You can also repeat playback of the file on a never-ending loop.

Tip _____

You can also apply filters to the playback, such as the Average or Edge Enhancement filters.

- 4 When you are done, click the **Stop** button on the Playback Console, then close the console.

Alternatively, click **File→Stop Playback**.

Related topics

[Convert to Video Format dialog box, page 105](#)

[Playback Console, page 115](#)

Converting your recording format

If you want to keep your recordings in .mmb format but process your data in .imb format, you can convert .mmb files to .imb files using a batch conversion utility.

Context


The M3 software records sonar data in two formats — raw element data (.mmb) or beamformed data (.imb).

If you wish to convert a selected clip of data, you can play back an .mmb file and record the clip as an .imb file. However, if you wish to batch convert many files, a conversion utility is provided with the M3 software.

Note _____

If files are recorded in .imb format, they cannot be converted to .mmb.

You can find the conversion utility in the folder C:\KML\M3_V0253\bin\M3Converter.exe.

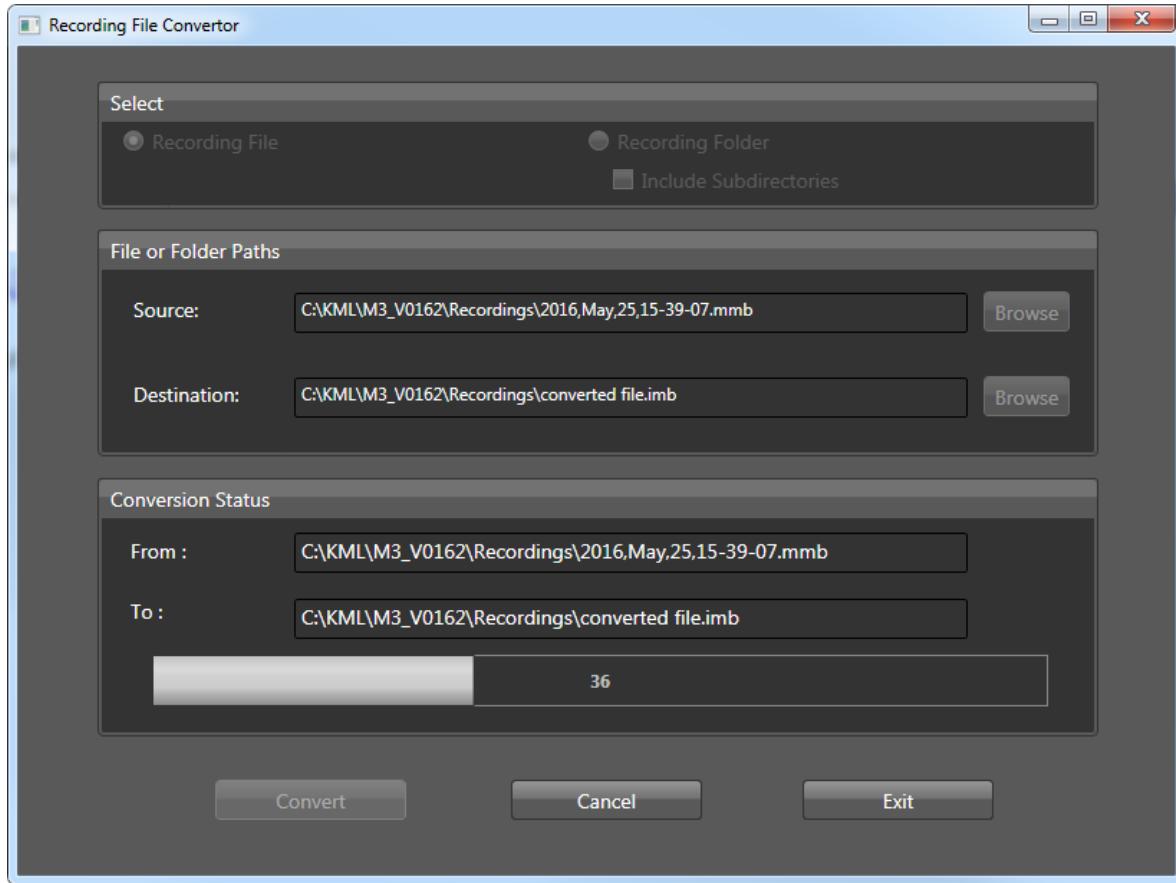

Procedure

- 1 Select *Recording File* to convert a single .mmb recording.
Alternatively, select *Recording Folder* and *Include Subdirectories* to convert all your .mmb files.
- 2 Click the **Browse** button beside **Source** to select your .mmb file or folder.
- 3 Click the **Browse** button beside **Destination** to select where you want to save the converted files.

If you are saving a single recording, then you must give the file a name.

Tip _____

When converting the contents of a folder, the files will automatically be renamed. However, we recommend selecting different source and destination folders to avoid filename duplications.

4 Click **Convert**.

A dialog box will notify you when the file conversion is complete. Click **OK** to dismiss it.

Related topics

[Recording Format, page 104](#)


Converting your recordings to video

As data files can only be opened by the M3 software, converting data files to video allows you to share them more easily with others.

Context

The **Convert to Video Format** dialog box allows you to convert an MMB or IMB file to a video file (MP4 format only).

Use this dialog box if you want to export a recording to a format that is playable by any media player. This function is useful if you wish to share recordings with others who do not have the M3 software installed on their computers, or if you wish to upload your recording to an online service.

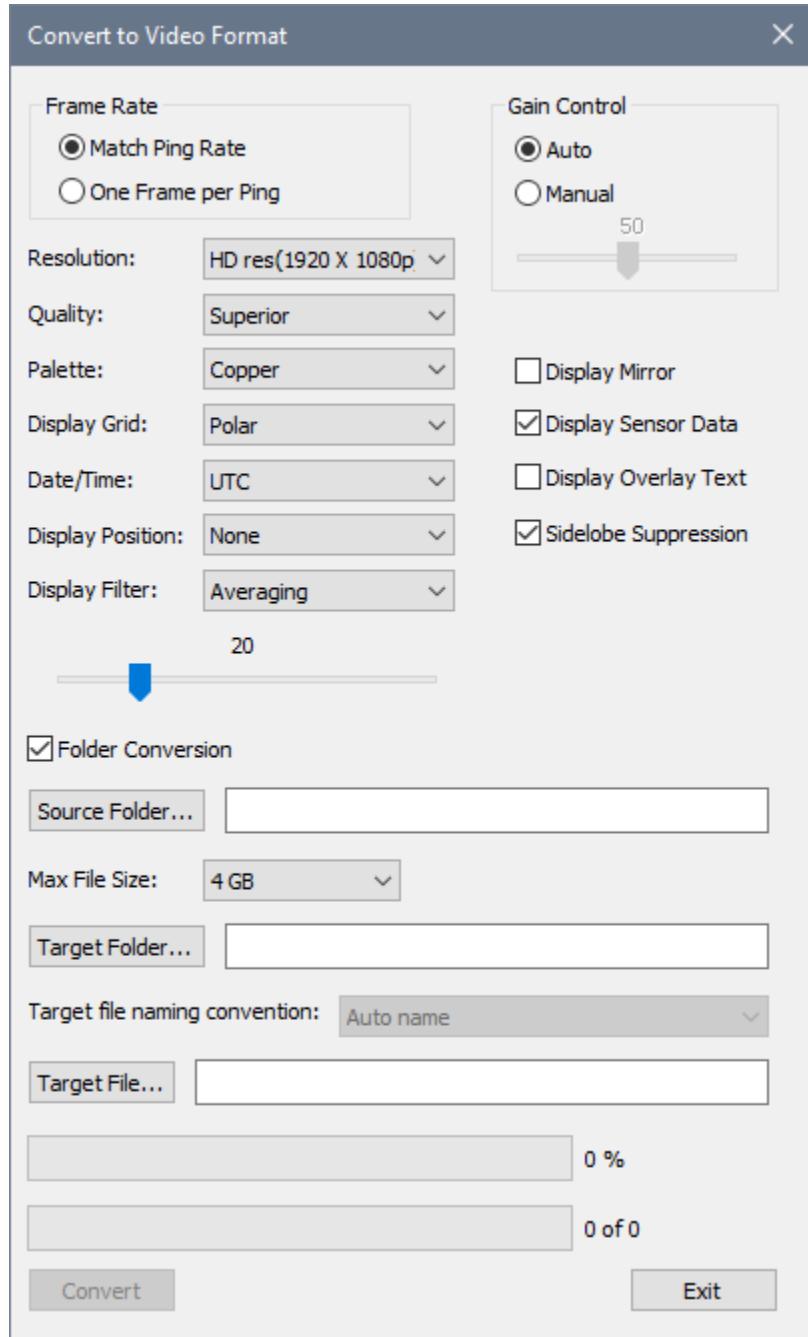

Procedure

- 1 Click File→Convert To Video.
Observe that the **Convert To Video Format** dialog box opens.
- 2 Select the desired video conversion settings.

- 3 To convert a single data file, select the **Source File** button and use the browser window to select the file.

To batch convert all sonar recordings in a selected folder, select the **Folder Conversion** checkbox, then select the **Source Folder** button to select the folder in the browser window.

Note _____

If you select this option, you will not be able to change the name of the converted files. Auto Name will be selected under the Target file naming convention drop-down list and the other options will not be available.

- 4 Click the **Convert** button to start the conversion.

- 5 Wait until the progress bar is complete before viewing the videos.

If you are performing a batch conversion, an additional progress bar will appear at the bottom of the dialog box to show you how many files are being converted.

Related topics

[Convert to Video Format dialog box, page 105](#)

Saving GeoTiff files

GeoTiff files are TIFF files which have geographic data embedded within them. The geographic data can then be used to position the image in the correct location and geometry on the screen.

Prerequisites

- You must have a position and heading sensor connected to your system and sending data to the M3 software. To add sensors, click **Setup**→**System Configuration**→**Devices**→**Sensors Setup**.
- Your Master Reference must be set up to use the sensor inputs or to use a fixed location by entering Latitude, Longitude, and Heading. To set up the Master Reference, click **Setup**→**System Configuration**→**Deployment**→**Master Reference**.
- Your mounting offsets must be configured correctly. To configure your mounting offsets, click **Setup**→**System Configuration**→**Deployment**→**Mounting Offsets**.
- You must be using the appropriate coordinate system for your current location. To choose your coordinate system, click **Setup**→**Geo Projection**.

Context

GeoTiff files contain georeferencing information and can be opened in third-party software, such as Google Earth Pro.



Procedure

- 1 Click **Setup**—>**Preferences**.
- 2 Fill out the fields in the **GeoTiff Auto Save** section.
 - a To automatically save a GeoTiff file every set number of meters, select **Distance** and enter a value. To automatically save a GeoTiff file every set number of seconds, select **Time** and enter a value.
 - b To save a cropped GeoTiff image for mosaicking purposes, enter the percentage to crop.

- 3 Press F11 to enable or disable GeoTiff auto save. The status bar will display “GeoTiff” in green when auto save is enabled.

When GeoTiff autosave is enabled, GeoTiff files will be saved automatically and continuously based on travel distance or time.

Alternatively, press **F10** to save a single GeoTiff file to your images folder. Your images will be saved under the folder “C:\KML\M3_V0253\Images” by default. You can change this save location through the **Preferences** dialog box.

Related topics

- [System Configuration dialog box - Sensors Setup page, page 138](#)
- [System Configuration dialog box - Master Reference page, page 148](#)
- [System Configuration dialog box - Mounting Offsets page, page 151](#)
- [Geo Projection dialog box, page 124](#)
- [Preferences dialog box, page 126](#)

Using sonar view overlays

Topics

[Measuring distances, page 64](#)

[Measuring angles, page 65](#)

[Defining an area, page 66](#)

[Placing text labels, page 66](#)

[Placing reference cursors, page 67](#)

[Placing target markers, page 68](#)

Measuring distances

You can use the tape measure tool to draw a line in the sonar view and measure the distance between two points.

Context

Measures distances on the sonar view. Also allows you to place a measurement overlay on the sonar view.

Procedure

- 1 Click the **Tape Measure** button.

This button is located on the tool bar.



- 2 Click and hold the left mouse button on your first target, then drag the mouse to your second target.

The length and bearing between the targets is displayed dynamically.

Note

The measurement line will not remain on the display when you release the mouse button.

- 3 To keep the measurement line on the display, place a measurement overlay.

- a Click and hold the right mouse button on your first target.

- b Drag the mouse to your second target and release the mouse button.

- c Move the mouse to a place on the screen where you would like to place the overlay length and bearing label.

Note

Once the measurement overlay is placed, you can use the default arrow cursor to drag the length and bearing label to a position on the screen where it is more legible.

- d Click the left mouse button to place the overlay.

Tip

*To remove this overlay, click the **Wiper** button, then click the overlay.*

Related topics

[Tape Measure, page 183](#)

Measuring angles

You can use the protractor to measure the angle between two lines, then place the resulting overlay in the sonar view.

Context

The protractor tool measures the angle between a baseline and a second line that intersects the baseline.

Procedure

- 1 Click the **Protractor** button.

This button is located on the tool bar.



- 2 In the sonar view, click the point where you want to start the baseline.

- 3 Click the point where you want to end the baseline.

The second line will appear.

- 4 Lock one end of the second line to the baseline.

- a Choose where you want the second line to intersect the baseline by moving the mouse along the length of the baseline.

- b When ready, click the left mouse button.

- 5 Choose where you want the second line to end.

- a Move the mouse to any point on either side of the baseline to adjust both the length and angle of the second line.

- b Click the left mouse button to place the overlay.

Tip

*To remove this overlay, click the **Wiper** button, then click the overlay.*

Related topics

[Protractor, page 183](#)

Defining an area

You can use the string measure tool to define an area. The size and perimeter of the area will be calculated for you.

Context

Defines and measures perimeters and areas. Allows you to place an area overlay on the sonar view.

Procedure

- 1 Click the **String Measure** button.

This button is located on the tool bar.



- 2 Click anywhere in the sonar view to start a point.
- 3 Move to the second point, then click again.
- 4 Click as many times as necessary to create the required area.
- 5 Double-click on the last point to finish.

The area will automatically be closed, and a rectangular label will appear providing information about the area and perimeter.

- 6 Move the label to a position on the screen where it is most legible, then click the left mouse button to place it.

Tip _____

*To remove this overlay, click the **Wiper** button, then click the overlay.*

Related topics

[String Measure, page 183](#)

Placing text labels

The text label tool allows you to place comments on the screen.

Prerequisites

Text labels will not appear on sonar data recordings. To place a text overlay on a recording, click **Setup**→**Preferences** and fill out the **Overlay Text** boxes.

Procedure

- 1 Click the **Text Label** button.
This button is located on the tool bar.
- 2 In the sonar view, click the area of interest that you want to label.
- 3 Click and hold the left mouse button on the label overlay and drag it to a place on the screen where the text is legible.
- 4 Label the area of interest.
 - a Double-click on the label overlay to open an **Edit Text Box** dialog box.
 - b Enter the desired text into the dialog box.
 - c Click **OK** when done.
- 5 If the text you entered does not fit within the text label overlay, you can resize the label by clicking on the label border, then dragging it to create a larger label.

Tip

*To remove this overlay, click the **Wiper** button, then click the overlay.*

Related topics

[Text Label, page 184](#)

Placing reference cursors

You can place one or two reference cursors as overlays on the sonar view. When you place two cursors, an additional overlay will appear with information about the cursors.

Context

The Reference Cursor buttons are used to mark points of interest and to determine the range and bearing of these points (relative to the Sonar Head).

These buttons are located on the tool bar.

Procedure

- 1 Click the **Reference Cursor 1** button.

- 2 Move the mouse to where you want to place the cursor.

Tip _____

To make fine adjustments to the cursor position, drop a reference cursor into a Zoom window.

- 3 Click the left mouse button to place the cursor as an overlay in the sonar view.

The range and bearing of the cursor's position — relative to the Sonar Head — is shown in the bottom-left corner of the view.

- 4 Click the **Reference Cursor 2** button.

- 5 Move the mouse to where you want to place the cursor.

- 6 Click the left mouse button to place the cursor as an overlay in the sonar view.

The range and bearing of the cursor's position — relative to the Sonar Head — is shown in the bottom-left corner of the view. “Delta” shows the range and bearing from cursor 1 to cursor 2.

Tip _____

To remove this overlay, click the Wiper button, then click the overlay.

Related topics

[Reference cursors, page 184](#)

Placing target markers

The Target Marker function is primarily used for remotely operated vehicle (ROV) navigation. Third-party ROV software can use the time and location information to steer the ROV toward the target.

Context

You can press 0–9 to place a marker in the sonar view that is stamped with time and location information. In addition, you can export this information to a serial or UDP port.

Procedure

- 1 To start using target markers, click **Display**→**Enable Target Marker**.

Observe that the **Target Marker Export** dialog box opens.

- 2 Choose a serial port from the drop-down list.

Note _____

The default serial settings cannot be altered.

- 3 Click **OK** to enable serial port export.

Alternatively, click **Cancel** to use the Target Marker function without exporting to a serial port.

UDP export is always available, whether you enable serial port export or not.

- 4 Move the mouse cursor to the location in the sonar view where you wish to place a marker.

- 5 Press any number key from 0 to 9 on your keyboard to place a marker.

Note _____

Target markers cannot be moved once they are placed.

- 6 To remove all target markers from the sonar view, click **Display**→**Delete All Markers**.

Alternatively, use the wiper located on the tool bar to remove individual markers.

Related topics

[Target Marker Export dialog box, page 113](#)

Configuring the Sonar Head

Topics

[Upgrading the Sonar Head, page 71](#)

[Changing the Sonar Head IP Address, page 73](#)

Upgrading the Sonar Head

The Sonar Head has both software and firmware. You can upgrade these with the latest versions obtained from Kongsberg Mesotech. You can also use this same procedure to downgrade software and firmware versions.

Prerequisites

If you are performing a full upgrade, you will need to write three files to the Sonar Head before power cycling the unit:

- The Sonar Head software file (.ASW)
- The Sonar Head transmit firmware file (.TXF)
- The Sonar Head receive firmware file (.RXF)

You can download these files from our website.

- <https://www.km.kongsberg.com/mesotechsoftware>

Context

The **Head Firmware Configuration** dialog box allows you to upgrade the Sonar Head firmware. This dialog box is only available when the Sonar Head is connected and paused.

Procedure

- 1 Click **Setup**—**Connect** to start the Sonar Head.
- 2 Open the **Head Firmware Configuration** dialog box.
 - a Click the circular icon in the top-right corner of the sonar view to open the **Menu Widget**.
 - b Click **Pause**.
 - c Click **Setup**—**Head Firmware Configuration**.Observe that the **Head Firmware Configuration** dialog box opens.
- 3 Take note of the current versions of software and firmware (Rx HW, Rx SW, Tx HW, and Tx SW).
The version numbers are listed in the **Head Firmware Configuration** dialog box.
- 4 Write the latest firmware and software to the Sonar Head.
 - a Select *Head Application Software* under **Configuration type**.

- b Click the file folder icon under **Configuration file** to browse and select the .ASW file on your local drive.

Tip _____

Use the .ASW file with the same version as the .RXF file.

- c Click **Write**.

Observe that a confirmation dialog box opens.

- d Click **Yes** to start the upgrade.

Tip _____

*If you click **Cancel** or **Stop**, the upgrade process will be aborted. The Sonar Head software and firmware will not be changed.*

- e Select *RX FPGA Configuration* (receive firmware) under **Configuration type**.

- f Click the file folder icon under **Configuration file** to browse and select the .RXF file on your local drive.

- g Click **Write**, then click **Yes** to start the upgrade.

Note _____

This file may take a few minutes to program.

- h Select *TX FPGA Configuration* (transmit firmware) under **Configuration type**.

- i Click the file folder icon under **Configuration file** to browse and select the .TXF file on your local drive.

- j Click **Write**, then click **Yes** to start the upgrade.

Note _____

This file may take a few minutes to program.

- k Close the **Head Firmware Configuration** dialog box.

- 5 Confirm the upgrade was successful.

- a Click **Setup**→**Disconnect**.

- b Disconnect the power to the Sonar Head, then power it up again.

- c Wait ten seconds for the software to discover the Sonar Head.

- d Click **Setup**→**Connect** to start the Sonar Head.

- e Click **Setup**→**Head Firmware Configuration**.

Observe that the **Head Firmware Configuration** dialog box opens.

- f Confirm that the software and firmware has been upgraded from the versions you took note of earlier.

Note

The receive hardware (RX HW) and software (RX SW) must both be on the same version. In other words, the application software (.ASW) and FPGA RX Firmware (.RXF) files being upgraded must have the same version numbers. The Sonar Head will make sure the versions are the same. If not, the version numbers shown in the Head Firmware Configuration dialog box will not be updated.

Related topics

[Head Firmware Configuration dialog box, page 133](#)

Changing the Sonar Head IP Address

If you have a unique network environment (such as an IP Address conflict between two devices on your network), or you are installing a second Sonar Head, then you will need to change the IP Address of the Sonar Head.

Context

The **Head Network Setup** dialog box allows you to change the Sonar Head network parameters, such as the IP address. This dialog box is only available when the Sonar Head is connected and paused.

You can program the IP address and the IP port of the Sonar Head for various network environments. The factory default IP address is 192.168.1.234, and the default port number is 30.

Procedure

- 1 Set up the Sonar Head and M3 software.
 - a Connect the Sonar Head directly to the computer network card. Do not connect through an intermediary device, such as a network switch or router.
 - b Power up the Sonar Head.
 - c Double click the M3 icon on the desktop to run the M3 software.
 - d Click **Setup**→**Connect** to start the Sonar Head.

- e Click the circular icon in the top-right corner of the sonar view to open the **Menu Widget**.
 - f Click **Pause**.
- 2 Write the new IP Address to the Sonar Head.
- a Click **Setup**→**Head Network Setup**.
Observe that the **Head Network Setup** dialog box opens.
 - b Click **Read from Head** to refresh the fields in the **Head Network Setup** table.
 - c Enter the new IP Address in the table.
- Tip* _____
- Avoid setting the third octet of the IP Address to a value of 100 or more, as you may experience periodic drops in traffic. We recommend leaving the third octet set to the default value (1). For example, xxx.xxx.1.xxx.*
-
- d Click **Write to Head**.
Observe that a confirmation dialog box opens.
 - e Click **Yes** to confirm.
Wait for the write operation to complete.
 - f Close the **Head Network Setup** dialog box.
- 3 Click **Setup**→**Disconnect**.
- 4 Apply the new IP Address to the Sonar Head.
- a Power off the Sonar Head for three seconds, then power it back up.
 - b If necessary, change the computer's network adapter address to place it on the same network as the Sonar Head.
 - c Click **Setup**→**System Configuration**→**Devices**→**Sonar Setup**.
 - d Click the **Discover Sonar Heads** button.
The Sonar Head with its updated IP Address should appear in the **Online Sonar Heads** table.
- e Select the Sonar Head in the **Online Sonar Heads** table, then click the **Use Discovered Head** button.
 - f Close the **System Configuration** dialog box.
- 5 Click **Setup**→**Connect** to start the Sonar Head.

Related topics

[Defining the IP address on the computer's network adapter, page 22](#)
[Head Network Setup dialog box, page 130](#)

User interface


Topics

- [Presentation overview, page 77](#)
- [The M3 software menu system, page 79](#)
- [Sonar view, page 80](#)
- [3D Point Cloud, page 83](#)
- [Tool bar description, page 85](#)
- [Status bar, page 87](#)

Presentation overview

By default, the display presentation covers the entire screen.

This M3 Sonar screen capture shows you a typical data replay situation.

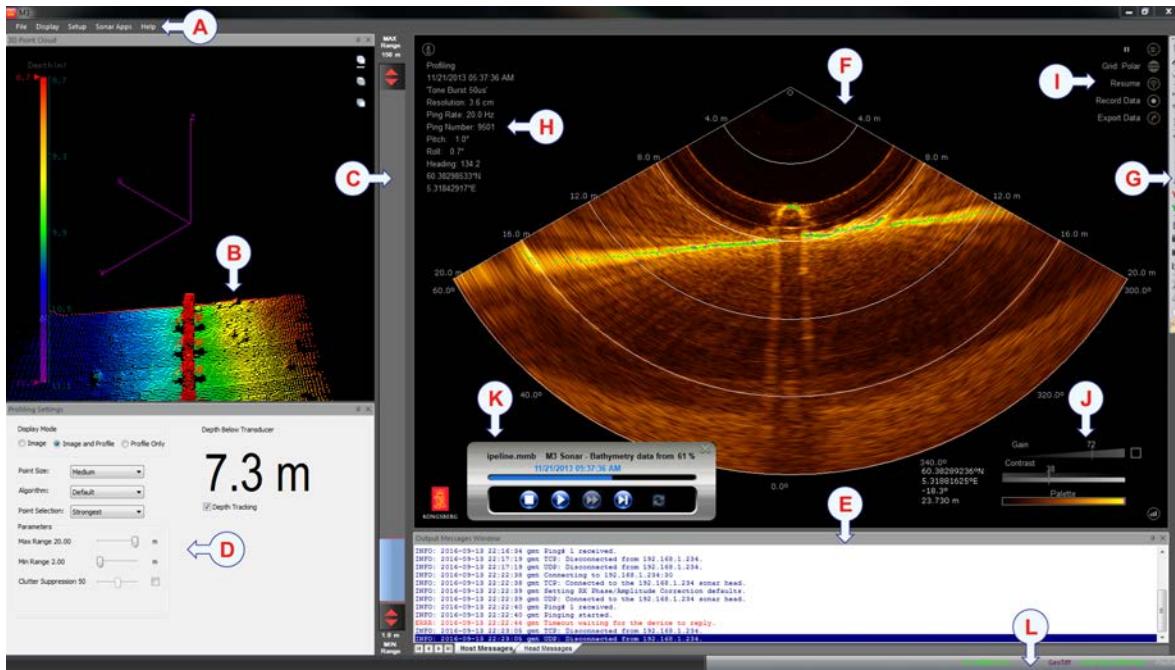

The presentation provides you with a lot of information. The sonar view presents sonar echo data. The 3D Point Cloud presents profile point data that can be rotated in three dimensions. The menu system on the top gives you easy access to all the functionality offered by the M3 software. The tool bar provides buttons for functions, filters, and sonar view overlays. The bottom **Output Messages** window and bottom status bar provide diagnostic messages.

You can resize a window by clicking on the window border, then dragging it to create a smaller or larger window. Click the pin icon on the window title bar to auto hide the window. To show the window, hover your mouse over the labelled tab that appears on the side of the presentation.

A Menu system

The menu system is located on the top of the presentation. To open any of the menus, click the menu title.

B 3D Point Cloud

Profiling mode allows you to view a real-time 3D point cloud of the sea bottom or structures under the water. You can zoom into or rotate the real-time 3D point cloud data, as well as switch to a project, top, or side view.

C Range slider bar

When the sonar is running, you can increase or decrease the range using the range slider bar to the left of the sonar view. Click the top arrows to increase or decrease the far range.

D Profiling Settings

In the **Profiling Settings** dialog box, you can choose to display only the sonar view, only the 3D Point Cloud, or both. The profile point data can be exported to a file so that third-party software can extract depth, distance, and volume measurements.

E Output Messages

The **Output Messages** window displays information, diagnostic, and error messages. There are two tabs in this window: one for host messages and one for head messages.

F Sonar view

All echo information offered by the M3 Sonar is shown in the sonar view.

G Tool bar

The tool bar provides access to useful functions, such as the ability to take a screenshot or change your TVG settings. In addition, several measuring tools are available.

H Information Widget

The **Information Widget** displays sonar pulse details as well as vessel speed, sound speed, heading, and latitude/longitude coordinates from external sensors.

I Menu Widget

The **Menu Widget** provides controls to record and export data, play or pause playback, and configure the grid.

J Display Widget

The **Display Widget** allows you to adjust the filter strength, change the display gain, and choose your echo colours. If you have a high-frequency M3 Sonar transducer, you can change the frequency using the **Display Widget**.

K Playback Console

Control playback using the **Playback Console**. You can stop, pause, fast forward, or advance through the recording one ping at a time. You can also repeat playback of the file on a never-ending loop.


L Status bar

The status bar is located at the bottom of the M3 Sonar presentation. It allows you to view the system status and disk space. You can also access detailed telemetry info.

The M3 software menu system

The menu system is located on the top of the presentation. To open any of the menus, click the menu title.

To select operational parameters on the M3 Sonar, use the menu system. The menus are organized in a tree structure. Some of the menu items open dialog boxes to offer additional choices.

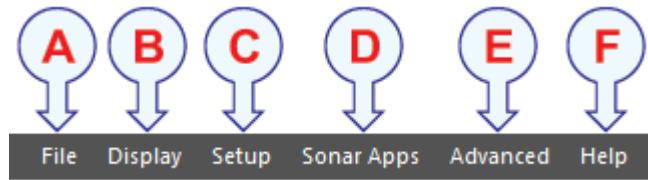


- A** The **File** menu allows you to open a recorded file, as well as choose the recording and exporting formats of your data files. You can also load your user settings from a previous software version.
- B** Use the **Display** menu to control the visual aspects of the system, and to show or hide various elements in the presentation.
- C** You can connect to the Sonar Head using the **Setup** menu. You can also configure the system, choose your preferences, set up the coordinate system, upgrade the Sonar Head firmware, or change the Sonar Head IP Address.
- D** The **Sonar Applications** menu lists various operating modes used for different applications. Each mode has its own pre-defined characteristics, such as differing ranges, angular resolutions, and pulse types. You can configure which applications will appear by opening the **Customize Apps** dialog box, which is the last item in this list. All **Sonar Applications** menu items will be greyed out until the sonar is running. The selection of sonar applications presented in the **Sonar Applications** menu depends on the current Sonar Head frequency.
- E** The **Advanced** menu is intended for experienced users or for testing purposes and is not required for normal operation of the M3 Sonar. This menu requires a software license key, and will not appear if you do not have one.
- F** The **Help** menu allows you to view hardware and software information in the **About M3** dialog box. You can also open the M3 Sonar *Reference Manual* from this menu.

Sonar view

All echo information offered by the M3 Sonar is shown in the sonar view.

Description

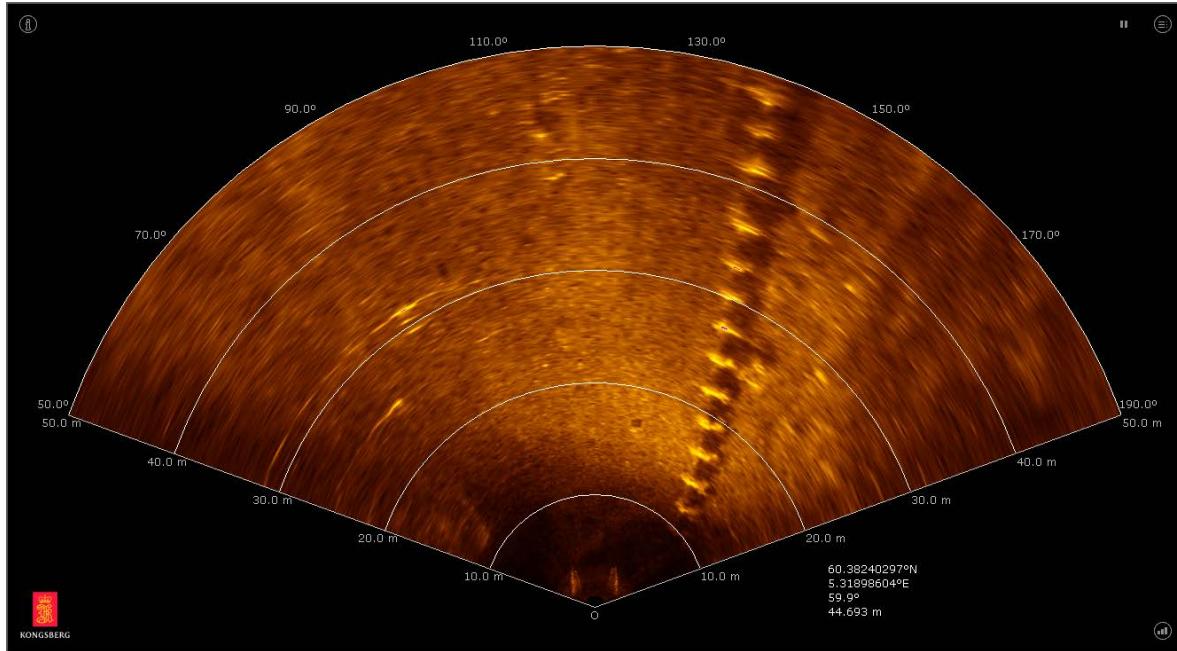

The range and bearing or X/Y coordinates of the current mouse cursor position is shown at the bottom of the sonar view.

Click the icon in the top-left corner of the sonar view to open the **Information Widget**. The **Information Widget** displays sonar pulse details as well as vessel speed, sound speed, heading, and latitude/longitude coordinates from external sensors.


Click the icon in the bottom-right corner of the sonar view to open the **Display Widget**. The **Display Widget** allows you to adjust the filter strength, change the display gain, and choose your echo colours.

Right-click inside the sonar view to display the range menu. You can increase or decrease the range using the range slider bar to the left of the sonar view. Enabling Depth Tracking will automatically adjust the range according to the current depth when the head is running.

To enable this feature, select the **Depth Tracking** checkbox in the **Profiling Settings** dialog box.

Tip

*You can change the shape of the grid (range rings), or turn it off. Click the icon in the top-right corner of the sonar view to open the **Menu Widget**, then click **Grid** to cycle through the options.*

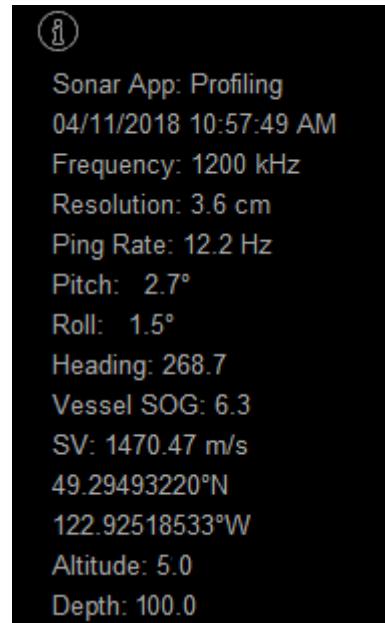

You can change the physical size of the sonar view by clicking on the left view border, then dragging it to create a smaller or larger window. You can also make the sonar view full screen by clicking **Display**→**Full Screen** or by clicking the **Show Full Screen** button in the tool bar.

Interpreting the sonar view

The sonar view is a map of the echo returns over the scanned area.

A sequence of colours is used to show the relative strengths of the echo returns. Several colour scale options are available. Most of them use darker colours to indicate weak returns, and brighter colours to indicate stronger returns.

Bright spots in the image indicate strong sonar targets. Generally, bright spots indicate a hard, highly reflective surface. Dark spots in the image indicate either areas of low reflectivity (soft areas), or possibly an acoustic shadow zone behind a target.

Most targets will block the transmission of sound — either by reflecting it, or absorbing it. This will leave a shadowed area behind the target that is not ensonified and therefore

will not generate any echoes. This is very similar to the shadow formed when an object is illuminated with a single light source. The shadow behind a target can often yield more information about the target than the reflections from the target itself. The shadow will often reveal the shape of the target, but you must remember that the shape will usually be distorted according to the position of the Sonar Head relative to the target and the bottom, and according to the slope of the bottom. It is often possible to estimate the height of a bottom target based on the length of the shadow and the known height of the Sonar Head.

Noise and interference

Acoustic noise and bubble interference can affect the quality of the sonar view image.


It is usually easy to recognize interference from other acoustic sources such as echo sounders, pingers, and other sonars. These sources all produce pulses at regularly timed intervals and will therefore tend to create a regular or symmetrical pattern of blips on the screen. Mechanical noise sources such as propellers, hydraulic pumps, and thrusters, are usually more directional and tend to show up only when the sonar is pointed directly at them.

In addition, sonar signals are easily blocked by air or gas bubbles in the water or on the transducer face. As an example, the aeration present in the wake of a vessel will often last for ten to twenty minutes and effectively mask out most sonar returns on the far side. The aeration partially blocks the outgoing pulses as well as any returns. Another source of gas bubbles can be found when a sea bottom containing decomposing organic matter is disturbed by dredging or ploughing.

3D Point Cloud

The 3D Point Cloud presents profile point data that can be rotated in three dimensions.

Description

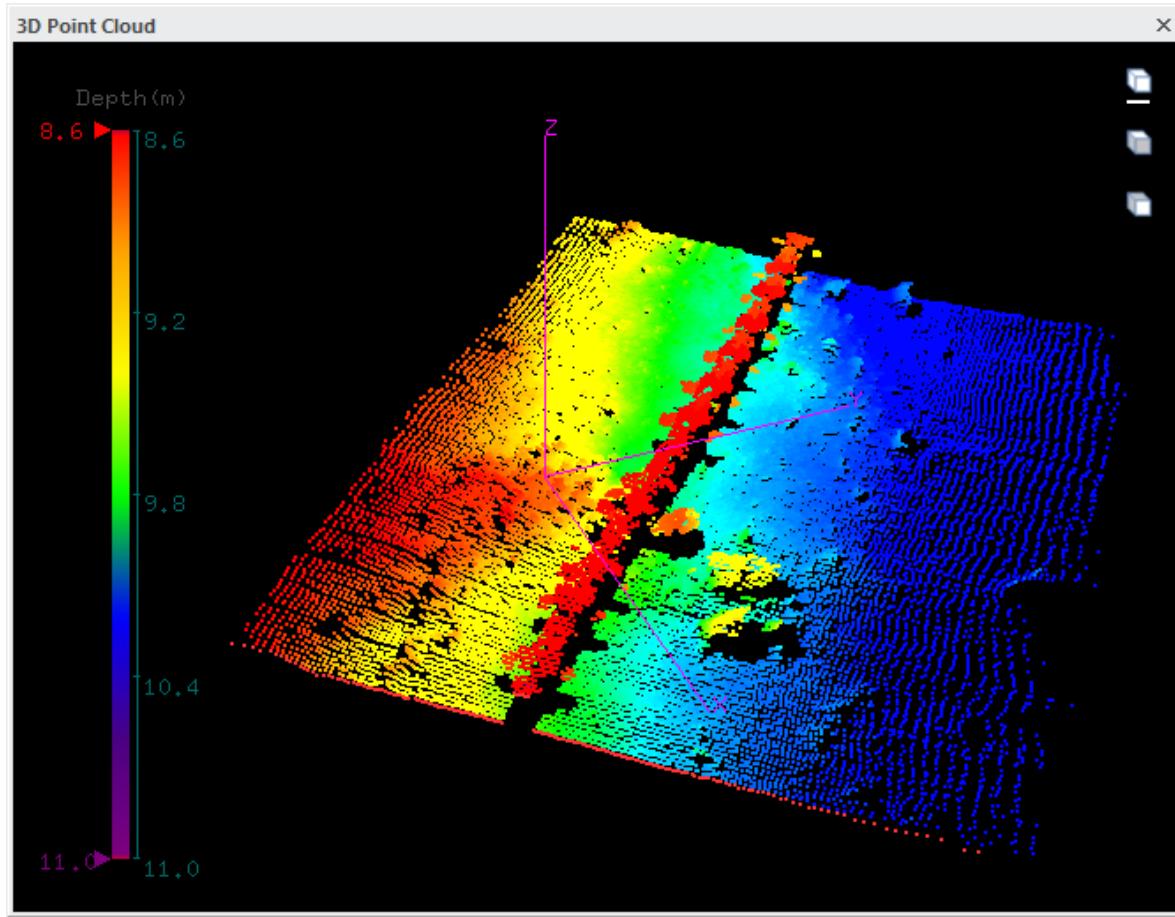

Profiling mode allows you to view a real-time 3D point cloud of the sea bottom or structures under the water. The profile point data can be exported to a file so that third-party software can extract depth, distance, and volume measurements.

Tip

In the Profiling Settings dialog box, you can choose to display only the sonar view, only the 3D Point Cloud, or both. If you can't see the 3D Point Cloud, ensure that either Image and Profile or Profile Only are selected. You can also change the point cloud display parameters in this dialog box.


To change the depth range settings in the **3D Point Cloud** window, click **Depth**, uncheck the **Adaptive Palette** box, enter the top and bottom depth, then click **Apply**. To change the colour scale of the 3D Point Cloud, click **Depth**, check the **Adaptive Palette** box, then click **Apply**.

The following controls can be used in the **3D Point Cloud** window.

- Use the mouse scroll wheel to zoom in or out.
- To rotate the point cloud, press and hold the left mouse button, then move the mouse.
- To clear the point cloud, double click the right mouse button.

The following buttons, found in the top-right corner of the **3D Point Cloud** window, offer different views and measurements. The currently selected view or tool will be underlined.

- A Project view:** An isometric view where you can rotate the point cloud in three dimensions.
- B Top view:** A top-down view where you can measure distances or place target markers.
- C Side view:** You can see the elevation of the points in the side view.
- D Marker:** Click to select this tool in the Top view, then click anywhere in the **3D Point Cloud** window to place a target marker overlay. You can place as many markers as you need.

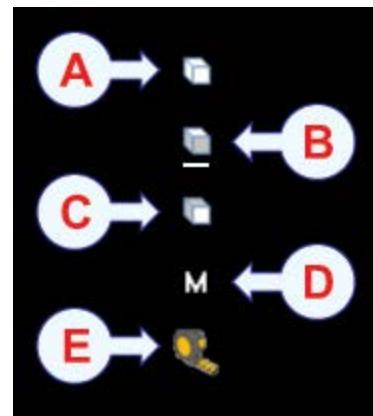

Note _____

Georeference information on each marker will be added to a “.kml” file in the folder “C:\KML\M3_V0253\Recordings”.


- E Tape Measure:** Click to select this tool in the Top view, then click and hold the left mouse button and drag the mouse to measure distances.

Related topics

[Profiling Settings dialog box, page 116](#)

Tool bar description

The tool bar provides buttons for functions, filters, and sonar view overlays.

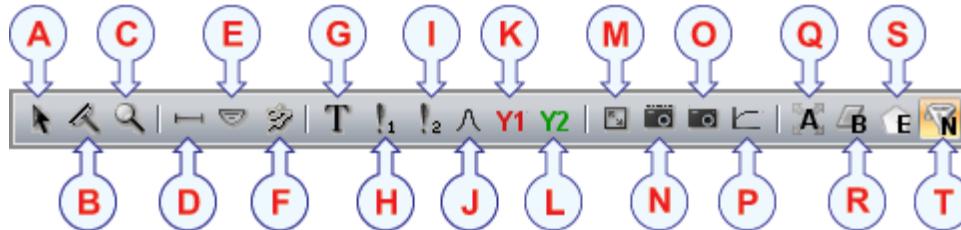

The tool bar provides access to useful functions, such as the ability to take a screenshot or change your TVG settings. In addition, several measuring tools are available.

A Arrow

Click to use the default arrow cursor. With the default cursor you can select and manipulate objects on the screen.

B Wiper

Removes items from the sonar view. When selected, click on each overlay you wish to delete.

C Zoom windows

You can open up to four true zoom windows when running a Sonar Head.

D Tape Measure

Measures distances on the sonar view. Also allows you to place a measurement overlay on the sonar view.

E Protractor

You can use the protractor to measure the angle between two lines, then place the resulting overlay in the sonar view.

F String Measure

You can use the string measure tool to define an area. The size and perimeter of the area will be calculated for you.

G Text Label

The text label tool allows you to place comments on the screen.

H Reference Cursor 1

I Reference Cursor 2

You can place one or two reference cursors as overlays on the sonar view. When you place two cursors, an additional overlay will appear with information about the cursors.

J Image Quality Analysis System

The Image Quality Analysis System (IQAS) analyzes the image quality of a point target, or can be used to measure a known point target against a specification.

K Y1

Horizontal line overlay that can be used to mark the depth of the natural seabed (for use when excavating).

L Y2

Horizontal line overlay that can be used to mark the depth of a trenching target (for use when excavating).

M Show Full Screen

Click **Full Screen** to make the sonar view full screen. Press the **Esc** key to exit full-screen mode.

N Save image with overlays

Click this button to save sonar view images, including any overlays you've placed in the sonar views.

O Save image without overlays

Click this button to save sonar view images, excluding any overlays you've placed in the sonar views.

P TVG Setup dialog box

TVG (Time Variable Gain) compensates for the loss of acoustic energy due to geometric spread and absorption.

Q Average Filter

Clicking the “A” button will enable the Average Filter. This filter reduces noise. Slow-moving features persist on-screen.

R Background Removal

Clicking the “B” button will enable the Background Removal filter. This filter removes stationary parts of the background to enhance moving objects (such as fish, for example).

S Edge Enhancement


Clicking the “E” button will enable Edge Enhancement. This filter enhances the edge of moving features.

T No Filter

Disables any filters. The sonar view will display an unfiltered sonar image.

Status bar

The status bar is located at the bottom of the M3 Sonar presentation. It allows you to view the system status and disk space. If network logging is enabled, you can view the sonar connection performance. You can also access detailed telemetry info.

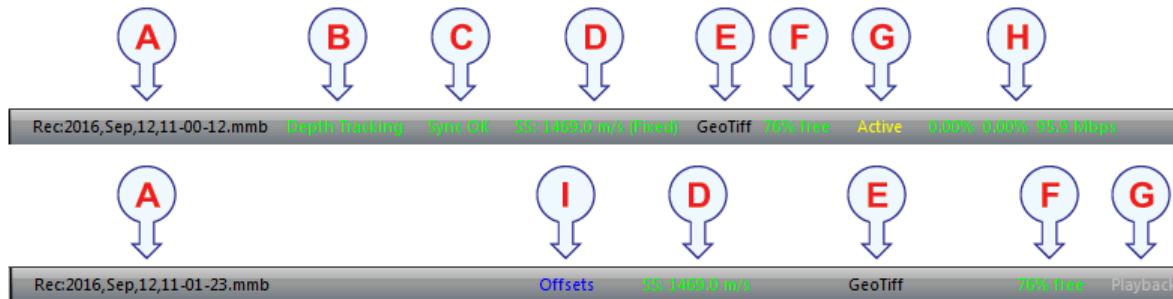

A Recording information

Displays the filename when you are recording data.

B Depth Tracking

If Depth Tracking is enabled, then this text will appear when the head is running.

C Time synchronization status

Displays the status of the time synchronization process if *Host* Time Sync Mode is enabled. “Syncing” displays during time synchronization (which takes approximately two minutes). “Sync OK” displays when time synchronization is complete. “Sync Error” displays if the computer clock is irregular (for example, due to interference from the time source). In this case, restart the synchronization process by disconnecting, then reconnecting, the Sonar Head.

D Sound Speed

The sound speed is displayed in green (after filtering and thresholding). This text will display in blue during playback if **Override Sound Speed** is enabled.

E GeoTiff

If GeoTiffs are automatically being created, then this text will display in green.

F Disk space monitor

Displays the percentage of hard drive space you have available for data recordings.

G System status

Shows the system status, such as “Active” when the system is connected to a Sonar Head, “Inactive” when not connected, or “Playback” when replaying a recorded file. Clicking the system status text will open a **Connection Status** window. You can click on **M3 Sonar** in the **Connection Status** window to open a **Head Status** window showing telemetry information.

H Sonar connection performance

If network logging is enabled in the **System Configuration** dialog box, then the ping loss, packet loss, and the last ping data rate will be displayed.

I Offsets

If Mounting Offsets Override is enabled then this text will appear during playback.

Tip _____

Right-click on the status bar to configure it. You can show or hide any of the information displayed here.

Related topics

[Recording sonar data, page 54](#)

[System Configuration dialog box - Master Reference page, page 148](#)

[System Configuration dialog box - Mounting Offsets page, page 151](#)

[Saving GeoTiff files, page 60](#)

[System Configuration dialog box - Sonar Setup page, page 134](#)

[Starting operation of the Sonar Head, page 33](#)

Menu system

Topics

- [File menu, page 90](#)
- [Display menu, page 91](#)
- [Setup menu, page 94](#)
- [Sonar Applications menu, page 96](#)
- [Advanced menu, page 100](#)
- [Help menu, page 101](#)

File menu

The **File** menu allows you to open a recorded file, as well as choose the recording and exporting formats of your data files. You can also load your user settings from a previous software version.

How to open

To open this menu, click the menu title.

Description

- **Playback**

The *Playback* mode allows you to choose the echo data file(s) you wish to play back.

- **Stop Playback**

Clicking *Stop Playback* will stop the playback of a recording. You can also use the **Playback Console** to control playback.

- **Recording Format**

Click *Recording Format* to choose between recording raw sonar data (to a “.mmb” file) or recording beamformed sonar data (to a “.imb” file).

- **Exporting Format**

You can choose the exporting format for sonar data. The default “.all” format is the Kongsberg EM datagram standard and can be processed by third-party software.

- **Load User Settings**


Click to browse for a “UserInfo.xml” file (in the folder **C:\KML\M3_V0253\bin\Settings**) from a previous software version. You can import your previous settings to a new version of the M3 software.

- **Convert to Video**

The **Convert to Video Format** dialog box allows you to convert an MMB or IMB file to a video file (MP4 format only).

- **Exit**

Click to close the M3 software.

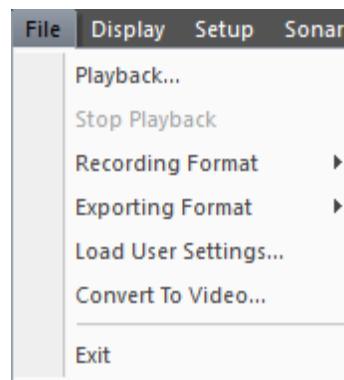

Display menu

Use the **Display** menu to control the visual aspects of the system, and to show or hide various elements in the presentation.

How to open

To open this menu, click the menu title.

Description

- **Enable Target Marker**

Click to enable the Target Marker function. You can press 0–9 to place a marker in the sonar view that is stamped with time and location information. In addition, you can export this information to a serial or UDP port.

- **Delete All Markers**

Click to remove all target markers from the sonar view.

- **Full Screen**

Click **Full Screen** to make the sonar view full screen. Press the **Esc** key to exit full-screen mode.

- **Output Messages window**

Click to show or hide the **Output Messages** window. The **Output Messages** window displays information, diagnostic, and error messages.

- **Playback Console**

Click to show or hide the **Playback Console**. Control playback using the **Playback Console**. You can stop, pause, fast forward, or advance through the recording one ping at a time. You can also repeat playback of the file on a never-ending loop.


- **3D Point Cloud**

Click to show or hide the **3D Point Cloud** window. The 3D Point Cloud presents profile point data that can be rotated in three dimensions.

- **Profiling Settings**

Click to show or hide the **Profiling Settings** dialog box. Profiling mode allows you to view a real-time 3D point cloud of the sea bottom or structures under the water.

- **Rotator Control**

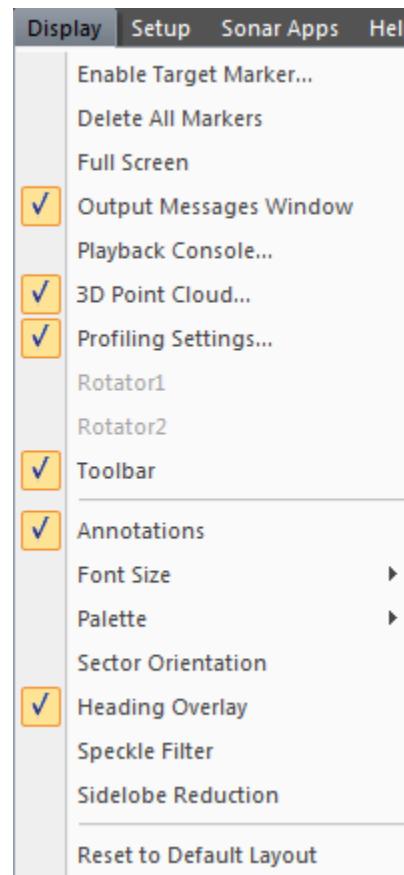

Click to show or hide the **Rotator Control** dialog box for each rotator you have installed.

- **Tool bar**

Click to show or hide the tool bar. The tool bar provides buttons for functions, filters, and sonar view overlays.

- **Annotations**

Click **Annotations** to enable or disable the bearing and range annotations in the sonar view.

- **Font Size**

You can choose between using a normal or a large font size throughout the M3 software.

- **Palette**

Select **Palette** to choose your preferred echo colours. Which colour scale to use is mainly a personal preference based on ambient light conditions, the nature of the echoes and your own experience.

- **Sector Orientation**

Enter an angle (in degrees) into the **Orientation** dialog box, then click **Apply** to rotate the sonar view to your chosen angle.

- **Heading Overlay**

If your Sonar Head is forward looking, click **Heading Overlay** to enable or disable this feature. When this feature is enabled, the degree annotations in the sonar view will change to reflect the current sonar heading.

- **Speckle Filter**

Click **Speckle Filter** to enable or disable this function. This filter reduces noise (the grainy “salt-and-pepper” pattern) in uniform areas of the sonar view. Distinguishable details in features and targets will be retained.

- **Sidelobe Reduction**

Click **Sidelobe Reduction** to enable or disable automatic sidelobe reduction. This function improves overall image quality by reducing the sidelobes of strong targets. Sidelobe reduction is especially useful at short ranges when targets are very close. In addition, the automatic adjustments work well when the sonar is constantly moving, such as on an ROV.

Tip

If you have a software license for advanced features, you can view the automatically-calculated sidelobe reduction ratio or manually adjust the ratio using a slider.

- **Reset to Default Layout**

Click to reset the presentation layout. All windows and dialog boxes will be docked in their default location. In addition, some display elements are hidden by default.

Setup menu

You can connect to the Sonar Head using the **Setup** menu. You can also configure the system, choose your preferences, set up the coordinate system, upgrade the Sonar Head firmware, or change the Sonar Head IP Address.

How to open

To open this menu, click the menu title.


Description

- **Connect**

Click **Connect** to connect to the Sonar Head and start “pinging”.

Note _____

When the Sonar Head is running, this menu command will change to Disconnect.

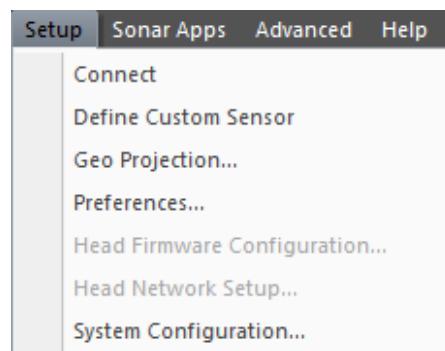

- **Define Custom Sensor**

Click to open the **Define Custom Sensor** dialog box. If the sensor protocol you want to use is not available on the **Sensors Setup** page, you can create a custom sensor format in the **Define Custom Sensor** dialog box.

- **Geo Projection**

Click to open the **Geo Projection** dialog box. You can configure the coordinate system using the **Geo Projection** dialog box.

- **Preferences**

Click to open the **Preferences** dialog box. The **Preferences** dialog box is used to set up system preferences such as units of measure, time format, etc.

- **Head Network Setup**

Click to open the **Head Network Setup** dialog box. The **Head Network Setup** dialog box allows you to change the Sonar Head network parameters, such as the IP address. This dialog box is only available when the Sonar Head is connected and paused.

- **Head Firmware Configuration**

Click to open the **Head Firmware Configuration** dialog box. The **Head Firmware Configuration** dialog box allows you to upgrade the Sonar Head firmware. This dialog box is only available when the Sonar Head is connected and paused.

- **System Configuration**

Click to open the **System Configuration** dialog box. This dialog box allows you to set up the Sonar Head, external sensors (such as a GPS or Motion Reference Unit), and rotators. In addition, you can configure the deployment of the M3 Sonar and enter mounting offsets.

Sonar Applications menu

The **Sonar Applications** menu lists various operating modes used for different applications. Each mode has its own pre-defined characteristics, such as differing ranges, angular resolutions, and pulse types.

Note

You cannot select a sonar application until the Sonar Head is connected. All Sonar Applications menu items will be greyed out until the sonar is running.

The selection of sonar applications presented in the Sonar Applications menu depends on the current Sonar Head frequency. The M3 software will automatically detect the frequency of your Sonar Head and display only the applicable sonar applications.

How to open

To open this menu, click the menu title.

The following sonar applications are available when using a 500-kHz Sonar Head transducer.

Description

- **EIQ**

This sonar application captures high-quality images. At short ranges the images are relatively insensitive to the motion of the sonar. At longer ranges the sonar should be relatively motionless.

Note _____

This application is less sensitive to motion than EIQ - Fine.

- **EIQ - Fine**

This sonar application captures very high-quality images. At short ranges the images are relatively insensitive to the motion of the sonar. At longer ranges the sonar should be relatively motionless.

- **EIQ - Ultra Fine**

This sonar application captures the highest quality images possible. At short ranges the images are relatively insensitive to the motion of the sonar. At longer ranges the sonar should be relatively motionless.

- **Ethernet Test - 1000Mbps**

You can test your 1000Mbps link to verify that the link throughput is available. The test uses 80 percent utilization and uses *EIQ - Ultra Fine*.

- **Ethernet Test - 100Mbps**

You can test your 100-Mbps link to make sure that the link throughput is available. The test uses 80 percent utilization and uses *EIQ*.

- **Ethernet Test - 10Mbps**

You can test your 10-Mbps link to make sure that the link throughput is available. The test uses 80 percent utilization and uses *Imaging 30*.

- **Imaging 15**

You can use this sonar application for navigation and obstacle avoidance. This application uses a 15-degree Tx vertical beamwidth.

- **Imaging 3**

Sonar Apps	Advanced	Help
EIQ		
EIQ - Fine		
EIQ - Ultra Fine		
Ethernet Test - 1000Mbps		
Ethernet Test - 100Mbps		
Ethernet Test - 10Mbps		
Imaging 15		
Imaging 3		
Imaging 30		
Imaging 30 - Short Range		
Imaging 7		
Profiling		
<input checked="" type="checkbox"/> Profiling - Bathy		
Profiling - Dual Head Master		
Profiling - Dual Head Slave		
Profiling - Fast		
ROV Navigation		
Rub Test		
Customize Apps		

Use this sonar application primarily for profiling using a 3-degree Tx vertical beamwidth. You may also use this application for shallow-water obstacle avoidance.

- **Imaging 30**

You can use this sonar application for navigation and obstacle avoidance. This application uses a 30-degree Tx vertical beamwidth.

- **Imaging 30 - Short Range**

You can use this sonar application for the support of manipulator operations, with the highest-speed short-range imaging. Speed and detail are more important than overall image quality.

- **Imaging 7**

You can use this sonar application to provide long-range obstacle avoidance and navigation into the work site. This application uses the highest pulse power. Pulse durations are used to get a reliable long-range detection. The trade-off is a reduction in the ping rate.

- **Profiling**

Use this sonar application for the automated point extraction of the sea bottom or structures to create a real-time 3D Point Cloud. The *Profiling* application has a slow ping repetition rate and is best suited for slow-moving ROVs, trenchers, and ploughs.

- **Profiling - Bathy**

This sonar application is ideal for Bathymetry Surveys.

- **Profiling - Dual Head Master**

You can use this profiling sonar application to generate an alternating sequence of pings and external trigger events. This sequence is used to implement alternate pinging in a dual-head profiling system.

- **Profiling - Dual Head Slave**

You can use this profiling sonar application to generate an alternating sequence of pings and external trigger events. This sequence is used to implement alternate pinging in a dual-head profiling system.

- **Profiling - Fast**

This sonar application performs using much higher ping rates than the normal *Profiling* application. This application is ideal for surface-vessel surveys.

- **ROV Navigation**

This sonar application automatically switches between *EIQ - Fine*, *EIQ*, and *Imaging 30* applications. *EIQ - Fine* is used to provide the highest-resolution images with a

good image update rate at short ranges. *EIQ* is used for medium ranges. *Imaging 30* is used for long ranges.

- **Rub Test**

Use this sonar application as part of a system test to make sure that the transducer is receiving a signal. Rub the transducer and make sure that bright streaks or rings appear in the sonar view.

- **Customize Apps**

Click to open the **Customize Apps** dialog box. You can select which sonar applications will appear in the **Sonar Apps** menu.

The following sonar applications are available only when using a high-frequency Sonar Head (such as a 700-kHz to 1400-kHz transducer, for example).

In addition, some of the sonar applications listed above are also available when using a high-frequency Sonar Head, but not all.

- **Imaging**

You can use this sonar application for navigation and obstacle avoidance. This application uses a 30-degree Tx vertical beamwidth.

- **Imaging Enhanced**

Use this sonar application for imaging or obstacle avoidance using one of the eIQ elements. This application uses a Time Delay FFT beamformer to produce a high-quality image.

- **Profiling - HiRes**

Use this sonar application if you have a high-frequency Sonar Head and require a higher horizontal beam resolution. This profiling mode uses the maximum number of beams (512) but has a slower ping rate as it uses more computational power. High-resolution profiling is ideal for applications such as pipeline inspections, fish behaviour studies, and gas plume detections.

Related topics

[Choosing a sonar application, page 36](#)

Advanced menu

The **Advanced** menu is intended for experienced users or for testing purposes and is not required for normal operation of the M3 Sonar. This menu requires a software license key, and will not appear if you do not have one.


How to open

To open this menu, click the menu title.

Description

- **Power User Settings**

Click to open the **Power User Settings** dialog box. The **Power User Settings** dialog box allows you to configure advanced controls. You can also override the beamlist or processing type during playback. The Ping Rate, Update Rate, and Mode ID are displayed for your information.

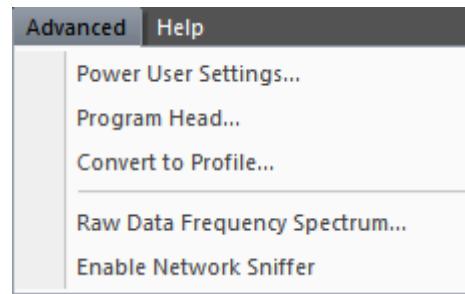

- **Program Head**

Click to open the **Program Head** dialog box. You can perform advanced tasks in the **Program Head** dialog box, such as configuring production settings, making head corrections, or changing transmit pulse definitions. This dialog box is only available when the Sonar Head is connected and paused.

- **Convert to Profile**

Click to open the **Profile Batch Conversion** dialog box. The **Profile Batch Conversion** dialog box allows you to convert many data files at once into another format. You can convert ".mmb", ".imb", and ".pmb" files.

- **Raw Data Frequency Spectrum**

Click to open the **Raw Data Spectrum** window. The **Raw Data Spectrum** window allows you to find and observe any noise in the data.

- **Enable Network Sniffer**

Click to open the **Network Sniffer** window. The **Network Sniffer** window allows you to monitor network traffic in real-time. When this feature is enabled, the menu option will change to **Disable Network Sniffer**.

Note _____

*To use this feature, you must run the M3 software as an administrator (right-click on the icon and select **Run as administrator**).*

Help menu

The **Help** menu allows you to view hardware and software information in the **About M3** dialog box. You can also open the M3 Sonar *Reference Manual* from this menu.


How to open

To open this menu, click the menu title.

Description

About M3

The **About** dialog box identifies the current software version. The version described in this publication is 2.5.3.



User Manual

Click **User Manual** to open the M3 Sonar *Reference Manual* in PDF format. This manual is only applicable to the software version you are using. If you are using an older version of software, it will not be the latest version.

Tip

You can download the latest software from <http://www.km.kongsberg.com/mesotechsoftware>, and the latest manuals from <http://www.km.kongsberg.com/mesotechdocumentation>.

Functions and dialog boxes

Topics

- [File menu, page 103](#)
- [Display menu, page 91](#)
- [Setup menu, page 94](#)
- [Sonar Applications menu, page 96](#)
- [Advanced menu, page 100](#)
- [Help menu, page 101](#)
- [Tool bar description, page 85](#)

File menu

The **File** menu allows you to open a recorded file, as well as choose the recording and exporting formats of your data files. You can also load your user settings from a previous software version.

How to open

To open this menu, click the menu title.

Description

- **Playback**

The *Playback* mode allows you to choose the echo data file(s) you wish to play back.

- **Stop Playback**

Clicking *Stop Playback* will stop the playback of a recording. You can also use the **Playback Console** to control playback.

- **Recording Format**

Click *Recording Format* to choose between recording raw sonar data (to a “.mmb” file) or recording beamformed sonar data (to a “.imb” file).

- **Exporting Format**

You can choose the exporting format for sonar data. The default “.all” format is the Kongsberg EM datagram standard and can be processed by third-party software.

- **Load User Settings**


Click to browse for a “UserInfo.xml” file (in the folder **C:\KML\M3_V0253\bin\Settings**) from a previous software version. You can import your previous settings to a new version of the M3 software.

- **Convert to Video**

The **Convert to Video Format** dialog box allows you to convert an MMB or IMB file to a video file (MP4 format only).

- **Exit**

Click to close the M3 software.

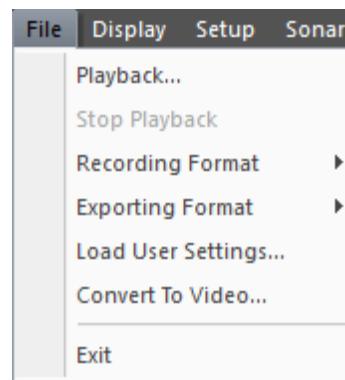

Topics

[Recording Format, page 104](#)

[Exporting Format, page 105](#)

[Convert to Video Format dialog box, page 105](#)

Recording Format

Click *Recording Format* to choose between recording raw sonar data (to a “.mmb” file) or recording beamformed sonar data (to a “.imb” file).

.mmb

.mmb is the default recommended recording format.

This is raw element data, not beamformed, in a 16-bit fixed-point complex format. This format allows great flexibility in how the data is processed and allows you to do your own beamforming or profile-point extraction. The data body size is determined by the number of elements and the number of samples.

If you want to keep your recordings in .mmb format but process your data in .imb format, you can convert .mmb files to .imb files using a batch conversion utility.

.imb

This format consists of beamformed data.

You can choose between a 32-bit floating point complex or 8-bit integer magnitude format. Select the 8-bit format only if you are interested in imaging pixel data and want a reduced data file size. The 8-bit format takes up a quarter of the 32-bit format's size.

Data body size is determined by the number of beams and samples. Different modes may form a different number of beams. Therefore, data body size may change depending upon the mode.

.imb files are easier to work with when using the M3 Sonar MATLAB toolbox and can be used with third-party software, such as Echoview.

Note

If files are recorded in .imb format, they cannot be converted to .mmb.

Related topics

[Recording sonar data, page 54](#)

[Converting your recording format, page 56](#)

Exporting Format

You can choose the exporting format for sonar data. The default “.all” format is the Kongsberg EM datagram standard and can be processed by third-party software.

.xyz

This is an ASCII point cloud format for M3 rotator 3D profiling data on a tripod only.

.all (recommended default)


This M3 profiling data format uses the Kongsberg EM datagram standard. The “.all” file can be processed by third-party software such as Hypack, QINSy, Caris, and EIVA.

Convert to Video Format dialog box

The **Convert to Video Format** dialog box allows you to convert an MMB or IMB file to a video file (MP4 format only).

How to open

This dialog box is opened from the **File** menu.

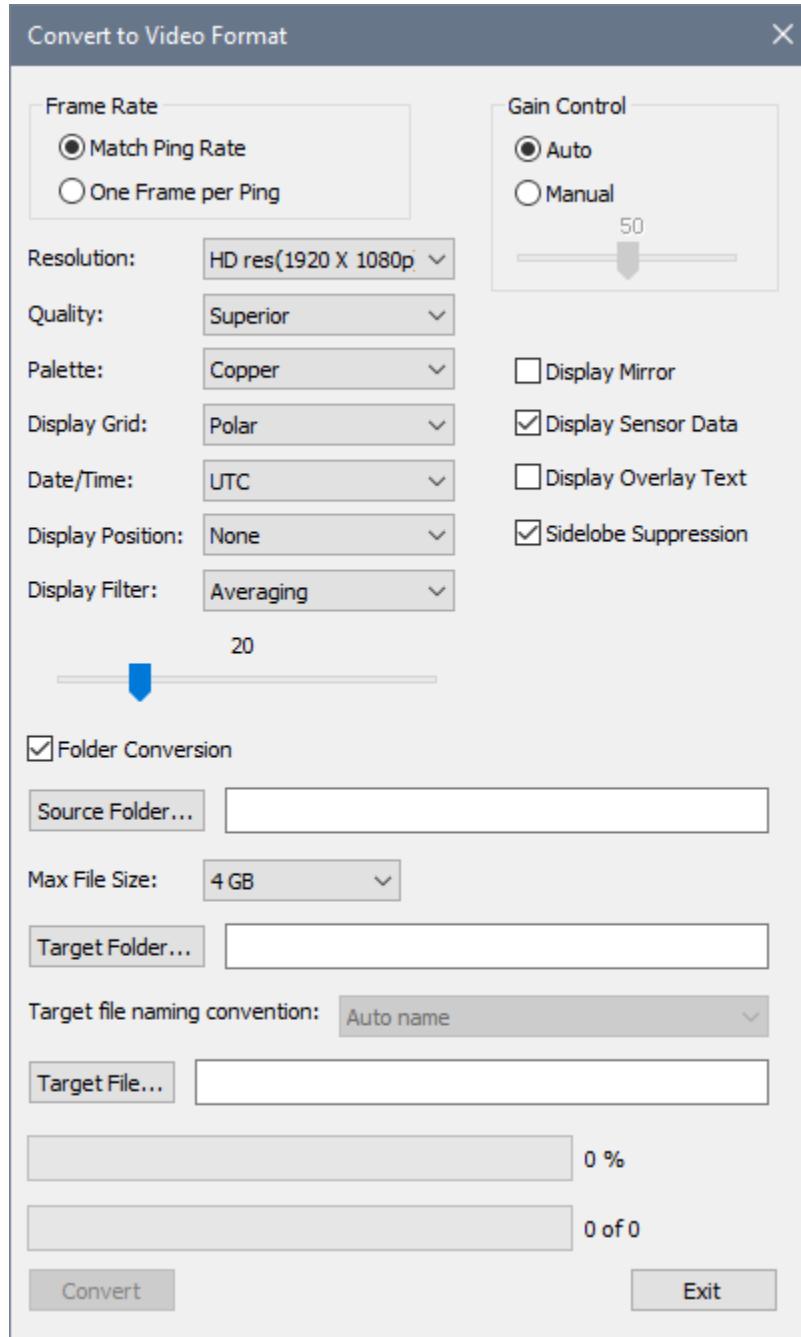

Description

Use this dialog box if you want to export a recording to a format that is playable by any media player. This function is useful if you wish to share recordings with others who do not have the M3 software installed on their computers, or if you wish to upload your recording to an online service.

Details

Frame Rate

- **Match Ping Rate**

Select if you want the converted video frame time to match the ping time.

- **One Frame per Ping**

Select if you want each video frame to be converted from each sonar ping.

Gain Control

- **Auto**

Select to automatically adjust the gain during the video conversion.

- **Manual**

Select to apply a fixed gain setting to the entire video. Use this setting when auto gain produces a video that is either too dark or too bright for a particular data set. Click and drag the slider to choose the gain setting.

Resolution

You can select the desired resolution for the converted video. Note that higher resolutions require longer conversion times and result in larger file sizes.

Note

*Due to space limitations, text overlays will not be included when converting to a resolution of 640x480p (the **Display Overlay Text** checkbox will not appear). Select a higher resolution if you wish to include text overlays.*

Quality

Select your video quality. A higher quality produces a video with a higher bit rate and less compression. The result is a better-looking video, but a larger file size. If storage space is a concern, choosing a lower quality will produce smaller files.

Palette

Select your preferred echo colours for the converted video file. Which colour scale to use is mainly a personal preference based on ambient light conditions, the nature of the echoes and your own experience.

Display Grid

You can choose whether to show the grid (range rings) in the video. You can also select the desired grid shape.

Date/Time

You can choose whether to display Coordinated Universal Time (UTC) Time or Local Time in the **Information Widget** in the sonar view.

Note

During the winter, Local Time equals standard time. During the summer, Local Time equals Daylight Saving Time (DST). Note that the offset between Local Time and UTC Time is not constant, but varies in locations where DST is used.

Display Position

You can choose whether the video will display your position coordinates in the **Information Widget** in the sonar view. You can also choose whether to display latitude and longitude coordinates (geographic system) or a Northing/Easting projection (projected coordinate system).

Display Filter

You can choose whether to apply a filter to the sonar view video. You can select which type of filter to apply. Drag the slider to increase or decrease the strength of the filter.

Display Mirror

Select this checkbox to mirror the sonar image in the converted video file (port to starboard, starboard to port).

Display Sensor Data

Select this checkbox to show sensor data in the **Information Widget** in the sonar view.

Display Overlay Text

Select this checkbox to show text overlays. To create text overlays for your video, click **Setup**→**Preferences** and fill out the **Overlay Text** boxes.

Sidelobe Suppression

Select this checkbox to enable the **Sidelobe Reduction** function for your video. This function improves overall image quality by reducing the sidelobes of strong targets. Sidelobe reduction is especially useful at short ranges when targets are very close.

Folder Conversion

Select this checkbox to perform a batch conversion of all sonar recordings in a selected folder. If you select this option, you will not be able to change the name of the converted files. *Auto Name* will be selected under the **Target file naming convention** drop-down list and the other options will not be available.

Note _____

The Source File button will change to Source Folder. An additional progress bar will appear at the bottom of the dialog box to show you how many files are being converted.

Source File/Source Folder

Click this button to select a recording or a folder for conversion (only .mmb or .imb files are supported).

Max File Size

Long data recordings will produce very large file sizes. Select the maximum file size for your video files.

If the maximum file size is reached, but the data conversion is not finished yet, a new file will be created. Each filename created for the converted recording will be given a unique filename with a sequential number.

Target Folder

Click this button to open a browser window where you can select a location for the converted video file(s).

Target file naming convention

Select a name for the converted file. Selecting *Auto name* will preserve the original filename and save the converted file in the same location as the original. Selecting *User defined* will allow you to enter your own filename into the **Target File** box. There are also some predefined filenames available.

Target File

Click this button to select a filename and location for the converted video file. This button is only available if you select *User defined* for the **Target file naming convention**.

Convert

Click this button to start the conversion.

Note _____

*The range annotations (metres or feet) displayed in the converted video file will be the same as currently configured in the M3 software. You can change the units of measurement in the **Preferences** dialog box.*

Related topics

[Playing back a recording, page 55](#)

[Converting your recordings to video, page 58](#)

Display menu

Use the **Display** menu to control the visual aspects of the system, and to show or hide various elements in the presentation.

How to open

To open this menu, click the menu title.

Description

- **Enable Target Marker**

Click to enable the Target Marker function. You can press 0–9 to place a marker in the sonar view that is stamped with time and location information. In addition, you can export this information to a serial or UDP port.

- **Delete All Markers**

Click to remove all target markers from the sonar view.

- **Full Screen**

Click **Full Screen** to make the sonar view full screen. Press the **Esc** key to exit full-screen mode.

- **Output Messages window**

Click to show or hide the **Output Messages** window. The **Output Messages** window displays information, diagnostic, and error messages.

- **Playback Console**

Click to show or hide the **Playback Console**. Control playback using the **Playback Console**. You can stop, pause, fast forward, or advance through the recording one ping at a time. You can also repeat playback of the file on a never-ending loop.


- **3D Point Cloud**

Click to show or hide the **3D Point Cloud** window. The 3D Point Cloud presents profile point data that can be rotated in three dimensions.

- **Profiling Settings**

Click to show or hide the **Profiling Settings** dialog box. Profiling mode allows you to view a real-time 3D point cloud of the sea bottom or structures under the water.

- **Rotator Control**

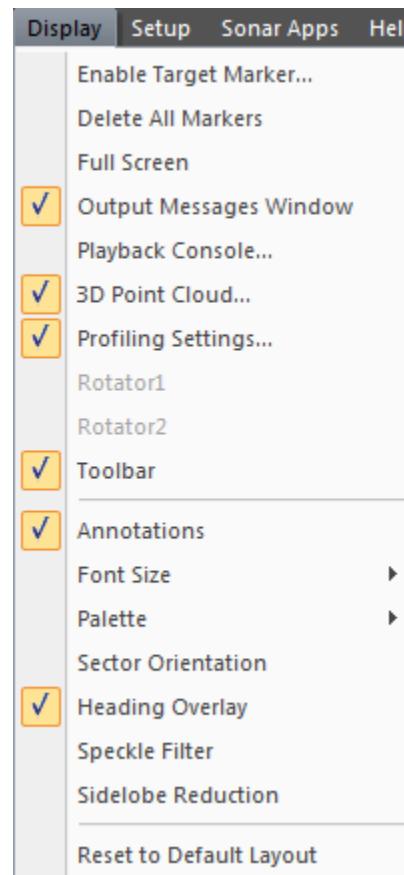

Click to show or hide the **Rotator Control** dialog box for each rotator you have installed.

- **Tool bar**

Click to show or hide the tool bar. The tool bar provides buttons for functions, filters, and sonar view overlays.

- **Annotations**

Click **Annotations** to enable or disable the bearing and range annotations in the sonar view.

- **Font Size**

You can choose between using a normal or a large font size throughout the M3 software.

- **Palette**

Select **Palette** to choose your preferred echo colours. Which colour scale to use is mainly a personal preference based on ambient light conditions, the nature of the echoes and your own experience.

- **Sector Orientation**

Enter an angle (in degrees) into the **Orientation** dialog box, then click **Apply** to rotate the sonar view to your chosen angle.

- **Heading Overlay**

If your Sonar Head is forward looking, click **Heading Overlay** to enable or disable this feature. When this feature is enabled, the degree annotations in the sonar view will change to reflect the current sonar heading.

- **Speckle Filter**

Click **Speckle Filter** to enable or disable this function. This filter reduces noise (the grainy “salt-and-pepper” pattern) in uniform areas of the sonar view. Distinguishable details in features and targets will be retained.

- **Sidelobe Reduction**

Click **Sidelobe Reduction** to enable or disable automatic sidelobe reduction. This function improves overall image quality by reducing the sidelobes of strong targets. Sidelobe reduction is especially useful at short ranges when targets are very close. In addition, the automatic adjustments work well when the sonar is constantly moving, such as on an ROV.

Tip

If you have a software license for advanced features, you can view the automatically-calculated sidelobe reduction ratio or manually adjust the ratio using a slider.

- **Reset to Default Layout**

Click to reset the presentation layout. All windows and dialog boxes will be docked in their default location. In addition, some display elements are hidden by default.

Topics

[Target Marker Export dialog box, page 113](#)

[Playback Console, page 115](#)

[Profiling Settings dialog box, page 116](#)

Target Marker Export dialog box

The Target Marker function is primarily used for remotely operated vehicle (ROV) navigation. Third-party ROV software can use the time and location information to steer the ROV toward the target.


How to open

This dialog box is opened from the **Display** menu.

Description

You can place a marker on a target of interest in the sonar view. This marker is stamped with both time and location details. You can export this time and location information to a serial port (or UDP port 20004).

To start using target markers, click **Display**→**Enable Target Marker**.

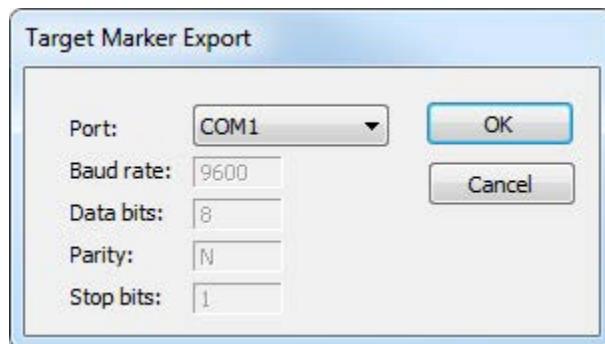

The **Target Marker Export** dialog box opens when you enable the Target Marker function.

Choose a serial port in the **Target Marker Export** dialog box, then click **OK** to enable serial port export. Click **Cancel** to use the Target Marker function without exporting to a serial port. UDP export is available in both cases.

Once the Target Marker function is enabled, pressing number keys 0 to 9 will place a marker at the location of the arrow cursor in the sonar view.

Details

Port

Select which serial port you want to export the time and location information to.

Serial port parameters

The serial port parameters are fixed and cannot be changed. Ensure that your third-party software is set to receive the data using these values.

- **Baud Rate**

9600

The speed of the serial communication.

- **Data Bits**

8

The number of data bits in each character.

- **Parity**

N

If required, a parity bit is used in a simple error detection algorithm for a serial port.

- **Stop Bits**

1

This parameter is used to indicate the end of the transmission. It is usually set to 1.

Target Marker format

\$MSTRK,xx,hhmmss.ss,nnnnnnnn.nn,c,eeeeeee.ee,c,U<CR><LF>

\$MSTRK	Start character and prefix.
xx	Target number, ranging from 00 to 99.
hhmmss.ss	UTC time in hours, minutes, and seconds.
nnnnnnnn.nn	Northing or Latitude depends on the “U” definition.
c	N: North; S: South
eeeeeee.ee	Easting or Longitude depends on the “U” definition.
c	E: East; W: West

U	<p>‘f’: Northing/Easting in feet. Variable number of digits for Northing/Easting and variable number of digits for decimal-fraction of Northing/Easting.</p> <p>‘m’: Northing/Easting in metres. Variable number of digits for Northing/Easting and variable number of digits for decimal-fraction of Northing/Easting.</p> <p>‘l’: Lat/Lon in degrees. For Latitude: two fixed digits of Latitude degrees, two fixed digits of minutes, and a variable number of digits for decimal-fraction of minutes. For Longitude: three fixed digits of Longitude degrees, two fixed digits of minutes, and a variable number of digits for decimal-fraction of minutes.</p>
CRLF	Termination

Related topics

[Placing target markers, page 68](#)


Playback Console

You can play back a previously recorded data file to view the sonar image sequence captured during operation of the Sonar Head. Control playback using the **Playback Console**.

How to open

The **Playback Console** is opened from the **Display** menu. The **Playback Console** is also opened automatically when you choose a file for playback.

Description

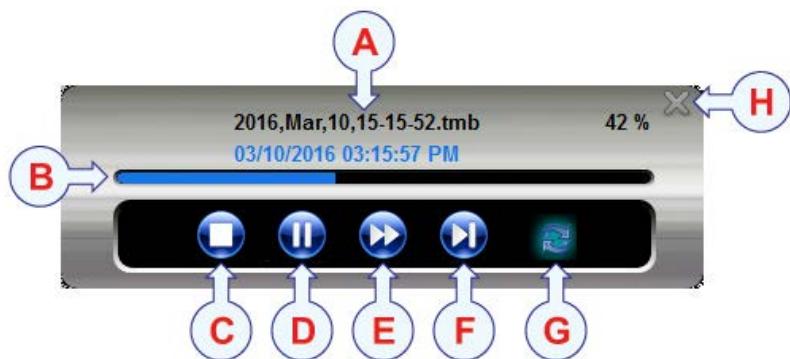

- A** The name of the playback file in use and the time and date of the recording.

- B** The playback progress bar. Click and hold, then drag your mouse along the bar to search through the recording. Click anywhere in the bar to jump to a specific point.
- C** Click to stop the recording.
- D** Click to pause the recording.
- E** Click to fast forward through the recording.
- F** Click to advance through the recording one ping at a time.
- G** Click to repeat playback of the file on a never-ending loop.
- H** Click to close the **Playback Console**. Closing the Console will not stop playback.

Related topics


[Playing back a recording, page 55](#)

Profiling Settings dialog box

Profiling mode allows you to view a real-time 3D point cloud of the sea bottom or structures under the water.

How to open

This dialog box is opened from the **Display** menu.

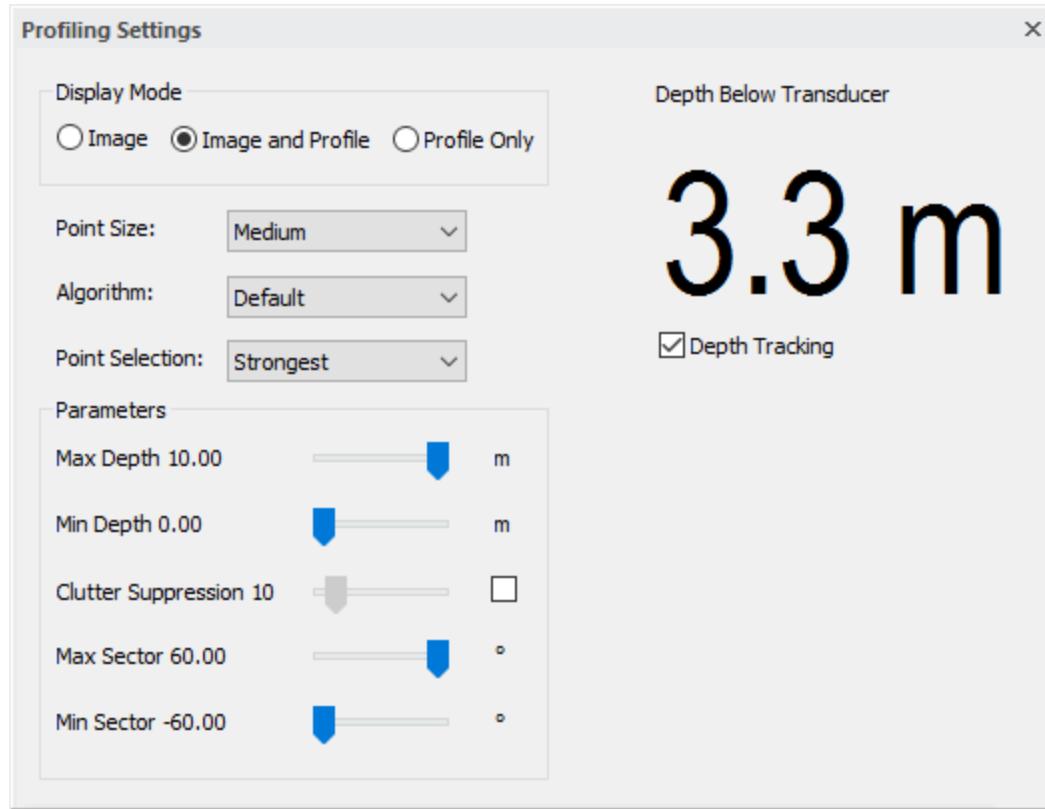

Description

In the **Profiling Settings** dialog box, you can choose to display only the sonar view, only the 3D Point Cloud, or both. The profile point data can be exported to a file so that third-party software can extract depth, distance, and volume measurements.

Details

Display Mode

- **Image**

Select if you want to update the sonar view only.

- **Image and Profile**

Select if you want to update both the sonar view and the 3D Point Cloud.

- **Profile Only**

Select if you want to display only the profile points in the sonar view and 3D Point Cloud.

Point Size

Select the size of the displayed profile points.

Algorithm

Select the profiling algorithm. The default setting is optimal for most conditions.

The *Split Beam* algorithm will improve point detection with sub-degree accuracy at a low grazing angle (but with the compromise of a lower ping rate).

Select the *Structure* algorithm for high-resolution structure inspections at short or medium ranges. For structure inspections, your sonar is usually orientated upward or looking sideways – this algorithm takes this orientation into account and adjusts the profiling points accordingly.

Point Selection

Select which profile points to display. You can choose to display only the points closest to the sonar transducer origin, or only the points with the strongest signal returns.

Parameters

- **Max Depth**

Drag the slider to set the upper depth limit of the profile points. No profile points will be detected above this depth.

A red line overlay will appear in the sonar view to indicate the max depth (view the result in the **3D Point Cloud** window).

- **Min Depth**

Drag the slider to set the lower depth limit of the profile points. No profile points will be detected below this depth.

A green line overlay will appear in the sonar view to indicate the min depth (view the result in the **3D Point Cloud** window).

- **Clutter Suppression**

This feature removes the number of detected noise profile points. If the box is unchecked, the system will automatically adjust the clutter suppression. You can choose your own clutter suppression percentage by checking the box and dragging the slider. Setting the suppression to zero will disable this feature. Setting the suppression to 100 will suppress all noise detections.

- **Max Sector**

Drag the slider to set the upper angle limit of the profile points. No profile points will be detected above this angle.

- **Min Sector**

Drag the slider to set the lower angle limit of the profile points. No profile points will be detected below this angle.

Depth Tracking

Check this box to automatically adjust the range according to the current depth when the head is running. This feature is only available if *Image and Profile* or *Profile Only* is selected for the **Display Mode**.

Note _____

When the head is running, the estimated depth below the Sonar Head is shown in real time. During playback, the recorded depth is shown.

Related topics

[3D Point Cloud, page 83](#)

Setup menu

You can connect to the Sonar Head using the **Setup** menu. You can also configure the system, choose your preferences, set up the coordinate system, upgrade the Sonar Head firmware, or change the Sonar Head IP Address.

How to open

To open this menu, click the menu title.


Description

- **Connect**

Click **Connect** to connect to the Sonar Head and start “pinging”.

Note _____

When the Sonar Head is running, this menu command will change to Disconnect.

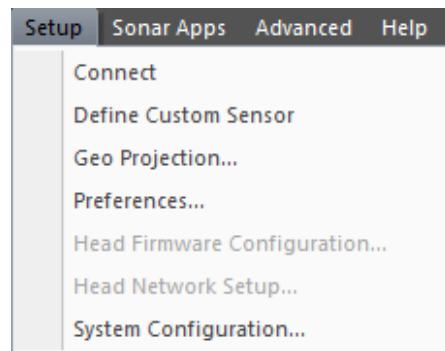

- **Define Custom Sensor**

Click to open the **Define Custom Sensor** dialog box. If the sensor protocol you want to use is not available on the **Sensors Setup** page, you can create a custom sensor format in the **Define Custom Sensor** dialog box.

- **Geo Projection**

Click to open the **Geo Projection** dialog box. You can configure the coordinate system using the **Geo Projection** dialog box.

- **Preferences**

Click to open the **Preferences** dialog box. The **Preferences** dialog box is used to set up system preferences such as units of measure, time format, etc.

- **Head Network Setup**

Click to open the **Head Network Setup** dialog box. The **Head Network Setup** dialog box allows you to change the Sonar Head network parameters, such as the IP address. This dialog box is only available when the Sonar Head is connected and paused.

- **Head Firmware Configuration**

Click to open the **Head Firmware Configuration** dialog box. The **Head Firmware Configuration** dialog box allows you to upgrade the Sonar Head firmware. This dialog box is only available when the Sonar Head is connected and paused.

- **System Configuration**

Click to open the **System Configuration** dialog box. This dialog box allows you to set up the Sonar Head, external sensors (such as a GPS or Motion Reference Unit), and rotators. In addition, you can configure the deployment of the M3 Sonar and enter mounting offsets.

Topics


- [Define Custom Sensor dialog box, page 121](#)
- [Geo Projection dialog box, page 124](#)
- [Preferences dialog box, page 126](#)
- [Head Network Setup dialog box, page 130](#)
- [Head Firmware Configuration dialog box, page 133](#)
- [System Configuration dialog box - Sonar Setup page, page 134](#)
- [System Configuration dialog box - Sensors Setup page, page 138](#)
- [System Configuration dialog box - Rotators Setup page, page 141](#)
- [System Configuration dialog box - Master Reference page, page 148](#)
- [System Configuration dialog box - Mounting Offsets page, page 151](#)

Define Custom Sensor dialog box

If the sensor protocol you want to use is not available on the **Sensors Setup** page, you can create a custom sensor format in the **Define Custom Sensor** dialog box.

How to open

This dialog box is opened from the **Setup** menu.

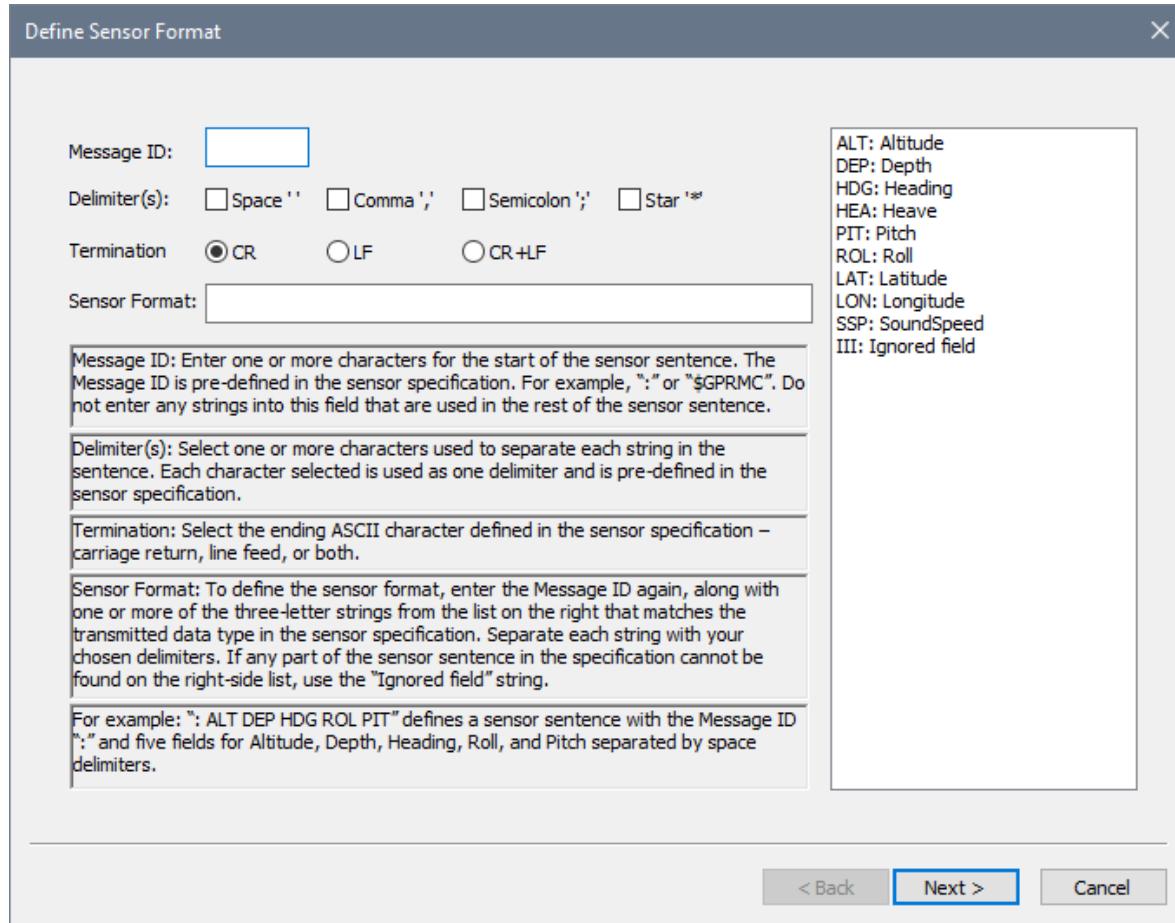

Description

Many third-party sensors or ROV systems export sensor strings through a UDP or serial connection. These sensor strings include various data types such as position, heading, depth, pressure, altitude, pitch, roll, and water temperature. The third-party sensor string may not conform to the universal NMEA standard and will change depending on the sensor or ROV manufacturer.

You will find many supported sensor formats in the **Protocol** drop-down list found on the **Sensors Setup** page in the **System Configuration** dialog box. However, if a particular third-party sensor format is not listed there, you can create it (using the third-party sensor specification as your guide).

Note

*After you are done creating the custom sensor format, it will appear in the **Protocol** drop-down list on the **Sensors Setup** page.*

The sensor string is comprised of a sentence with defined parts: Message ID + Sensor Format and Delimiters + Termination.

Details

Message ID

The start (prefix) of the sensor sentence. Refer to the manufacturer's sensor specification to determine what to use. For example, ":" or "\$GPRMC".

Delimiter(s)

The character used to separate each string in the sentence. You can select more than one if necessary - each character will be treated as one delimiter. Refer to the manufacturer's sensor specification to determine what to use.

Termination

The ASCII character that tells the software where the sensor string ends. Options include a carriage return (CR), line feed (LF), or both. Refer to the manufacturer's sensor specification to determine what to use.

Sensor Format

Define the entire sensor string in this field.

Enter the Message ID, followed by the chosen delimiter. Enter in one or more of the three-letter definition strings from the list on the right side of the dialog box. Match each three-letter string with the data type in the sensor specification. For example, enter "ALT" for the part of the sensor sentence corresponding to Altitude, and so on. Separate each string with the chosen delimiters. If you can't find any part of the sensor sentence on the right-side list, then enter the "Ignored field" string (III). This will tell the software to skip over this part of the sensor sentence when parsing the string.

For example: ":" ALT DEP HDG ROL PIT defines a sensor sentence with the Message ID ":" and five fields for Altitude, Depth, Heading, Roll, and Pitch separated by space delimiters.

Data Type

If the data type in the sensor sentence is an integer (for example, 1002), then select *Whole number*. If the data type in the sensor sentence is a float (for example, 10.02), then select *Decimal number*. Refer to the manufacturer's sensor specification to determine what to use.

Latitude / Longitude Format

Choose whether to display the latitude/longitude format in degrees, degrees and minutes, or degrees, minutes, and seconds.

Unit Scale Factor

The dialog box will tell you what unit scale the software expects (meters, degrees, meters per second, and so on). If the data type in the specification does not match the required unit scale, you must enter an appropriate scaling factor. For example, if the Depth data type is in feet, then you must enter 0.3048 to scale the depth value to meters.

Sensor Name

This name will appear in the **Protocol** drop-down list found on the **Sensors Setup** page in the **System Configuration** dialog box.

Related topics


[Defining a custom sensor, page 45](#)

Geo Projection dialog box

You can configure the coordinate system using the **Geo Projection** dialog box.

How to open

This dialog box is opened from the **Setup** menu.

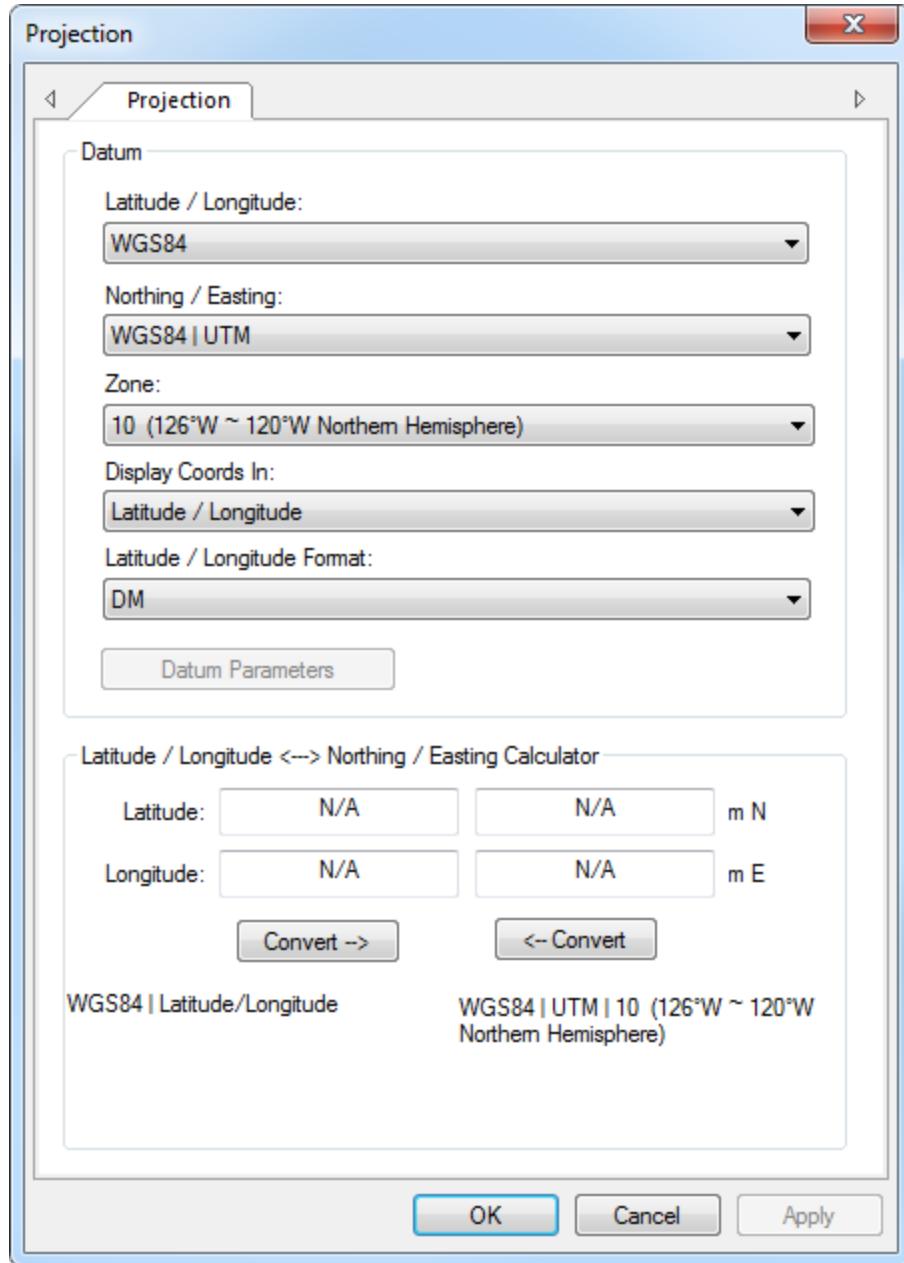

Description

This dialog box allows you to convert the latitude and longitude data from your GPS into a coordinate system of your choice. For example, you may wish to match the coordinate system used in your survey maps. You can display location data as Easting and Northing coordinates measured from a horizontal datum. You can also set the zone so that accurate location data is embedded in any GeoTiff files that you create.

Details

Datum

- **Latitude / Longitude**
Select a datum for latitude and longitude coordinates (geographic system).
- **Northing / Easting**
Select a datum for a Northing/Easting projection (projected coordinate system).
- **Zone**
Select a zone for a Northing/Easting projection.
- **Display Coords In**
Choose which coordinate format you want to use in the sonar view when displaying location information.
- **Latitude / Longitude Format**
Choose whether to display the latitude/longitude format in degrees, degrees and minutes, or degrees, minutes, and seconds.
- **Datum Parameters**
The **Datum Parameters** button will become available when selecting the *BEIJING_1954* datum. Clicking the **Datum Parameters** button will open a dialog box with a number of fields specific to this datum.

Calculator


You can use the calculator as a tool to convert your location from one coordinate system to another.

Preferences dialog box

The **Preferences** dialog box is used to set up system preferences such as units of measure, time format, etc. This dialog box also allows you to select the save location for screenshot images and recorded sonar data files.

How to open

This dialog box is opened from the **Setup** menu.

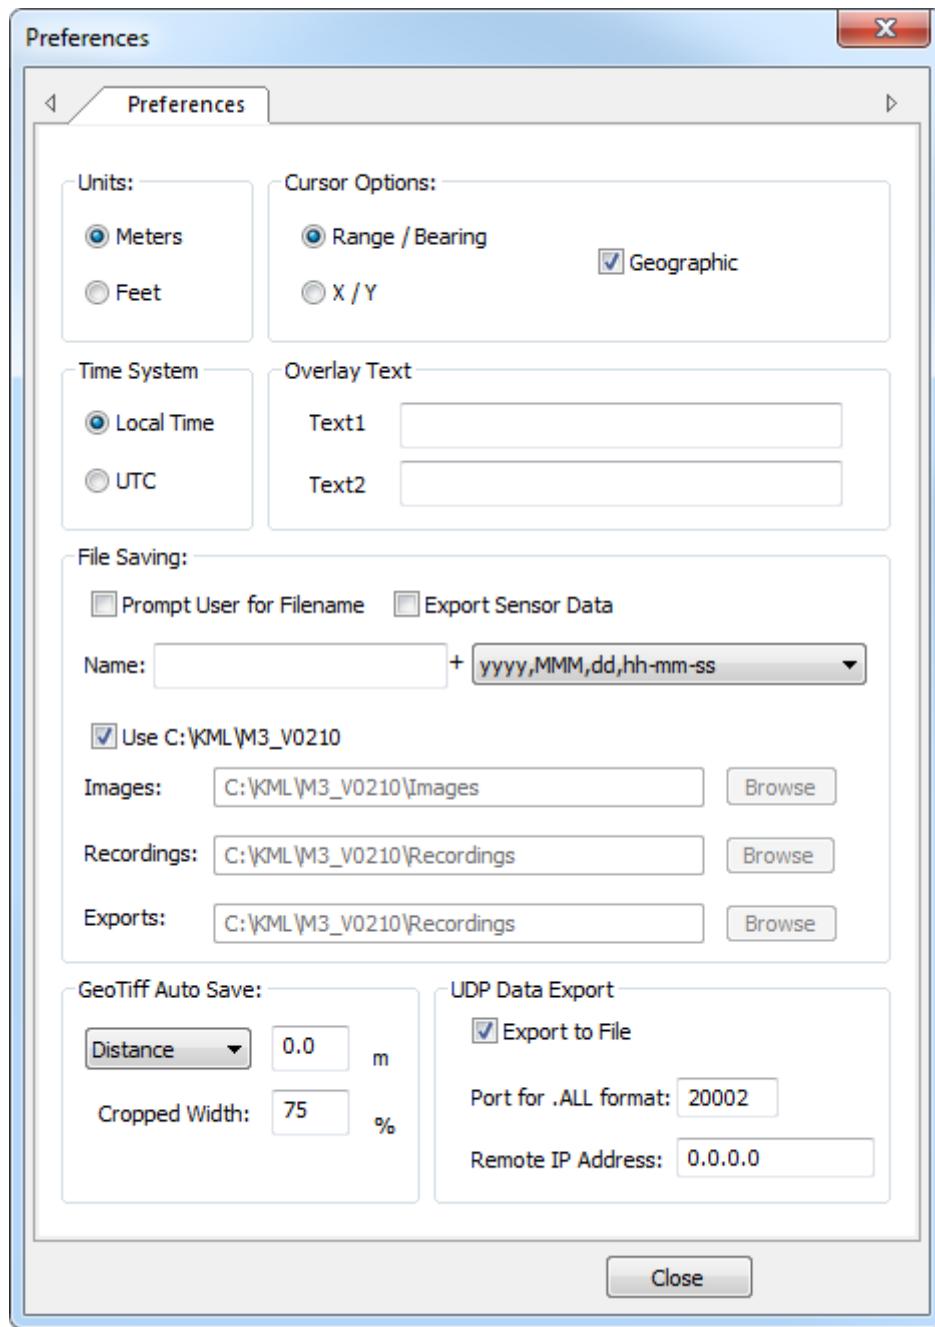

Description

The **Preferences** dialog box allows you to customize the software. In addition, you can configure features such as GeoTiff Auto Save and UDP Data Export. You can also configure unique filenames and save locations.

Details

Units

- **Meters**

Select to display all units of measurement in meters.

- **Feet**

Select to display all units of measurement in feet.

Cursor Options

- **Range / Bearing**

Select to show the range and bearing of the current mouse position at the bottom of the sonar view.

- **X / Y**

Select to show the X and Y coordinates of the current mouse position at the bottom of the sonar view.

- **Geographic**

Check this box if you want to display the coordinates of the mouse position at the bottom of the sonar view.

Tip _____

*You can configure the coordinate system using the **Geo Projection** dialog box.*

Time System

- **Local Time**

Select to use the current time at your location.

- **UTC Time**

Select to use Coordinated Universal Time (UTC).

Note _____

During the winter, Local Time equals standard time. During the summer, Local Time equals Daylight Saving Time (DST). Note that the offset between Local Time and UTC Time is not constant, but varies in locations where DST is used.

Overlay Text

Fill out the **Overlay Text** boxes if you wish to display information on your screenshots and data recordings.

File Saving

- **Prompt User for Filename**

Check this box to open a “Save As” dialog box when you record data or save an image.

- **Export Sensor Data**

Check this box to save timestamped sensor data to a text file (in CSV format). When this feature is enabled, a text file will be created every time the sonar runs or a recording is played back. The text file is saved in the **Recordings** folder shown in this dialog box. If you export a recording to video, then the text file will be saved in the **Target Folder** shown in the **Convert to Video Format** dialog box.

Tip _____

If you need to troubleshoot sensor data logging issues, you can compare the sensor data text file to the NAV file provided by a survey or ROV on-board the vessel.

- **Name**

Type any name into the text box. The chosen name will be used as prefix in all the data file names. The time/date stamp will be used as the filename if the name field is left blank.

- **Use C:\KML\M3_V0253**

Check this box to use the default location when saving files. Disable this setting if you want to choose alternative save locations. The **Browse** buttons will become available.

GeoTiff Auto Save

- **Distance / Time**

To automatically save a GeoTiff file every set number of meters, select Distance and enter a value. To automatically save a GeoTiff file every set number of seconds, select Time and enter a value.

Tip _____

Press F11 to enable or disable GeoTiff auto save. The status bar will display “GeoTiff” in green when auto save is enabled.

- **Cropped Width**

To save a cropped GeoTiff image for mosaicking purposes, enter the percentage to crop.

UDP Data Export

- **Export to File**

Check this box to save export data to a file on the local hard drive.

- **Port for .ALL format**

Enter the UDP port for exporting .ALL data. You need to configure this port if you are interfacing with third-party software.

- **Remote IP Address**

Enter the IP Address of the computer you wish to export the profile data to.

- To disable data export, enter *0.0.0.0*.
- To broadcast, enter *255.255.255.255*.
- To use the local computer, enter *127.0.0.1* (for example, if your third-party software is installed on the same computer as the M3 software).

Related topics

[Configuring your preferences, page 34](#)

Head Network Setup dialog box


The **Head Network Setup** dialog box allows you to change the Sonar Head network parameters, such as the IP address.

How to open

This dialog box is opened from the **Setup** menu.

Note

*This dialog box is only available when the Sonar Head is connected and paused. To pause the Sonar Head, click **Setup**→**Connect**, then open the Menu Widget in the top-right corner of the sonar view. Click **Pause**.*

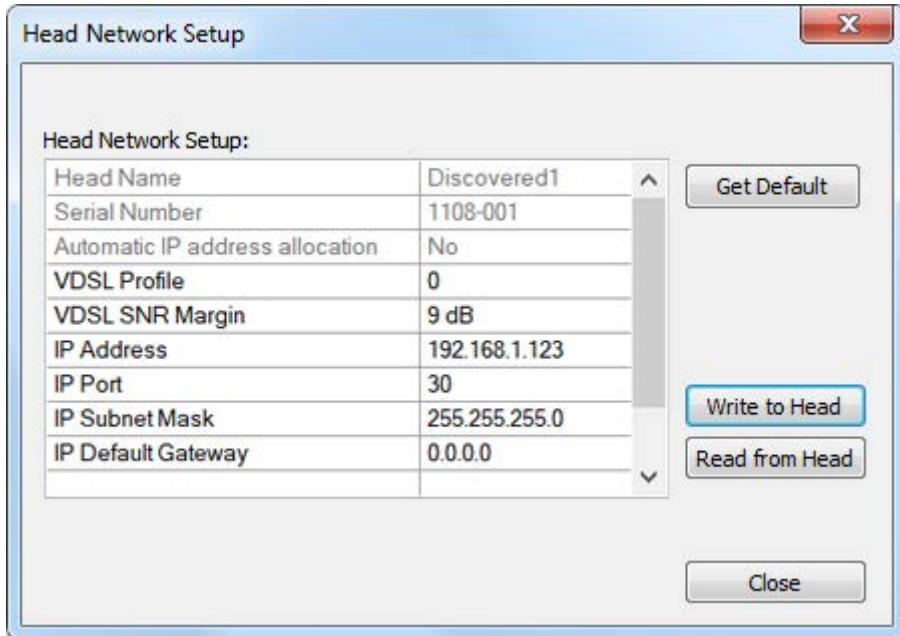

Description

You can program the IP address and the IP port of the Sonar Head for various network environments. The factory default IP address is 192.168.1.234, and the default port number is 30.

To change the Sonar Head IP address, click **Read from Head** to get the information from the Sonar Head. Edit the fields, then click **Write to Head**.

Details

Head Name

The name assigned to the Sonar Head. You cannot change this parameter — it is read only.

Serial Number

The unique serial number of the Sonar Head. You cannot change this parameter — it is read only.

Automatic IP address allocation

Determines whether the Sonar Head can be assigned an IP address from a DHCP Server. By default, the Sonar Head uses a static IP address. You cannot change this parameter — it is read only.

VDSL Profile

The VDSL2 standard defines various profiles that can optimize the data rate and link performance on cables of different quality and lengths. For longer cables, you may wish to use a profile with a lower bandwidth, such as profile 0 (8b) or 1 (12a).

The following profiles are available:

- **0 (8b)**: Suitable for long or low-quality cables, but has a slower data rate.
- **1 (12a)**: A good compromise for medium-length cables, or cables that are of marginal quality, and provides a medium-speed data rate.
- **2 (30a)**: Suitable for short cables. Provides a fast data rate.
- **3 (30a)**: Provides the fastest data rate but is only suitable for very short cables.

Note

The maximum achievable data rate depends on a number of factors, such as cable length, the number of junctions, and your slip ring installation. You can measure the link speed by performing the “Testing the Sonar Head telemetry” procedure.

VDSL SNR Margin

The VDSL Signal to Noise Ratio (SNR) Margin controls the amount of noise and tolerance in the cable. It is the difference between the actual SNR and the minimal SNR required to sync at a specific speed. For longer cables, use 6 dB instead of 9 dB.

IP Address, Port, Subnet Mask, and Default Gateway

These network parameters are used to identify and locate the Sonar Head on the local network. If you need to set up a unique network environment, you can change the IP Address, Port, Subnet Mask, and Default Gateway of the Sonar Head using the **Head Network Setup** dialog box.

Note

Your Sonar Processor must be on the same network as the Sonar Head.

Get Default

Click this button to populate the fields with the default network settings for the Sonar Head.

Write to Head

Click this button to re-program the Sonar Head with the parameters that you have entered.

Read from Head

Click this button to populate the fields with the current parameter values.

Related topics

[Changing the Sonar Head IP Address, page 73](#)
[Testing the Sonar Head telemetry, page 26](#)

Head Firmware Configuration dialog box


The **Head Firmware Configuration** dialog box allows you to upgrade the Sonar Head firmware.

How to open

This dialog box is opened from the **Setup** menu.

Note

*This dialog box is only available when the Sonar Head is connected and paused. To pause the Sonar Head, click **Setup**→**Connect**, then open the Menu Widget in the top-right corner of the sonar view. Click **Pause**.*

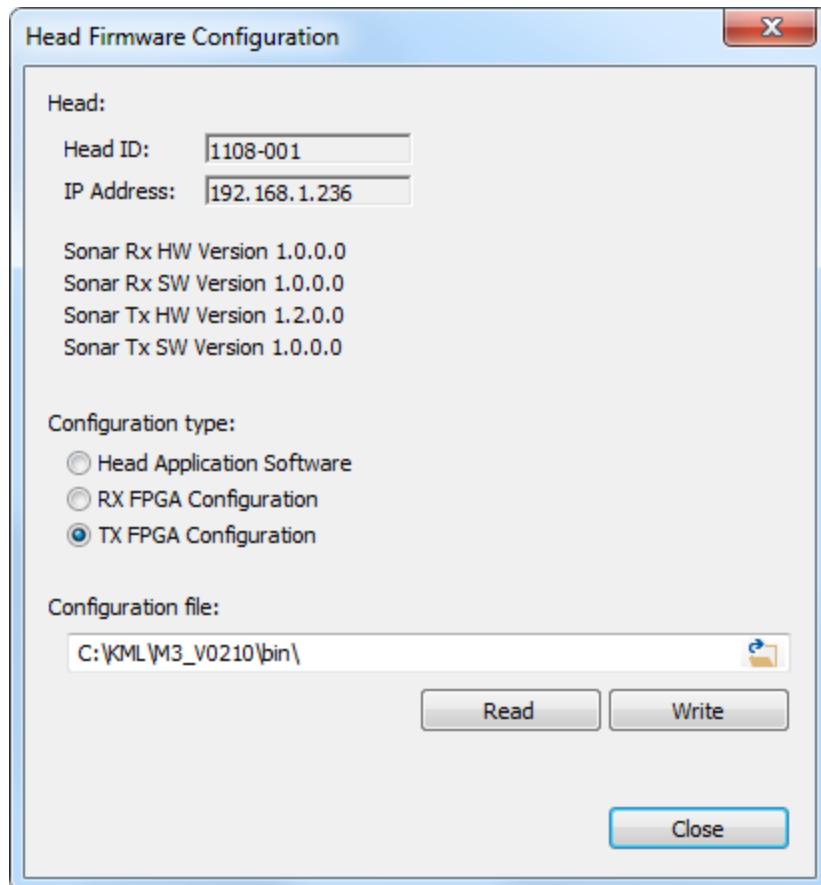

Description

In addition to head application software, the Sonar Head has receive firmware (RX FPGA) and transmit firmware (TX FPGA). You can upgrade these by selecting the configuration type, browsing for the file, then clicking the **Write** button.

Note

The receive hardware (RX HW) and software (RX SW) must both be on the same version. You can view the current version numbers in this dialog box.

Details

Head

The **Head** table shows you the serial number and IP Address of the Sonar Head.

Configuration type

Select the type of software or firmware that you are upgrading.

Configuration file

Click the folder icon to browse for the latest software or firmware file on your local drive.

Read

Enter a filename in the **Configuration file** box, then click **Read** to save the firmware or software to a file. You can create a backup of your current software or firmware with this feature.

Write

Click this button to start the upgrade process. You will be prompted to confirm the upgrade.

Related topics

[Upgrading the Sonar Head, page 71](#)

System Configuration dialog box - Sonar Setup page

You can discover and connect to the Sonar Head on the **Sonar Setup** page. You can also view the Sonar Head network properties and adjust the network link speed.


How to open

This dialog box is opened from the **Setup** menu.

Select the **Devices**→**Sonar Setup** tab.

Note _____

This page is not available while the Sonar Head is running.

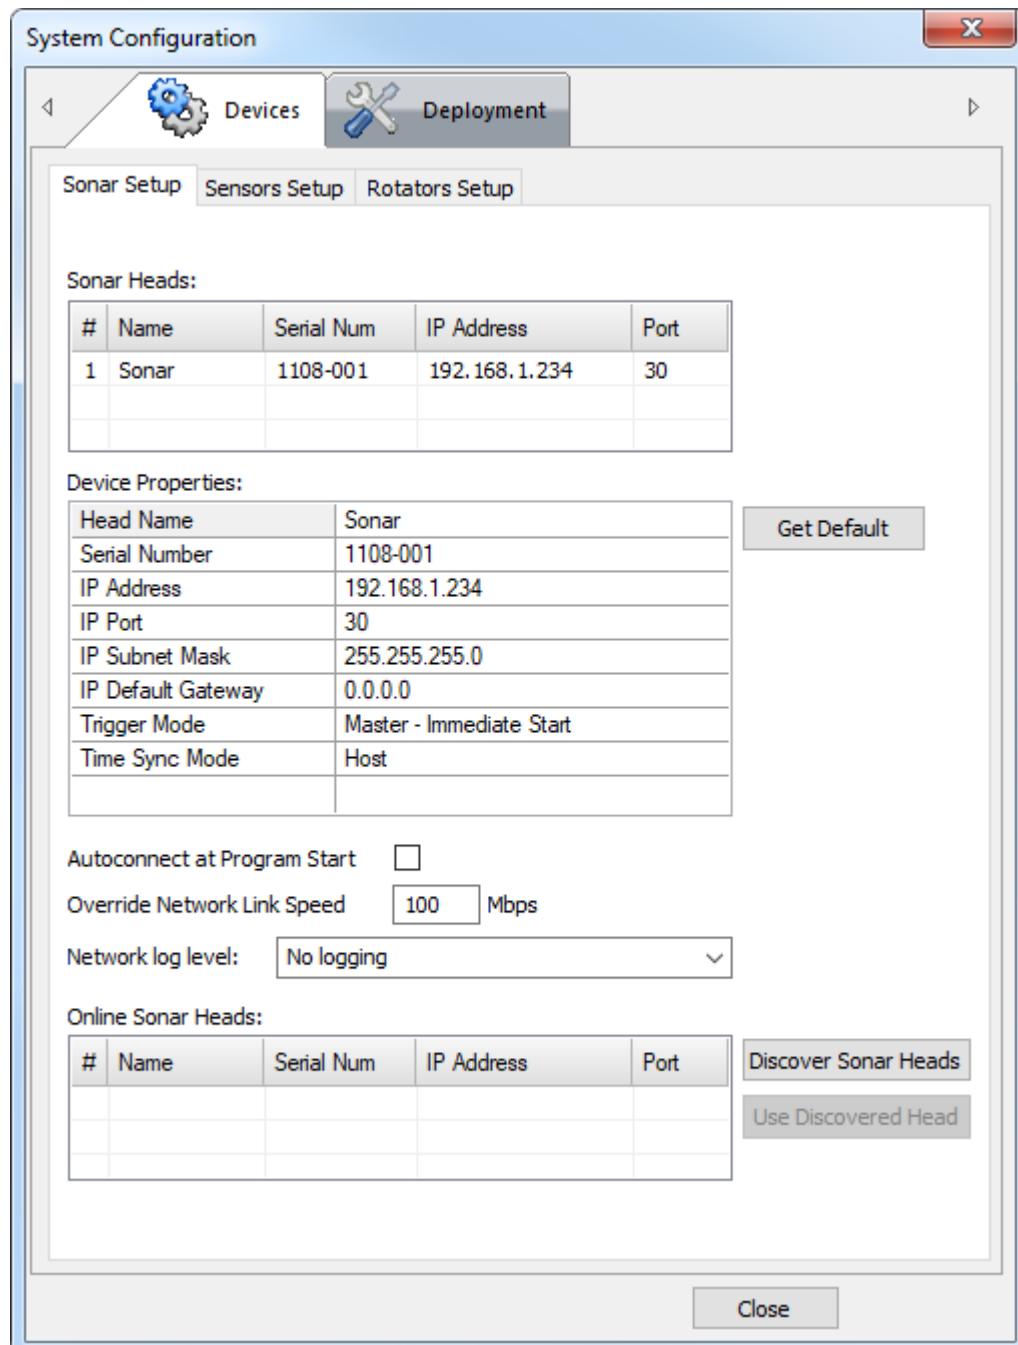

Description

This dialog box allows you to connect to the Sonar Head. You can connect manually or automatically each time you start the software. This dialog box also provides diagnostic network tools.

Details

Device Properties

Tip _____

*You do not have to enter in the Device Properties manually. Clicking **Discover Sonar Heads**, then **Use Discovered Head** will automatically populate the Device Properties fields.*

- **Head Name**

You can enter any name to identify the Sonar Head.

- **Serial Number**

The unique serial number of the Sonar Head.

- **IP Address, Port, Subnet Mask, and Default Gateway**

These network parameters are used to identify and locate the Sonar Head on the local network. Your Sonar Processor must be on the same network as the Sonar Head.

Tip _____

*If you need to set up a unique network environment, you can change the IP Address, Port, Subnet Mask, and Default Gateway of the Sonar Head using the **Head Network Setup** dialog box.*

- **Trigger Mode**

If applicable, set the **Trigger mode** to synchronize the Sonar Head with another acoustic device (such as a second M3 Sonar Head or a sub-bottom profiler). Set the trigger mode to *Master* to send out a sync pulse so that the other acoustic device can be triggered. Set the trigger mode to *Slave* to be triggered by the sync pulse from the other device. For the M3 Sonar, the default is set to *Master*.

- **Time Sync Mode**

Time synchronization is critical for Bathymetry applications. By default, the M3 software uses the computer's time to set the Sonar Head clock (*Host mode*). Your computer can keep accurate time by using a GPS or network time server as the master time source. When connecting to the Sonar Head, it takes two minutes to synchronize the time to within five milliseconds. The M3 software will then continuously keep the Sonar Head clock in sync for the duration of the session. The status bar shows the time synchronization status.

If you have an M3 Sonar Head with a 1PPS connector, you can synchronize the Sonar Head clock with an external 1PPS source.

Get Default

Click this button to use the default network settings to connect to a Sonar Head.

Autoconnect at program start

Check this box to connect to the Sonar Head automatically the next time the software starts.

Override Network Link Speed

If telemetry quality is poor, you can limit the network link speed. Be default, the network link speed is limited to 100 Mbps. There are no standard sonar applications with a telemetry-link speed requirement higher than 100 Mbps.

Note _____

Overriding the network link speed will provide a more stable link connection, but a slower ping rate.

Network log level

This setting outputs network-related diagnostic messages to the **Output Messages** window and a “.log” file (found in the LOGS directory) for troubleshooting purposes. You can select the amount of detail provided, ranging from none (No logging) to high (Detailed info). When logging is enabled, ping loss, packet loss and the last ping data rate will be displayed on the status bar.

Discover Sonar Heads

Click **Discover Sonar Heads** to search for the sonar on the network.

Use Discovered Head

Click **Use Discovered Head** to connect to the discovered head.

Related topics

[Starting operation of the Sonar Head, page 33](#)
[Testing operation of the Sonar Head, page 23](#)

System Configuration dialog box - Sensors Setup page

The **Sensors Setup** page allows you to configure external sensors (such as a GPS to provide navigation information).


How to open

This dialog box is opened from the **Setup** menu.

Select the **Devices**→**Sensors Setup** tab.

Note

This page is not available while the Sonar Head is running.

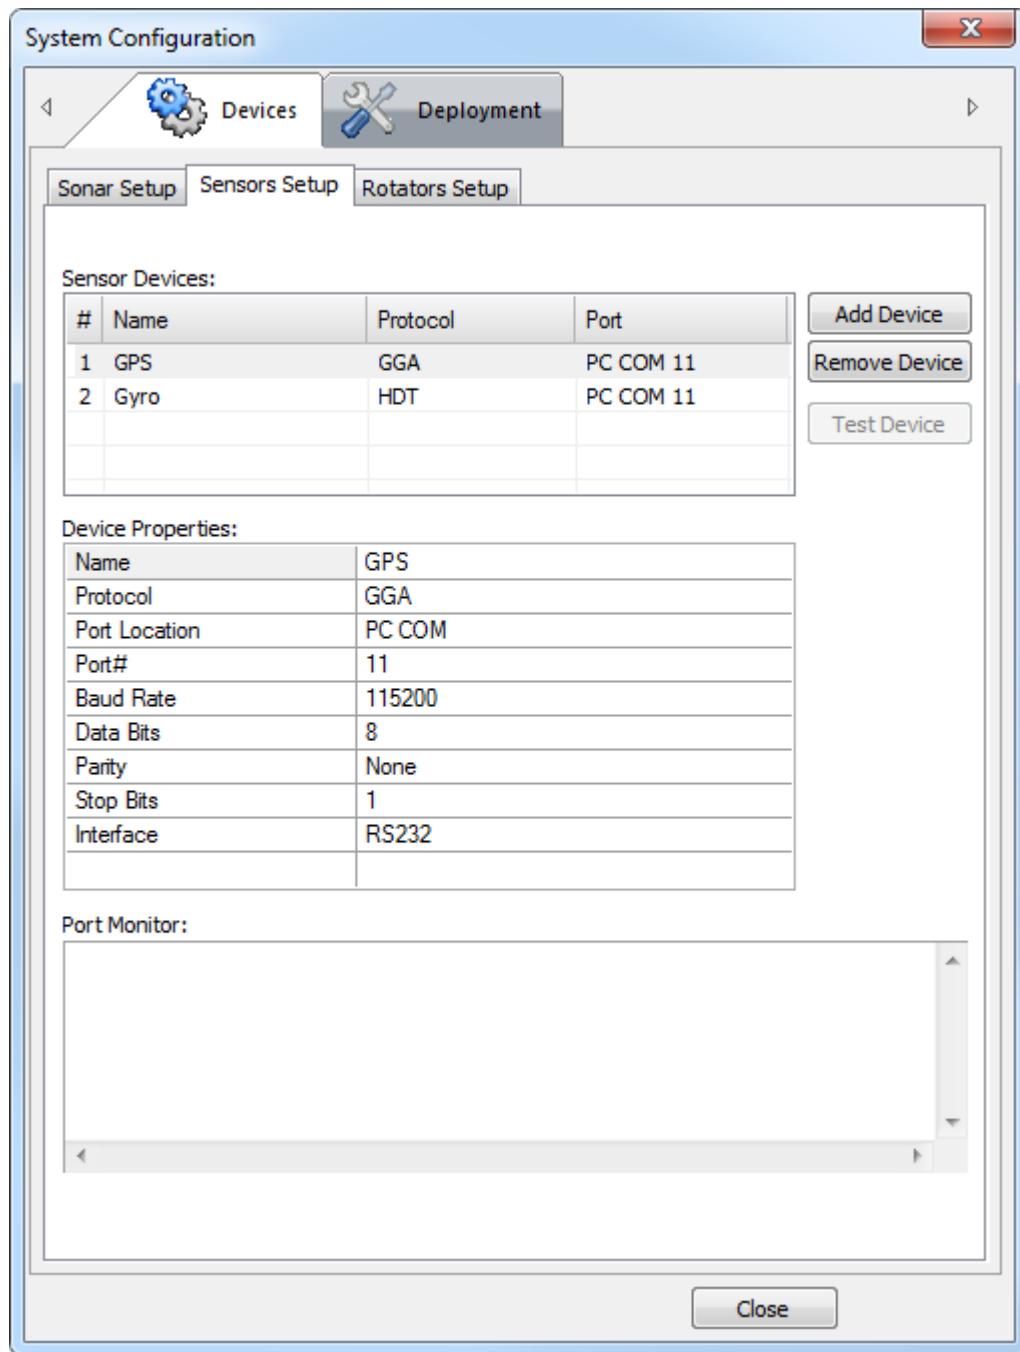

Description

If you have external sensors that provide speed, heading, or latitude/longitude coordinates, then this dialog box allows you to set them up. Readings from these sensors will appear in the **Information Widget** located in the sonar view.

Details

Add Device

Click this button to add a sensor for data import.

Remove Device

Click this button to remove the selected sensor from the **Sensor Devices** list.

Test Device

Click this button to start a sensor test. The sensor data will be displayed in the **Port Monitor** box.

Device Properties

- **Name**

Enter any name into this field to label the device.

- **Protocol**

This drop-down lists all supported datagram formats.

- **Port Location**

The location of the port receiving external sensor data – can be a COM port, a UDP Ethernet port, or a port on the Sonar Head.

- **Port#**

This drop-down lists the available port numbers. Select the port where the device is connected.

- **Baud Rate**

Specify the baud rate (“speed”) for the serial communication. The standard baud rate defined for NMEA communication is **4800**.

- **Data Bits**

Select the number of data bits for the serial communication.

Note

The standard number of data bits defined for NMEA serial line communication is 8 (eight).

- **Parity**

Specify the parity for the serial communication.

Note _____

If required, a parity bit is used in a simple error detection algorithm for a serial port. Standard parity defined for NMEA serial line communication is "None".

- **Stop Bits**

This parameter is used to indicate the end of the transmission. It is usually set to 1.

- **Interface**

This drop-down lists possible serial communication methods.

Related topics

[System Configuration dialog box - Master Reference page, page 148](#)

System Configuration dialog box - Rotators Setup page

Rotators are required if you wish to pan or tilt the M3 Sonar during operation. Use the **Rotators Setup** page to set up and test your rotators.


How to open

This dialog box is opened from the **Setup** menu.

Select the **Devices**→**Rotators Setup** tab.

Note _____

This page is not available while the Sonar Head is running.

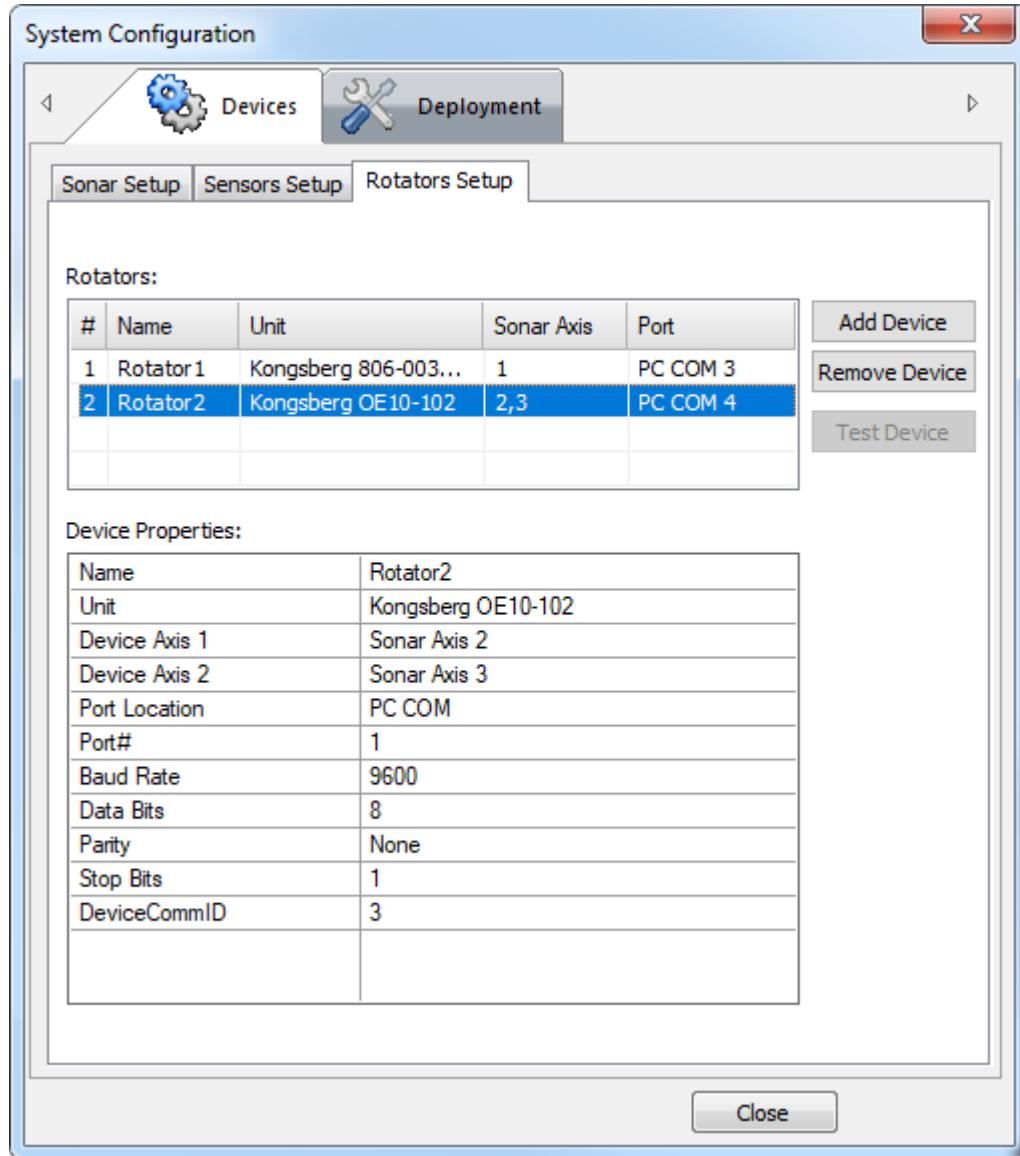

Description

The M3 software supports the following rotators.

- Kongsberg OE 10-102: Dual-Axes Pan and Tilt unit
- Kongsberg OE10-103: Single-Axis Pan unit
- Kongsberg Mesotech 806-00360000 (SS350): Single-Axis high-precision Pan unit

You must connect your rotator to a PC COM port.

Details

Add Device

Click this button to add a rotator.

Remove Device

Click this button to remove the selected rotator from the **Rotators** list.

Test Device

Click this button to open the **Rotator Test** dialog box.

Device Properties

- **Name**

Enter any name into this field to label the device.

- **Unit**

Select the rotator model you have from the list.

- **Device Axis**

Select one sonar axis if you are using a single-axis unit, or select two sonar axes for a dual-axes unit.

There are three possible sonar axes. To view the orientation of each axis, click **System Configuration**→**Deployment**→**Mounting Offsets** and select each axis in the **Rotators** section. Observe the animation to see the rotation of each axis.

- **Port Location**

Select which port the rotator is connected to — can either be a COM port or a Sonar port.

- **Port#**

This drop-down lists the available port numbers. Select the port where the device is connected.

- **Baud Rate**

Specify the baud rate (“speed”) for the serial communication.

- **Data Bits**

Select the number of data bits for the serial communication.

- **Parity**

Specify the parity for the serial communication.

Note

If required, a parity bit is used in a simple error detection algorithm for a serial port.

- **Stop Bits**

This parameter is used to indicate the end of the transmission. It is usually set to 1.

- **DeviceCommID**

The rotator manufacturer assigns this network identifier for communication between the rotator and the software. The default for newer rotator models is “3”. The default for older rotator models is “2”. If you are experiencing communication problems with your rotator, make sure that you have selected the correct ID for your model.

Related topics

[System Configuration dialog box - Mounting Offsets page, page 151](#)
[Controlling the rotator, page 48](#)

Rotator Test dialog box

Test your rotators in this dialog box by making sure you can connect to the rotator and send commands to it.

How to open

This dialog box is opened from the **Rotators Setup** page in the **System Configuration** dialog box.

Click the **Test Device** button to open this dialog box.


Description

Use this dialog box to test the rotator rotation speed, rotator movement, and pan and tilt operation (for dual-axes rotators). If you are using a single-axis rotator, you can choose the type of rotator control dialog box you will see when running the sonar (*3D Scan* or *Pan/Tilt Control*).


If you have selected a single-axis rotator, then the following dialog box is used.

Note

This dialog box shows the options for the Kongsberg OE10-103. The Kongsberg Mesotech 806-00360000 (SS350) is similar, except a **Calibrate** button appears. You must click this button to correctly align the rotator after powering down and powering up (this rotator does not keep absolute zero indexing). In addition, there is no option to set up soft stops (this rotator has fixed hard and soft stops).

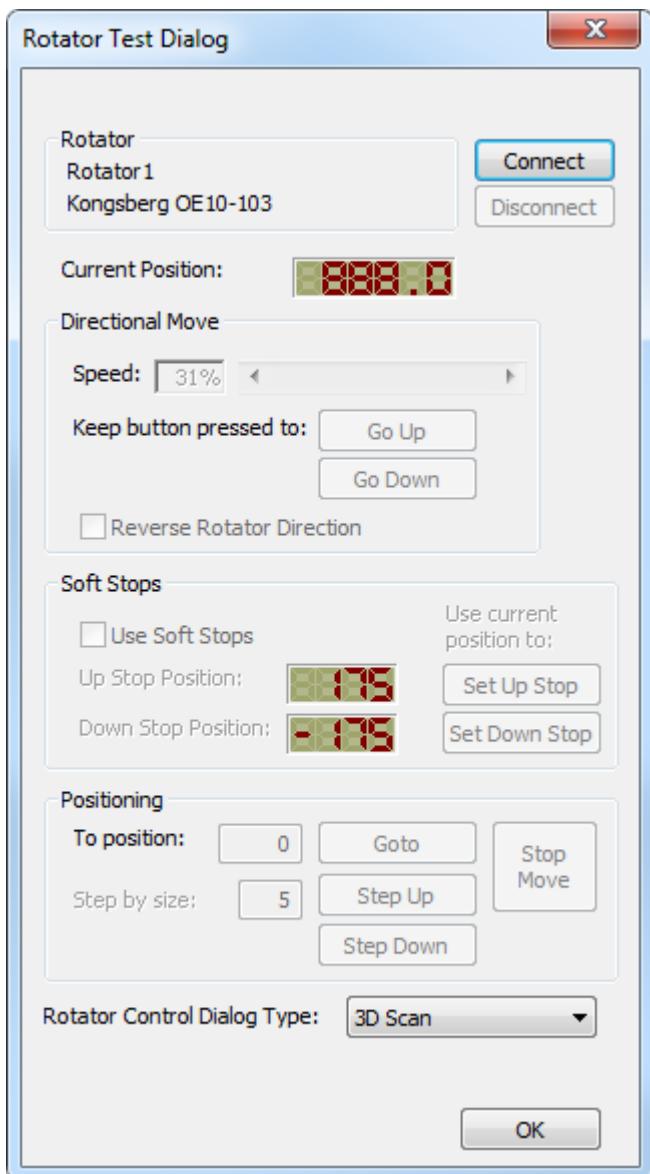

If you have selected a dual-axes rotator, then the following dialog box is used.

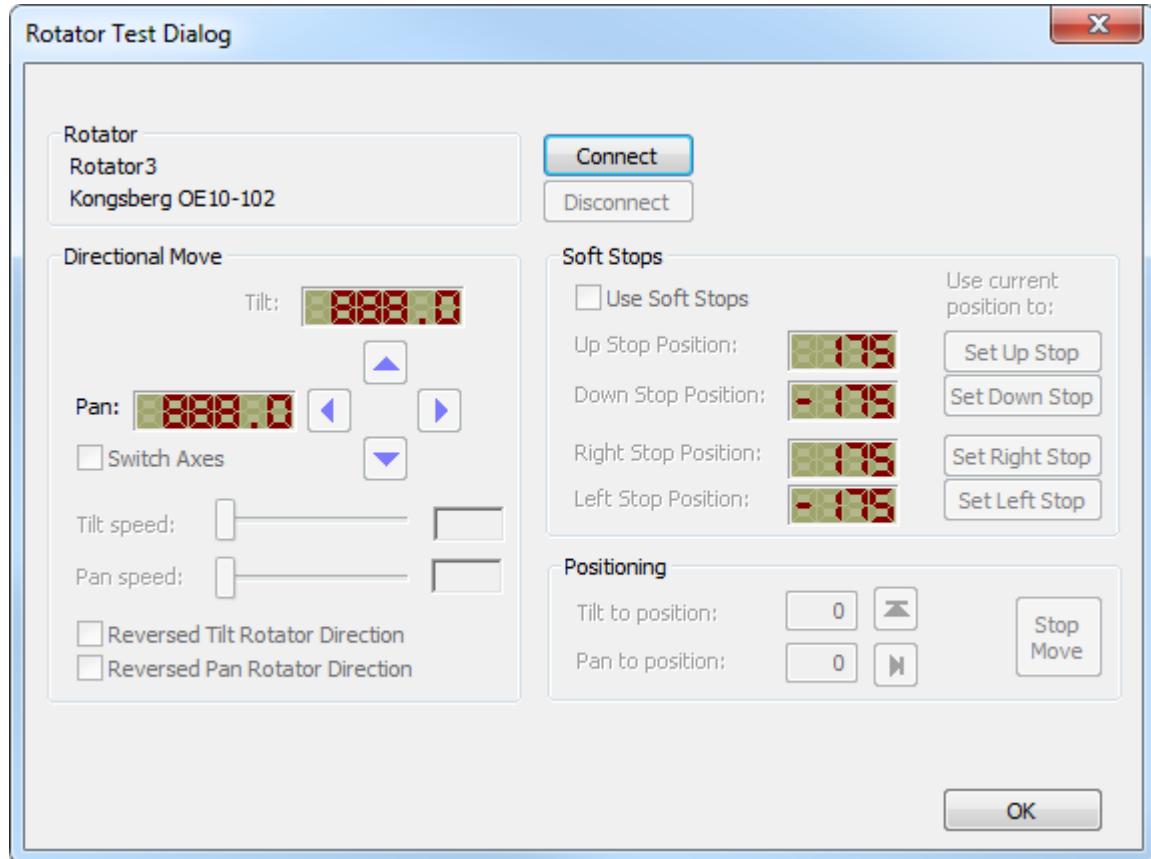

Details

Connect

Click this button to connect to the rotator.

Disconnect

Click this button to disconnect from the rotator.

Current Position

Shows the current rotator position in degrees.

A **Calibrate** button will appear here if you are using the Kongsberg Mesotech 806-00360000 (SS350) rotator. Click this button to reset the zero index after powering down then powering up.

Directional Move

For single-axis rotators, use the **Speed** control to set the rotator rotation speed. Click and hold the **Go Up** button to move the rotator up. Click and hold the **Go Down** button to move the rotator down. Check the **Reverse Rotator Direction** box if your rotator has been installed in a reversed position.

If you have a dual-axes rotator, you will be presented with arrow icons. Click the up and down arrow icons to tilt up or down. Click the left and right arrows to pan left or right. Check the **Switch Axes** box to invert the controls so that the up/down arrows are used to pan and the left/right arrows are used to tilt. You can adjust the tilt and pan speeds by dragging the sliders. Check the **Reversed Tilt Rotator Direction** box if your rotator is installed with the tilt axis reversed. Check the **Reversed Pan Rotator Direction** box if your rotator is installed with the pan axis reversed.

Soft Stops

Check the **Use Soft Stops** box to use a software function to set the rotator stops, so that the rotator will not rotate beyond the stops during operation. To avoid hitting objects or twisting cables when rotating, hard stops (pins) are usually bolted onto the rotator mount to stop rotation at predefined positions. However, soft stops allow you to program the rotator stops in the M3 software to mitigate mechanical wear and avoid shearing the hard stops.

To set the soft stops, uncheck the **Use Soft Stops** box. Set up the soft stops by moving the rotator until it reaches the limit where the attached devices or cables still have clearance.

- Click the **Go Up** button/up arrow to move the rotator up to the desired position, then click the **Set Up Stop** button.
- Click the **Go Down** button/down arrow to move the rotator down to the desired position, then click the **Set Down Stop** button.
- Click the right arrow (dual-axes only) to move the rotator right to the desired position, then click the **Set Right Stop** button.
- Click the left arrow (dual-axes only) to move the rotator left to the desired position, then click the **Set Left Stop** button.

Re-check the **Use Soft Stops** box when you are done.

Positioning

You can use the positioning function to move the rotator to a specific position (in degrees). Use this function for precise and quick positioning instead of clicking the **Go Up** or **Go Down** buttons. Enter a degree in the **To position** field, then click **Goto** (single-axis only). You can also rotate in degree increments by entering a degree into the **Step by size** field, then clicking **Step Up** or **Step Down** to rotate to the next/previous increment.

If you have a dual-axes rotator, you can enter a degree into the **Tilt to position** or **Pan to position** fields, then click the associated button to move the Sonar Head to that position on the tilt or pan axis.

Click the **Stop Move** button to cancel the rotation.

Rotator Control Dialog Type

Set the **Rotator Control Dialog Type** before you start operation of the sonar.

Select *3D Scan* if you have installed the Sonar Head to automatically scan a sector during operation, with the rotator sweeping the Sonar Head from one side of the sector to the other. Select *Pan/Tilt Control* if you wish to manually move the Sonar Head up, down, or sideways during operation.


System Configuration dialog box - Master Reference page

On the **Master Reference** page, you can assign any external sensors you have set up as the primary source for various types of navigational data.

How to open

This dialog box is opened from the **Setup** menu.

Select the **Deployment**→**Master Reference** tab.

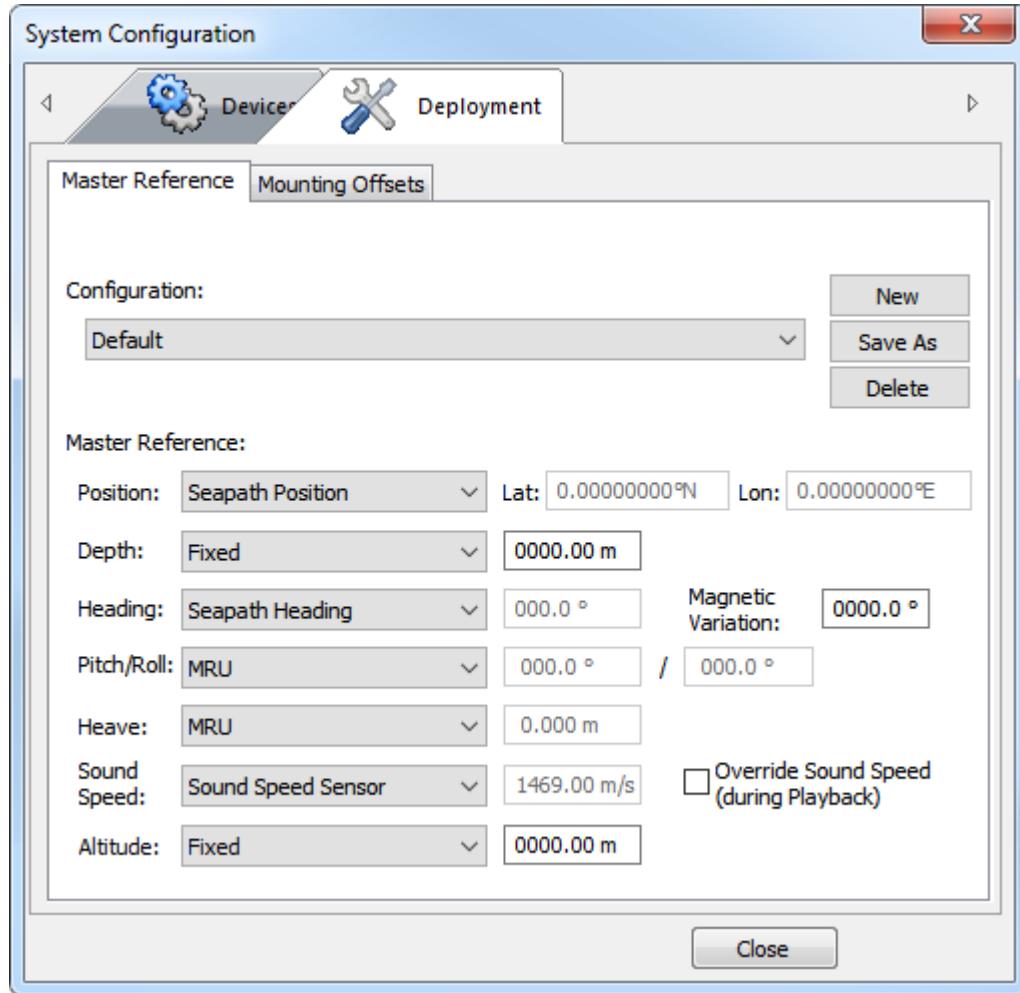

Description

When using the M3 Sonar for imaging, set up sensors for **Position** and **Heading** if you want to create GeoTiff files or create a real-time mosaic.

When using the M3 Sonar for Bathymetry or Profiling, set up sensors for **Position**, **Heading**, **Pitch/Roll**, and **Heave** as a minimum.

If no sensor input is required for a particular reference, you may leave the value set to *Fixed*. For example, if the Sonar Head is mounted on a tripod with a known position, heading, and pitch/roll, these references will have fixed values. Also, sensor input may not be required for the M3 software if the sensors have been set up in third-party software. When setting a value to *Fixed*, you can enter the fixed value into the adjacent text box.

Details

Configuration

Select the desired configuration from the drop-down list. Click **New** to create a new configuration based on the default settings. Click **Save As** to save the current configuration or **Delete** to delete the current configuration.

Master Reference

- **Position**

A location derived from measuring external reference points.

- **Depth**

The vertical distance downwards from the water surface.

- **Heading**

The direction in which a vessel is pointing, as opposed to the course made good.

- **Magnetic Variation**

If you are using a magnetic heading sensor, enter the local magnetic variation into the **Magnetic Variation** box to get true heading. This parameter can be changed while the Sonar Head is running.

- **Pitch/Roll**

Pitch is the up/down rotation of a vessel about its lateral axis. Roll is the tilting rotation of a vessel about its longitudinal axis.

- **Heave**

Heave is the linear vertical (up/down) motion of the vessel.

- **Sound Speed**

A sound speed sensor is required to accurately measure in-water speed near the Sonar Head. This parameter can be changed while the Sonar Head is running.

Note _____

*Select **IntegratedSVS** only if you are using a Sonar Head with an integrated sound speed sensor.*

Check the **Override Sound Speed** box if you want to replace the sound speed value in your recording with a fixed value during playback. This may be necessary, for example, if your recorded sound speed is not accurate. You can override the sound speed in .mmb files only.

- **Altitude**

Altitude is the vertical distance from the sensor to the seafloor. If you need the depth below the transducer, use the NMEA DBT datagram.

Related topics

[System Configuration dialog box - Sensors Setup page, page 138](#)

System Configuration dialog box - Mounting Offsets page

The mounting offsets are required to calibrate the position of the Sonar Head relative to the GPS antenna. If you have a rotator, you must calibrate the position of the rotator relative to the Sonar Head.


How to open

This dialog box is opened from the **Setup** menu.

Select the **Deployment**→**Mounting Offsets** tab.

Note

This page is not available while the Sonar Head is running.

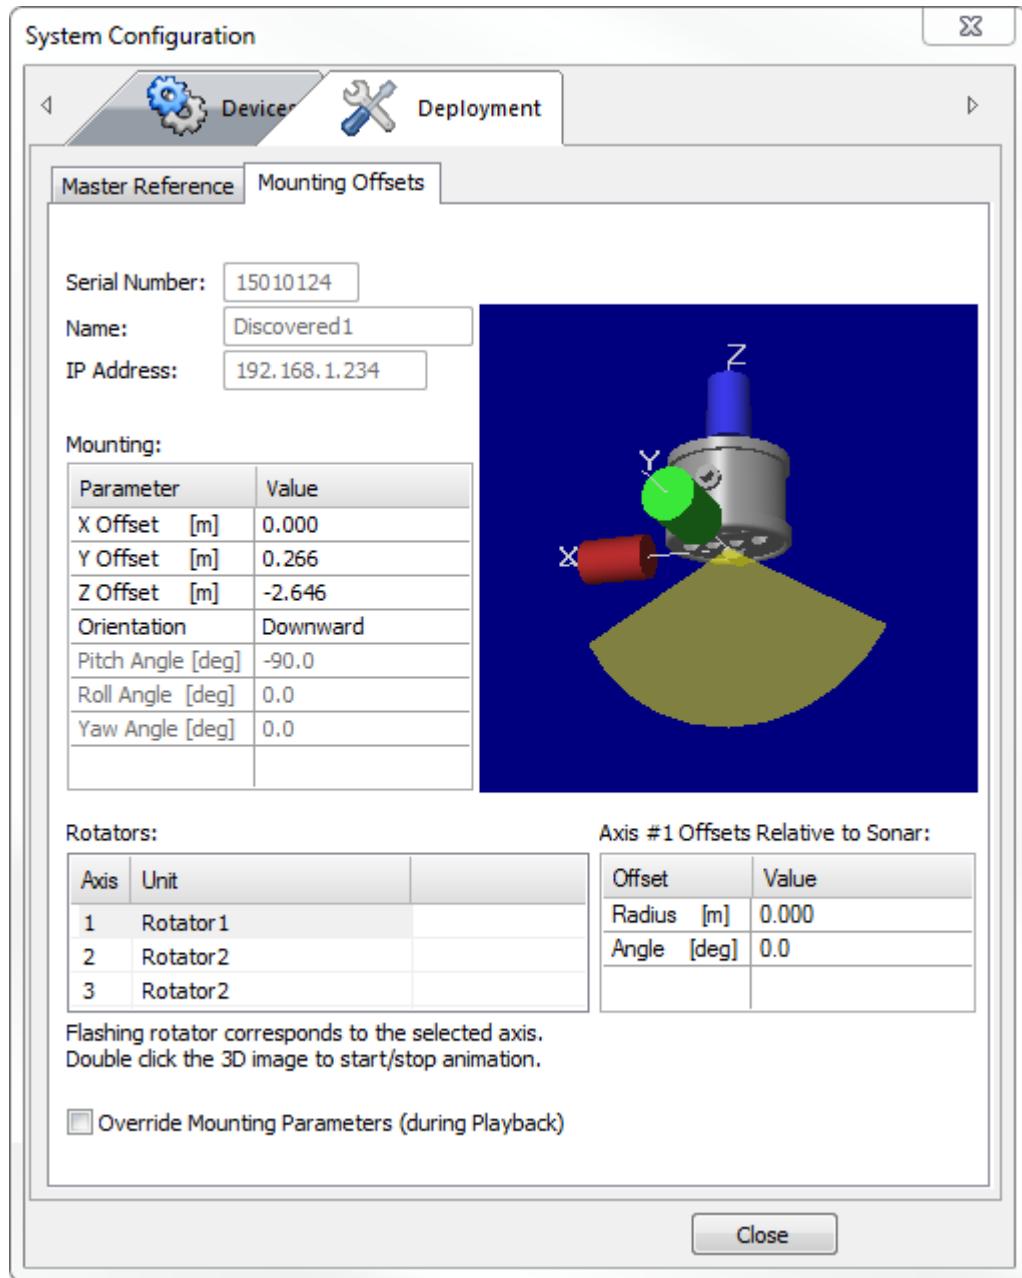

Description

If you are mounting your M3 Sonar Head (on a Pole Mount for example), you will need to specify where the Sonar Head is positioned in three-dimensional space relative to the GPS antenna.

Inaccurate mounting offsets will display your sonar data incorrectly in the 3D Point Cloud and sonar view.

Tip _____

If you have recorded your sonar data using the wrong offsets, you can still fix the offsets using this dialog box. Check the **Override Mounting Parameters** box to apply the correct mounting offsets to your recording.

Details

Mounting

- **X Offset**

X is defined as the Sonar Head relative to the GPS antenna across track. Port is negative and Starboard is positive.

- **Y Offset**

Y is defined as the Sonar Head relative to the GPS antenna along track. Aft is negative and Fore is positive.

- **Z Offset**

Z is defined as the Sonar Head relative to the GPS antenna's vertical distance. Down is negative and Up is positive.

- **Orientation**

This drop-down list allows you to select a number of pre-configured Sonar Head orientations. Observe the animation to make sure your Sonar Head is facing in the correct direction for the selected orientation. The orientation depends on how you are using the M3 Sonar. For example, a forward-facing orientation can be used for obstacle avoidance on a remotely operated vehicle (ROV). A downward-facing orientation can be used for bathymetric surveying. An orientation that rolls sideways can be used to scan vertical structures. An upward-facing orientation can be used for scientific research, such as gas-seep monitoring. If you wish to create your own orientation, select *Custom*, then enter in the precise pitch, roll, and yaw angles of the Sonar Head position.

Tip _____

If images appear on the wrong side of the sonar view (for example, objects on the right appear on the left), then select one of the “Inverted” orientations.

Rotators

Select the rotator you wish to configure from the Rotators list. You can see which axis has been assigned to each rotator.

- **Radius**

The radius offset is necessary if your Sonar Head is attached to the rotator with an arm. The length of the arm can be entered as the radius.

- **Angle**

Entering an angle is not necessary if the transducer face of the Sonar Head is aligned with the rotator. However, if the Sonar Head is installed at an angle to the rotator, then enter that value here.

Override Mounting Parameters

Enabling this option will apply the current offsets on this page during playback instead of the offsets recorded in your data file. The offset override affects what you see during playback in the 3D Point Cloud, not the sonar view.

Tip _____

If you apply the offset override, playback a file, then re-record a new file during playback, the offsets will not be applied to the new re-recorded file (the new file will use the original offsets). However, if you export data to a third-party application in playback mode, the offset override will be applied to the exported data.

Related topics

[System Configuration dialog box - Rotators Setup page, page 141](#)

Sonar Applications menu

The **Sonar Applications** menu lists various operating modes used for different applications. Each mode has its own pre-defined characteristics, such as differing ranges, angular resolutions, and pulse types.

Note

You cannot select a sonar application until the Sonar Head is connected. All Sonar Applications menu items will be greyed out until the sonar is running.

The selection of sonar applications presented in the Sonar Applications menu depends on the current Sonar Head frequency. The M3 software will automatically detect the frequency of your Sonar Head and display only the applicable sonar applications.

How to open

To open this menu, click the menu title.

The following sonar applications are available when using a 500-kHz Sonar Head transducer.

Description

- **EIQ**

This sonar application captures high-quality images. At short ranges the images are relatively insensitive to the motion of the sonar. At longer ranges the sonar should be relatively motionless.

Note _____

This application is less sensitive to motion than EIQ - Fine.

- **EIQ - Fine**

This sonar application captures very high-quality images. At short ranges the images are relatively insensitive to the motion of the sonar. At longer ranges the sonar should be relatively motionless.

- **EIQ - Ultra Fine**

This sonar application captures the highest quality images possible. At short ranges the images are relatively insensitive to the motion of the sonar. At longer ranges the sonar should be relatively motionless.

- **Ethernet Test - 1000Mbps**

You can test your 1000Mbps link to verify that the link throughput is available. The test uses 80 percent utilization and uses *EIQ - Ultra Fine*.

- **Ethernet Test - 100Mbps**

You can test your 100-Mbps link to make sure that the link throughput is available. The test uses 80 percent utilization and uses *EIQ*.

- **Ethernet Test - 10Mbps**

You can test your 10-Mbps link to make sure that the link throughput is available. The test uses 80 percent utilization and uses *Imaging 30*.

- **Imaging 15**

You can use this sonar application for navigation and obstacle avoidance. This application uses a 15-degree Tx vertical beamwidth.

- **Imaging 3**

Sonar Apps	Advanced	Help
EIQ		
EIQ - Fine		
EIQ - Ultra Fine		
Ethernet Test - 1000Mbps		
Ethernet Test - 100Mbps		
Ethernet Test - 10Mbps		
Imaging 15		
Imaging 3		
Imaging 30		
Imaging 30 - Short Range		
Imaging 7		
Profiling		
<input checked="" type="checkbox"/> Profiling - Bathy		
Profiling - Dual Head Master		
Profiling - Dual Head Slave		
Profiling - Fast		
ROV Navigation		
Rub Test		
Customize Apps		

Use this sonar application primarily for profiling using a 3-degree Tx vertical beamwidth. You may also use this application for shallow-water obstacle avoidance.

- **Imaging 30**

You can use this sonar application for navigation and obstacle avoidance. This application uses a 30-degree Tx vertical beamwidth.

- **Imaging 30 - Short Range**

You can use this sonar application for the support of manipulator operations, with the highest-speed short-range imaging. Speed and detail are more important than overall image quality.

- **Imaging 7**

You can use this sonar application to provide long-range obstacle avoidance and navigation into the work site. This application uses the highest pulse power. Pulse durations are used to get a reliable long-range detection. The trade-off is a reduction in the ping rate.

- **Profiling**

Use this sonar application for the automated point extraction of the sea bottom or structures to create a real-time 3D Point Cloud. The *Profiling* application has a slow ping repetition rate and is best suited for slow-moving ROVs, trenchers, and ploughs.

- **Profiling - Bathy**

This sonar application is ideal for Bathymetry Surveys.

- **Profiling - Dual Head Master**

You can use this profiling sonar application to generate an alternating sequence of pings and external trigger events. This sequence is used to implement alternate pinging in a dual-head profiling system.

- **Profiling - Dual Head Slave**

You can use this profiling sonar application to generate an alternating sequence of pings and external trigger events. This sequence is used to implement alternate pinging in a dual-head profiling system.

- **Profiling - Fast**

This sonar application performs using much higher ping rates than the normal *Profiling* application. This application is ideal for surface-vessel surveys.

- **ROV Navigation**

This sonar application automatically switches between *EIQ - Fine*, *EIQ*, and *Imaging 30* applications. *EIQ - Fine* is used to provide the highest-resolution images with a

good image update rate at short ranges. *EIQ* is used for medium ranges. *Imaging 30* is used for long ranges.

- **Rub Test**

Use this sonar application as part of a system test to make sure that the transducer is receiving a signal. Rub the transducer and make sure that bright streaks or rings appear in the sonar view.

- **Customize Apps**

Click to open the **Customize Apps** dialog box. You can select which sonar applications will appear in the **Sonar Apps** menu.

The following sonar applications are available only when using a high-frequency Sonar Head (such as a 700-kHz to 1400-kHz transducer, for example).

In addition, some of the sonar applications listed above are also available when using a high-frequency Sonar Head, but not all.

- **Imaging**

You can use this sonar application for navigation and obstacle avoidance. This application uses a 30-degree Tx vertical beamwidth.

- **Imaging Enhanced**

Use this sonar application for imaging or obstacle avoidance using one of the eIQ elements. This application uses a Time Delay FFT beamformer to produce a high-quality image.

- **Profiling - HiRes**

Use this sonar application if you have a high-frequency Sonar Head and require a higher horizontal beam resolution. This profiling mode uses the maximum number of beams (512) but has a slower ping rate as it uses more computational power. High-resolution profiling is ideal for applications such as pipeline inspections, fish behaviour studies, and gas plume detections.

Topics

[Enhanced Image Quality \(EIQ\), page 159](#)

[Imaging, page 159](#)

[Profiling, page 160](#)

[ROV Navigation, page 161](#)

Enhanced Image Quality (EIQ)

Enhanced Image Quality (EIQ) applications are intended for slower moving operations where the vehicle or vessel is moving slowly, or is stationary for at least a few seconds.

Description

The Fine EIQ applications overlap beams to improve image quality. *EIQ* uses four pings. *EIQ - Fine* uses eight pings. *EIQ - Ultra Fine* uses 12 pings. Note that the Fine EIQ applications have a slower sonar view refresh rate.

We recommend a maximum vessel speed of two knots for *EIQ* mode and 0.5 knots for *EIQ - Fine* mode.

Details

Sonar Application Names:	EIQ EIQ - Fine EIQ - Ultra Fine
Range:	0.4 m to 150 m
Angular Resolution:	0.95° x 30°
Pulse Type:	Continuous Wave and Linear FM (Chirp)

Imaging

Imaging applications provide long-range detection for monitoring and navigation.

Description

Imaging applications use the highest pulse power. They use pulse durations to get reliable long-range detection. The trade-off is a reduction in the ping rate, partially due to the long range, and partially to maintain power consumption within reasonable limits.

We recommend a maximum vessel speed of five knots for imaging applications.

Details

The following sonar applications are available when using a 500-kHz Sonar Head transducer.

Sonar Application Names:	Imaging 30 Imaging 15 Imaging 7 Imaging 3 Imaging 30 - Short Range
Range:	0.2 m to 150 m
Angular Resolution:	1.6° x 30° 1.6° x 15° 1.6° x 7° 1.6° x 3°
Pulse Type:	Continuous Wave and Linear FM (Chirp)

The following sonar applications are available only when using a high-frequency Sonar Head (such as a 700-kHz to 1400-kHz transducer, for example).

Sonar Application Names:	Imaging Imaging Enhanced
Range:	0.2 m to 100 m
Angular Resolution:	140°x30° (700 kHz) 140°x27° (950 kHz) 75°x21° (1200 kHz) 45°x18° (1400 kHz)
Pulse Type:	Continuous Wave and Linear FM (Chirp)

Profiling

Use this sonar application for the automated point extraction of the sea bottom or structures to create a real-time 3D Point Cloud.

Description

The *Profiling* application has a slow ping repetition rate and is best suited for slow-moving ROVs, trenchers, and ploughs. When recording data, the file size will be small. Use the *Profiling* application for very shallow depths. The *Profiling - Bathy* application is more versatile. This sonar application is ideal for Bathymetry Surveys. The *Profiling - Fast* application performs best at longer ranges (i.e. depths greater than 5 m). This sonar

application performs using much higher ping rates than the normal *Profiling* application. This application is ideal for surface-vessel surveys.

Details

Sonar Application Names:	Profiling Profiling - Bathy (500-kHz transducer only) Profiling - Fast (500-kHz transducer only) Profiling - Dual Head Master (500-kHz transducer only) Profiling - Dual Head Slave (500-kHz transducer only) Profiling - HiRes (700-kHz to 1400-kHz transducer only)
Range:	1 m to 150 m
Angular Resolution:	1.6° x 3° 1.8° x 1° 1.8° x 2° 1.4° x 0.75° 1.4° x 1.5° 1.1° x 0.6° 1.1° x 1.2° 0.9° x 0.5° 0.9° x 1°
Pulse Type:	Continuous Wave and Linear FM (Chirp)

ROV Navigation

This sonar application automatically switches between *EIQ - Fine*, *EIQ*, and *Imaging 30* applications.

Description

EIQ - Fine is used to provide the highest-resolution images with a good image update rate at short ranges. *EIQ* is used for medium ranges. *Imaging 30* is used for long ranges.

Details

Sonar Application Name:	ROV Navigation
Range:	0.4 m to 150 m
Angular Resolution:	1.6° x 30°
Pulse Type:	Continuous Wave and Linear FM (Chirp)

Advanced menu

The **Advanced** menu is intended for experienced users or for testing purposes and is not required for normal operation of the M3 Sonar. This menu requires a software license key, and will not appear if you do not have one.


How to open

To open this menu, click the menu title.

Description

- **Power User Settings**

Click to open the **Power User Settings** dialog box. The **Power User Settings** dialog box allows you to configure advanced controls. You can also override the beamlist or processing type during playback. The Ping Rate, Update Rate, and Mode ID are displayed for your information.

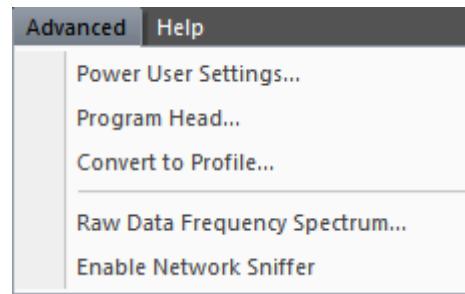

- **Program Head**

Click to open the **Program Head** dialog box. You can perform advanced tasks in the **Program Head** dialog box, such as configuring production settings, making head corrections, or changing transmit pulse definitions. This dialog box is only available when the Sonar Head is connected and paused.

- **Convert to Profile**

Click to open the **Profile Batch Conversion** dialog box. The **Profile Batch Conversion** dialog box allows you to convert many data files at once into another format. You can convert “.mmb”, “.imb”, and “.pmb” files.

- **Raw Data Frequency Spectrum**

Click to open the **Raw Data Spectrum** window. The **Raw Data Spectrum** window allows you to find and observe any noise in the data.

- **Enable Network Sniffer**

Click to open the **Network Sniffer** window. The **Network Sniffer** window allows you to monitor network traffic in real-time. When this feature is enabled, the menu option will change to **Disable Network Sniffer**.

Note

*To use this feature, you must run the M3 software as an administrator (right-click on the icon and select **Run as administrator**).*

Topics

- [Power User Settings dialog box, page 164](#)
- [Program Head dialog box - Production Config page, page 167](#)
- [Program Head dialog box - Head Corrections page, page 169](#)
- [Program Head dialog box - TX Pulse page, page 171](#)
- [Profile Batch Conversion dialog box, page 172](#)
- [Raw Data Spectrum window, page 174](#)
- [Power User Settings XML file, page 175](#)

Power User Settings dialog box

The **Power User Settings** dialog box allows you to configure advanced controls. You can also override the beamlist or processing type during playback. The Ping Rate, Update Rate, and Mode ID are displayed for your information.

How to open

This dialog box is opened from the **Advanced** menu.

Description

Use the Advanced Controls to configure special processes used during beamforming. Use the Playback Controls to override the fields of recorded “.mmb” data during playback. You can also view detailed system information for the current sonar application.

Details

Advanced Controls

- RX Amplitude and Phase Correction**


This feature allows you to make sure the RX Amplitude and Phase Correction has been successfully written to the Sonar Head during production configuration. Unchecking this box will not apply the correction stored in the Sonar Head to the raw data before beamforming.

- Azimuth Processing**

This feature allows you to make sure the raw data is received properly and to make sure there are no faulty elements in the transducer. Unchecking this box will display the range-compressed raw data in the sonar view with a range vs. element number instead of a range vs. beam angle. The beamforming processing (either the time-domain beamformer or the FFT beamformer) will not be applied.

- Range Processing**

This feature, when used together with Azimuth Processing, allows you to see the unprocessed raw data received directly from the transducer. If the transmit pulse is an LFM pulse, unchecking this box will not apply range compression to the raw data before the beamforming processing.

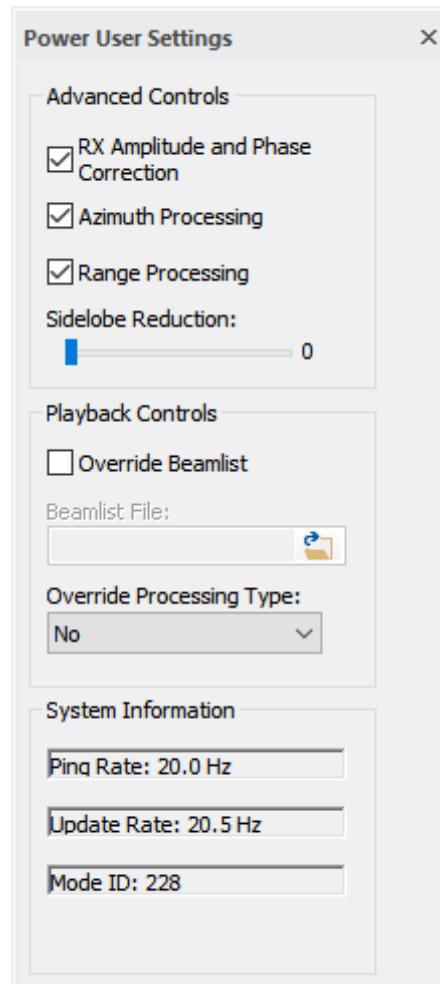

- **Sidelobe Reduction**

This feature allows you to reduce the sidelobe for very bright targets in imaging applications (this feature is not recommended for profiling applications). Sidelobe reduction is especially useful at short ranges when targets are very close.

Note _____

*If automatic sidelobe reduction is enabled in the **Display** menu, the slider will be greyed out and you can view the automatically-calculated sidelobe reduction ratio. If automatic sidelobe reduction is disabled in the **Display** menu, you can drag the slider to the right to manually increase sidelobe reduction. On the highest settings you may notice a black line appearing around the same range of the bright target.*

Playback Controls

Note _____

*You can also edit the **Playback Controls** settings in the “PowerUsersInfo.xml” file.*

- **Override Beamlist**

This feature allows you to replace the beamlist of a recorded “.mmb” file with a new beamlist XML file. The recorded raw data will be beamformed based on the new beamlist. Checking the **Override Beamlist** box will enable the **Beamlist File** field. You can type in the beamlist file’s address or click the folder icon to browse for it.

- **Override Processing Type**

This feature allows you to switch between the time-domain beamformer and the FFT beamformer for profiling applications. Select the *Profiling* option when playing back an “.mmb” file (recorded using the *Profiling - Fast* or *Profiling - Bathy* sonar applications) to use the time-domain beamformer. Leave this setting as *No* to use the original processing type for beamforming in post processing.

System Information

- **Ping Rate**

The ping rate is determined either by the current sonar application, or calculated based on the network link speed.

- **Update Rate**

The update rate is the number of times the sonar view is updated per second. The displayed ping rate may be different from the update rate because the system might be impacted by other processes.

- **Mode ID**

All sonar applications have their own unique mode number. The mode number displayed here corresponds to a PRI Sequence ID found in the M3 software database.

Related topics

[Power User Settings XML file, page 175](#)

Program Head dialog box - Production Config page

You can perform advanced tasks in the **Program Head** dialog box, such as configuring production settings, making head corrections, or changing transmit pulse definitions.


How to open

This dialog box is opened from the **Advanced** menu.

Note

*This dialog box is only available when the Sonar Head is connected and paused. To pause the Sonar Head, click **Setup**→**Connect**, then open the Menu Widget in the top-right corner of the sonar view. Click **Pause**.*

Select the **Production Config** tab.

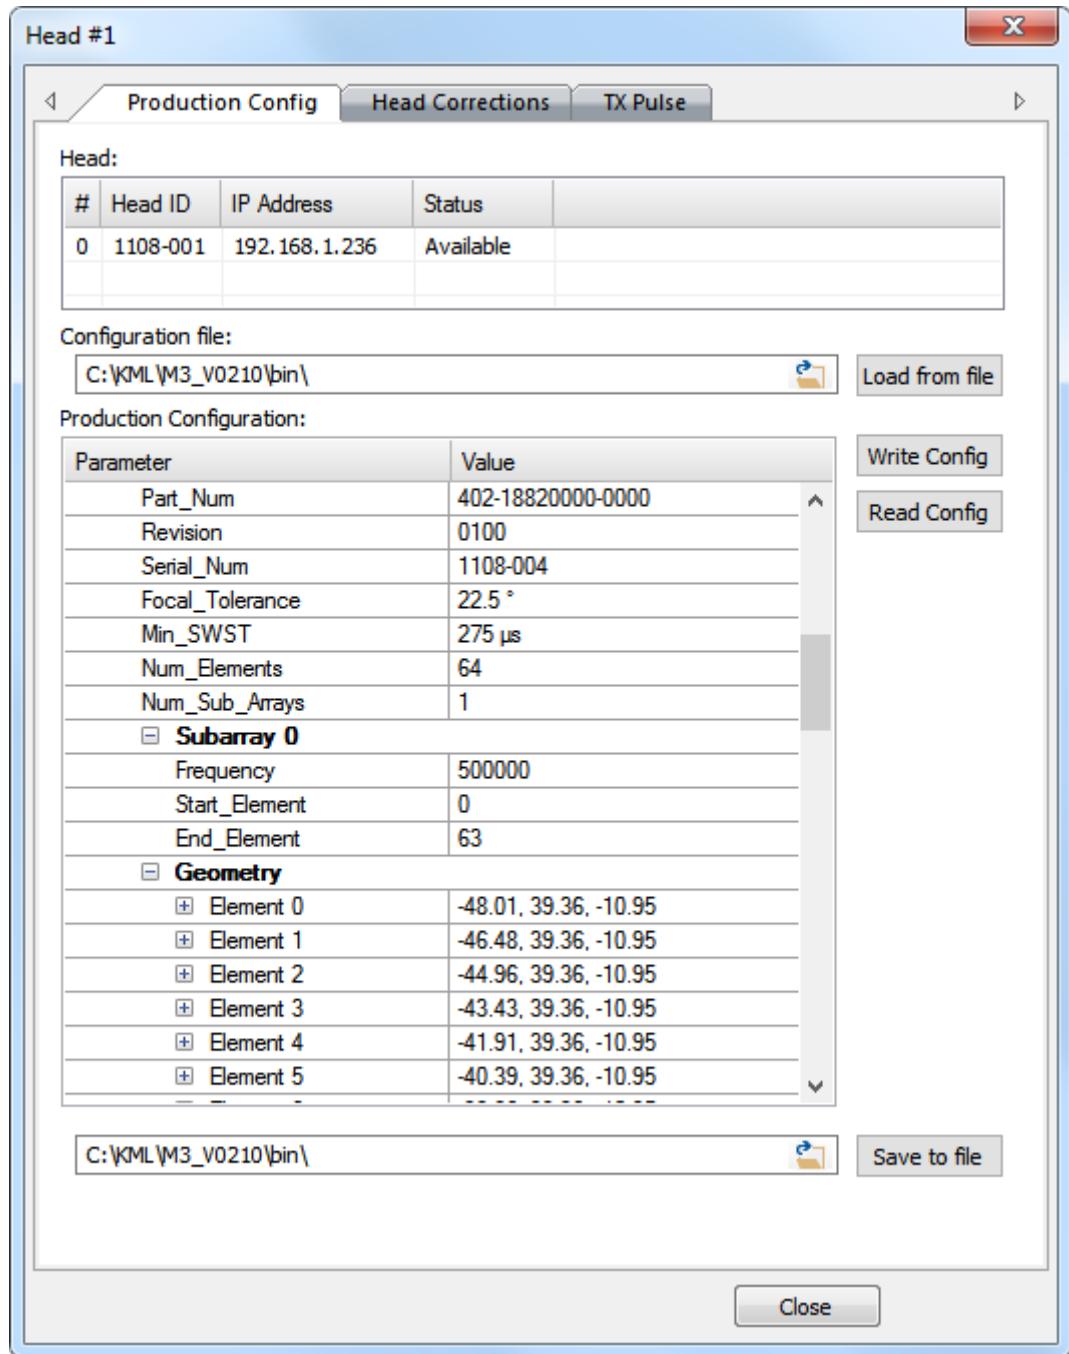

Description

Use the **Production Config** page to view or change advanced Sonar Head parameters, such as the Serial Number or MAC Address. This page is primarily intended for use by production test engineers.

Details

Head

The **Head** table shows you the serial number and IP Address of the Sonar Head.

Configuration file

Click the folder icon to browse for the latest configuration file on your local drive. Click the **Load from file** button to populate the **Production Configuration** fields with values from your configuration file.

To save the current parameters, locate the field at the bottom of the dialog box and choose a filename or browse to replace an existing file. Click the **Save to file** button beside this field.

Production Configuration

This table lists all the advanced parameters and their values for the Sonar Head.

Write Config

Click this button to re-program the Sonar Head with the parameters displayed in the **Production Configuration** table.

Read Config

Click this button to populate the **Production Configuration** fields with the current parameter values (values are read from the Sonar Head).

Program Head dialog box - Head Corrections page

You can perform advanced tasks in the **Program Head** dialog box, such as configuring production settings, making head corrections, or changing transmit pulse definitions.


How to open

This dialog box is opened from the **Advanced** menu.

Note

*This dialog box is only available when the Sonar Head is connected and paused. To pause the Sonar Head, click **Setup**→**Connect**, then open the Menu Widget in the top-right corner of the sonar view. Click **Pause**.*

Select the **Head Corrections** tab.

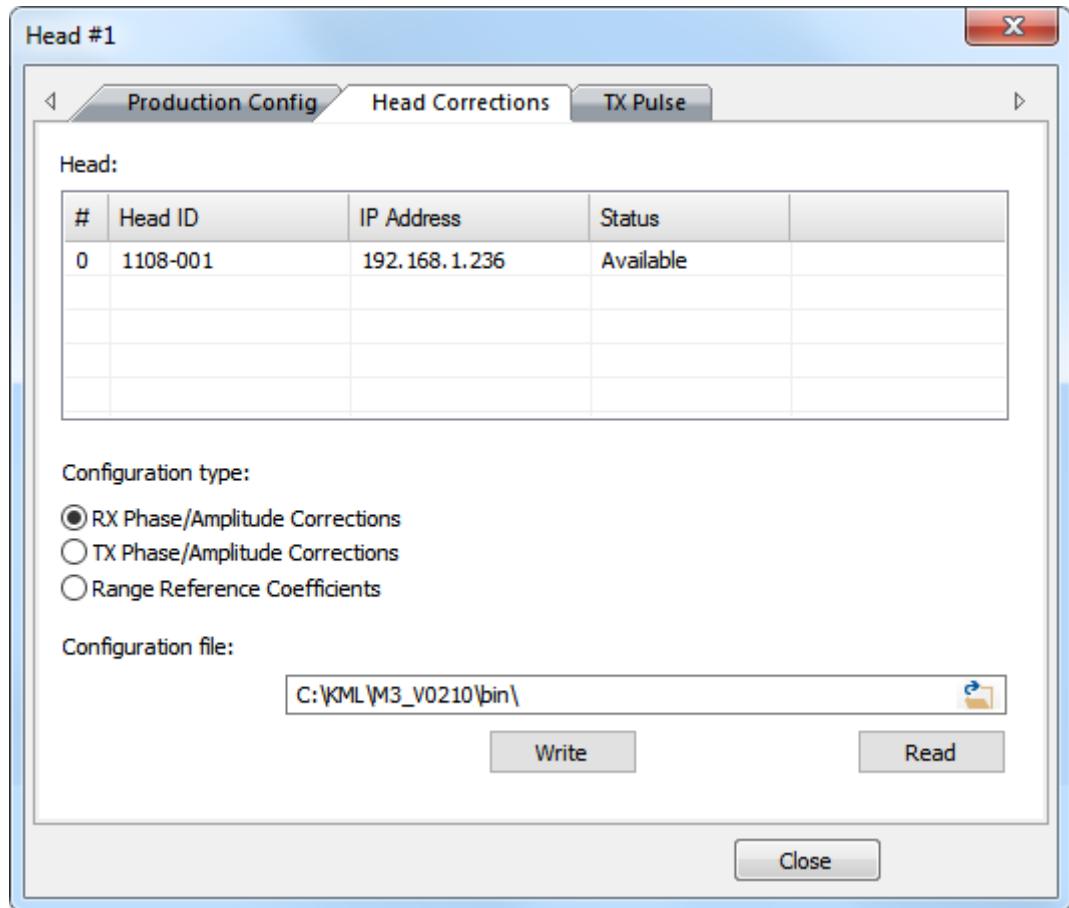

Description

Use the **Head Corrections** page to write Phase/Amplitude Corrections or Range Reference Coefficients to the Sonar Head. This page is primarily intended for use by production test engineers.

Details

Head

The **Head** table shows you the serial number and IP Address of the Sonar Head.

Configuration type

Select the type of configuration you wish to apply.

Configuration file

Click the folder icon to browse for the latest configuration file on your local drive.

Click the **Write** button to apply the configuration parameters in your file to the Sonar Head. Click the **Read** button to save the current Sonar Head configuration to your configuration file.

Program Head dialog box - TX Pulse page

You can perform advanced tasks in the **Program Head** dialog box, such as configuring production settings, making head corrections, or changing transmit pulse definitions.


How to open

This dialog box is opened from the **Advanced** menu.

Note

*This dialog box is only available when the Sonar Head is connected and paused. To pause the Sonar Head, click **Setup**→**Connect**, then open the Menu Widget in the top-right corner of the sonar view. Click **Pause**.*

Select the **TX Pulse** tab.

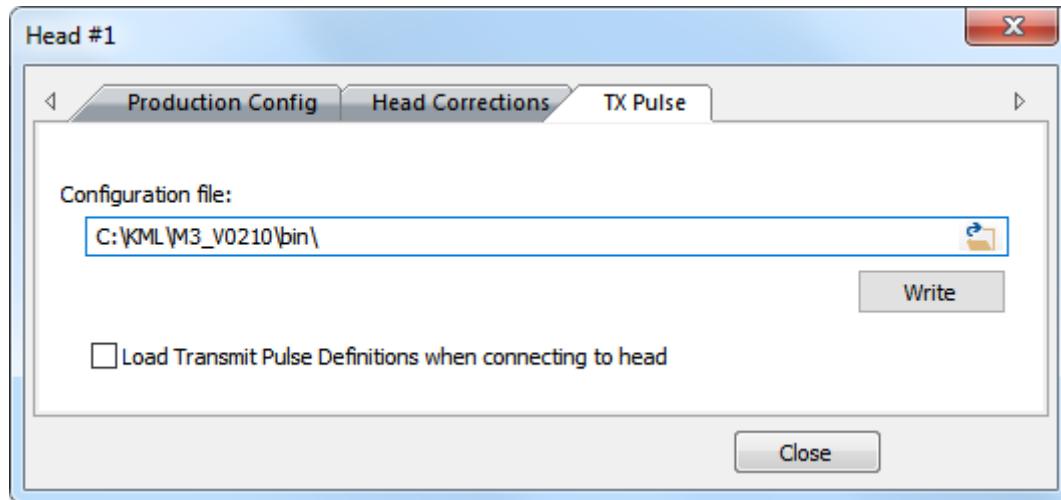

Description

Use the **TX Pulse** page to apply a new TX pulse definition to the Sonar Head if a new TX pulse is designed for the M3 software database.

Details

Configuration file

Click the folder icon to browse for the latest configuration file on your local drive.


Click the **Write** button to apply the configuration parameters in your file to the Sonar Head. Select the box if you wish to load the transmit pulse definitions when connecting to the Sonar Head.

Profile Batch Conversion dialog box

The **Profile Batch Conversion** dialog box allows you to convert many data files at once into another format.

How to open

This dialog box is opened from the **Advanced** menu.

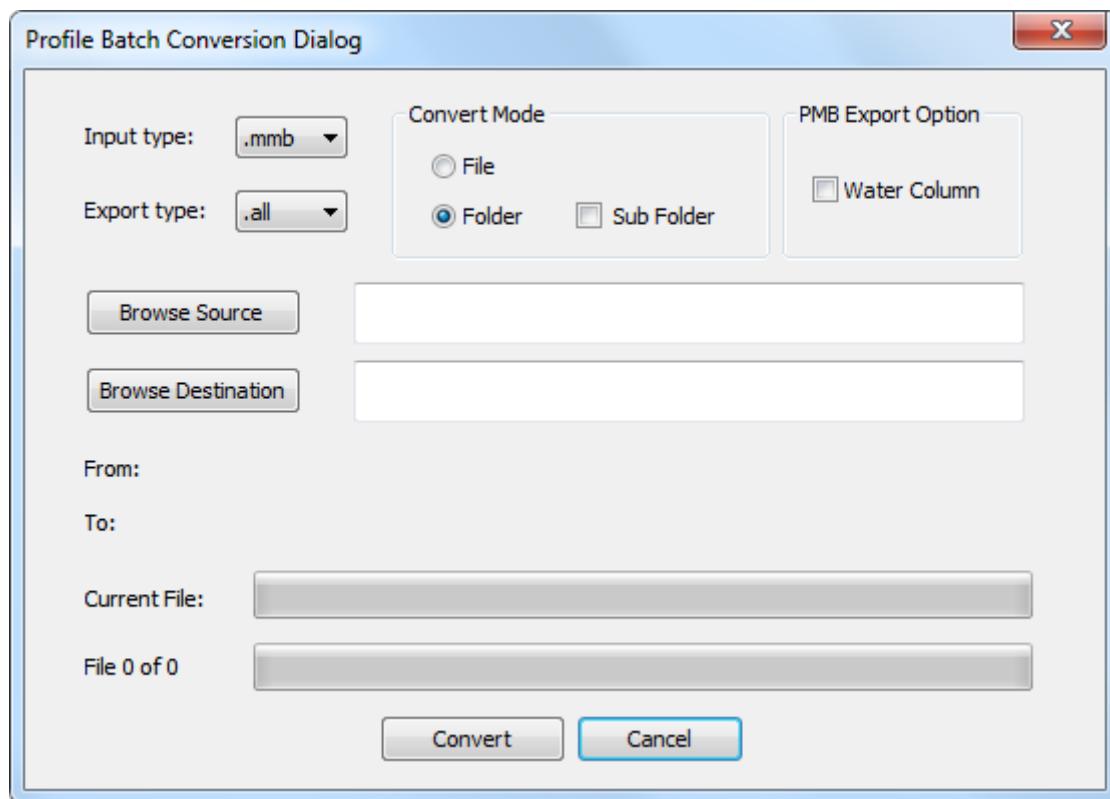

Description

You can convert “.mmb”, “.imb”, and “.pmb” files. The current profiling settings in the M3 software are used when converting to “.all” files. The source and destination folders

are saved in the “PowerUsersInfo.xml” file after the **Profile Batch Conversion** dialog box is closed.

After setting up the batch conversion, click the **Convert** button to start the conversion process. You can view the progress of both the current file and of all files in the batch.

Details

Input type

Select the type of source file that you wish to convert. Click the **Browse Source** button to select a valid source file or folder.

Export type

Select the file type for your destination file. Click the **Browse Destination** button to select a destination folder or enter a filename.

If your selected export type is “.pmb”, then you can check the *Water Column* box to export the “.pmb” file with water column data. When saving water column data, profile range and bearing data will also be saved. Split-beam profiling will include amplitude and phase in the water column data, but the default profiling mode will include amplitude only.

Convert Mode

Select *Folder* for batch conversion. If you check the *Sub Folder* box, then all files in all sub folders will be included in the batch conversion. To convert a single file, select *File*.

Related topics


[Power User Settings XML file, page 175](#)

Raw Data Spectrum window

The **Raw Data Spectrum** window allows you to find and observe any noise in the data.

How to open

This window is opened from the **Advanced** menu.

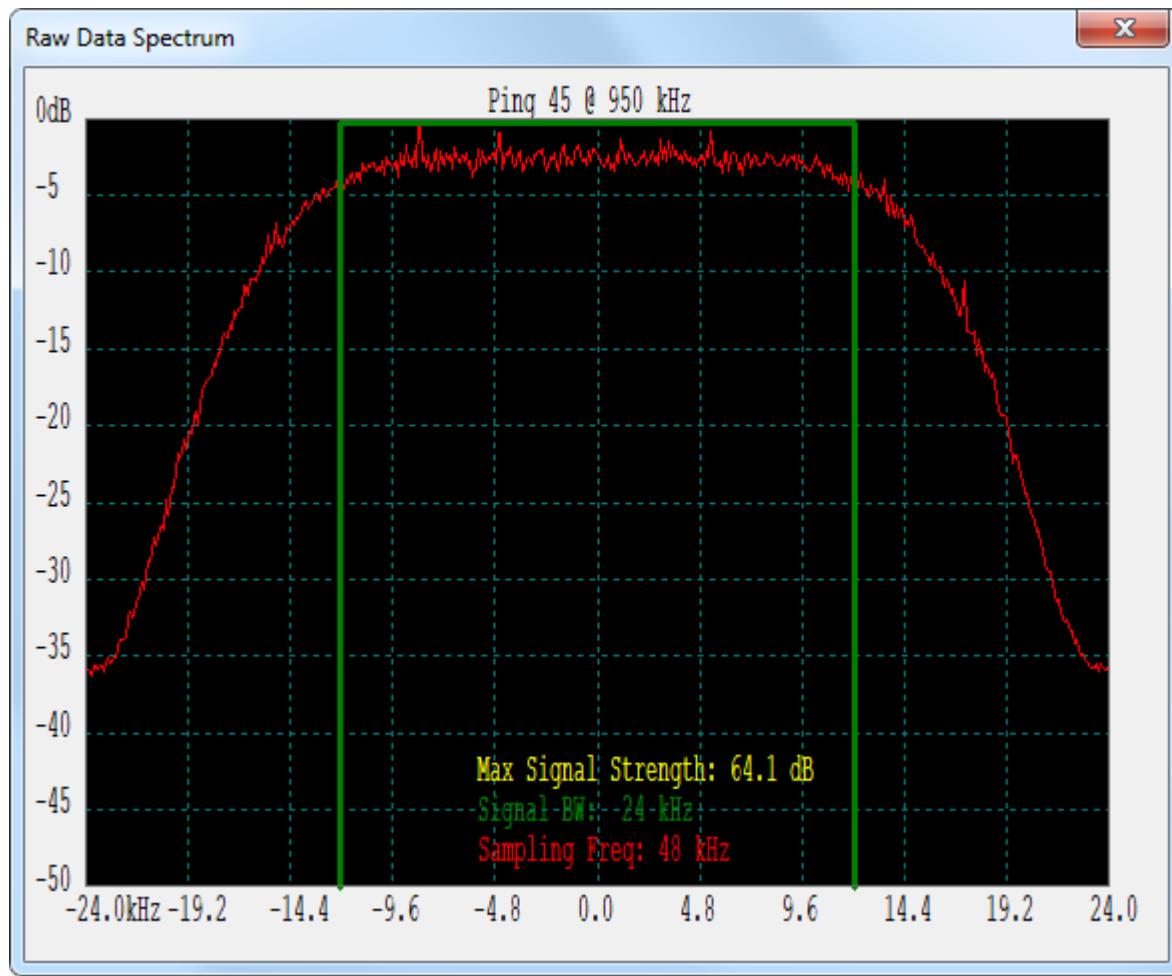

Description

This window displays the normalized, real-time raw data spectrum. The baseband sampling frequency range of the received signal is shown on the x-axis, and the normalized spectrum amplitude is shown on the y-axis (in dB). You can also view the carrier frequency of the raw data, the normalized transmitted signal frequency spectrum, and the maximum signal strength averaged across the elements.

Power User Settings XML file

The Power User Settings XML file allows you to change advanced M3 software parameters by editing the file with any text editor.

How to open

Note

Close the M3 software before editing the Power User Settings XML file.

Download and install a free XML file editor, such as Notepad++. Navigate to C:\KML\M3_V0253\BIN\SETTINGS. Open the “PowerUsersInfo.xml” file with your XML file editor.

```
<?xml version="1.0" encoding="UTF-8" ?>
<!!--Remove blank lines!!-->
<dataroot Software="M3" Version="0002">
    <User>
        <ID>0</ID>
        <Name>none</Name>
        <Password>none</Password>
        <Level>P</Level>
        <DeploymentFile></DeploymentFile>
        <Settings>
            <PlaybackOverrideBeamlists>No</PlaybackOverrideBeamlists>
            <OverrideBeamlistFile></OverrideBeamlistFile>
            <ProcessingTypeOverride>No</ProcessingTypeOverride>
            <BatchProfilingSrcFolder></BatchProfilingSrcFolder>
            <BatchProfilingDesFolder></BatchProfilingDesFolder>
            <Profile3DCloudPingToKeep>2000</Profile3DCloudPingToKeep>
            <ProfileSpikeFilter>0</ProfileSpikeFilter>
            <ProfileContinuousContour>0</ProfileContinuousContour>
            <ProfileSelectionFilterCoef>1.00</ProfileSelectionFilterCoef>
        </Settings>
    </User>
</dataroot>
```

Description

You need a software license key to apply the values in the “PowerUsersInfo.xml” XML file to the M3 software. If you do not have a software license, then the default values will be used. The new values will be applied after restarting a licensed copy of the M3 software.

Details

<PlaybackOverrideBeamlists>

This feature allows you to replace the beamlist of a recorded “.mmb” file with a new beamlist XML file. The recorded raw data will be beamformed based on the new beamlist. Enter a value of “Yes” or “No” in the XML tag.

<OverrideBeamlistFile>

Enter the beamlist file’s address into the XML tag.

<ProcessingTypeOverride>

Enter a value of “Yes” or “No” in the XML tag. This feature allows you to switch between the time-domain beamformer and the FFT beamformer for profiling applications. Select the *Profiling* option when playing back an “.mmb” file (recorded using the *Profiling - Fast* or *Profiling - Bathy* sonar applications) to use the time-domain beamformer. Leave this setting as *No* to use the original processing type for beamforming in post processing.

<BatchProfilingSrcFolder>

In the XML tag, enter the address of the folder for the files you wish to convert.

<BatchProfilingDesFolder>

In the XML tag, enter the address of the destination folder where your converted files will be saved.

<Profile3DCloudPingToKeep>

This parameter controls how many pings to keep in the memory when displaying a 3D point cloud. The maximum value depends on the amount of memory allocated to the point cloud. If the value you enter exceeds the maximum, then it will be reset to the default value of 2000.

<ProfileSpikeFilter>

This parameter removes noisy profiling points due to midwater objects, such as fish, and is useful when a clean bottom profile is needed. Enter a value between zero and 51 into the XML tag (zero disables the filter). The spike filter applies to profiling applications.

<ProfileContinuousContour>

This parameter interpolates the profiling result before it is displayed. Sometimes the bottom profile has missing points due to noise or midwater objects. Enabling this filter can replace these points. For example, this filter will fill out a hole in the middle of a bottom profile, but may produce artificial points at both edges.

<ProfileSelectionFilterCoef>

This parameter adjusts the smoothing filter before selecting the profiling algorithm. Enter a value between one and ten in the XML tag.

Related topics

[Power User Settings dialog box, page 164](#)

[Profile Batch Conversion dialog box, page 172](#)

Help menu

The **Help** menu allows you to view hardware and software information in the **About M3** dialog box. You can also open the M3 Sonar *Reference Manual* from this menu.


How to open

To open this menu, click the menu title.

Description

About M3

The **About** dialog box identifies the current software version. The version described in this publication is 2.5.3.



User Manual


Click **User Manual** to open the M3 Sonar *Reference Manual* in PDF format. This manual is only applicable to the software version you are using. If you are using an older version of software, it will not be the latest version.

Tip

You can download the latest software from <http://www.km.kongsberg.com/mesotechsoftware>, and the latest manuals from <http://www.km.kongsberg.com/mesotechdocumentation>.

Tool bar description

The tool bar provides buttons for functions, filters, and sonar view overlays.

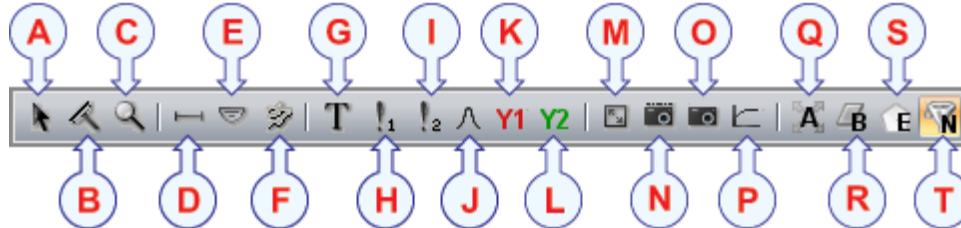

The tool bar provides access to useful functions, such as the ability to take a screenshot or change your TVG settings. In addition, several measuring tools are available.

A Arrow

Click to use the default arrow cursor. With the default cursor you can select and manipulate objects on the screen.

B Wiper

Removes items from the sonar view. When selected, click on each overlay you wish to delete.

C Zoom windows

You can open up to four true zoom windows when running a Sonar Head.

D Tape Measure

Measures distances on the sonar view. Also allows you to place a measurement overlay on the sonar view.

E Protractor

You can use the protractor to measure the angle between two lines, then place the resulting overlay in the sonar view.

F String Measure

You can use the string measure tool to define an area. The size and perimeter of the area will be calculated for you.

G Text Label

The text label tool allows you to place comments on the screen.

H Reference Cursor 1

I Reference Cursor 2

You can place one or two reference cursors as overlays on the sonar view. When you place two cursors, an additional overlay will appear with information about the cursors.

J Image Quality Analysis System

The Image Quality Analysis System (IQAS) analyzes the image quality of a point target, or can be used to measure a known point target against a specification.

K Y1

Horizontal line overlay that can be used to mark the depth of the natural seabed (for use when excavating).

L Y2

Horizontal line overlay that can be used to mark the depth of a trenching target (for use when excavating).

M Show Full Screen

Click **Full Screen** to make the sonar view full screen. Press the **Esc** key to exit full-screen mode.

N Save image with overlays

Click this button to save sonar view images, including any overlays you've placed in the sonar views.

O Save image without overlays

Click this button to save sonar view images, excluding any overlays you've placed in the sonar views.

P TVG Setup dialog box

TVG (Time Variable Gain) compensates for the loss of acoustic energy due to geometric spread and absorption.

Q Average Filter

Clicking the “A” button will enable the Average Filter. This filter reduces noise. Slow-moving features persist on-screen.

R Background Removal

Clicking the “B” button will enable the Background Removal filter. This filter removes stationary parts of the background to enhance moving objects (such as fish, for example).

S Edge Enhancement

Clicking the “E” button will enable Edge Enhancement. This filter enhances the edge of moving features.

T No Filter

Disables any filters. The sonar view will display an unfiltered sonar image.

Topics

- [Arrow, page 181](#)
- [Wiper, page 181](#)
- [Zoom windows, page 182](#)
- [Tape Measure, page 183](#)
- [Protractor, page 183](#)
- [String Measure, page 183](#)
- [Text Label, page 184](#)
- [Reference cursors, page 184](#)
- [Image Quality Analysis System, page 185](#)
- [Save image with or without overlays, page 186](#)
- [TVG Setup dialog box, page 187](#)
- [Filters, page 190](#)

Arrow

Click to use the default arrow cursor. With the default cursor you can select and manipulate objects on the screen.

If you are currently using one of the tools, such as the **Tape Measure** for example, clicking the **Arrow** button will cancel the current tool.



To move overlays around in the sonar view, click the **Arrow** button, then click and hold the left mouse button on an overlay. Drag it to where you want it then release the mouse button.

Wiper

Removes items from the sonar view. When selected, click on each overlay you wish to delete.

If your sonar view becomes too cluttered with overlays, you may wish to remove some of them.



Click the **Wiper** button, then left-click on any overlay that has been placed in the sonar view (such as a **Reference Cursor**, for example) to remove it. Note that you cannot undo this action.

Zoom windows


You can open up to four true zoom windows when running a Sonar Head.

To open a zoom window, click the **Zoom windows** button in the tool bar, then click a target of interest in the sonar view.



The zoom area (A) in the sonar view is a fixed size and cannot be adjusted. However, you can move the zoom area to another location with the cursor. The images in the true zoom windows (B) are acquired separately using high-resolution sampling parameters and adequate transmit pulses.

If you record sonar data while the zoom windows are open, the zoom window data will also be recorded for replay. During playback, the zoom windows will open automatically.

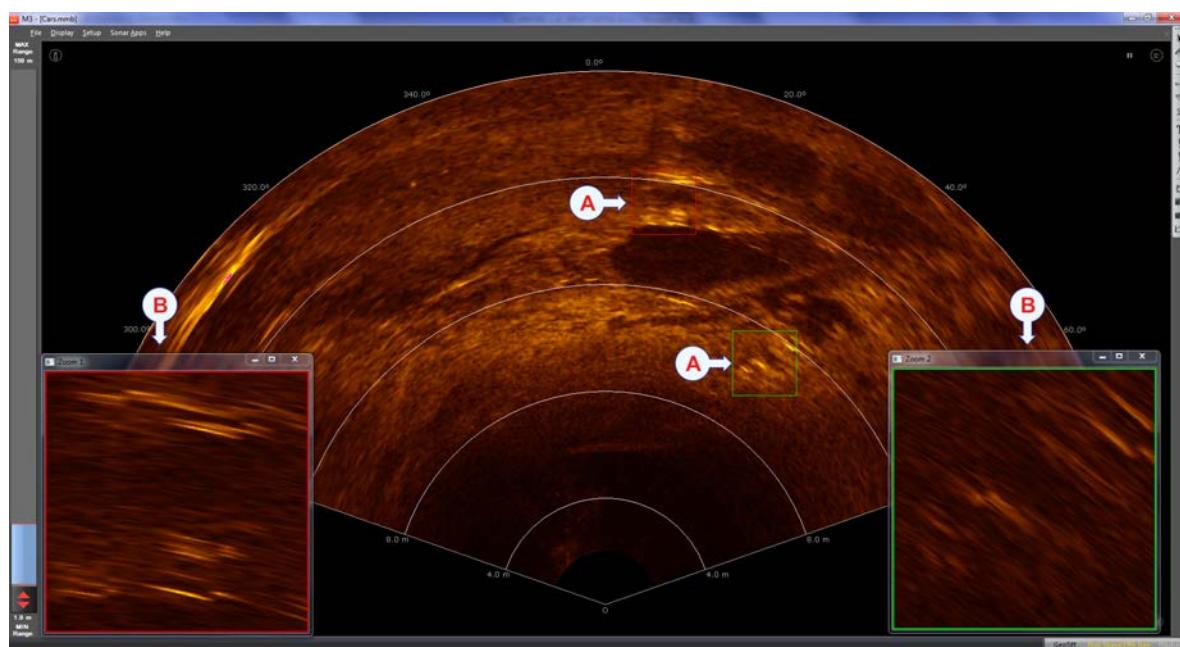

Tip

Reference cursors can be used with a Zoom window. To make fine adjustments to the cursor position, drop a reference cursor into a Zoom window.

Tape Measure

Measures distances on the sonar view. Also allows you to place a measurement overlay on the sonar view.

To measure the distance between two targets, click the **Tape Measure** button. Click and hold the left mouse button on your first target, then drag the mouse to your second target. The length and bearing between the targets is displayed dynamically. The measurement line will not remain on the display when you release the mouse button.



To place a persistent measurement overlay, click and hold the right mouse button on your first target, then drag the mouse to your second target and release the mouse button. Click the left mouse button to place the overlay.

Tip

Once the measurement overlay is placed, you can use the default arrow cursor to drag the length and bearing label to a position on the screen where it is more legible.

Related topics

[Measuring distances, page 64](#)

Protractor

You can use the protractor to measure the angle between two lines, then place the resulting overlay in the sonar view.

The protractor tool measures the angle between a baseline and a second line that intersects the baseline.



In the sonar view, click the point where you want to start the baseline. Click the point where you want to end the baseline. Lock one end of the second line to the baseline. Choose where you want the second line to end.

Related topics

[Measuring angles, page 65](#)

String Measure

Defines and measures perimeters and areas. Allows you to place an area overlay on the sonar view.

To define an area, click the **String Measure** button. Click anywhere in the sonar view to start a point. Move to the second point, then click again. Click as many times as necessary to create the required area. Double-click on the last point to finish. The area will



automatically be closed, and a rectangular label will appear providing information about the area and perimeter. Move the label to a position on the screen where it is most legible, then click the left mouse button to place it.

Tip

*You can place multiple areas on the display. The areas will remain on the display until you delete them individually with the **Wiper** function.*

Related topics

[Defining an area, page 66](#)

Text Label

The text label tool allows you to place comments on the screen.

Click the **Text Label** button. In the sonar view, click the area of interest that you want to label. Click and hold the left mouse button on the label overlay and drag it to a place on the screen where the text is legible. Double-click on the label overlay to open an **Edit Text Box** dialog box.



Tip

If the text you entered does not fit within the text label overlay, you can resize the label by clicking on the label border, then dragging it to create a larger label.

Related topics

[Placing text labels, page 66](#)

Reference cursors

You can place one or two reference cursors as overlays on the sonar view. When you place two cursors, an additional overlay will appear with information about the cursors.

To mark a point of interest, you can place a cross-hair type marker on the sonar view. Click one of the **Reference Cursor** buttons. Choose where you want to place the cursor, then click the left mouse button to place it. The range and bearing of the cursor's position — relative to the Sonar Head — is shown in the bottom-left corner of the view.



When you place both cursor 1 and cursor 2 on the sonar display, the cursor range and bearing — relative to the Sonar Head — will be displayed. “Delta” shows the range and bearing from cursor 1 to cursor 2.

Cursor:1	Cursor:2	Delta:
154.5°	14.3°	357.9°
45.425 m	63.702 m	102.794 m

Related topics

[Placing reference cursors, page 67](#)

Image Quality Analysis System


The Image Quality Analysis System (IQAS) analyzes the image quality of a point target, or can be used to measure a known point target against a specification.

IQAS measures a known point target against a specification, such as resolution, Peak Side Lobe Ratio (PSLR), or Integrated Side Lobe Ratio (ISLR). 

To enable IQAS, click the **IQAS** button on the tool bar.

Two IQAS dialog boxes will open. One dialog box shows the range (in metres), and the other shows the azimuth angle (in degrees).

Move the IQAS cursor to a target of interest in the sonar view, then click the left mouse button to place the cursor.

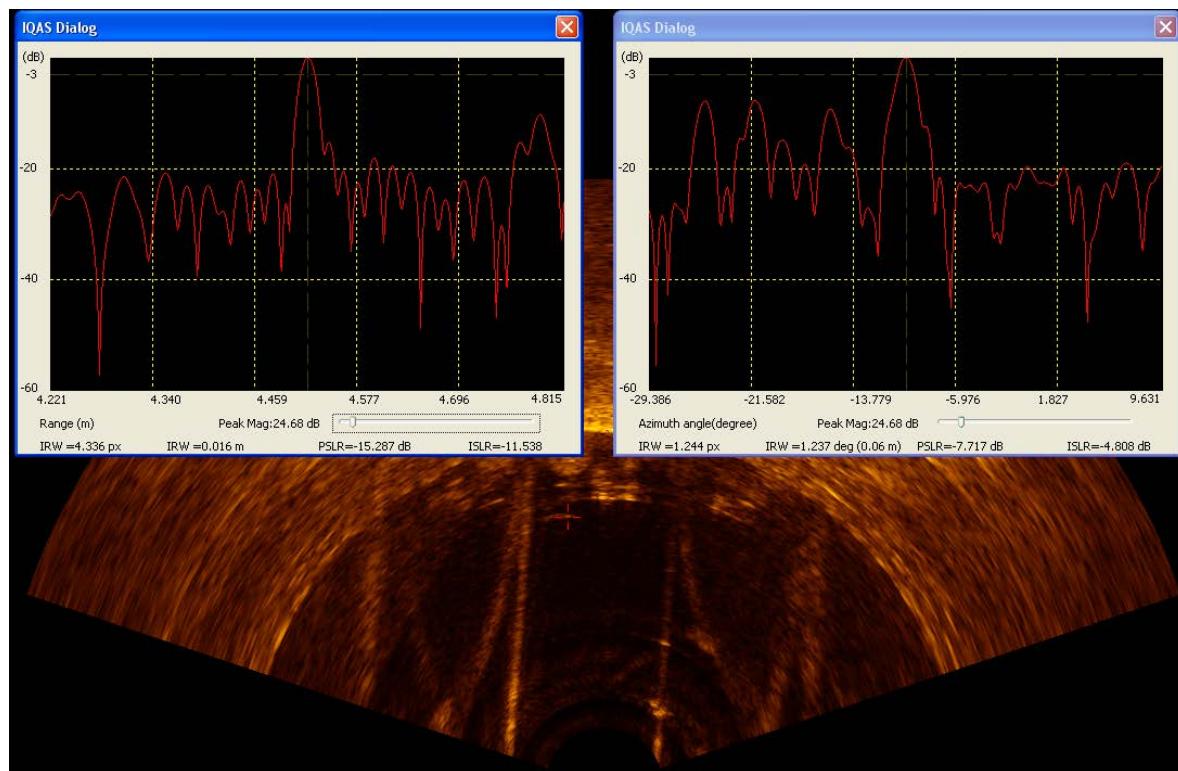

The following information will be displayed in the two IQAS dialog boxes.

Resolution, Impulse Response Width (IRW)

The IRW is measured 3 dB down from the top of the Main Lobe of the impulse response. In the range dialog box, the IRW is displayed in pixels and metres. In the azimuth angle dialog box, the IRW is displayed in pixels and degrees.

Peak Side Lobe Ratio (PSLR)

The PSLR is the Peak Side Lobe level in the Near Region relative to the level of the Main Lobe. The unit of measurement is dB.

Integrated Side Lobe Ratio (ISLR)

The ISLR is the ratio of the energy in the Near Region to the energy within the Main Lobe Region. The unit of measurement is dB.

Save image with or without overlays

With one click, you can capture an image of the sonar view — either with overlays or without overlays. Click this button to save sonar view images, including any overlays you've placed in the sonar views.

Click the **Save image with overlay** button to save the sonar view image, including any overlays (such as the Tape Measure or Text Labels for example) you've placed in the sonar view. If you want to save the sonar view without overlays, click the **Save image without overlay** button instead.



Your images will be saved under the folder "C:\KML\M3_V0253\Images" by default. You can change this save location through the **Preferences** dialog box.

A text file with information on the image capture sonar settings will also be created.

Tip

*Open the **Preferences** dialog box to change the default save location, choose your own filename, and add overlay text.*

TVG Setup dialog box

When an acoustic pulse is sent through the water, it will gradually lose its energy. The greater the distance between the transducer and the target(s), the greater the loss of energy. TVG (Time Variable Gain) compensates for the loss of acoustic energy due to geometric spread and absorption.


How to open

Note

*Each sonar application has its own TVG profile. Before changing the TVG settings, start the sonar (click **Setup**→**Connect**), then select the sonar application you want to configure from the **Sonar applications** list.*

If you are using a high-frequency M3 Sonar, the TVG profiles will not be saved when closing the software — default values will apply when switching to a new frequency or when starting up the M3 software.

Click the TVG button. This button is located on the tool bar.

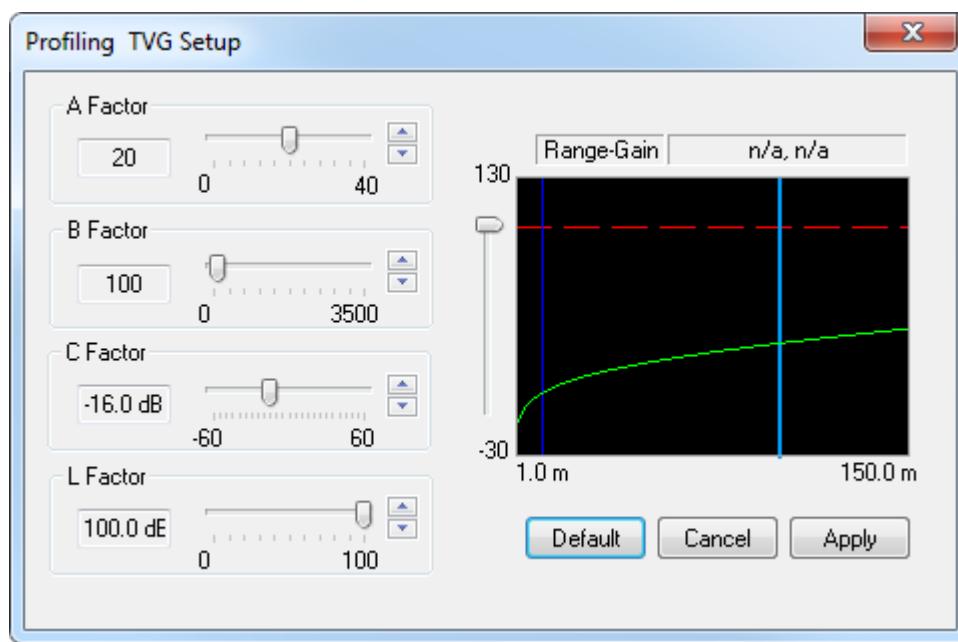

Description

When an acoustic pulse is sent through the water, it will gradually lose its energy. The greater the distance between the transducer and the target(s), the greater the loss of energy.

- **Geometric spread**

Once transmitted, the acoustic energy will spread out to form a circular beam. The width of this beam increases with the physical distance to the target(s).

- **Absorption loss**

Depending on the salinity and temperature, the water will absorb some of the energy from the acoustic transmission. The absorption loss increases as the physical distance to the target(s) increases.

Both the geometric spread and the absorption will also have an effect on the returned echo signal. That is why we normally refer to these factors as the two-way transmission loss.

The TVG (Time Variable Gain) compensation is designed to counteract the natural phenomena of geometric spread and absorption loss. In the M3 Sonar system, the TVG compensation is made using digital signal processing software. By means of algorithms, the time variable gain compensation converts the echo presentation as a function of range. This makes the targets with the same strength appear with the same intensity independent of their physical distance from the transducer.

Details

The TVG compensation is expressed as a logarithmic curve. You can choose from a selection of curves. Each curve has a different slope creating a different gain compensation. Four adjustable factors are used to set the gain curve.

A Factor

Represents spreading loss.

B Factor

Represents one-way absorption loss.

C Factor

Represents a base or starting gain level.

L Factor

Limits the maximum gain to reasonable levels.

To the left of the TVG curve display is a slider with a range from -30 to 130. This represents the system gain. Moving this slider down until the line intersects the green TVG curve will cause a Range-Gain pair of values to be displayed in the “Range-Gain” box. Adjust this slider to determine the gain at a particular range.

If you have a software license for advanced features, then an additional pane and slider bar will become available. When the Sonar Head is running, a graphic representation of the receive signal will appear at the bottom of the dialog box so that you can ensure that the signal is not being clipped. A slider is provided so that you can exclude the low end percent of the gain.

Related topics

[Adjusting the TVG \(Time Variable Gain\) setting, page 41](#)

Filters

You can apply an averaging, background removal, or an edge enhancement filter to the sonar view.



Note _____

*You can adjust the strength of these filters in the **Display Widget**.*

Average Filter

Clicking the “A” button will enable the Average Filter. This filter reduces noise. Slow-moving features persist on-screen.

This filter averages the image from ping to ping so that slow-moving features will persist, while reducing noise in the image. The Average Filter is especially useful when the image is constructed from multiple pings.

Background Removal

Clicking the “B” button will enable the Background Removal filter. This filter removes stationary parts of the background to enhance moving objects (such as fish, for example).

Edge Enhancement

Clicking the “E” button will enable Edge Enhancement. This filter enhances the edge of moving features.

This filter provides some persistence for the image. Edge Enhancement is especially useful when you wish to view a school of fish clearly, for example.

No Filter

Disables any filters. The sonar view will display an unfiltered sonar image.

No filtering is preferable if instantaneous readings are required, since this shortens the delay between updating the changes in sonar data, and the corresponding displayed information.

Related topics

[Applying filters, page 41](#)

Technical specifications

Topics

- [Introduction to technical specifications, page 192](#)
- [Interface specifications, page 193](#)
- [Performance specifications, page 196](#)
- [Mechanical specifications, page 200](#)
- [Power requirements, page 202](#)
- [Environmental requirements, page 203](#)
- [Minimum computer requirements, page 204](#)

Introduction to technical specifications

These technical specifications summarize the main functional and operational characteristics of the M3 Sonar Multibeam sonar. They also provide information related to power requirements, physical properties and environmental conditions.

Note

At Kongsberg Mesotech, we are continuously working to improve the quality and performance of our products. The technical specifications may be changed without prior notice.

Interface specifications

The M3 Sonar system will interface with peripheral systems and sensors using standard and/or proprietary datagram formats.

Supported datagram formats for GPS (position) information

The M3 Sonar system supports the following datagram formats for position information:

- **NMEA GGA**

The NMEA GGA datagram transfers time-, position- and fix-related data from a global positioning system (GPS).

- **NMEA GLL**

The NMEA GLL datagram transfers the latitude and longitude of vessel position, the time of the position fix and the current status from a global positioning system (GPS).

- **GGK**

This third party datagram format contains the vessel's current position with the assigned coordinated universal time (UTC) of position, as well as a selection of position quality factors.

Supported datagram formats for speed information

The M3 Sonar system supports the following datagram format for speed information:

- **NMEA VTG**

The NMEA VTG datagram contains the actual course and speed relative to the ground.

Supported datagram formats for heading information

The M3 Sonar system supports the following datagram formats for vessel heading and/or gyro information:

- **NMEA HDG**

The NMEA HDG datagram provides heading from a magnetic sensor. If this reading is corrected for deviation, it produces the magnetic heading. If it is offset by variation, it provides the true heading.

- **NMEA HDM**

The NMEA HDM datagram provides vessel heading in degrees magnetic. The datagram is no longer recommended for use in new designs. It is often replaced by the NMEA HDG telegram.

- **NMEA HDT**

The NMEA HDT datagram provides the true vessel heading. The information is normally provided by a course gyro.

- **EM Attitude 3000**

The Kongsberg EM Attitude 3000 is a proprietary datagram format created by Kongsberg Mesotech for use with digital motion sensors. It holds roll, pitch, heave and heading information. The datagram contains a 10-byte message.

- **Octans STD1**

This is a third-party proprietary datagram format for heading, speed, and motion. It was created by iXSea (<http://www.ixblue.com>) for use with their Octans gyrocompass.

Supported datagram formats for motion information

The M3 Sonar system supports the following datagram formats from a motion sensor:

- **Teledyne TSS1**

Teledyne TSS1 is a proprietary datagram format for heave, roll and pitch compensation. When you select this protocol, the number of sensor variables is fixed, and there is no token associated with it.

- **EM Attitude 3000**

The Kongsberg EM Attitude 3000 is a proprietary datagram format created by Kongsberg Mesotech for use with digital motion sensors. It holds roll, pitch, heave and heading information. The datagram contains a 10-byte message.

- **Octans STD1**

This is a third-party proprietary datagram format for heading, speed, and motion. It was created by iXSea (<http://www.ixblue.com>) for use with their Octans gyrocompass.

Supported datagram formats for sound speed sensors

The M3 Sonar supports the following datagram format from a sound speed sensor.

- **Valeport**

This is a third-party proprietary datagram format created by Valeport Ltd. for use with their sound velocity sensors. The file format is ASCII. There are three formats: standard format (millimetres per second), alternative format #2 (metres per second with two decimal places), and alternative format #3 (metres per second with three decimal places). For more information, see <http://www.valeport.co.uk>.

Note

If you are using a Sonar Head with an integrated AML sound speed sensor, you do not need to interface with a datagram as it is built into the sonar.

Supported datagram formats for depth information

The M3 Sonar system supports the following datagram formats for depth output:

- **NMEA DBT**

The NMEA DBT datagram provides the current depth under the transducer. In new designs, this datagram format is frequently used to replace the DBK and DBS formats.

- **NMEA DPT**

The NMEA DPT datagram provides the water depth relative to the transducer, and the offset of the measuring transducer.

Processed data formats

The following processed data output formats are available.

- **.mmb**

This is raw element data, not beamformed, in a 16-bit fixed-point complex format. This format allows great flexibility in how the data is processed and allows you to do your own beamforming or profile-point extraction. The data body size is determined by the number of elements and the number of samples.

- **.imb**

This format consists of beamformed data.

You can choose between a 32-bit floating point complex or 8-bit integer magnitude format. Select the 8-bit format only if you are interested in imaging pixel data and want a reduced data file size. The 8-bit format takes up a quarter of the 32-bit format's size.

Data body size is determined by the number of beams and samples. Different modes may form a different number of beams. Therefore, data body size may change depending upon the mode.

- **.ALL**

This is the proprietary Kongsberg EM series datagram format. The M3 software can output this data format to be compatible with third-party post-processing software.

Synchronization

- **PRI Sync**

PRI Sync (set with *Trigger Mode* on the **Sonar Setup** page of the **System Configuration** dialog box) provides ping synchronization with another Sonar Head or other acoustic source that supports synchronization (for example, EK60, Sidescan, DVL, etc.). PRI Sync is a level-sensitive method of synchronization. When the sync is held high, the sonar will not transmit. The PRI Sync INPUT must be held low for 25µs in order to trigger the Sonar Head. The Sonar Head will transmit a 100µs sync OUTPUT pulse when configured as **Master** on the **Sonar Setup** page. The sync OUTPUT is generated each time the Sonar Head transmits.

- **Host Time Sync Mode**

Host mode synchronizes the Sonar Head time with the computer time. This mode is critical for Bathymetry applications. *Host* mode only works if the computer is connected to an accurate time source, such as a GPS or network time server. When connecting to the Sonar Head, it takes two minutes to synchronize the time to within five milliseconds.

- **1PPS Time Sync Mode**

1PPS is a 0 to 5 VDC pulse, with a 50% duty cycle. The Sonar Head time can be synchronized to external 1PPS pulses.

The time is synchronized to the rising edge of the 1PPS pulses. When the rising edge of a 1PPS pulse is detected then the ns, us and ms counters are set to zero. The second counter is set to zero if the ms counter is < 500 and increased by 1 if the ms counter is \geq 500.

1PPS synchronization requires ZDA input over UDP to the Sonar Head (not to the M3 software) on UDP port 31100 at 1Hz.

The 1PPS signal must be sent to the Sonar Head using the 1PPS input on one of the following cables.

- 10-pin SEA CON® MINK-10-CCPL cable used with M3 Sonar model 922-20220000.
- 4-pin SEA CON® MIND-4-FCR cable used with M3 Sonar model 922-20050000.

The Sonar Head must be upgraded to the latest firmware version (version 1.5 or later).

- **Computer Time Sync**

If ZDA is configured, the M3 software will use the time in the ZDA message to synchronize the computer clock automatically in the background. However, you may need to run the M3 software as an administrator (right-click on the icon and select **Run as administrator**) or Windows may not allow the software to change the system clock. Computer time sync can be useful when data is being logged on more than one computer and synchronized timing is required. This method is not recommended for Bathymetry applications as it is not accurate enough.

Note _____

Computer time sync requires both GGA and ZDA input.

Performance specifications

These performance specifications summarize the main functional and operational characteristics of the M3 Sonar system.

- **Slant range:** 0.2 to 150 m (depends on model)
- **Coverage:** up to 140°

- **Range resolution:** 1 cm
- **Frequency:** 500 kHz to 1400 kHz (depends on model)
- **Pulse types:** CW, LFM
- **Communication:** Ethernet
- **Data Rates:** 10/100/1000 Mbps

Synchronization

- **PRI Synchronization (master / slave operation):**
 - **Sync Input:** 0 to 5 VDC, hold-off when high
 - **Sync Output:** 0 to 5VDC active low pulse 100µs
- **1PPS Synchronization**

Note

The selection of sonar applications presented in the Sonar Applications menu depends on the current Sonar Head frequency. The M3 software will automatically detect the frequency of your Sonar Head and display only the applicable sonar applications.

Variable Vertical Beamwidth (Imaging) mode — 500 kHz

- **Horizontal Field of View:** 120°
- **Vertical Field of View:** 3°, 7°, 15°, 30°
- **Angular Resolution:** 1.6°
- **Update rate:** up to 40 Hz

EIQ mode — 500 kHz

- **Horizontal Field of View:** 140°
- **Vertical Field of View:** 30°
- **Angular Resolution:** 0.95°
- **Update rate:** up to 10 Hz

Bathymetry/Profiling mode — 500 kHz

- **Across track field of view:** 120°
- **Along track field of view:** 3°
- **Number of beams:** up to 256

- **Update rate:** up to 40 Hz
- **Beam spacing:** Equiangular

Imaging mode — 700 kHz

- **Horizontal Field of View:** 140°
- **Vertical Beamwidth:** 30°
- **Angular Resolution:** 1.0°
- **Update rate:** up to 40 Hz

Imaging mode — 950 kHz

- **Horizontal Field of View:** 140°
- **Vertical Beamwidth:** 27°
- **Angular Resolution:** 0.8°
- **Update rate:** up to 40 Hz

Imaging mode — 1200 kHz

- **Horizontal Field of View:** 75°
- **Vertical Beamwidth:** 21°
- **Angular Resolution:** 0.65°
- **Update rate:** up to 40 Hz

Imaging mode — 1400 kHz

- **Horizontal Field of View:** 45°
- **Vertical Beamwidth:** 18°
- **Angular Resolution:** 0.55°
- **Update rate:** up to 40 Hz

Profiling mode — 700 kHz

- **View angle:** 140°
- **Resolution:** 1.8° x 2.0°
- **Max Range:** 140 m
- **No. of Beams:** 256

Profiling mode — 950 kHz

- **View angle:** 140°

- **Resolution:** $1.4^\circ \times 1.5^\circ$
- **Max Range:** 100 m
- **No. of Beams:** 256

Profiling mode — 1200 kHz

- **View angle:** 75°
- **Resolution:** $1.1^\circ \times 1.2^\circ$
- **Max Range:** 70 m
- **No. of Beams:** 256

Profiling mode — 1400 kHz

- **View angle:** 45°
- **Resolution:** $0.9^\circ \times 1.0^\circ$
- **Max Range:** 50 m
- **No. of Beams:** 256

Profiling - HiRes mode — 700 kHz

- **View angle:** 140°
- **Resolution:** $1.8^\circ \times 1.0^\circ$
- **Max Range:** 140 m
- **No. of Beams:** 512

Profiling - HiRes mode — 950 kHz

- **View angle:** 140°
- **Resolution:** $1.4^\circ \times 0.75^\circ$
- **Max Range:** 100 m
- **No. of Beams:** 512

Profiling - HiRes mode — 1200 kHz

- **View angle:** 75°
- **Resolution:** $1.1^\circ \times 0.6^\circ$
- **Max Range:** 70 m
- **No. of Beams:** 512

Profiling - HiRes mode — 1400 kHz

- **View angle:** 45°
- **Resolution:** 0.9° x 0.5°
- **Max Range:** 50 m
- **No. of Beams:** 512

VDSL

Firmware version: 1.5

Part number: 320-27701000-0150 (Rx controller)

Important

Although VDSL sonar heads are pre-programmed at the factory with the correct firmware, you may need to upgrade your firmware if you do not have the latest version for your VDSL Sonar Head. For the best performance, firmware version 1.5 (or later) is required for applications using a long cable and VDSL telemetry. Note that you only need to upgrade the Sonar Head receive firmware file (.RXF) and the Sonar Head software file (.ASW). You do not need to upgrade the Sonar Head transmit firmware file (.TXF).

AML SVT Xchange sound speed sensor

A Sonar Head with an integrated AML sound speed sensor is available from Kongsberg Mesotech.

- **Range:** 1375 - 1625 m/s
- **Resolution:** 0.001 m/s
- **Accuracy:** 0.025 m/s
- **Response time:** 20 ms
- **Precision:** 0.006 m/s

Mechanical specifications

These mechanical specifications summarize the physical properties of the M3 Sonar system.

Sonar Processor

The Sonar Processor uses a high-quality commercial-off-the-shelf laptop computer workstation. The weight and dimensions of the model may vary. Contact your Kongsberg

Mesotech representative for information about the current model that is delivered with your M3 Sonar system.

500 m Sonar Head

- **Depth rating:** 500 m
- **Dimensions**
 - **Diameter:** 185 mm (7.28")
 - **Depth:** 126 mm (4.95")
- **Weight:** 4.4 kg (air), 1.8 kg (water)
- **Materials:** Anodized Aluminium, Stainless Steel 316, Elastomeric Polyurethane
- **Connector type:** SEA CON®
- **Connector model:** MINK-10-FCRL (Telemetry & Power)

4000 m Sonar Head

- **Depth rating:** 4000m
- **Dimensions**
 - **Diameter:** 185 mm (7.28")
 - **Depth:** 140 mm (5.50")
- **Weight:** 8.2 kg (air), 5.1 kg (water)
- **Materials:** Titanium, Stainless Steel 316, Elastomeric Polyurethane
- **Connector type:** SEA CON®
- **Connector model:** MINK-10-FCRL (Telemetry & Power)

Optional connector models

- **Synchronization:** SEA CON®, MIND-4-FCR
- **100BaseTX Ethernet and Power:** Alstom Seanet (4000 m M3 Sonar only)
- **100BaseTX Ethernet and Power:** SubConn MCBHRA6MSS (500 m M3 Sonar only)

High-frequency Sonar Head

- **Depth rating:** 4000 m
- **Dimensions**
 - **Width:** 218 mm (8.59")
 - **Height:** 144 mm (5.67")
- **Weight:** 7.8 kg (air), 5.0 kg (water)

- **Materials:** Titanium, Elastomeric Polyurethane
- **Connector type:** SEA CON®
- **Connector model:** MINK-10-FCRL (Telemetry & Power)

VDSL

Cable requirements: One twisted pair (100-ohm impedance)

Note

VDSL will work over two wires. Actual data rate will vary with the cable quality.

- **3 m (10 foot) cable:** Up to 100 Mbps
- **152 m (500 foot) cable:** Up to 100 Mbps
- **1000 m (3300 foot) cable:** 27 Mbps (measured on Belkin 1353A)

AML SVT Xchange sound speed sensor

A Sonar Head with an integrated AML sound speed sensor is available from Kongsberg Mesotech.

- **Depth rating:** 11000 m
- **Weight:** 120 g
- **Material:** Titanium

Power requirements

These power characteristics summarize the supply power requirements for the M3 Sonar system.

Sonar Processor

- **Power adapter input voltage:** 120/240 VAC
- **Laptop input voltage:** 19.5 VDC @ 180W (max)

Sonar Head

- **Input voltage:** 12 to 36 VDC
- **Input power:** 22W (avg.), peak power < 60W, mode dependant
- **Maximum cable loop resistance for Sonar Head power:**
 - 0.1 Ω @ 12VDC

- 2 Ω @ 24VDC
- 6 Ω @ 36VDC

Note _____

These values were measured at +23°C.

Environmental requirements

These specifications summarize the temperature requirements and other environmental standards for the M3 Sonar system.

Sonar Processor

The Sonar Processor uses a high-quality commercial-off-the-shelf laptop computer workstation. This computer is intended to be installed inside in an area suitable for extended human habitation. Contact your Kongsberg Mesotech representative for information about the current model that is delivered with your M3 Sonar system.

Sonar Head

- **Temperature:** -2° to + 38 °C (operation), -40 to +55 °C (storage)
- **Shock qualified:** +/-50gs, 3 Axes, 6 shocks per axis
- **Vibration qualified:** 4g, 30Hz 3 Axes, 2 hours per axis. No resonance below 800Hz

The stated operation temperature range is for the Sonar Head in water. The Sonar Head can be powered on and started at temperatures between -20° to +45° C. There is a built-in temperature monitor that will display a software warning message and automatically power down the Sonar Head before it overheats.

Caution _____

The Sonar Head must not be exposed to direct sunlight for prolonged periods of time. Prolonged exposure to ultra-violet rays and excessive heat may damage the surface of the polyurethane transducer face. Store the Sonar Head in a cool, dry location away from ozone sources (such as electric motors or welders).

AML SVT Xchange sound speed sensor

A Sonar Head with an integrated AML sound speed sensor is available from Kongsberg Mesotech.

- **Storage temperature:** -20 to 60 °C
- **Operating temperature:** -5 to 45 °C

Minimum computer requirements

Although a computer can be ordered from Kongsberg Mesotech as a part of the M3 Sonar system delivery, it is also possible to purchase one locally.

If you purchase a computer locally, make sure that the chosen model meets the functional and technical requirements.

It is important that the chosen computer model is relatively new with sufficient processing power, a high performance graphics adapter, and a high speed Ethernet adapter.

We recommend a computer with a CPU that has a PassMark Software benchmark score of 14,000 or more (passmark.com).

PassMark Software is a Windows computer performance benchmarking utility. Computers with a CPU score of 14,000 or higher have been tested with the M3 Sonar. Lower-scoring computers may not perform well, resulting in a slow GUI response, slower ping rates, or dropped pings.

When running two M3 Sonars, an average CPU Mark of 30,000 is recommended.

The computer must be able to facilitate the various interface requirements made by the M3 Sonar system, and you may need to add extra Ethernet and/or serial adapters.

Note

The computer design and construction must allow for maritime use. Easy access to connectors, parts and cables must be provided. Make sure that the installation method allows for the physical vibration, movements and forces normally experienced on a vessel.

The minimum technical requirements are:

- **Microprocessor:** 2.80 GHz, Intel quad core i7
- **Memory:** minimum 8 GB
- **Hard disk:** minimum 500 GB
- **Graphics card RAM:** 256 MB
- **Network interface:** 100/1000 Mbps
- **Serial adapters:** One or more serial line interfaces are required. The number of serial lines depends on your interface requirements.
- **Operating system:** The M3 software has been designed for the Microsoft® 64-bit Windows 10 operating system. Windows 7 is supported for imaging applications only.

Profiling applications will not work properly in Windows 7. Operating systems older than Windows 7 are not supported.

Index

1PPS Time Sync Mode	190
testing	29
3D Point Cloud	19
about.....	83
description	83
3D Point Cloud function	176
purpose	91, 111
 A	
about	182
3D Point Cloud.....	83
comments	8
constructive criticism.....	8
feedback.....	8
registered trademarks.....	7
software license	7
software version.....	7
sonar view	80
status bar	87
suggestions	8
target audience	7
this publication	7
About dialog box	182
purpose	101, 178
Add Device	143
System Configuration dialog box.....	140, 143
adjust	182
sonar views	38
Advanced menu	182
description	100, 163
how to open.....	100, 163
Algorithm	118
Profiling Settings dialog box	118
Angle	153
System Configuration dialog box.....	153
angles	182
measuring.....	65
Annotations	182
purpose	92, 112
applying	182
filters.....	41
areas	182
defining.....	66
Arrow	182
description	181
Auto	107
Convert to Video dialog box	107
Autoconnect at program start	137
System Configuration dialog box.....	137
Automatic IP address allocation	131
Head Network Setup dialog box.....	131
Average Filter	190
description	190
Azimuth Processing	165
Power User Settings dialog box.....	165
 B	
Background Removal Filter	182
basic procedures	19
getting started	19
<BatchProfilingDesFolder>	176
Power User Settings XML file	176
<BatchProfilingSrcFolder>	176
Power User Settings XML file	176
Baud rate	113
Baud Rate	143
System Configuration dialog box.....	140, 143
button	182
Arrow.....	181
Average Filter	190
Background Removal Filter	190
Edge Enhancement	190
IQAS.....	185
No Filter.....	190
Protractor.....	183
Reference cursor 1	184
Reference cursor 2	184
Save image with overlay.....	186
Save image without overlay.....	186
String measure	183
Tape measure	183
Text label.....	184
Wiper	181
Zoom windows.....	182
 C	
Calculator	126
Geo Projection dialog box	126
changing	23
frequency.....	23
changing IP Address	73
Sonar Head	73
characteristics	200
mechanical.....	200
choosing	36
sonar application.....	36
Clutter Suppression	118
Profiling Settings dialog box	118
comments	8
send us.....	8
computer	204
minimum requirements	204
concept	187
Time Variable Gain (TVG)	187
Configuration	150
System Configuration dialog box.....	150
Configuration file	134
Head Firmware Configuration dialog box	134
Program Head dialog box.....	169–170, 172
Configuration type	134
Head Firmware Configuration dialog box	134
Program Head dialog box.....	170
configuring	34
preferences.....	34
Sonar Processor	20

Connect	
Rotator Test dialog box	146
Connect function	
purpose	94, 120
connecting	
sonar head	33
constructive criticism	
send us	8
controlling	
rotator	48
Convert	
Convert to Video dialog box	109
Convert Mode	
Profile Batch Conversion dialog box	173
Convert to Video dialog box	
Auto	107
Convert	109
Date/Time	107
description	106
details	107
Display Filter	108
Display Grid	107
Display Mirror	108
Display Overlay Text	108
Display Position	108
Display Sensor Data	108
Folder Conversion	108
Manual	107
Match Ping Rate	107
Max File Size	109
One Frame per Ping	107
Palette	107
purpose	90, 103
Quality	107
Resolution	107
Sidelobe Suppression	108
Source File	109
Source Folder	109
Target File	109
Target file naming convention	109
Target Folder	109
converting	
recordings	56, 58
Cropped Width	
Preferences dialog box	129
Current Position	
Rotator Test dialog box	146
custom sensor	
defining	45
Customize Apps dialog box	
purpose	99, 158
D	
Data bits	
Target Marker Export dialog box	113
Data Bits	
System Configuration dialog box	140, 143
Data Type	
Define Custom Sensor dialog box	123
datagram formats	
depth information	195
GPS (Global Positioning System)	193
gyro compass	193
heading sensor	193
motion sensor	194
positioning system	193
sound speed	194
speed log	193
Date/Time	
Convert to Video dialog box	107
Datum Parameters	
Geo Projection dialog box	126
Define Custom Sensor dialog box	
Data Type	123
defining	45
Delimiter(s)	123
description	122
details	123
Latitude / Longitude Format	123
Message ID	123
purpose	94, 120
Sensor Format	123
Sensor Name	124
Termination	123
Unit Scale Factor	123
defining	
areas	66
custom sensor	45
IPAddress	22
Defining the IP address on the network adapter	22
Delete All Markers function	
purpose	91, 111
Delimiter(s)	
Define Custom Sensor dialog box	123
Depth	
System Configuration dialog box	150
depth information	
datagram formats	195
depth range	
choosing	35
Depth Tracking	
Profiling Settings dialog box	119
description	
3D Point Cloud	83
Advanced menu	100, 163
Arrow	181
Average Filter	190
Background Removal Filter	190
Convert to Video dialog box	106
Define Custom Sensor dialog box	122
Display menu	91, 111
Edge Enhancement	190
Exporting Format function	105
File menu	90, 103
Geo Projection dialog box	125
Head Firmware Configuration dialog box	134
Head Network Setup dialog box	131
Help menu	101, 178
IQAS	185
menu system	79
No Filter	190
Playback Console	115
Power User Settings dialog box	165
Power User Settings XML file	175
Preferences dialog box	127
Profile Batch Conversion dialog box	172
Profiling Settings dialog box	117
Program Head dialog box	168, 170–171
Protractor	183

Raw Data Spectrum window	174
Recording Format function	104
Reference cursor 1	184
Reference cursor 2	184
Rotator Test dialog box	144
Save image with overlay	186
Save image without overlay	186
Setup menu	94, 120
Sonar Applications menu	96, 155, 159–161
sonar view	80
status bar	87
String measure	183
system	10
System Configuration dialog box	136, 139, 142, 149, 152
Tape measure	183
Target Marker function	113
Text label	184
tool bar	85, 179
Wiper	181
Zoom windows	182
details	
Convert to Video dialog box	107
Define Custom Sensor dialog box	123
Geo Projection dialog box	126
Head Firmware Configuration dialog box	134
Head Network Setup dialog box	131
Power User Settings dialog box	165
Power User Settings XML file	176
Preferences dialog box	128
Profile Batch Conversion dialog box	173
Profiling Settings dialog box	117
Program Head dialog box	169–170, 172
Rotator Test dialog box	146
Sonar Applications menu	159, 161–162
System Configuration dialog box	136, 140, 143, 150, 153
Target Marker function	113
TVG	188
Device Axis	
System Configuration dialog box	143
diagram	
system	11
dialog box	
Convert to Video dialog box description	106
Define Custom Sensor dialog box	
description	122
Geo Projection dialog box description	125
Head Firmware Configuration dialog box	
description	134
Head Network Setup dialog box description	131
Power User Settings dialog box description	165
Preferences dialog box description	127
Profile Batch Conversion dialog box	
description	172
Profiling Settings dialog box description	117
Program Head dialog box	
description	168, 170–171
Rotator Test dialog box description	144
System Configuration dialog box	
description	136, 139, 142, 149, 152
Directional Move	
Rotator Test dialog box	146
Disconnect	
Rotator Test dialog box	146
Discover Sonar Heads	
System Configuration dialog box	137
Display Coords In	
Geo Projection dialog box	126
Display Filter	
Convert to Video dialog box	108
Display Grid	
Convert to Video dialog box	107
Display menu	
description	91, 111
how to open	91, 111
Display Mirror	
Convert to Video dialog box	108
display organisation	
description	77
Display Overlay Text	
Convert to Video dialog box	108
Display Position	
Convert to Video dialog box	108
Display Sensor Data	
Convert to Video dialog box	108
display views	
description	77
Distance / Time	
Preferences dialog box	129
distances	
measuring	64
E	
echogram	
choosing range	35
Edge Enhancement	
description	190
EIQ	
purpose	97, 156
EIQ - Fine	
purpose	97, 156
EIQ - Ultra Fine	
purpose	97, 156
Enable Target Marker function	
purpose	91, 111
environmental	
requirements	203
Ethernet adapter	
Defining the IP address on the network	
adapter	22
Ethernet Test - 1000Mbps	
purpose	97, 156
Ethernet Test - 100Mbps	
purpose	97, 156
Ethernet Test - 10Mbps	
purpose	97, 156
Exit function	
purpose	90, 103
Export to File	
Preferences dialog box	129
Export type	
Profile Batch Conversion dialog box	173
Exporting Format function	
description	105
purpose	90, 103
external sensors	
setting up	42

F

- feedback
 - send us..... 8
- Feet
 - Preferences dialog box..... 128
- File menu
 - description 90, 103
 - how to open..... 90, 103
- filters
 - applying..... 41
- Folder Conversion
 - Convert to Video dialog box 108
- Font Size function
 - purpose 92, 112
- formats
 - processed data..... 195
- frequency
 - changing..... 23
- Full Screen function
 - purpose..... 91, 111
- function
 - Exporting Format function description 105
 - Playback Console description 115
 - Recording Format function description 104
 - Target Marker function description..... 113
 - TVG details..... 188

G

- Geo Projection dialog box
 - Calculator 126
 - Datum Parameters 126
 - description 125
 - details..... 126
 - Display Coords In..... 126
 - Latitude / Longitude..... 126
 - Latitude / Longitude Format 126
 - Northing / Easting 126
 - purpose 94, 120
 - Zone 126
- Geographic
 - Preferences dialog box..... 128
- GeoTiff files
 - saving..... 60
- Get Default
 - Head Network Setup dialog box..... 132
 - System Configuration dialog box..... 137
- getting started
 - procedures 19
- Global Positioning System (GPS)
 - datagram formats 193
- GPS (Global Positioning System)
 - datagram formats 193
- gyro compass
 - datagram formats 193

H

- Head
 - Head Firmware Configuration dialog box 134
 - Program Head dialog box..... 169–170
- Head Firmware Configuration dialog box
 - Configuration file 134
 - Configuration type..... 134

- description 134
- details..... 134
- Head 134
- purpose 94, 120
- Read 134
- Write..... 134
- Head Name
 - Head Network Setup dialog box 131
 - System Configuration dialog box..... 136
- Head Network Setup dialog box
 - Automatic IP address allocation 131
 - description 131
 - details..... 131
 - Get Default 132
 - Head Name 131
 - IP Address 132
 - IP Default Gateway..... 132
 - IP Port 132
 - IP Subnet Mask 132
 - purpose 94, 120
 - Read from Head..... 132
 - Serial Number..... 131
 - VDSL Profile..... 131
 - VDSL SNR Margin..... 132
 - Write to Head..... 132
- Heading
 - System Configuration dialog box..... 150
- Heading Overlay function
 - purpose 92, 112
- heading sensor
 - datagram formats 193
- Heave
 - System Configuration dialog box..... 150
- Help menu
 - description 101, 178
 - how to open..... 101, 178
- how to
 - adjust sonar views 38
 - adjust the TVG 41
 - apply filters 41
 - change the frequency 23
 - change the Sonar Head IP Address..... 73
 - choose a sonar application..... 36
 - choose range 35
 - configure preferences..... 34
 - configure the Sonar Processor..... 20
 - connect to the sonar 33
 - control the rotator 48
 - convert recordings 56, 58
 - define areas 66
 - define custom sensor 45
 - Defining the IP address on the network
 - adapter 22
 - install the operational software 21
 - interpret the sonar view 81
 - measure angles 65
 - measure distances 64
 - place reference cursors..... 67
 - place target markers 68
 - place text labels 66
 - play back a record file 55
 - record sonar data..... 54
 - save and retrieve images..... 54
 - save GeoTiff files 60
 - set up external sensors 42

test 1PPS Time Sync Mode.....	29
test the sonar and sensors	26
test the Sonar Head	23
Turning off the M3 Sonar system.....	18
Turning on the M3 Sonar system.....	17
upgrade the Sonar Head.....	71
how to open	
Advanced menu.....	100, 163
Display menu.....	91, 111
File menu	90, 103
Help menu	101, 178
Setup menu	94, 120
Sonar Applications menu	96, 155

I

icon	
Arrow.....	181
Average Filter	190
Background Removal Filter	190
Edge Enhancement	190
IQAS.....	185
No Filter.....	190
Protractor.....	183
Reference cursor 1	184
Reference cursor 2	184
Save image with overlay.....	186
Save image without overlay	186
String measure	183
Tape measure	183
Text label	184
Wiper	181
Zoom windows.....	182

Image	
Profiling Settings dialog box	117
Image and Profile	
Profiling Settings dialog box	117
images	
saving and retrieving	54
Imaging	
purpose	99, 158
Imaging 15	
purpose	97, 156
Imaging 3	
purpose	97, 156
Imaging 30	
purpose	98, 157
Imaging 30 - Short Range	
purpose	98, 157
Imaging 7	
purpose	98, 157
Imaging Enhanced	
purpose	99, 158
information	
support	15
Input type	
Profile Batch Conversion dialog box.....	173
installation	
software	21
installation requirements	
environmental	203
temperature	203
interface	
specifications	193
Interface	

System Configuration dialog box.....	140, 143
interpret	
sonar view	81
introduction	
power supply	13
Sonar Head	14
Sonar Processor	13
technical specifications.....	192
Introduction to technical specifications	192
IP Address	
Head Network Setup dialog box	132
System Configuration dialog box	136
IP Default Gateway	
Head Network Setup dialog box	132
System Configuration dialog box	136
IP Port	
Head Network Setup dialog box	132
System Configuration dialog box	136
IP Subnet Mask	
Head Network Setup dialog box	132
System Configuration dialog box	136
IPAddress	
defining.....	22
IQAS	
description	185

K

Kongsberg Mesotech	
support	15

L

Latitude / Longitude	
Geo Projection dialog box	126
Latitude / Longitude Format	
Define Custom Sensor dialog box	123
Geo Projection dialog box	126
license information	
software	7
Load User Settings function	
purpose	90, 103
Local Time	
Preferences dialog box	128

M

M3 Sonar	
system diagram.....	11
Magnetic Variation	
System Configuration dialog box.....	150
mains power	
requirements	202
Manual	
Convert to Video dialog box	107
Match Ping Rate	
Convert to Video dialog box	107
Max Depth	
Profiling Settings dialog box	118
Max File Size	
Convert to Video dialog box	109
Max Sector	
Profiling Settings dialog box	118
measuring	

angles.....	65
distances.....	64
mechanical	
specifications	200
menu	
Advanced menu description.....	100, 163
Display	91, 111
File menu description	90, 103
Help menu description	101, 178
Setup.....	94, 120
Sonar Applications menu description	96, 155, 159–161
menu system	
description	79
Message ID	
Define Custom Sensor dialog box	123
Meters	
Preferences dialog box	128
Min Depth	
Profiling Settings dialog box	118
Min Sector	
Profiling Settings dialog box	118
minimum requirements	
computer	204
Mode ID	
Power User Settings dialog box.....	166
motion sensor	
datagram formats	194
N	
Name	
Preferences dialog box	128
System Configuration dialog box.....	140, 143
network adapter	
Defining the IP address on the network	
adapter	22
Network log level	
System Configuration dialog box.....	137
Network Sniffer window	
purpose	100, 163
No Filter	
description	190
noise and interference	
sonar view	82
Northing / Easting	
Geo Projection dialog box	126
O	
office	
support	15
One Frame per Ping	
Convert to Video dialog box	107
open	
Advanced menu	100, 163
Display menu.....	91, 111
File menu	90, 103
Help menu	101, 178
Setup menu	94, 120
Sonar Applications menu	96, 155
operational software	
installation	21
Orientation	
System Configuration dialog box	153
Output Messages function	
purpose	91, 111
Overlay Text	
Preferences dialog box	128
Override Beamlist	
Power User Settings dialog box.....	166
Override Mounting Parameters function	
purpose	154
Override Network Link Speed	
System Configuration dialog box.....	137
Override Processing Type	
Power User Settings dialog box.....	166
<OverrideBeamlistFile>	
Power User Settings XML file	176
overview	
power supply	13
Sonar Head	14
Sonar Processor	13
P	
Palette	
Convert to Video dialog box	107
Palette function	
purpose	92, 112
Parity	
System Configuration dialog box.....	140, 143
Target Marker Export dialog box.....	113
performance	
specifications	196
peripheral systems	
interface specifications	193
Ping Rate	
Power User Settings dialog box.....	166
Pitch Angle	
System Configuration dialog box.....	153
Pitch/Roll	
System Configuration dialog box.....	150
placing	
reference cursors	67
target markers	68
text labels	66
Playback Console	
description	115
Playback Console function	
purpose	91, 111
Playback function	
purpose	90, 103
<PlaybackOverrideBeamlists>	
Power User Settings XML file	176
playing back	
record file	55
Point Selection	
Profiling Settings dialog box	118
Point Size	
Profiling Settings dialog box	117
Port	
Target Marker Export dialog box	113
Port for .ALL format	
Preferences dialog box	129
Port Location	
System Configuration dialog box.....	140, 143
Port#	
System Configuration dialog box	140, 143
Position	

System Configuration dialog box	150
Positioning	
Rotator Test dialog box	147
positioning system	
datagram formats	193
power	
requirements	202
specifications	202
power supply	
introduction	13
overview	13
purpose	13
Power User Settings dialog box	
Azimuth Processing	165
description	165
details	165
Mode ID	166
Override Beamlist	166
Override Processing Type	166
Ping Rate	166
purpose	100, 163
Range Processing	165
RX Amplitude and Phase Correction	165
Sidelobe Reduction	165
Update Rate	166
Power User Settings XML file	
<BatchProfilingDesFolder>	176
<BatchProfilingSrcFolder>	176
description	175
details	176
<OverrideBeamlistFile>	176
<PlaybackOverrideBeamlists>	176
<ProcessingTypeOverride>	176
<Profile3DCloudPingToKeep>	176
<ProfileContinuousContour>	176
<ProfileSelectionFilterCoef>	176
<ProfileSpikeFilter>	176
preferences	
configuring	34
Preferences dialog box	
configuring	34
Cropped Width	129
description	127
details	128
Distance / Time	129
Export to File	129
Feet	128
Geographic	128
Local Time	128
Meters	128
Name	128
Overlay Text	128
Port for ALL format	129
Prompt User for Filename	128
purpose	94, 120
Range / Bearing	128
Remote IP Address	129
Use default location	128
UTC Time	128
X / Y	128
presentation	
description	77
procedure	
adjusting sonar views	38
adjusting the TVG	41
applying filters	41
changing the frequency	23
changing the Sonar Head IP Address	73
choosing a sonar application	36
choosing range	35
configuring preferences	34
configuring the Sonar Processor	20
connecting to the sonar	33
controlling the rotator	48
converting recordings	56, 58
defining areas	66
defining custom sensor	45
Defining the IP address on the network	
adapter	22
installing the operational software	21
interpreting the sonar view	81
measuring angles	65
measuring distances	64
placing reference cursors	67
placing target markers	68
placing text labels	66
playing back a record file	55
recording sonar data	54
saving and retrieving images	54
saving GeoTiff files	60
setting up external sensors	42
testing 1PPS Time Sync Mode	29
testing the sonar and sensors	26
testing the Sonar Head	23
Turning off the M3 Sonar system	18
Turning on the M3 Sonar system	17
upgrading the Sonar Head	71
procedures	
getting started	19
processed data	
formats	195
<ProcessingTypeOverride>	
Power User Settings XML file	176
Production Configuration	
Program Head dialog box	169
Profile Batch Conversion dialog box	
Convert Mode	173
description	172
details	173
Export type	173
Input type	173
purpose	100, 163
Profile Only	
Profiling Settings dialog box	117
<Profile3DCloudPingToKeep>	
Power User Settings XML file	176
<ProfileContinuousContour>	
Power User Settings XML file	176
<ProfileSelectionFilterCoef>	
Power User Settings XML file	176
<ProfileSpikeFilter>	
Power User Settings XML file	176
Profiling	
purpose	98, 157
Profiling - Bathy	
purpose	98, 157
Profiling - Dual Head Master	
purpose	98, 157
Profiling - Dual Head Slave	
purpose	98, 157

- Profiling - Fast
 purpose 98, 157
- Profiling - HiRes
 purpose 99, 158
- Profiling Settings dialog box
 Algorithm 118
 Clutter Suppression 118
 Depth Tracking 119
 description 117
 details 117
 Image 117
 Image and Profile 117
 Max Depth 118
 Max Sector 118
 Min Depth 118
 Min Sector 118
 Point Selection 118
 Point Size 117
 Profile Only 117
 purpose 91, 111
- Program Head dialog box
 Configuration file 169–170, 172
 Configuration type 170
 description 168, 170–171
 details 169–170, 172
 Head 169–170
 Production Configuration 169
 purpose 100, 163
 Read Config 169
 Write Config 169
- Prompt User for Filename
 Preferences dialog box 128
- Protocol
 System Configuration dialog box 140
- Protractor
 description 183
- purpose
 3D Point Cloud function 91, 111
 About dialog box 101, 178
 Annotations 92, 112
 Connect function 94, 120
 Convert to Video dialog box 90, 103
 Customize Apps dialog box 99, 158
 Define Custom Sensor dialog box 94, 120
 Delete All Markers function 91, 111
 EIQ 97, 156
 EIQ - Fine 97, 156
 EIQ - Ultra Fine 97, 156
 Enable Target Marker function 91, 111
 Ethernet Test - 1000Mbps 97, 156
 Ethernet Test - 100Mbps 97, 156
 Ethernet Test - 10Mbps 97, 156
 Exit function 90, 103
 Exporting Format function 90, 103
 Font Size function 92, 112
 Full Screen function 91, 111
 Geo Projection dialog box 94, 120
 Head Firmware Configuration dialog
 box 94, 120
 Head Network Setup dialog box 94, 120
 Heading Overlay function 92, 112
 Imaging 99, 158
 Imaging 15 97, 156
 Imaging 3 97, 156
 Imaging 30 98, 157
- Imaging 30 - Short Range 98, 157
 Imaging 7 98, 157
 Imaging Enhanced 99, 158
 Load User Settings function 90, 103
 Network Sniffer window 100, 163
 Output Messages function 91, 111
 Override Mounting Parameters function 154
 Palette function 92, 112
 Playback Console function 91, 111
 Playback function 90, 103
 power supply 13
 Power User Settings dialog box 100, 163
 Preferences dialog box 94, 120
 Profile Batch Conversion dialog box 100, 163
 Profiling 98, 157
 Profiling - Bathy 98, 157
 Profiling - Dual Head Master 98, 157
 Profiling - Dual Head Slave 98, 157
 Profiling - Fast 98, 157
 Profiling - HiRes 99, 158
 Profiling Settings dialog box 91, 111
 Program Head dialog box 100, 163
 Raw Data Spectrum window 100, 163
 Recording Format function 90, 103
 Reset to Default Layout function 92, 112
 Rotator Control dialog box 91, 111
 ROV Navigation 98, 157
 Rub Test 99, 158
 Sector Orientation function 92, 112
 Sidelobe Reduction function 92, 112
 Sonar Head 14
 Sonar Processor 13
 Speckle Filter function 92, 112
 Stop Playback function 90, 103
 System Configuration dialog box 94, 120
 this publication 7
 tool bar 92, 112
 User Manual function 101, 178
- Q**
- Quality
 Convert to Video dialog box 107
- R**
- Radius
 System Configuration dialog box 153
- range
 choosing 35
- Range / Bearing
 Preferences dialog box 128
- Range Processing
 Power User Settings dialog box 165
- Raw Data Spectrum window
 description 174
 purpose 100, 163
- Read
 Head Firmware Configuration dialog box 134
- Read Config
 Program Head dialog box 169
- Read from Head
 Head Network Setup dialog box 132
- record file

playing back	55
recording	
sonar data	54
Recording Format function	
description	104
purpose	90, 103
recordings	
converting.....	56, 58
Reference cursor 1	
description	184
Reference cursor 2	
description	184
reference cursors	
placing.....	67
registered trademarks.....	7
Remote IP Address	
Preferences dialog box	129
Remove Device	
System Configuration dialog box.....	140, 143
requirements	
computer	204
environmental	203
mains power	202
power	202
supply power	202
temperature	203
Reset to Default Layout function	
purpose	92, 112
Resolution	
Convert to Video dialog box	107
Roll Angle	
System Configuration dialog box.....	153
rotator	
controlling	48
Rotator Control dialog box	
purpose	91, 111
Rotator Control Dialog Type	
Rotator Test dialog box	148
Rotator Test dialog box	
Connect.....	146
Current Position.....	146
description	144
details.....	146
Directional Move	146
Disconnect.....	146
Positioning.....	147
Rotator Control Dialog Type	148
Soft Stops	147
ROV Navigation	
purpose	98, 157
Rub Test	
purpose	99, 158
RX Amplitude and Phase Correction	
Power User Settings dialog box.....	165
S	
Save image with overlay	
description	186
Save image without overlay	
description	186
saving	
GeoTiff files	60
saving and retrieving	
images	54
Sector Orientation function	
purpose	92, 112
Sensor Format	
Define Custom Sensor dialog box	123
Sensor Name	
Define Custom Sensor dialog box	124
sensors	
interface specifications	193
setting up.....	42
Serial Number	
Head Network Setup dialog box	131
System Configuration dialog box.....	136
setting up	
external sensors	42
sensors.....	42
Setup menu	
description	94, 120
how to open.....	94, 120
Sidelobe Reduction	
Power User Settings dialog box.....	165
Sidelobe Reduction function	
purpose	92, 112
Sidelobe Suppression	
Convert to Video dialog box	108
Soft Stops	
Rotator Test dialog box	147
software	
installation	21
software license	
about	7
software version	
about	7
sonar and sensors	
testing	26
sonar application	
choosing.....	36
Sonar Applications menu	
description	96, 155, 159–161
details.....	159, 161–162
how to open.....	96, 155
sonar data	
recording	54
sonar head	
connecting	33
Sonar Head	
changing IP Address.....	73
introduction	14
overview	14
purpose	14
testing	23
upgrading	71
sonar presentation	
description	77
Sonar Processor	
configuring.....	20
introduction	13
overview	13
purpose	13
Sonar Setup dialog box	
connecting to the sonar.....	33
sonar view	
about	80
description	80
interpreting.....	81
noise and interference	82

sonar views	
adjust	38
sound speed	
datagram formats	194
Sound Speed	
System Configuration dialog box.....	150
Source File	
Convert to Video dialog box	109
Source Folder	
Convert to Video dialog box	109
specification	
synchronization	195
specifications	
interface capabilities.....	193
mechanical.....	200
performance	196
power	202
Speckle Filter function	
purpose.....	92, 112
speed log	
datagram formats	193
status bar	
description	87
Stop bits	
Target Marker Export dialog box	113
Stop Bits	
System Configuration dialog box.....	140, 143
Stop Playback function	
purpose	90, 103
String measure	
description	183
suggestions	
send us.....	8
supply power	
requirements.....	202
support information.....	15
Supported datagram formats for sound speed	
sensors	194
SW	
software version.....	7
SW license	
about.....	7
synchronization	
specification	195
system	
description	10
diagram.....	11
System Configuration dialog box	
Add Device	140, 143
Angle	153
Autoconnect at program start	137
Baud Rate	140, 143
Configuration.....	150
Data Bits	140, 143
Depth	150
description	136, 139, 142, 149, 152
details.....	136, 140, 143, 150, 153
Device Axis.....	143
Discover Sonar Heads.....	137
Get Default	137
Head Name	136
Heading	150
Heave.....	150
Interface.....	140, 143
IP Address	136
IP Default Gateway.....	136
IP Port	136
IP Subnet Mask	136
Magnetic Variation	150
Name	140, 143
Network log level.....	137
Orientation.....	153
Override Network Link Speed	137
Parity	140, 143
Pitch Angle	153
Pitch/Roll	150
Port Location	140, 143
Port#	140, 143
Position.....	150
Protocol	140
purpose	94, 120
Radius	153
Remove Device	140, 143
Roll Angle	153
Serial Number.....	136
setting up external sensors.....	42
Sound Speed.....	150
Stop Bits	140, 143
Test Device	140, 143
testing 1PPS Time Sync Mode.....	29
Time Sync Mode.....	136
Trigger Mode.....	136
Unit	143
Use Discovered Head	137
X Offset	153
Y Offset	153
Yaw Angle	153
Z Offset	153
system software	
installation	21
T	
Tape measure	
description	183
target audience	
this publication.....	7
Target File	
Convert to Video dialog box	109
Target file naming convention	
Convert to Video dialog box	109
Target Folder	
Convert to Video dialog box	109
Target Marker Export dialog box	
Baud rate	113
Data bits.....	113
Parity	113
Port	113
Stop bits	113
Target Marker function	
description	113
details.....	113
target markers	
placing.....	68
technical requirements	
computer	204
mains power	202
power	202
supply power	202
technical specifications	

interface specifications	193
introduction	192
performance	196
temperature	
requirements	203
Termination	
Define Custom Sensor dialog box	123
Test Device	
System Configuration dialog box	140, 143
testing	
1PPS Time Sync Mode.....	29
sonar and sensors	26
Sonar Head	23
Text label	
description	184
text labels	
placing.....	66
this publication	
about.....	7
purpose	7
target audience	7
this user manual	
about	7
purpose	7
target audience	7
Time Sync Mode	
System Configuration dialog box	136
time variable gain	
adjusting	41
Time Variable Gain	
details.....	188
Time Variable Gain (TVG)	
concept	187
tool bar	
Arrow description.....	181
Average Filter description	190
Background Removal Filter description	190
description	85, 179
Edge Enhancement description	190
IQAS description	185
No Filter description.....	190
Protractor description	183
purpose	92, 112
Reference cursor 1 description	184
Reference cursor 2 description	184
Save image with overlay description.....	186
Save image without overlay description.....	186
String measure description	183
Tape measure description	183
Text label description.....	184
Wiper description	181
Zoom windows description	182
Trigger Mode	
System Configuration dialog box	136
Turning off the M3 Sonar system.....	18
Turning on the M3 Sonar system	17
TVG	
adjusting	41
details.....	188
TVG (Time Variable Gain)	
concept	187
U	
Unit	
System Configuration dialog box	143
Unit Scale Factor	
Define Custom Sensor dialog box	123
Update Rate	
Power User Settings dialog box.....	166
upgrading	
Sonar Head	71
Use default location	
Preferences dialog box	128
Use Discovered Head	
System Configuration dialog box	137
user interface	
description	77
User Manual function	
purpose	101, 178
UTC Time	
Preferences dialog box	128
V	
VDSL Profile	
Head Network Setup dialog box	131
VDSL SNR Margin	
Head Network Setup dialog box	132
view	
3D Point Cloud description.....	83
sonar view description	80
W	
window	
Raw Data Spectrum window description	174
Wiper	
description	181
Write	
Head Firmware Configuration dialog box	134
Write Config	
Program Head dialog box.....	169
Write to Head	
Head Network Setup dialog box	132
X	
X / Y	
Preferences dialog box	128
X Offset	
System Configuration dialog box	153
Y	
Y Offset	
System Configuration dialog box	153
Yaw Angle	
System Configuration dialog box	153
Z	
Z Offset	
System Configuration dialog box	153
Zone	
Geo Projection dialog box	126
Zoom windows	
description	182

©2022 Kongsberg Mesotech