

# PROTOTYPING AREA



## Notes:

Solid plane on top of board is connected to VCC.  
Solid plane on bottom of board is connected to GND.

Easy connection of a component leg to VCC or GND is achieved with solder bridging to the exposed circular area for the VCC or GND planes.

In some cases this can be more easily done by creating a "solder bridge triangle", with the component leg and two VCC or GND plane connections.

VCC  VCC

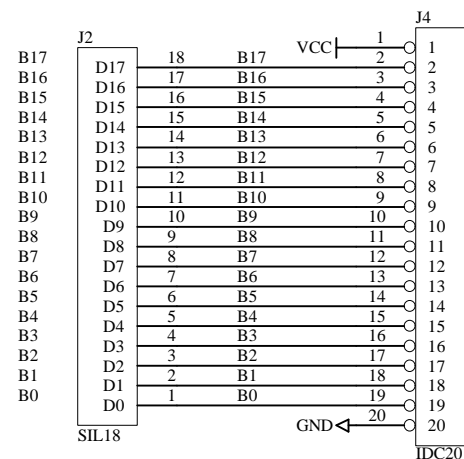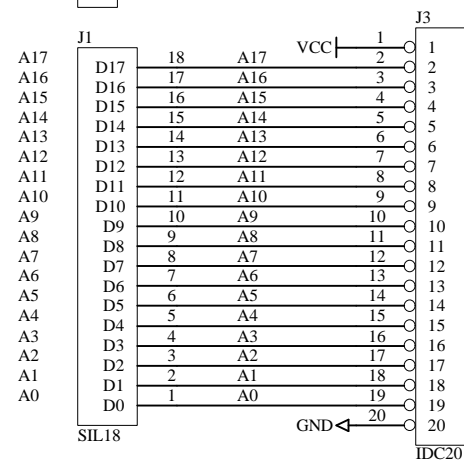

GND  GND