

ROHand 灵巧手

ROHand Dexterous Robotic Hand

ROH-AP003



三维力控
3D Force Control




仿生触觉
Bionic Touch



自适应抓取
Adaptive Grasp



更多应用场景
More Use Cases

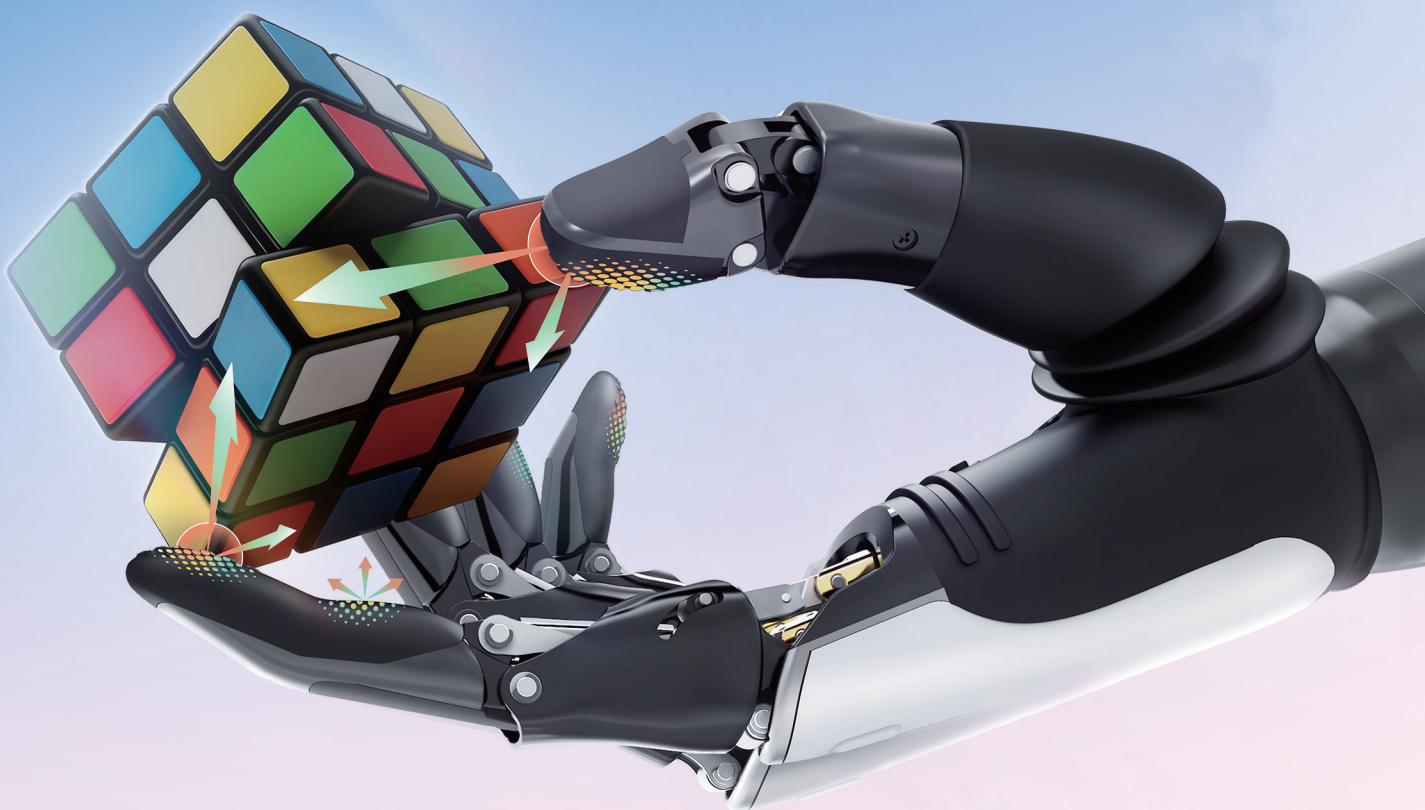


集成三维力传感 多维度精准控制

Integrated 3D Force Sensing For Total Control

ROH-AP003

技术参数

Technical Parameters

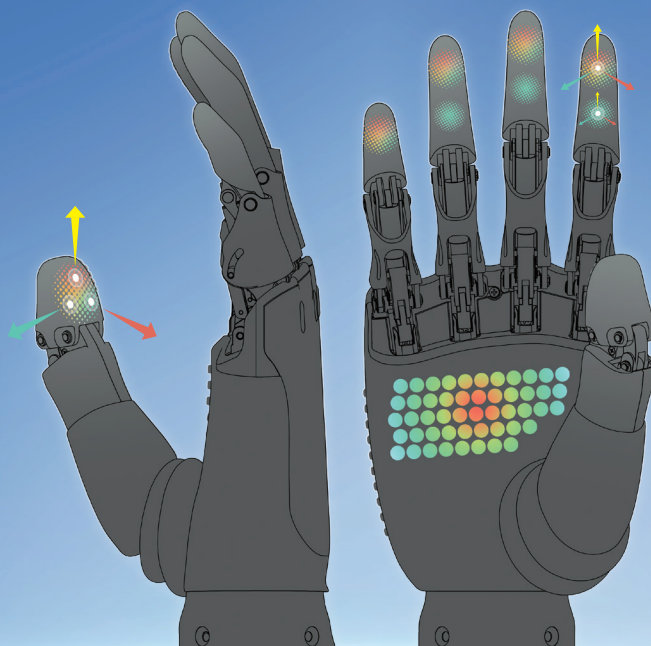

载荷和速度 Load and Speed

手指全程运行时间(最大速度下) Bending/stretching time for full range at maximum speed	0.7 s
大拇指旋转全程运行时间(最大速度下) Rotation time of thumb for full range at maximum speed	0.7 s
指尖(除拇指外)最大主动推力(伸直状态) Active force of each finger tip on stretched state	≥0.5 Kg
指尖(除拇指外)最大主动推力(弯曲状态) Active force of each finger tip on bended state	≥1.0 Kg
拇指指尖最大主动推力 Maximum active force of thumb tip	≥1.0 Kg
最大提重物(四指弯曲状态) Maximum passive load for four fingers on bended state	30 Kg
最大单指静态载荷(手指弯曲状态) Maximum passive load for each finger on bended state	10 Kg
最大单指指尖静态载荷(平伸状态) Maximum passive load for each finger on stretched state	8 Kg

重量 Weight

重量(含手腕) Weight (including wrist)	626g±5g
-------------------------------------	---------

力传感器 Force Sensor

区 域 Area	参 数 Parameters		
三 维 力 3D Force			
手指远段 Distal Phalanx + 手指中段 Proximal Phalanx	采样频率 Frequency	≥50Hz	
	最大耐受力 Maximum Withstand Force	30N (针对单个触觉传感器) (For Individual Tactile Sensor)	
	法向力 Normal Force	量程 Range	15 N
		灵敏度 Sensitivity	0.1 N
手指远段 Distal Phalanx	剪切力 Shear Force	量程 Range	±5 N
		方向分辨率 Directional Resolution	1°
点 阵 式 Dot Matrix			
手掌 Palm	采样频率 Frequency	150Hz	
	法向力 Normal Force	点阵数 Dots	11×5
		量程 Range	0.1N~25N
		重复精度 Repeatability Accuracy	±20% (500g 负载) (500g load)

联系我们 / Contact Us

+86 21 63210200

info@oymotion.com

www.oymotion.com

上海市浦东新区紫萍路788号 / No. 788 Ziping Road, Pudong New Area, Shanghai, China

