



CLASS : SYCS

DATE :

Practical No. : 1 Topic : CN

Aim :- Using, Linux-terminal or Windows-cmd, execute following networking commands and note the output : ping, traceroute, netstat, arp, ipconfig, Getmac, hostname, NSLookup, pathping, SystemInfo

Theory :-

1) ping - ping is a computer network administration software utility used to test the reachability of a host on an Internet Protocol network. It is available for virtually all operating system that have networking capability, including most embedded network administration software.

2) traceroute - The traceroute command (tracert) is a utility designed for displaying the time it takes for a packet of information to travel between a host system and the final destination system. This command returns a list of the hops that the data packets take along their path along their way to the destination.

3) netstat - The netstat provides statistics about all active connection so you that we can find out which computers or networks a PC is connected to some of the netstat command commonly used are

i) netstat -in command

This netstat function shows the state of all sockets

ii) netstat -a command

It shows the state of all sockets

iii) netstat -s

It shows statistics for each protocol.

iv) netstat -r

Another option relevant to performance is the display of the discovered Path Maximum Transmission unit (PMTU)

4) arp - The ARP (Address Resolution Protocol) commands are used to view, display or modify the details / information in an ARP table / cache. Some of the common arp commands are as follows:

i) arp -a

It is used to display the ARP table for a particular IP address. It also shows all the entries of the ARP cache or table.

ii) arp -g

Same as the arp -a command.

iii) arp -d

It is used to delete an entry from the ARP table for a particular interface. To delete an entry, write arp -d command along with the IP address in a command prompt to be deleted.

iv) arp -s

This command is used to add the static entry in the ARP table, which resolves the InetAddr (IP Address) to the EtherAddress (physical address). To add a static entry in ARP table, we write arp -s command along with the IP address & MAC address of

the device in a command prompt.

5) ipconfig - ipconfig (Internet Protocol CONFIGURATION) is used to display & manage the IP address assigned to the machine. In windows, typing inconfig without any parameters display the computer's currently assigned IP, subnet mask and default gateway addresses.

6) getmac - Getmac is a windows command used to display the Media Access Control (MAC) addresses for each network adapter in the computer.

7) hostname - It is a label that is assigned to device connected to computer network & it used to identify the device.

8) NSlookup - Using command we can find corresponding IP address or domain name system record. The user can also enter a command for it do reverse DNS lookup & find the host name for an IP address that is specified.

9) Pathping - This command sends multiple echo Request message to each router between a source & destination, over a period of time & then computer result based on the packets returned from each router. It can be used to find the router or link having network problem.

10) SystemInfo - This command is used to display detailed configuration information about a computer & its operating system, including operating system configuration, security information, product ID and hardware properties.

~~Page No.
27/112~~



CLASS : SYCS


DATE : 2023-08-09

Practical No. : 02 Topic : CN

Aim : Using Packet Tracer, create a basic network of two computers using appropriate network wire through static IP address allocation & verify connectivity.

Theory :-

We use the following network to verify the connectivity using Cisco packet tracer

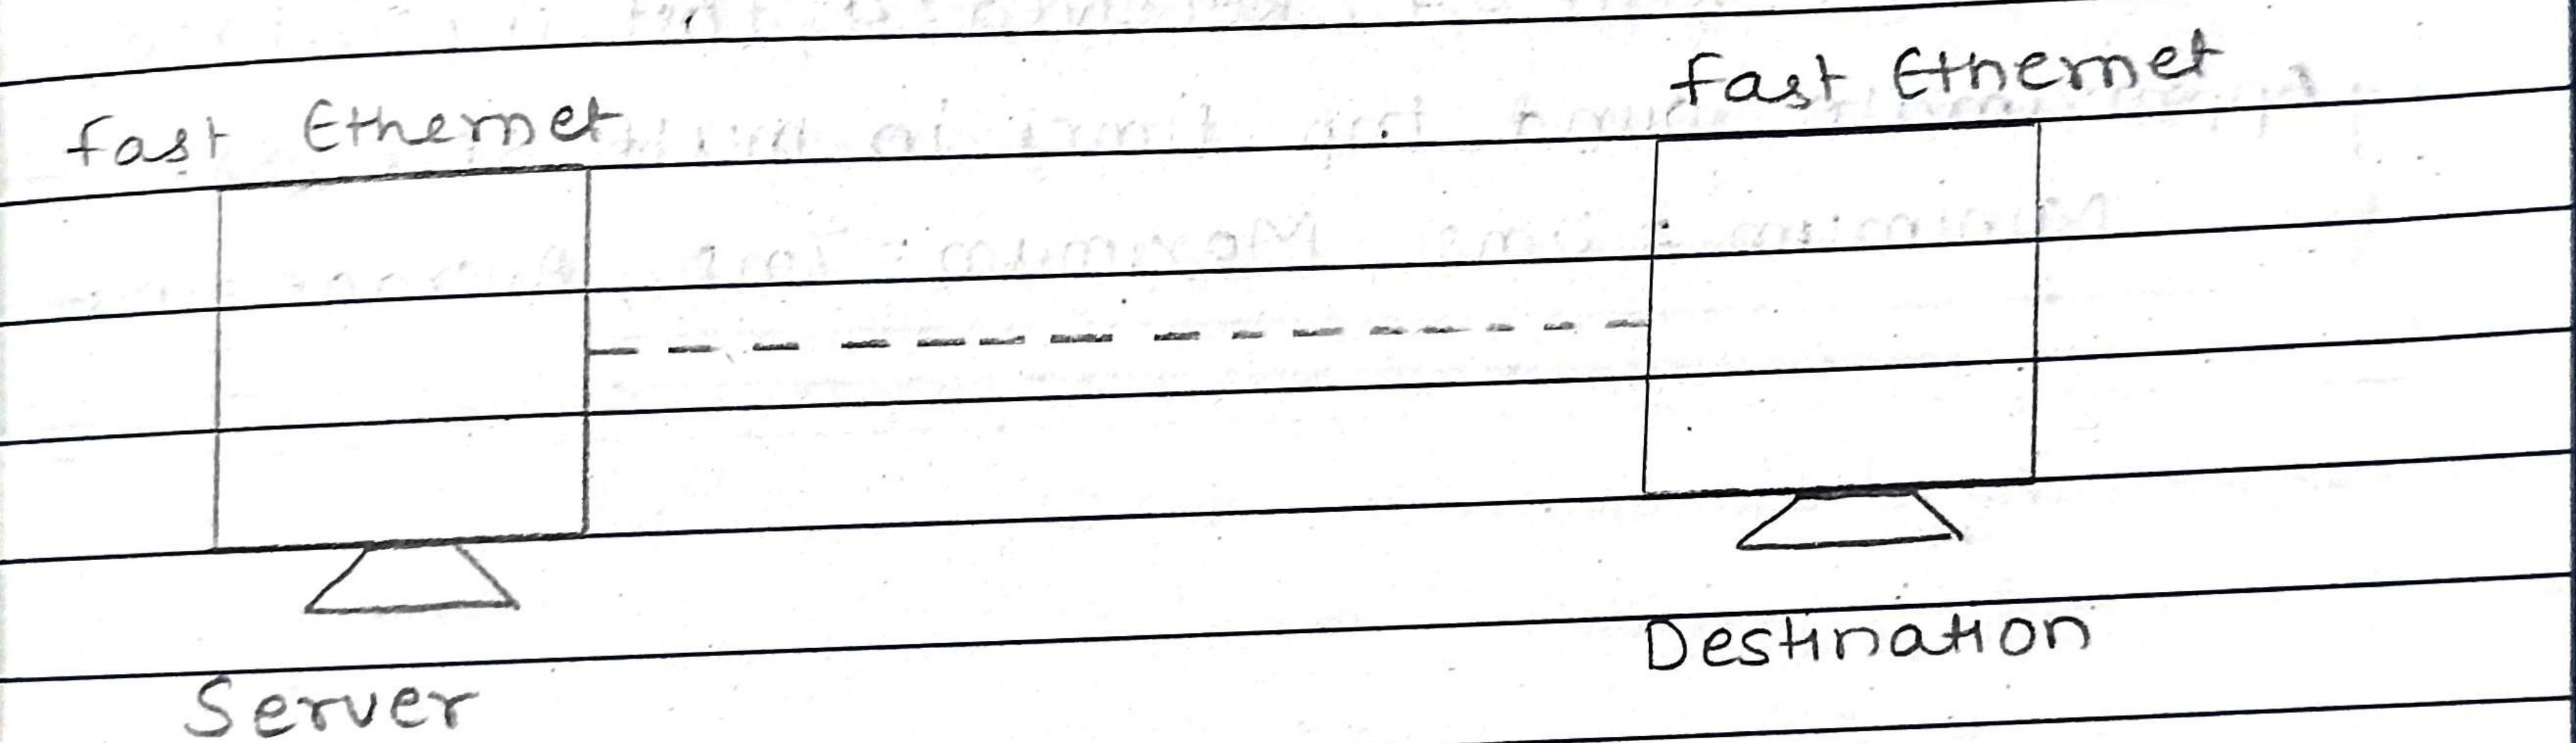

Now we set the ip address of the device as follows :

Hostname	ip Address	Default Gateway
Server	192.168.1.2	192.168.1.1
Destination	192.168.1.3	192.168.1.1

In order to check the connectivity we send a ping command from server to destination as follows:

Server

Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0

C:\> ping 192.168.1.3

Pinging 192.168.1.3 : bytes = 32 time = 7ms TTL = 128

Reply from 192.168.1.3 : bytes = 32 time = 7ms TTL = 128

Reply from 192.168.1.3 : bytes = 32 time < 1ms TTL = 128

Reply from 192.168.1.3 : bytes = 32 time < 1ms TTL = 128

Reply from 192.168.1.3 : bytes = 32 time < 1ms TTL = 128

Ping statistics for 192.168.1.3:

packets : sent = 4 , Received = 4 , Lost = 0 (0% loss),

Approximate round trip times in multi-secs:

Minimum = 0ms , Maximum = 7ms , Average = 1ms

Interfaz de red 10.223.66.91 es la interfaz de red.

Intf: 1.2.21.8.81 (S-1-8.81.8.81) en linea

Intf: 1.2.21.8.81 (S-1-8.81.8.81) no tiene IP

Server

Physical Config	Desktop Programming	Attributes
Interface	fastEthernet 0	✓
IP Configuration		
o DHCP	o Static	
IPv4 Address	192.168.1.2	
Subnet Mask	255.255.255.0	
Default Gateway	192.168.1.1	
DNS Server	0.0.0.0	
IPv6 Configuration		
o Automatic	o Static	
IPv6 Address		
Link local Address	fe80::206:2aff:fe01:eede	
Default Gateway		
DNS Server		

Destination

Physical Config	Desktop Programming	Attributes
Interface	fastEthernet 0	
IP Configuration		
o DHCP	o Static	
IPv4 Address	192.168.1.3	
Subnet Mask	255.255.255.0	
Default Gateway	192.168.1.1	
DNS Server	0.0.0.0	
IPv6 Configuration		
o Automatic	o Static	
IPv6 Address		
Link local Address	fe80::206:2aff:fe01:eed	
Default Gateway		
DNS Server		

Rejesh
27/11/23



CLASS : SYCS

DATE :

Practical No. : 03 Topic :

Aim :- Using Packet Tracer, create a basic network of one server and two computers using appropriate network wire. Use Dynamic IP address allocation and show connectivity.

Theory

for assigning ip addresses dynamically we use the DHCP protocol


Dynamic Host Configuration Protocol (DHCP) is a client/server protocol that automatically provides an Internet Protocol (IP) host with its IP address & other related configuration information such as the subnet mask and default gateway.

The DHCP server maintains a pool of IP addresses and leases an address to any DHCP-enabled client when it starts up on the network. Because the IP addresses are dynamic rather than static, addresses no longer in use are automatically returned to the pool for re-allocation.

DHCP provides the following benefits :

- 1) Reliable IP address configuration. DHCP minimizes configuration error caused by manual IP address configuration, such as typographical error, or address conflict caused by assignment of an IP address to more than one computer at same time.

Page No. 06

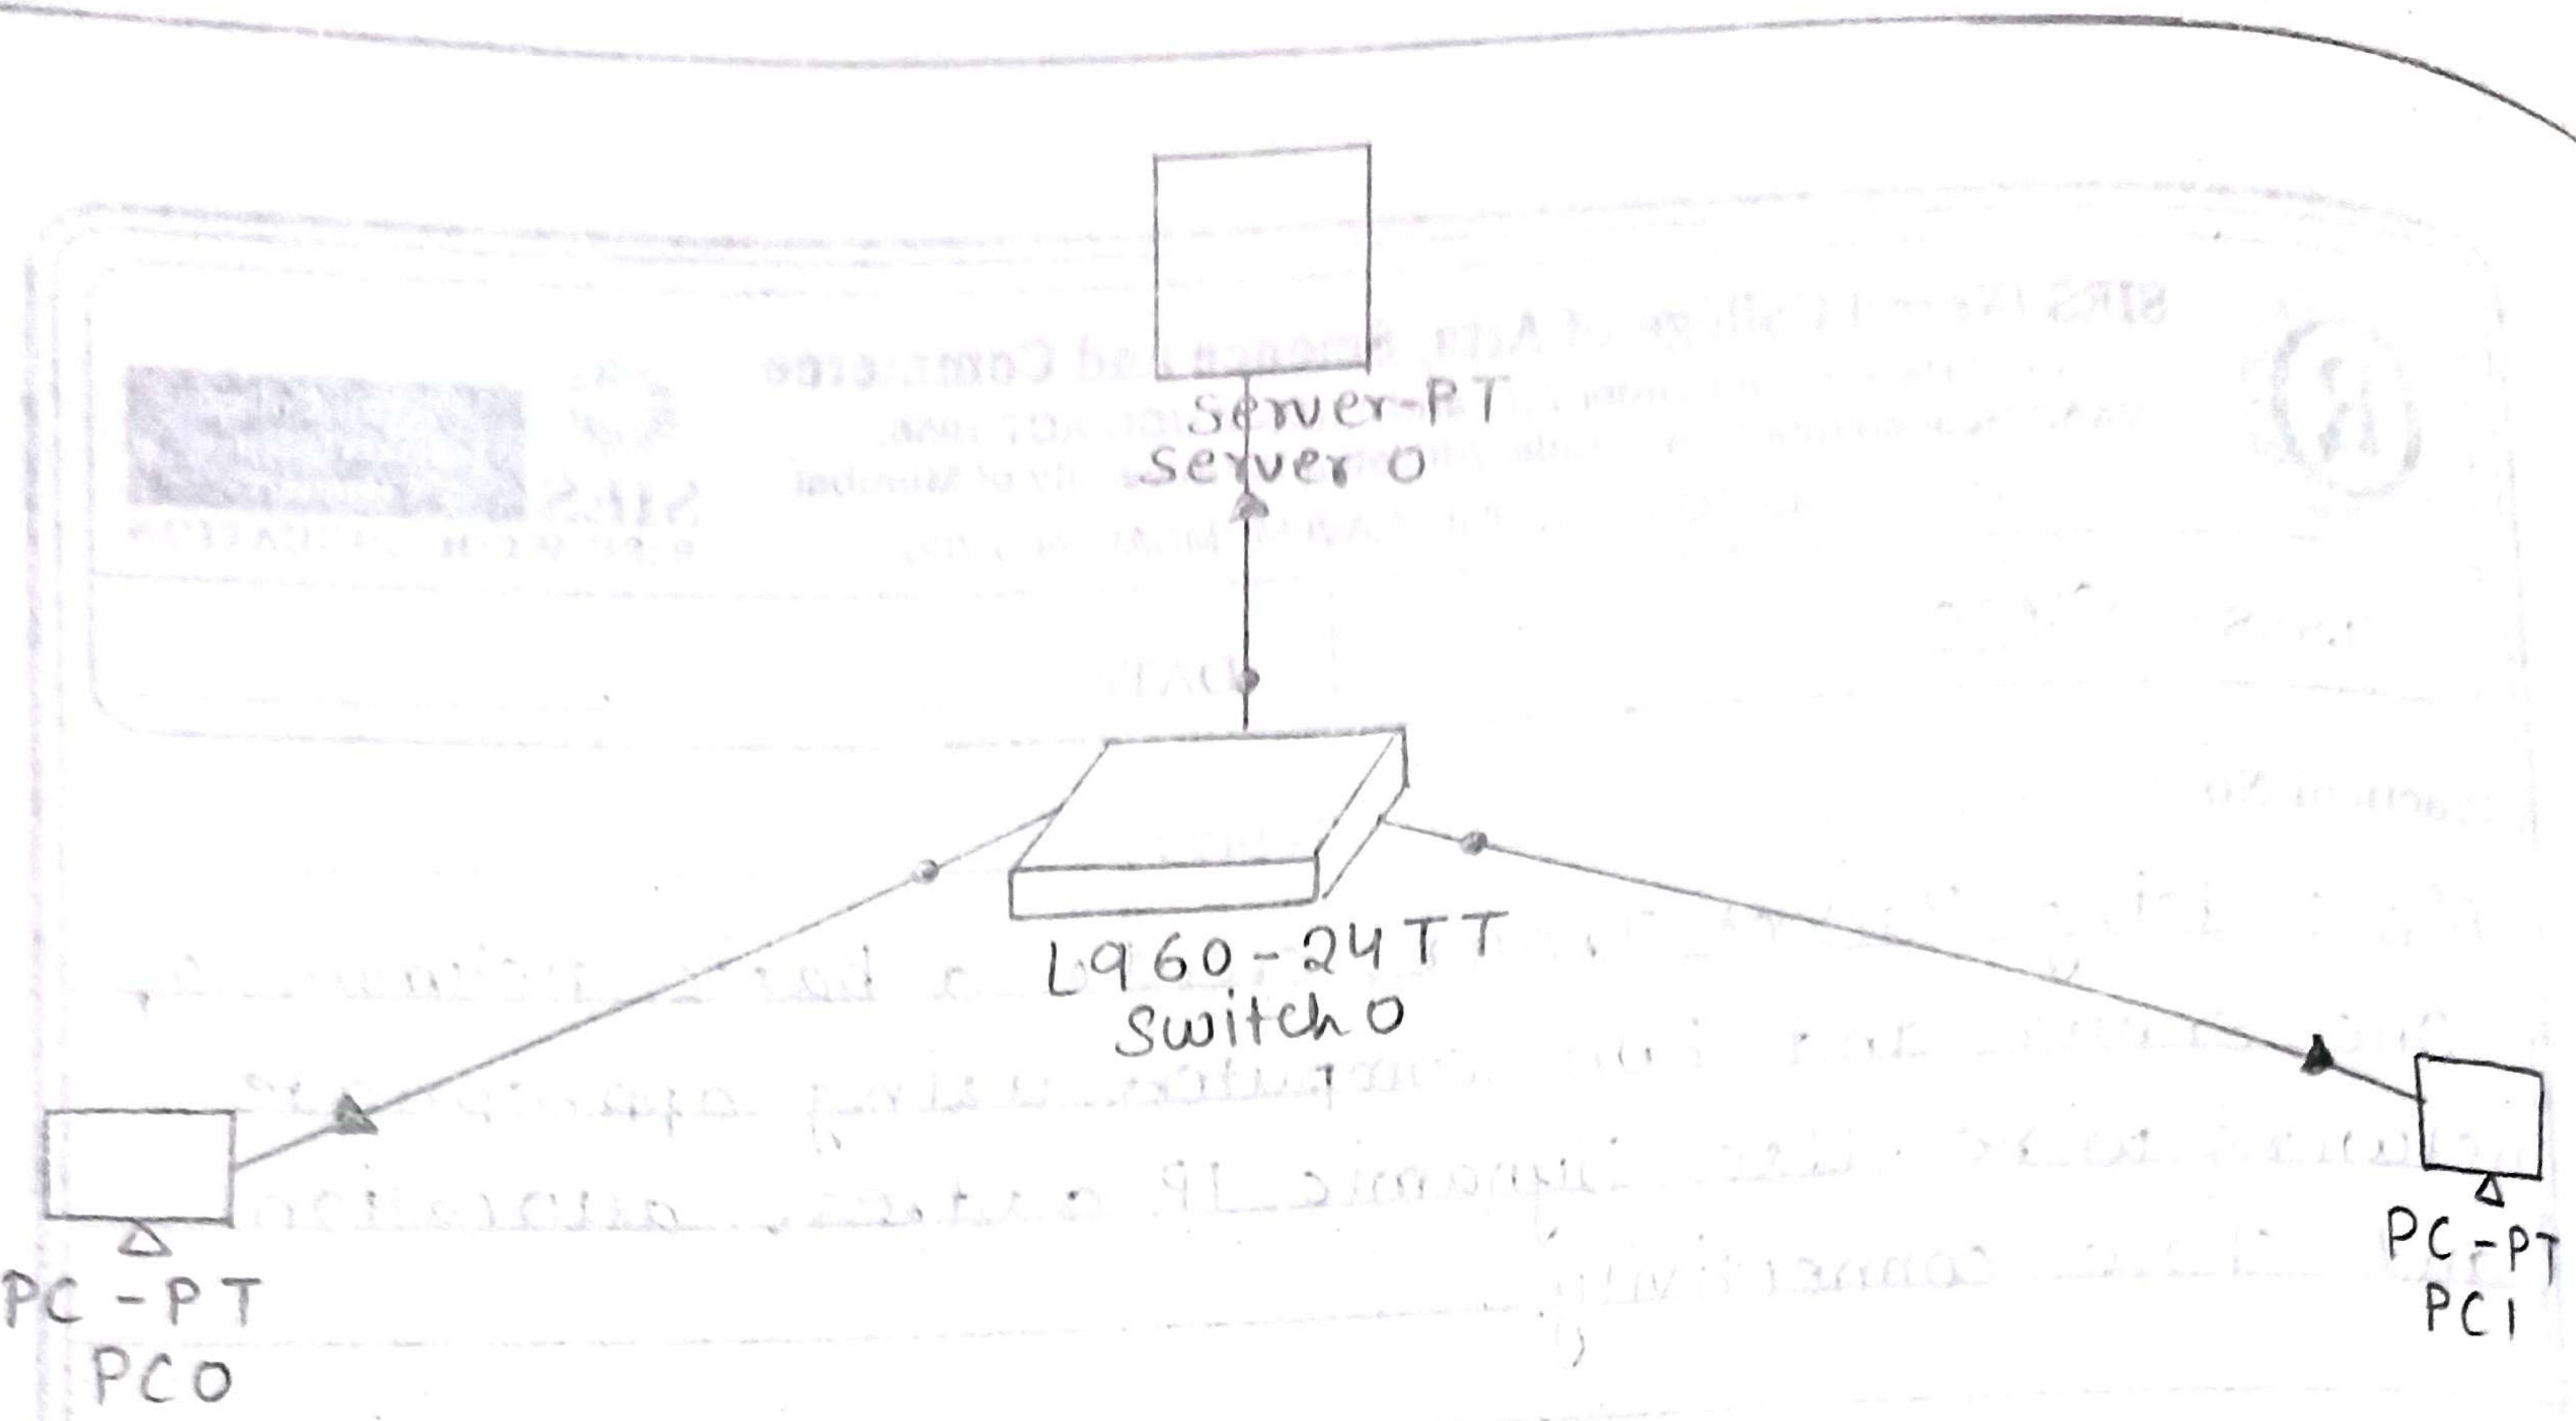

Configuring the Server

Server 0	
Physical	Config Services Desktop Programming
IP Configuration	
<input checked="" type="checkbox"/> IP Configuration <input type="checkbox"/> DHCP <input type="checkbox"/> Static	
IPv4 Address	10.0.0.2
Subnet Mask	255.0.0.0
Default Gateway	10.0.0.1
DNS Server	10.0.0.2
IPv6 Configuration	
<input checked="" type="checkbox"/> Automatic <input type="checkbox"/> Static	
IPv6 Address	fe80:201:96ff:fe30:3343
Link local Address	
Default Gateway	
DNS Server	

o) Reduced network administration. DHCP includes the following features to reduce network administration. DHCP runs at the application layer of Transmission Control Protocol / IP (TCP / IP) stack to dynamically assign IP addresses to DHCP clients and to allocate TCP / IP configuration information to DHCP clients.

Enabling & setting the DHCP service on server:

Server 0

Physical Config Services Desktop Programming Attributes

SERVICES	DHCP				
HTTP	Interface	Fast Ethernet	Service	<input checked="" type="radio"/> ON	<input type="radio"/> OFF
DHCP	Pool Name	serverpool			
DHCPv6	Default Gateway	10.0.0.1			
TFTP	DNS Server	10.0.0.2			
DNS	Start IP Address:	10	0	0	3
SYSLOG	Subnet Mask:	255	0	0	0
AAA	Maximum Number of Users:	512			
NTP	TFTP Server:	0.0.0.0			
EMAIL	WLC Address:	0.0.0.0			
FTP	Add	Save	Remove		
IOT	Pool	Default	DNS	StartIP	Subnet Max
VM Management	Name	Gateway	Server Address	Mask	User
Radius EAP	serverpool	10.0.0.1	10.0.0.2	10.0.0.3	255.0.0.0
					512

Checking the connectivity:

PC1

Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0

c:\>ping 10.0.0.3

Pinging 10.0.0.3 with 32 bytes of data:

Reply from 10.0.0.3: bytes = 32 time <1ms TTL = 120

Reply from 10.0.0.3: bytes = 32 time <1ms TTL = 120

Reply from 10.0.0.3: bytes = 32 time <1ms TTL = 120

Reply from 10.0.0.3: bytes = 32 time <1ms TTL = 120

Reply from 10.0.0.3: bytes = 32 time <1ms TTL = 120

Ping statistics for 10.0.0.3:

_packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milliseconds:

Minimum = 0ms, Maximum = 0ms, Average = 0ms

Verifying the Dynamic Addressing on both the PCs:

PC0	Physical Config	Desktop Programming Attributes
Interface	Fast Ethernet 0	
IP Configuration		
• DHCP	o Static	DHCP request successful.
IPv4 Addresses	10.0.0.3	
Subnet Mask	255.0.0.0	
Default Gateway	10.0.0.1	
DNS Server	10.0.0.2	
IPv6 Configuration		
• Automatic	o Static	
IPv6 Address		
Link Local Address	fe80:260:5cff:fe65:c024	
Default Gateway		
DNS Server		

PC1	Physical Config	Desktop Programming Attributes
Interface	Fast Ethernet 0	
IP Configuration		
o DHCP	o Static	DHCP request successful
IPv4 Addresses	10.0.0.4	
Subnet Mask	255.0.0.0	
Default Gateway	10.0.0.1	
DNS Server	10.0.0.2	
IPv6 Configuration		
o Automatic	o Static	
IPv6 Address		
Link Local Address	fe80:260:70ff:fe82:2ec7	
Default Gateway		
DNS Server		



SIES (Nerul) College of Arts, Science and Commerce

UGC Recognized under 2(F) and 12(B) of UGC ACT 1956.
NAAC Reaccredited- "A" Grade. Affiliated to University of Mumbai

PLOT 1-C, SECTOR-V, NERUL, NAVI MUMBAI - 400 706.



(Nerul) College
of Arts Science
& Commerce

RISE WITH EDUCATION

CLASS : SYCS

DATE : 27/01/2023

Practical No. : 04 Topic :

Aim:- using Pakit Thaler create a basic network of one server and two computers and two mobile/ movable devices using appropriate network wire. Show connectivity


Theory: A wireless Access Point (WAP) is a networking device that allows wireless capable devices to connect to a wired network. Instead of using wires and cables to connect every computer or device in the network, installing WAP is more convenient, more secure and cost efficient alternative.

Setting up a wireless network provides a lot of advantages and benefits for you and your small business.

1. It is easier to set up compared to setting up a wired network
2. It is more convenient to access.
3. It is less complicated to add new users in the network
4. It gives user more flexibility to stay online even when moving from one area in the office to another.
5. Guest users can have internet access by just using a password.
6. Wireless network protection can be set up even if the network is visible to the public by configuring maximum wireless security.
7. Segmentation of users such as guests and employees is possible by creating Virtual Local Area Network (VLANs) to protect your network resources and assets.

Page No. _____

In the present case we use the following topology

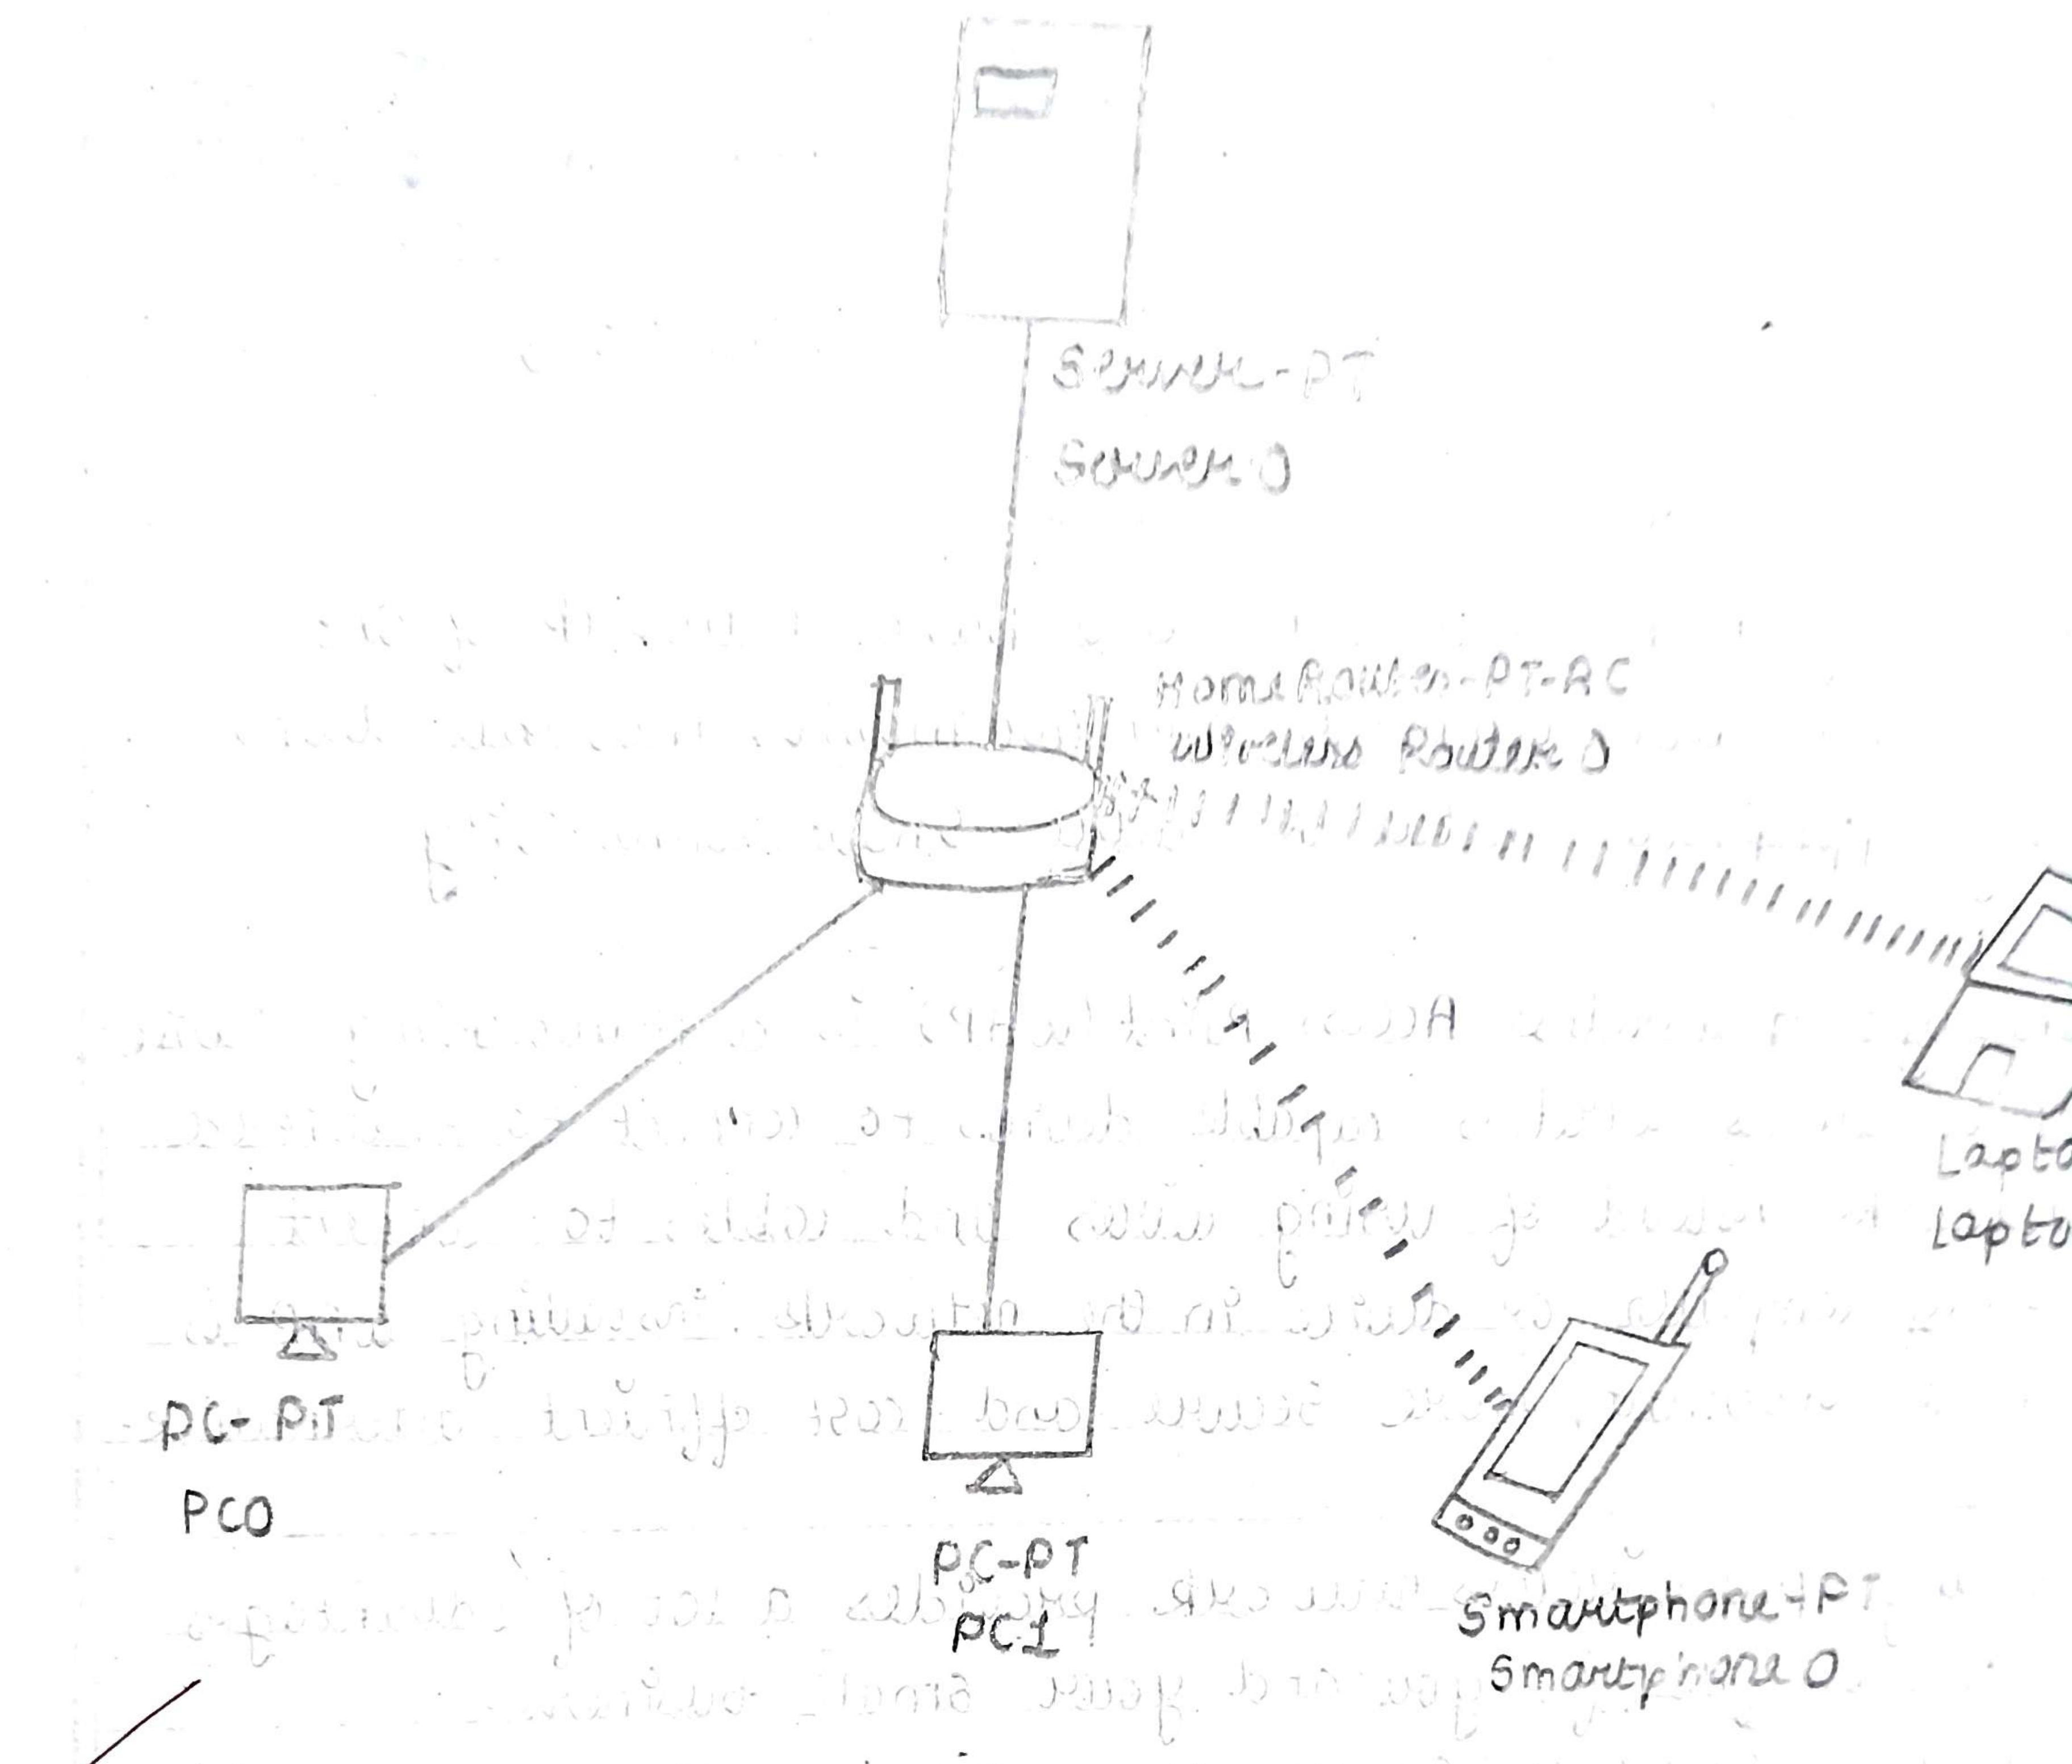

Configures the Server of the network

Physical	Config	Services	Desktop	Programming	Attributes
<u>IP configuration</u>					
0 DHCP	Static				
IPV4 Address		192.168.1.2			
Subnet mask		255.255.255.0			
Default gateway		192.168.1.1			
DNS server		0.0.0.0			
<u>PV6 configuration</u>					
0 Automatic	Static				
IPV6 Address					
Link local Address		FEB0::2018:43FF:FECD:0046			
Default gateway					
DNS server					

There are different purposes of setting up a wireless network using a WAP.

With a WAP the following can be done:

1. Create a wireless network within your existing wired network.
2. Extend the signal range and strength of your wireless network to provide complete wireless coverage and get rid of dead spots especially in larger office spaces or buildings.
3. Accommodate wireless devices within a wired network.
4. Configure the settings of your wireless access point in one device.

Configure PC0

Physical Interface	Config	Desktop	Programming	Attributes
Fast Ethernet 0				
IP Configuration				
<input checked="" type="radio"/> DHCP				
IPV4 Address		192.168.1.3		
Subnet Mask		255.255.255.0		
Default Gateway		192.168.1.1		
DNS Server		0.0.0.0		
<input type="radio"/> Static				
IPV4 Address		192.168.1.3		
Subnet Mask		255.255.255.0		
Default Gateway		192.168.1.1		
DNS Server		0.0.0.0		
IPV6 Configuration				
<input checked="" type="radio"/> Automatic		FE80::202:7FF:FA8B:7024		
IPV6 Address		FE80::202:7FF:FA8B:7024		
Link Local Address		FE80::202:7FF:FA8B:7024		
Default Gateway				
DNS Server				

Configure PC1

Physical Interface	Config	Desktop	Programming	Attribute
Wireless 0				
IP Configuration				
<input checked="" type="radio"/> DHCP				
IPV4 Address		192.168.1.4		
Subnet Mask		255.255.255.0		
Default Gateway		192.168.1.1		
DNS Server		0.0.0.0		
<input type="radio"/> Static				
IPV4 Address		192.168.1.4		
Subnet Mask		255.255.255.0		
Default Gateway		192.168.1.1		
DNS Server		0.0.0.0		
IPV6 Configuration				
<input checked="" type="radio"/> Automatic		FE80::200:1FF:FC03:E89		
IPV6 Address		FE80::200:1FF:FC03:E89		
Link Local Address		FE80::200:1FF:FC03:E89		
Default Gateway				
DNS Server				

Configure Smartphone O

Physical Config Desktop Programming Attributes
IP Configuration

0.0.0.0 IP Address
192.168.1.5

Static

Subnet Mask
255.255.255.0

Default Gateway
192.168.1.1

DNS Server
0.0.0.0

IPv6 Configuration

Automatic

Static

IPv6 Address

FF80::2E0:FF:FE12:4387

Link Local Address

Default Gateway

DNS Server

Configure Laptop O

Physical Config Desktop Programming Attributes
IP Configuration

Review

0.0.0.0 IP Address
192.168.1.5

Static

Subnet Mask
255.255.255.0

Default Gateway
192.168.1.1

DNS Server
0.0.0.0

IPv6 Configuration

Automatic

Static

IPv6 Address

FF80::20A:F3FF:FE79:7E8B

Link Local Address

Default Gateway

DNS Server


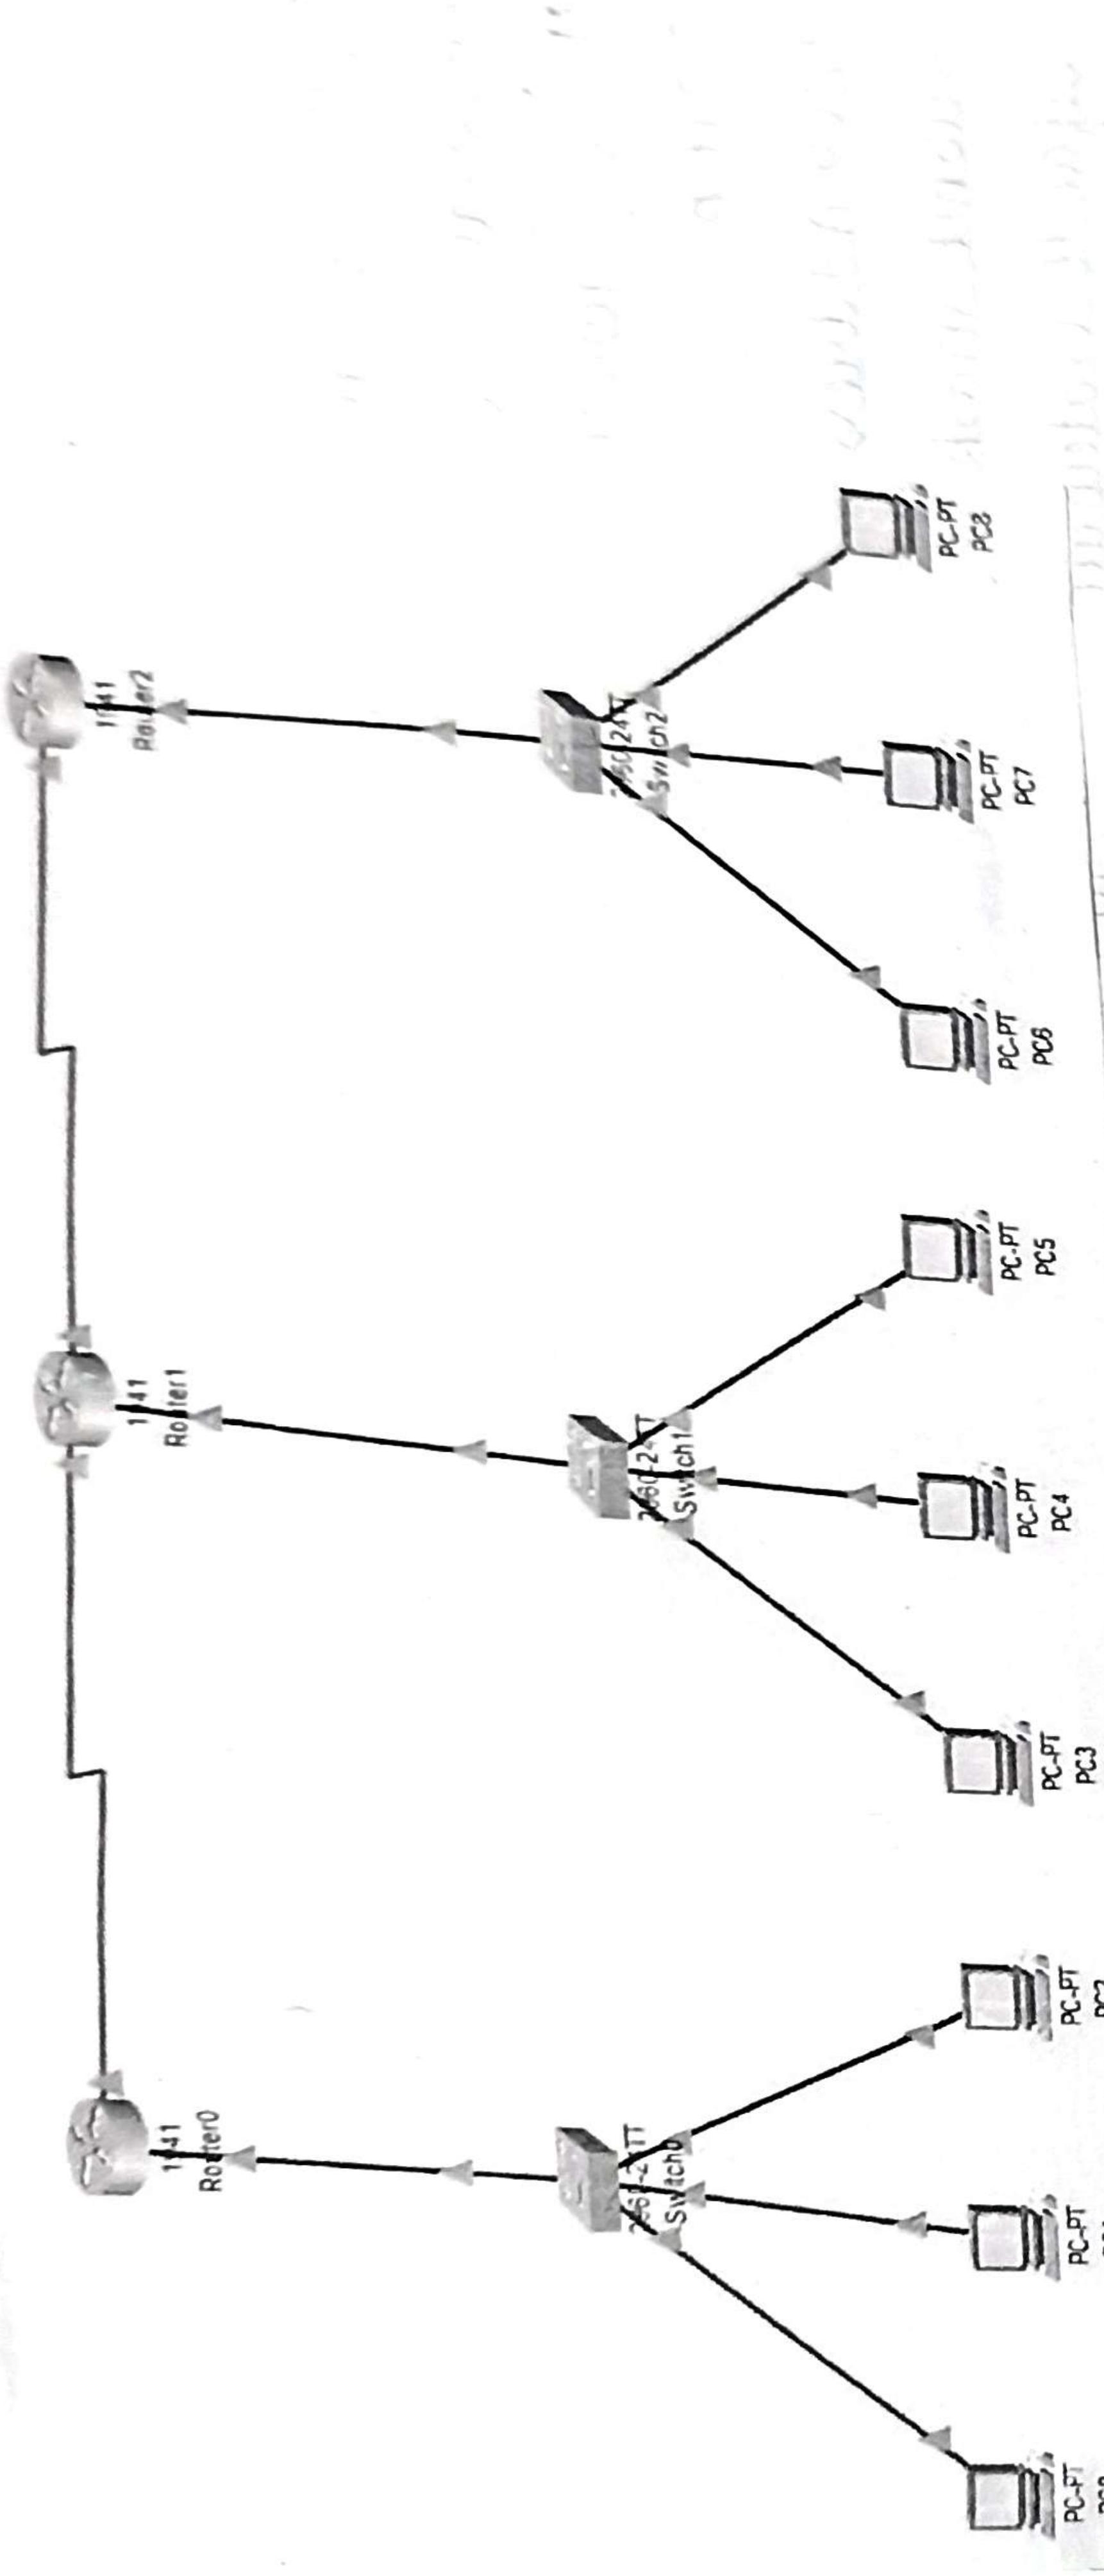


Diagram of the network topology.

Host	Interface	IP address	Network Address	Default Gateway
Router 0	G0/0	10.0.0.1	10.0.0.0	192.168.0.0
	S0/1/0	192.168.0.1	192.168.0.0	
Router 1	G0/0	20.0.0.1	20.0.0.0	192.168.0.0
	S0/1/0	192.168.0.2	192.168.0.0	
Router 2	S0/1/1	192.168.1.1	192.168.1.0	30.0.0.0
	G0/0	30.0.0.1	30.0.0.0	
PC0	FastEthernet0	10.0.0.2	10.0.0.0	10.0.0.1
	FastEthernet0	10.0.0.3	10.0.0.0	
PC1	FastEthernet0	10.0.0.4	10.0.0.0	10.0.0.1
	FastEthernet0	20.0.0.2	20.0.0.0	
PC2	FastEthernet0	20.0.0.3	20.0.0.0	20.0.0.1
	FastEthernet0	20.0.0.4	20.0.0.0	
PC3	FastEthernet0	30.0.0.2	30.0.0.0	30.0.0.1
	FastEthernet0	30.0.0.3	30.0.0.0	
PC4	FastEthernet0	30.0.0.4	30.0.0.0	30.0.0.1
	FastEthernet0	30.0.0.5	30.0.0.0	
PC5	FastEthernet0	30.0.0.6	30.0.0.0	30.0.0.1
	FastEthernet0	30.0.0.7	30.0.0.0	
PC6	FastEthernet0	30.0.0.8	30.0.0.0	30.0.0.1
	FastEthernet0	30.0.0.9	30.0.0.0	
PC7	FastEthernet0	30.0.0.10	30.0.0.0	30.0.0.1
	FastEthernet0	30.0.0.11	30.0.0.0	
PC8	FastEthernet0	30.0.0.12	30.0.0.0	30.0.0.1
	FastEthernet0	30.0.0.13	30.0.0.0	

Adding Serial Interface in each Router

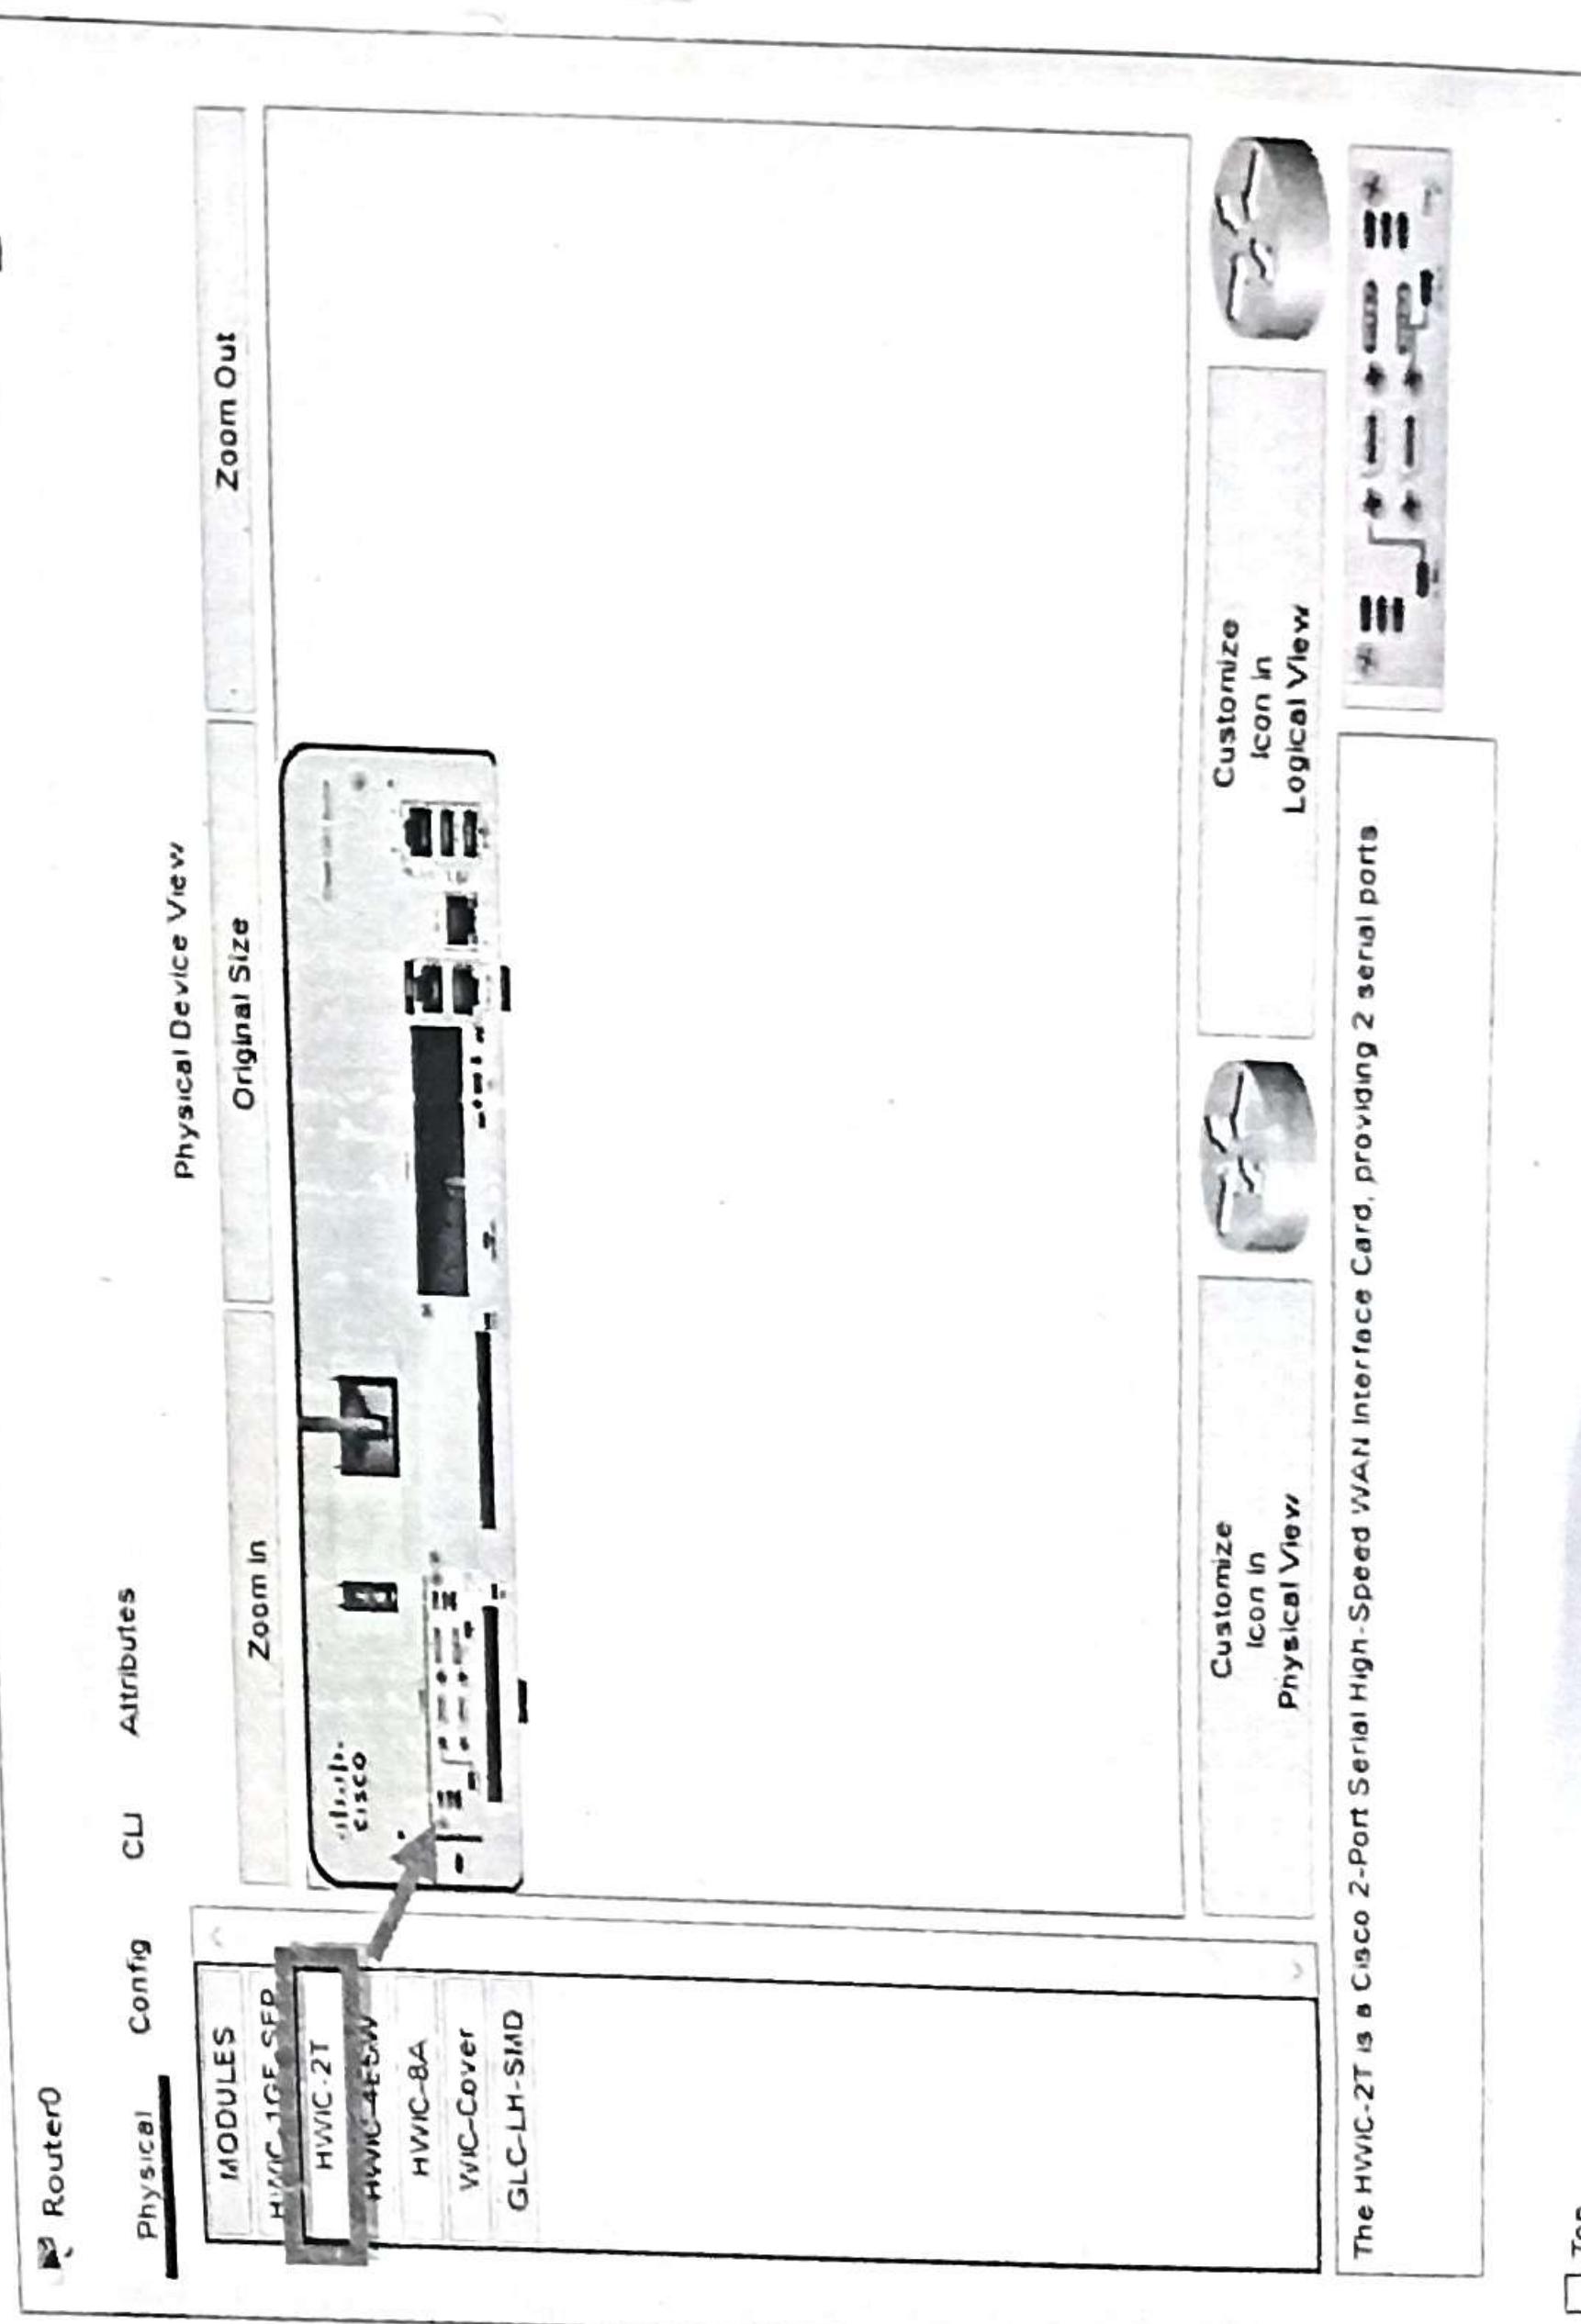

The HWIC-2T is a Cisco 2-Port Serial High-Speed WAN Interface Card, providing 2 serial ports

□ Top



SIES (Nerul) College of Arts, Science and Commerce
UGC Recognized under 2(F) and 12(B) of UGC ACT 1956.
NAAC Reaccredited- "A" Grade. Affiliated to University of Mumbai
PLOT 1-C, SECTOR-V, NERUL, NAVI MUMBAI - 400 706.

CLASS : 54CS

DATE : 01/02/2023

Practical No. : 05

Topic :

Aim:- Using Packet Tracer to create a network with three routers with RIPV1 and each router associated network will have minimum three PC and show the connectivity

Theory :- RIP^o is one of the dynamic routing protocols and the first distance vector routing protocol that uses the hop count as routing metric. A lower hop count is preferred.

② Each router between the source and destination network is counted as one loop. RIP prevents routing loops by imposing a maximum number of hops on the path between source and destination.

In RIP, Every 30 seconds each router broadcasts its entire routing table to its nearest neighbours.

Pros and Cons of RIP protocol :-


Pros :-

1. The RIP protocol is ideal for small networks since it is simple to learn and configure.
2. RIP routing is guaranteed to work with nearly all routers.
3. When the network topology changes, RIP does not require an update.


Cons :-

1. RIP does not support variable length subnet masks.
2. RIP broadcast updates every 30 seconds which causes traffic and consumes bandwidth.


Configuring PC0:

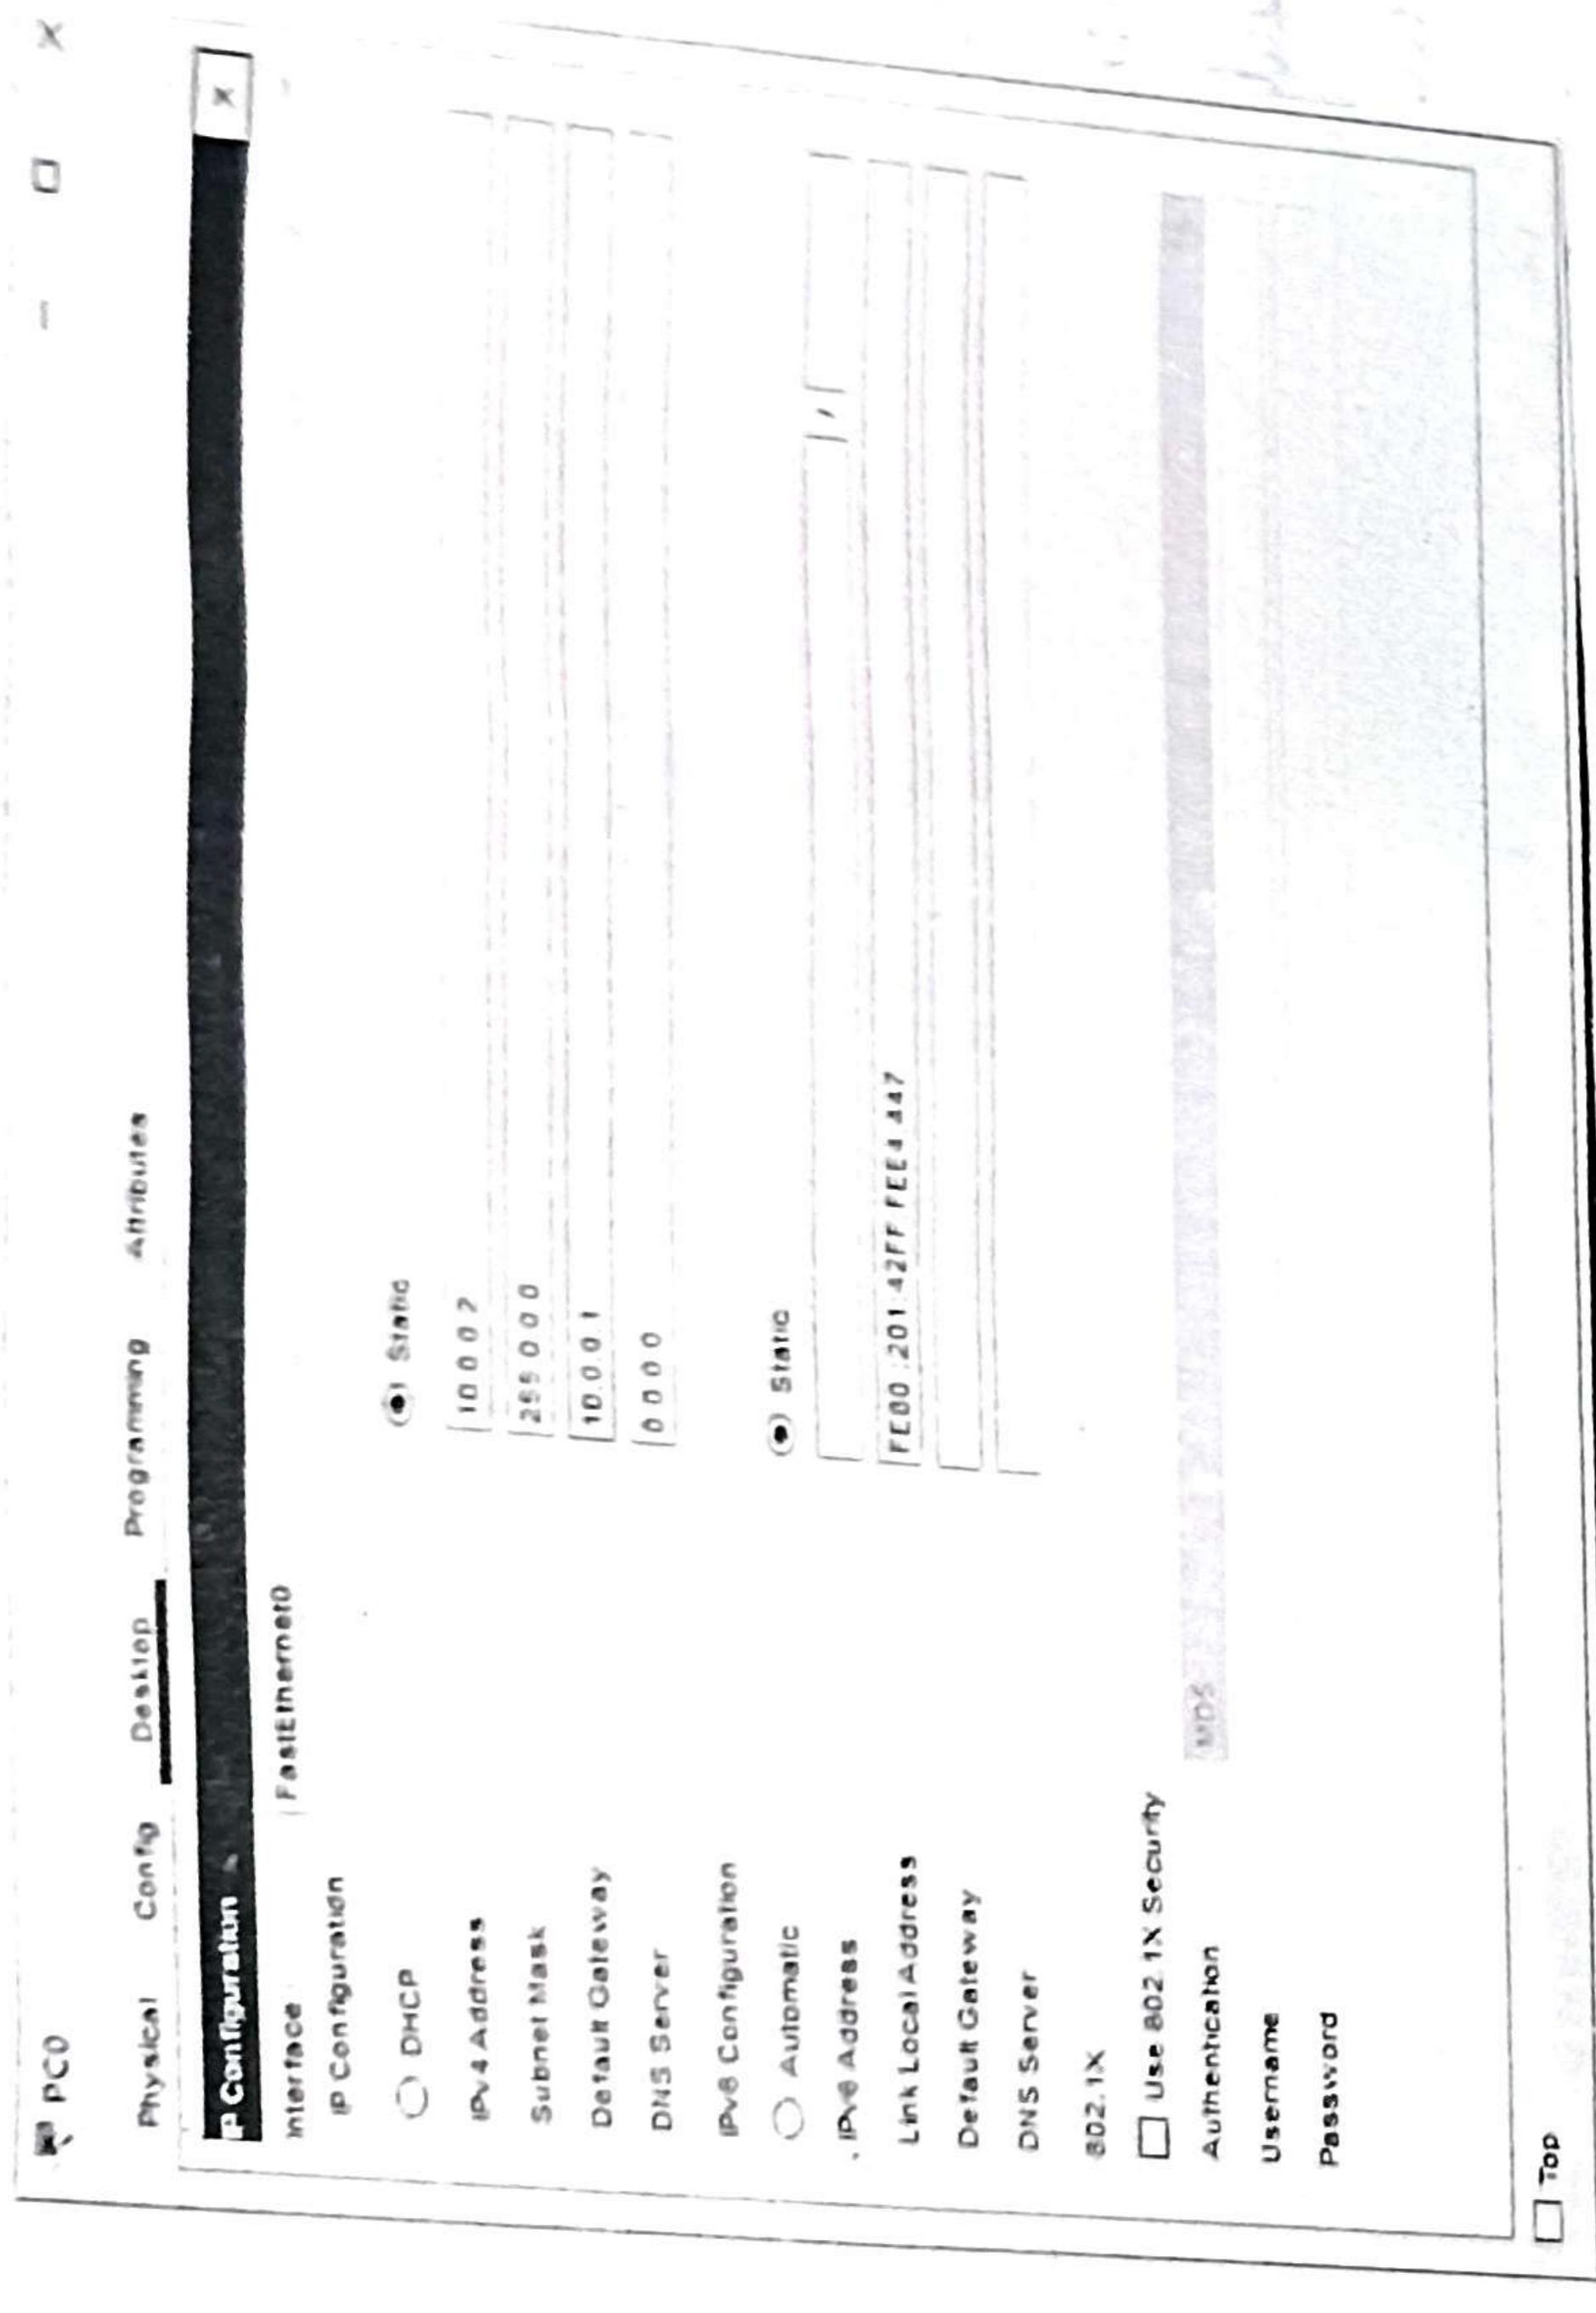

Configuring PC1:

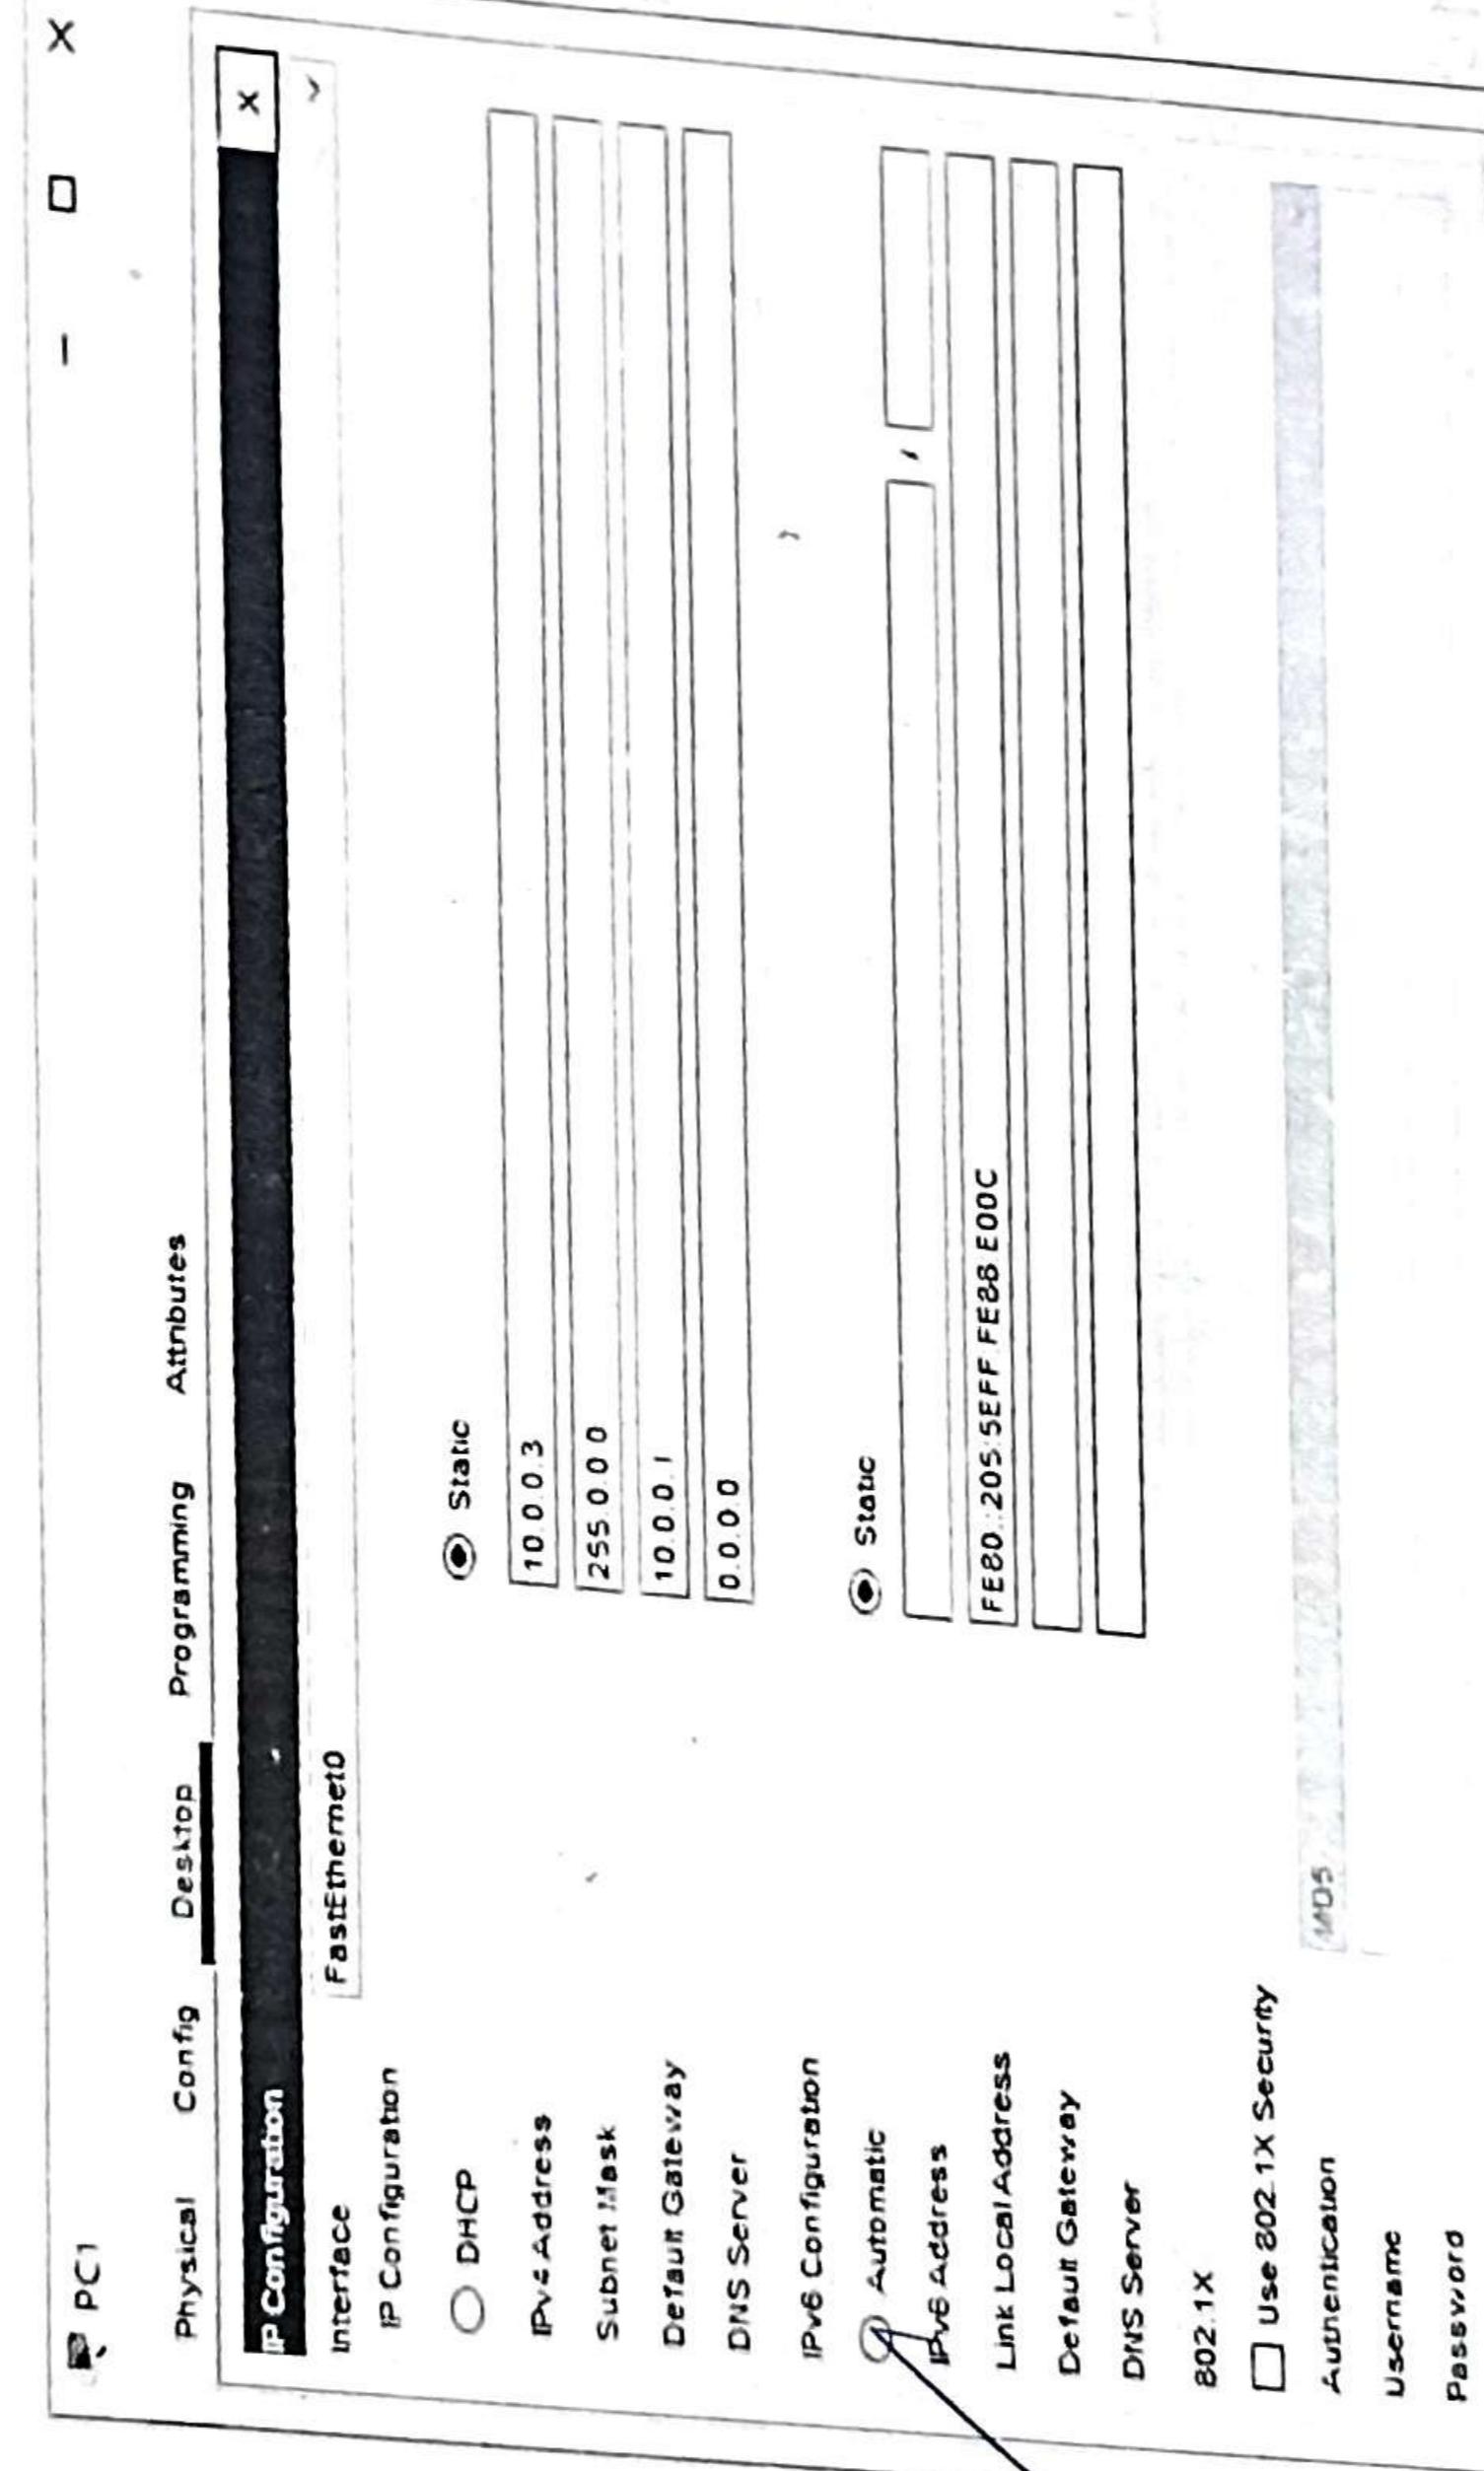

Configuring PC2:

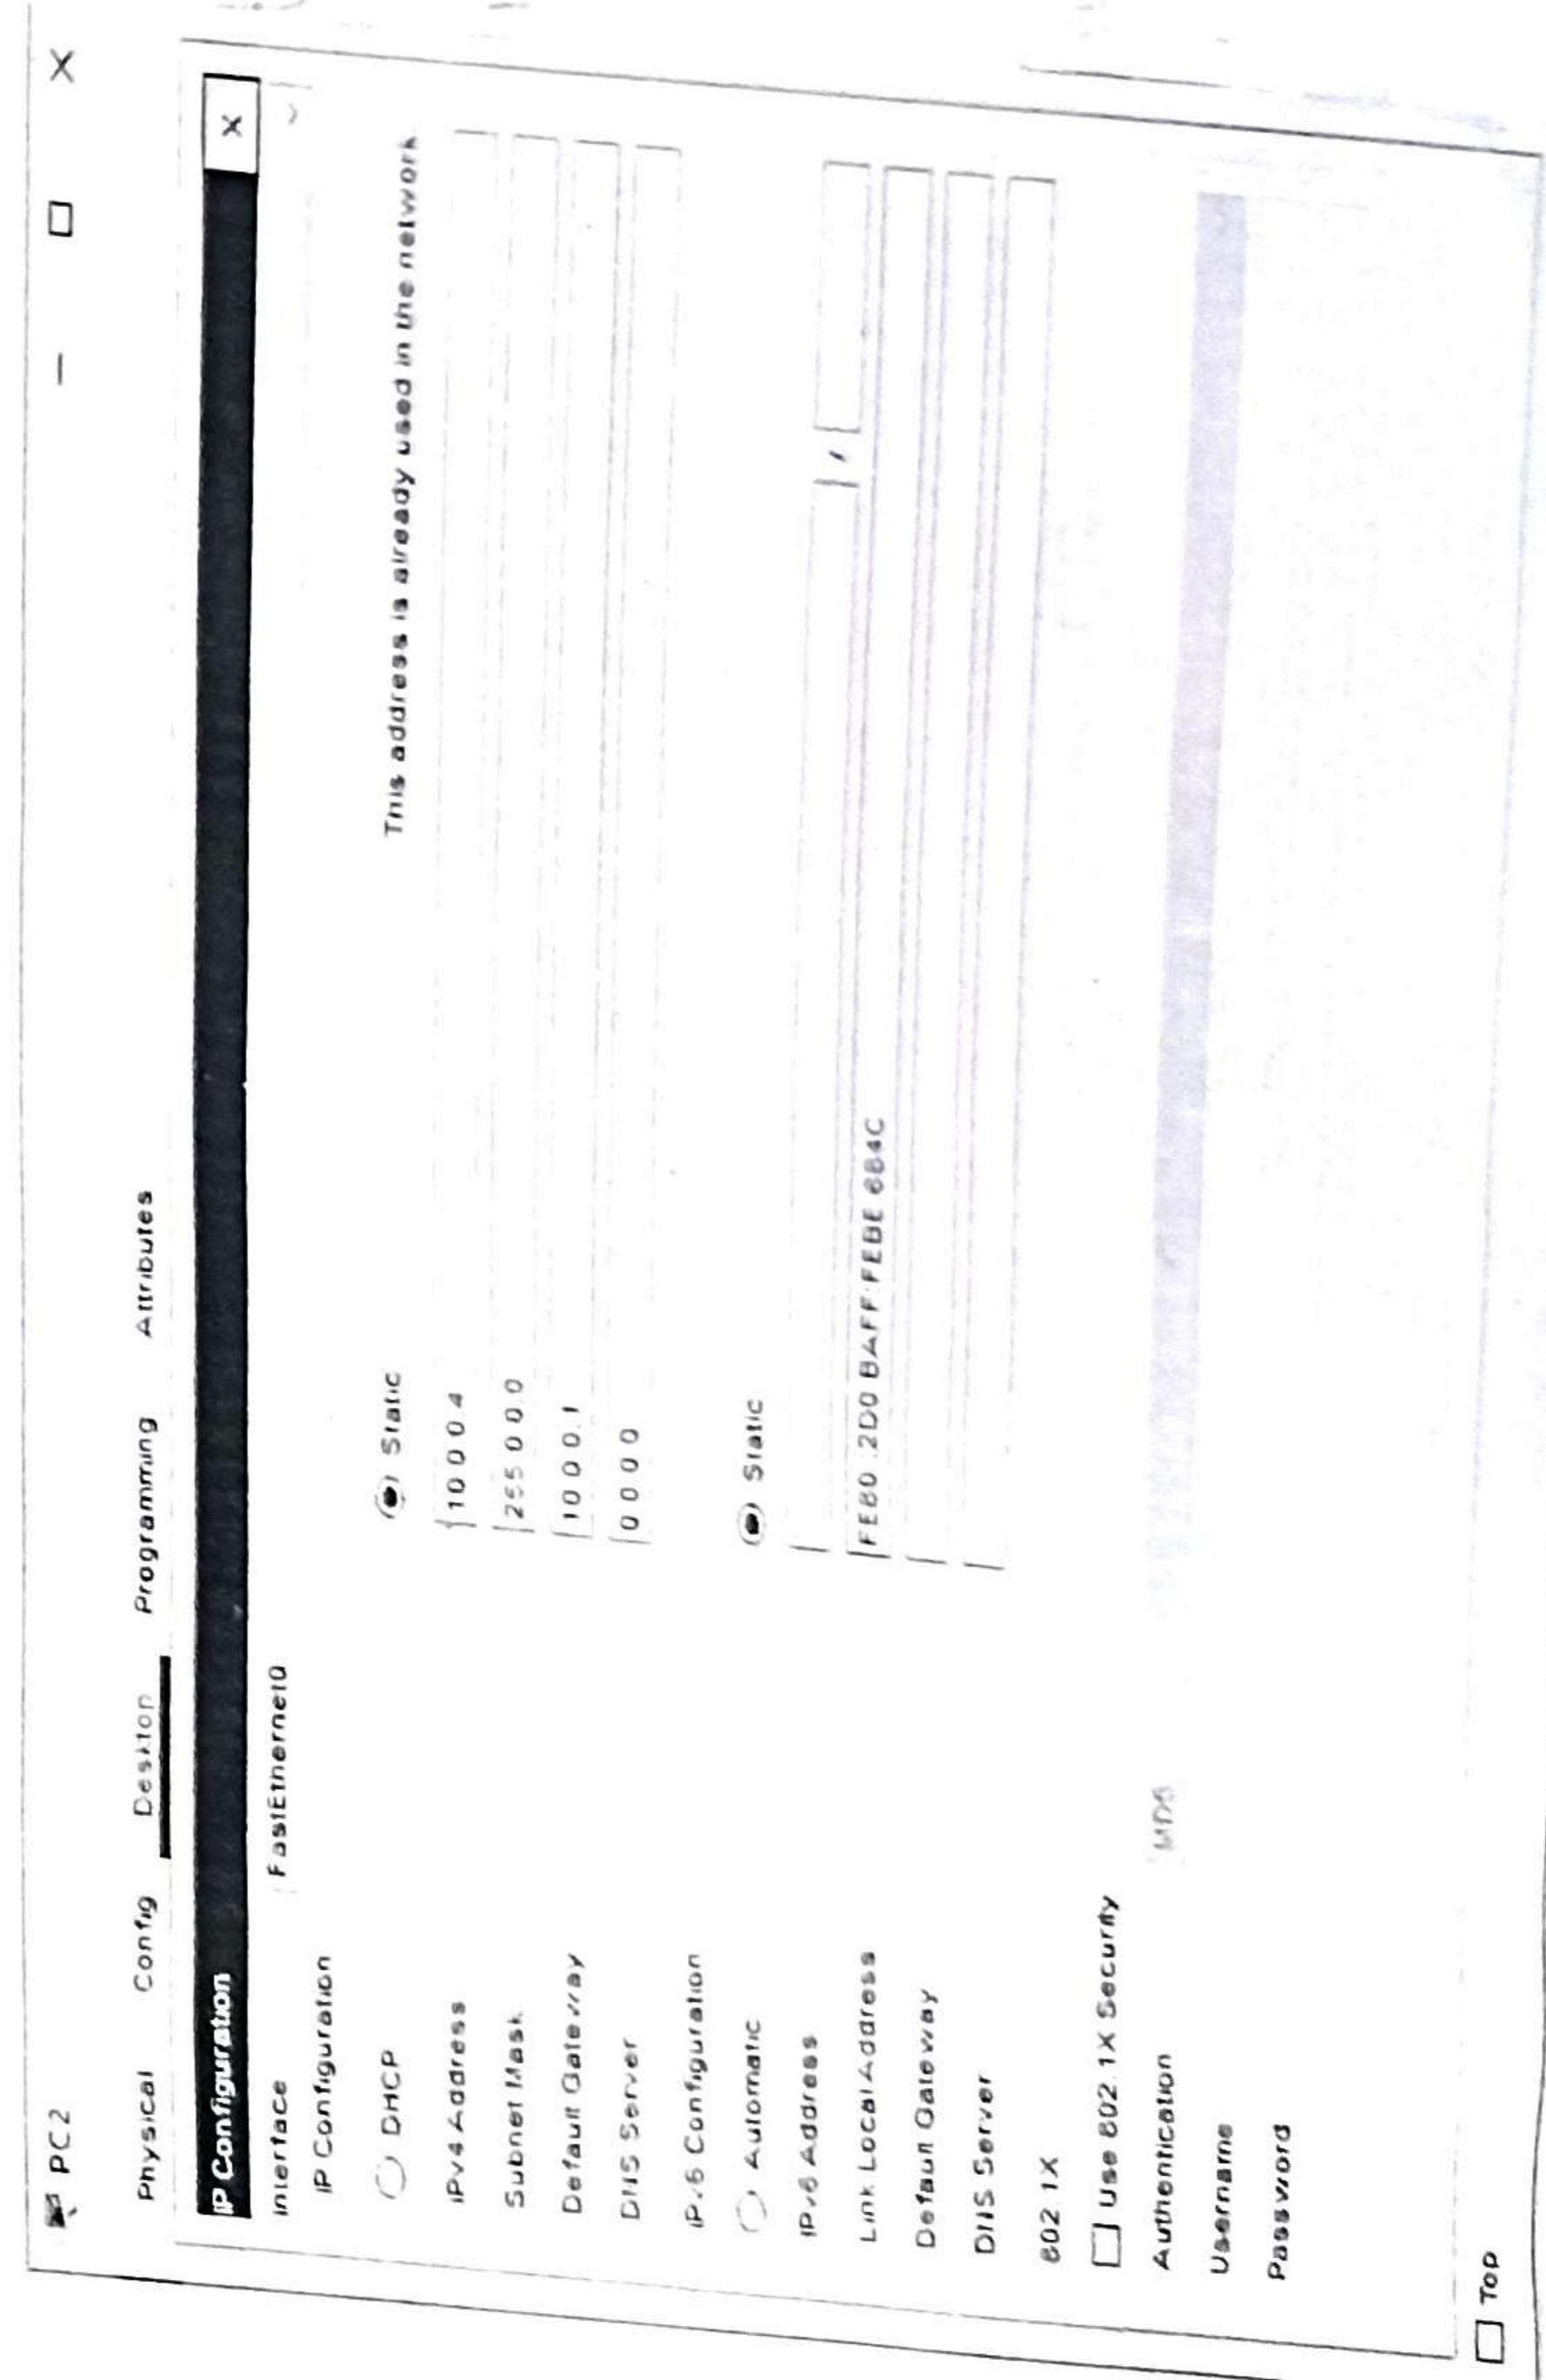

3. RIP hop counts are restricted to 15, hence any router beyond this distance is deemed infinity and becomes unreachable.

4. The rate of convergence is slow in RIP compared to other routing protocols. When a link fails finding alternate network paths take a long time.

5. RIP does not support multiple path on the same time, route which may result in extra routing loops.

Configuring Router Using the CLI mode

Router>

Router#

Router# configure terminal

Enter configuration command, one per line: End with CNTL Z.

Router(config)# interface gigabitEthernet 0/0

Router(config-if)# ip address 10.0.0.1 255.0.0.0

Router(config-if)# no shutdown

Router(config-if)# exit

Router(config)# interface serial 0/1/0

Router(config-if)# ip address 192.168.0.1 255.255.0

Router(config-if)# no shutdown

Router(config-if)# exit

Router(config)#

Router#

Configuring Router 1 using the CLI mode)

Router> enable

Router# configure terminal

Router(config)# interface gigabitEthernet 0/0

Router(config-if)# ip address 20.0.0.1 255.0.0.0

Router(config-if)# no shutdown

SIES (Nerul) College of Arts, Science and Commerce

UGC Recognized under 2(F) and 12(B) of UGC ACT 1956.

NAAC Reaccredited- "A" Grade. Affiliated to University of Mumbai

Configuring PC3:

PC3

Physical	Config	Desktop	Programming	Attributes
IP Configuration	FastEthernet0			
<input type="radio"/> DHCP				
IPv4 Address	200.0.2			
Subnet Mask	255.0.0.0			
Default Gateway	200.0.1			
DNS Server	0.0.0.0			
IPv6 Configuration				
<input type="radio"/> Automatic				
IPv6 Address				
Link Local Address	FE80::202:17FF:FE81:0006			
Default Gateway				
DNS Server				
802.1X				
<input type="checkbox"/> Use 802.1X Security				
Authentication	MDS			
Username				
Password				

Configuring PC4:

PC4

Physical	Config	Desktop	Programming	Attributes
IP Configuration	FastEthernet0			
<input type="radio"/> DHCP				
IPv4 Address	200.0.3			
Subnet Mask	255.0.0.0			
Default Gateway	200.0.1			
DNS Server	0.0.0.0			
IPv6 Configuration				
<input type="radio"/> Automatic				
IPv6 Address	FE80::202:41FF:FE13:AB7E			
Link Local Address				
Default Gateway				
DNS Server				
802.1X				
<input type="checkbox"/> Use 802.1X Security				
Authentication	MDS			
Username				
Password				

Configuring PC5:

PC5

Physical	Config	Desktop	Programming	Attributes
IP Configuration	FastEthernet0			
<input type="radio"/> DHCP				
IPv4 Address	200.0.4			
Subnet Mask	255.0.0.0			
Default Gateway	200.0.1			
DNS Server	0.0.0.0			
IPv6 Configuration				
<input type="radio"/> Automatic				
IPv6 Address	FE80::2E0:F9FF:FE0D:3AA4			
Link Local Address				
Default Gateway				
DNS Server				
802.1X				
<input type="checkbox"/> Use 802.1X Security				
Authentication	MDS			
Username				
Password				

Top

```

Router(config)# exit
Router(config)# interface serial 0/1/0
Router(config)# ip address 192.168.0.2 255.255.255.0
Router(config)# no shutdown
Router(config-if)# exit
Router(config)# interface serial 0/1/1
Router(config)# ip address 192.168.0.2 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit

Configuring Router 2 (using the CLI mode)

Router>enable

Router# configure terminal
Router(config)# interface gigabitEthernet 0/0
Router(config-if)# ip address 30.0.0.1 255.0.0.0
Router(config-if)# no shutdown
Router(config-if)# exit

Router(config)# interface serial 0/1/1
Router(config)# ip address 192.168.1.2 255.255.255.0
Router(config-if)# no shutdown
Router(config-if)# exit

```

```

Setting the RIP V1 on Router 0
Router>enable
Router# configure terminal
Router(config)# router rip
Router(config-router)# network 10.0.0.0
Router(config-router)# network 192.168.0.0
Router(config-router)# exit

```

Configuring PC6:

PC6

Physical	Config	Desktop	Programming	Attributes
Interface	IP Configuration	FastEthernet0		
IP Configuration				
<input type="radio"/> DHCP	<input checked="" type="radio"/> Static			
IPv4 Address	30.0.0.2			
Subnet Mask	255.0.0.0			
Default Gateway	30.0.0.1			
DNS Server	0.0.0.0			
IPv6 Configuration				
<input type="radio"/> Automatic	<input checked="" type="radio"/> Static			
IPv6 Address	FE80::2E0:FFF:FE9A:D3AA			
Link Local Address				
Default Gateway				
DNS Server				
802.1X				
<input type="checkbox"/> Use 802.1X Security				
Authentication				
Username				
Password				

Configuring PC7:

PC7

Physical	Config	Desktop	Programming	Attributes
Interface	IP Configuration	FastEthernet0		
IP Configuration				
<input type="radio"/> DHCP	<input checked="" type="radio"/> Static			
IPv4 Address	30.0.0.3			
Subnet Mask	255.0.0.0			
Default Gateway	30.0.0.1			
DNS Server	0.0.0.0			
IPv6 Configuration				
<input type="radio"/> Automatic	<input checked="" type="radio"/> Static			
IPv6 Address	FE80::201:C9FF:FE0C:D816			
Link Local Address				
Default Gateway				
DNS Server				
802.1X				
<input type="checkbox"/> Use 802.1X Security				
Authentication				
Username				
Password				

Configuring PC8:

PC8

Physical	Config	Desktop	Programming	Attributes
Interface	IP Configuration	FastEthernet0		
IP Configuration				
<input type="radio"/> DHCP	<input checked="" type="radio"/> Static			
IPv4 Address	30.0.0.4			
Subnet Mask	255.0.0.0			
Default Gateway	30.0.0.1			
DNS Server	0.0.0.0			
IPv6 Configuration				
<input type="radio"/> Automatic	<input checked="" type="radio"/> Static			
IPv6 Address	FE80::260:3EFF:FE25:E1BE			
Link Local Address				
Default Gateway				
DNS Server				
802.1X				
<input type="checkbox"/> Use 802.1X Security				
Authentication				
Username				
Password				

TOP

Setting the RIP v1 on Router 1

Router > enable

Router # configure terminal

Enter configuration commands, one per line. End with control-Z

Router (config) # router -rip

Router (config-router) # network 192.168.0.0

Router (config-router) # network 20.0.0.0

Router (config-router) # network 192.168.1.0

Router (config-router) # exit

Router (config) #

Router #

~~Setting the RIP v1 on Router 2~~

~~Router 1~~

Router # configure terminal

Router (config) # router rip

Router (config-router) # network 192.168.1.0


Router (config-router) # network 30.0.0.0

Router (config-router) # exit

Router (config) #

Checking the connectivity by using the ping command

Pinging PC8 (ip address 30.0.0.4) from PC0

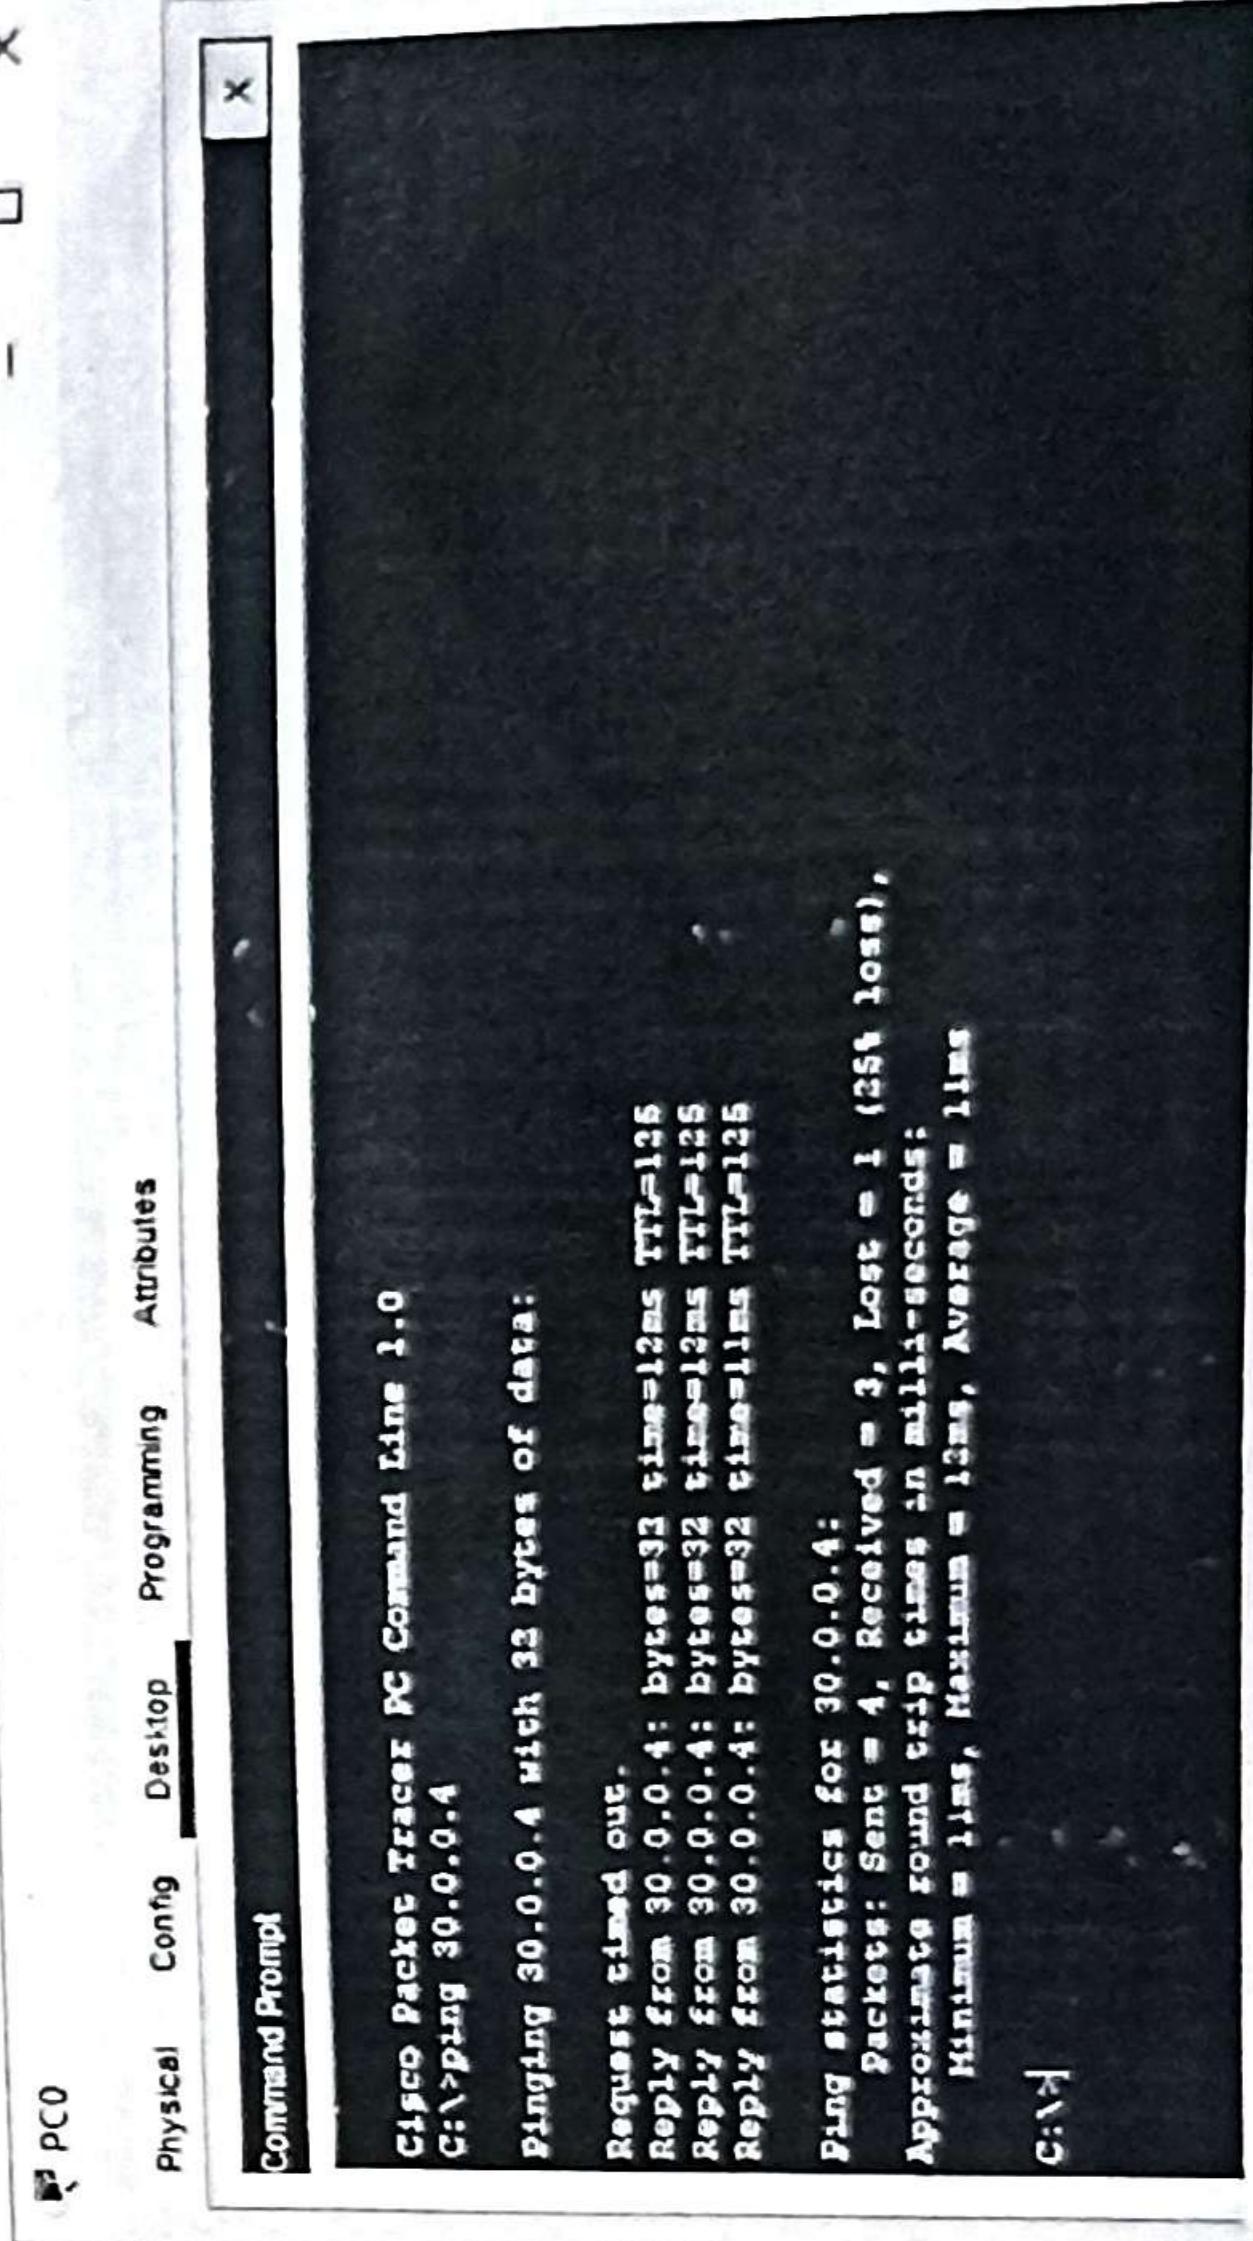



SIES (Nerul) College of Arts, Science and Commerce

UGC Recognized under 2(F) and 12(B) of UGC ACT 1956.

NAAC Reaccredited- "A" Grade. Affiliated to University of Mumbai

PLOT 1-C, SECTOR-V, NERUL, NAVI MUMBAI - 400 706.



(Nerul) College
of Arts Science
& Commerce
SIES
RISE WITH EDUCATION

CLASS : 54CS

DATE : 04/02/2023

Practical No. : 06

Topic :

Aim :- Using Packet Tracer to create a network with three routers with RIPV2 and each router associate network will have minimum three PC and show the connectivity.


Theory:-

RIPV2 is an enhancement to the original RIP protocol developed in 1994, RIPV2 is also a distance vector routing protocol but has a few enhancements to make it more efficient than RIPV1.

- RIPV2 is more efficient than RIPV1 but is not suitable for large more complex networks. It simply provides more flexibility on smaller networks.

RIPV2 uses the same routing metric as RIPV1 the hop count. Updates with RIPV2 are sent via multicast and not broadcast. RIPV2 can also be configured to do classless routing. When configured for classless routing, RIPV2 will transmit subnet mask when it sends routing updates. This allows for the use of subnetting and discontiguous networks and networks.

RIPV2 allows for authentication to be required for updates. When authentication is enabled each router is configured with the RIP update password. The password sent with the RIP update must match the password configured on the destination router. If the password does not match, then the receiving router will not process the update.

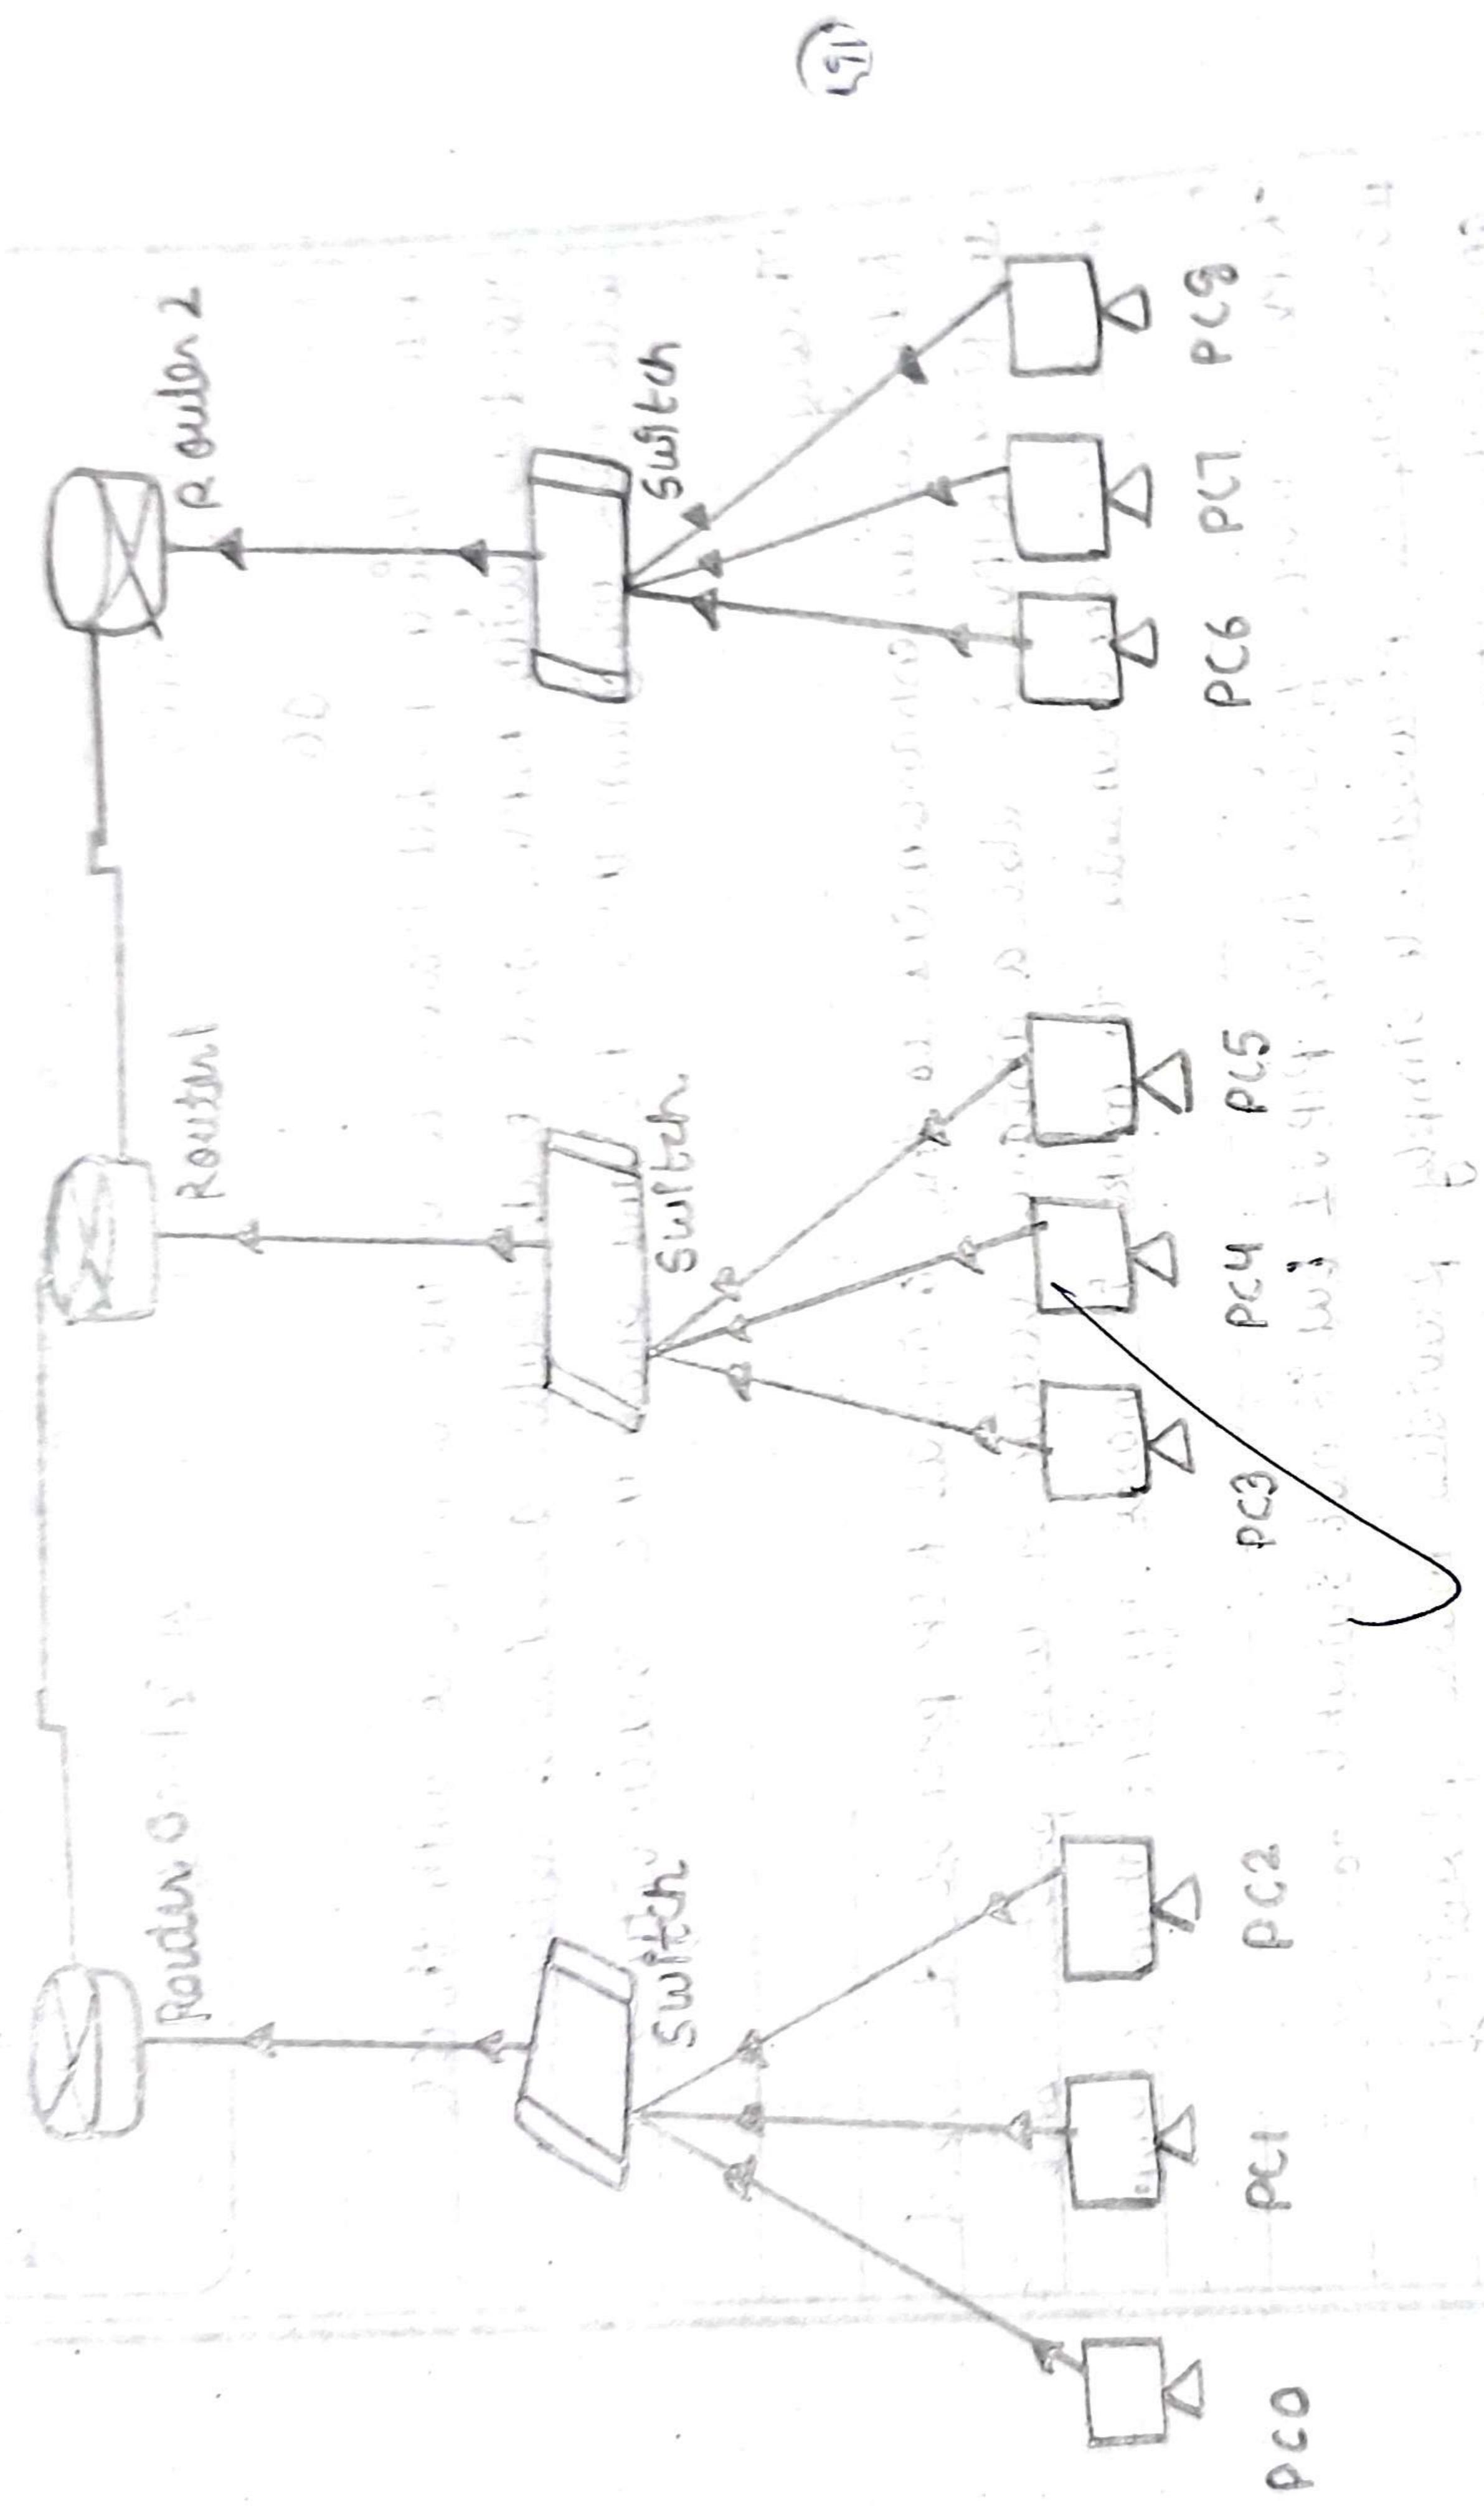

(a) In the network shown in Fig. 1, if a link between the hub and PC1 fails, then
 (i) the link between Router 1 and the hub will still work.
 (ii) the link between Router 2 and the hub will still work.
 (iii) the link between Router 1 and Router 2 will still work.
 (iv) the link between Router 1 and Router 2 will not work.
 (v) the link between Router 2 and the hub will not work.
 (vi) the link between Router 1 and the hub will not work.
 (vii) the link between Router 2 and Router 1 will not work.
 (viii) the link between Router 2 and Router 1 will still work.

(b) In the network shown in Fig. 1, if a link between the hub and PC1 fails, then
 (i) the link between Router 1 and the hub will still work.
 (ii) the link between Router 2 and the hub will still work.
 (iii) the link between Router 1 and Router 2 will still work.
 (iv) the link between Router 1 and Router 2 will not work.
 (v) the link between Router 2 and the hub will not work.
 (vi) the link between Router 1 and the hub will not work.
 (vii) the link between Router 2 and Router 1 will not work.
 (viii) the link between Router 2 and Router 1 will still work.

Advantages of RIP V2

- It's a standardized protocol
- It's IISM compliant
- Provides fast convergence
- It sends triggered updates when the network changes
- Works with snapshot routing - making it ideal for dial networks.

Disadvantage of RIP V2

- Max hop count of 15, due to the 'count-to-infinity' vulnerability
- No concept of neighbors
- Exchange entire table with all neighbors every 30 second (except in the case of triggered update).

~~Configuring Router 0 for RIP V2 (using the CLI mode)~~

```
Router # configure terminal
Router(config) # router rip
Router(config-router) # version 2
Router(config-router) # network 10.10.0.0
Router(config-router) # network 192.168.0.0
Router(config-router) # exit
Router(config)#
```

~~Configuring Router 1 for RIP V2 (using the CLI mode)~~

```
Router # configure terminal
Router(config) # router rip
Router(config) # version 2
Router(config)#
```

```
Router (config-router) # network 10.20.0.0
Router (config-router) # network 192.168.0.0
Router (config-router) # network 192.168.1.0
Router (config-router) # exit
Router(config) #
```

Configuring Router 2 for RIP V2 (using the CLI mode)

Router> enable

Router# configure terminal

Router(config) # router rip

Router (config-router) # version 2

Router (config-router) # network 10.30.0.0

Router (config-router) # network 192.168.1.0

Router (config-router) # exit

Router(config) #

*Configured
Router 2*



SIES (Nerul) College of Arts, Science and Commerce

UGC Recognized under 2(F) and 12(B) of UGC ACT 1956.

NAAC Reaccredited- "A" Grade. Affiliated to University of Mumbai

PLOT 1-C, SECTOR-V, NERUL, NAVI MUMBAI - 400 706.



(Nerul) College
of Arts Science
& Commerce

SIES
RISE WITH EDUCATION

CLASS : 54CS

DATE : 06/02/2023

Practical No. : 07 Topic :

Aim:- Using Packet Tracer create a network with three routers with OSPF and each router associated will have minimum three pc and show connectivity.

Theory :-


open shortest path first (OSPF) is a link state routing protocol that is used to find the best path between the source and the destination router using its own shortest path first (SPF) algorithm. A link state routing protocol is a protocol that uses the concept of triggered updates, i.e. if there is a change observed in the learned routing table then the updates are triggered only, not like the distance-vector routing protocol where the routing table is exchanged at a period of time.

Open Shortest path first (OSPF) is developed by Internet Engineering Task force (IETF) as one of the Interior Gateway Protocol (IGP) i.e. the protocol which aims at moving the packet within a large autonomous system or routing domain.

OSPF advantages:-

1. Both IPv4 and IPv6 routed protocols
2. Load balancing with equal cost routes for the same destination
3. Unlimited hop counts
4. Trigger updates for fast convergence

Page No. _____

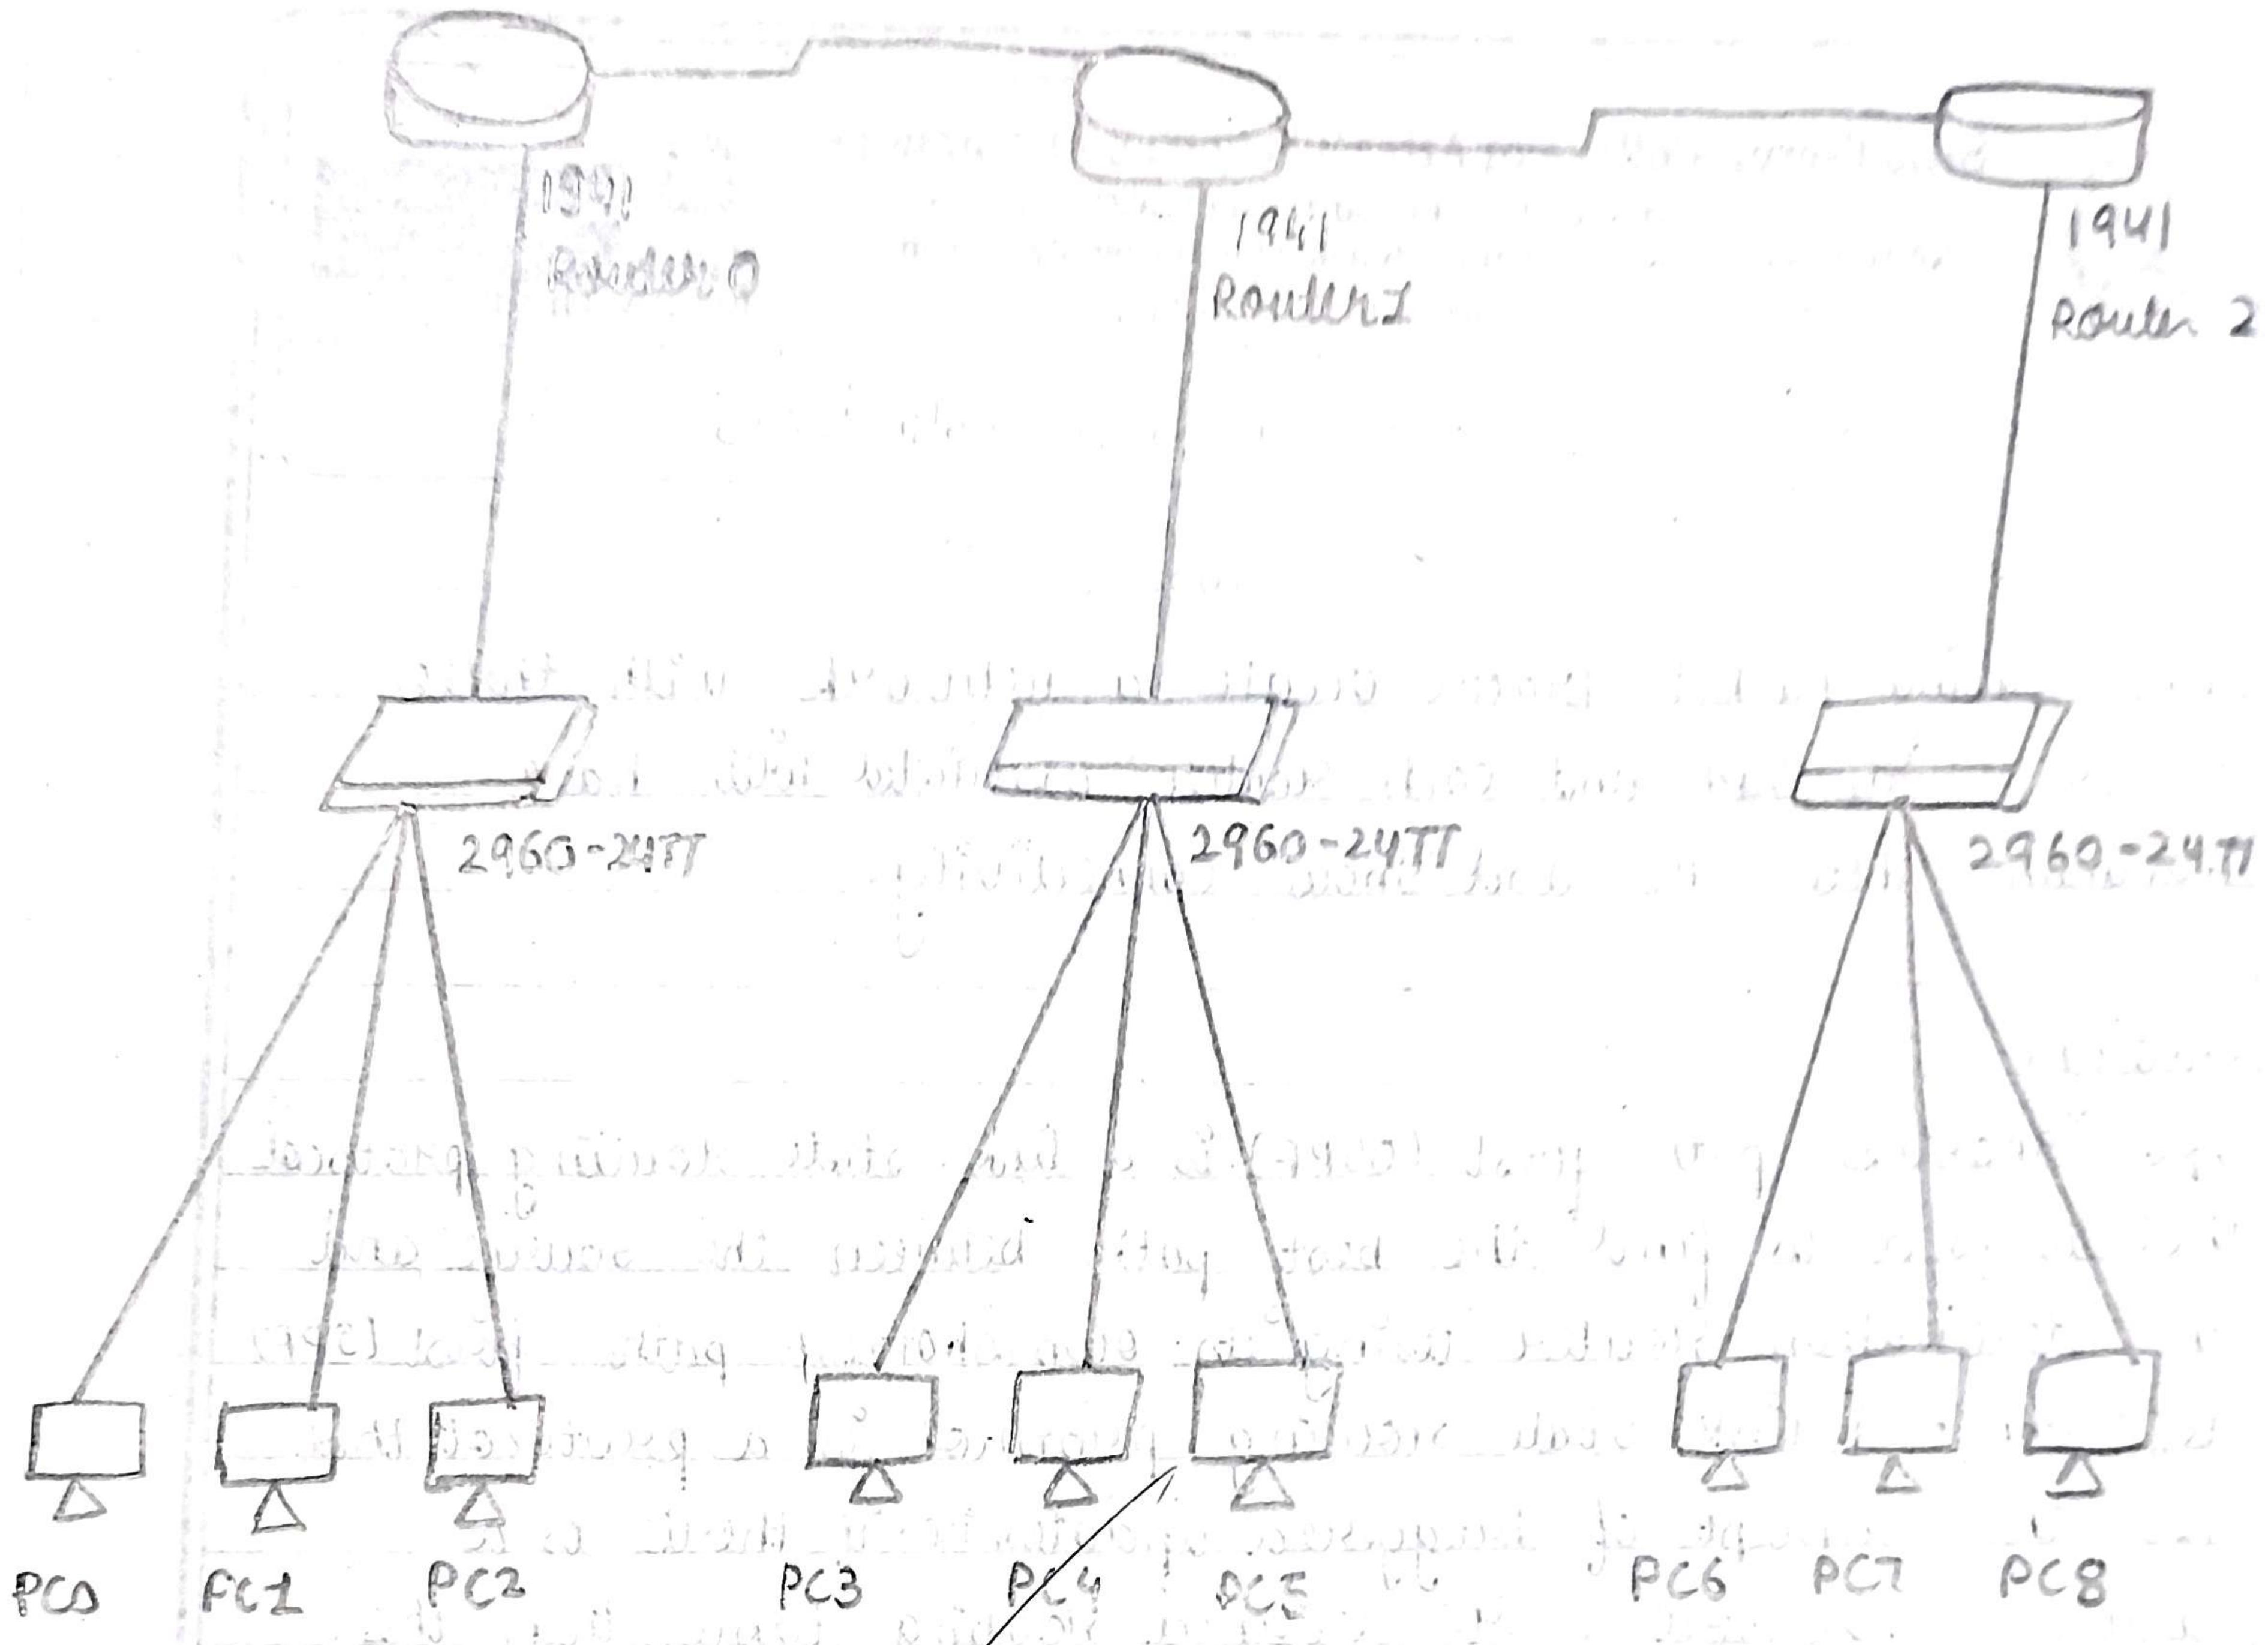

PC0

PC1

PC2

PC3

PC4

PC5

PC6

PC7

PC8

5. A loop-free topology using SPF algorithm
6. Run-on most routers
7. Classless protocol

There are some disadvantages of OSPF like It requires an extra CPU process to run the SPF algorithm requiring more RAM to store adjacency topology and being more complex to set up and hard to troubleshoot.

~~Review
2/4/2015~~



SIES (Nerul) College of Arts, Science and Commerce

UGC Recognized under 2(F) and 12(B) of UGC ACT 1956.
NAAC Reaccredited - "A" Grade. Affiliated to University of Mumbai

PLOT 1-C, SECTOR-V, NERUL, NAVI MUMBAI - 400 706.



(Nerul) College
of Arts Science
& Commerce

CLASS : S4CS

DATE : 24/02/2023

Practical No. : 08 Topic :

Aim :- Using Packet Tracer, create a network with three routers with BGP and each router associated network will have minimum three PC and show connectivity.

Theory :-

Border Gateway Protocol (BGP) is used to Exchange routing information for the internet and is the protocol used between ISP which are different Autonomous System (AS). The protocol can connect together any internetwork of autonomous system using an arbitrary topology. The only requirement is that AS have at least one router that is able to run BGP and that is router connect to at least one other AS's BGP router.

BGP's main function is to exchange network reachability information with other BGP system.

Characteristics of Border Gateway Protocol (BGP)

1. The main role of BGP is to provide communication between two autonomous system.
2. BGP supports Next-Hop Paradigm.
3. Co-ordination among multiple BGP speakers within the AS (Autonomous System).
4. BGP advertisement also include path information, along with the reachable destination and next destination pair.

Page No. _____

5. BGP can implement policies that can be configured by the administrator.
6. BGP runs over TCP.
7. BGP conserves network Bandwidth.
8. BGP supports CIDR.
9. BGP also supports Security.

~~rejha~~
2021/22