



Rules on receiving waste from ships

In force as of January 1, 2021


PORT OF AARHUS



Table of contents

1.	Plan of waste containers.....	3
2.	About the Port of Aarhus.....	4
2.1	Aim of rules on receiving waste.....	4
2.2	Port management	4
2.3	Legal basis	5
2.4	Definitions.....	5
3.	Rules on receiving individual types of waste	6
3.1	Domestic waste and other solid waste	6
3.2	Sewage	6
3.3	Sewage sludge	8
3.4	Oil mixtures and residues	8
3.5	Cargo residues.....	9
3.6	Oily ballast water and tank washings.....	10
4.	General provisions	10
5.	Waste management	10
6.	General information about the rules on receiving waste...	11
6.1	Liability	11
6.2	Making a complaint	11
6.3	Consultation with users	11
6.4	Coming into force	11
7.	Flange specifications and forms	12
7.1	Standard flanges	13
7.2	Complaints form.....	15
7.3	Sewage form cruise ships	15

1. Plan of waste containers

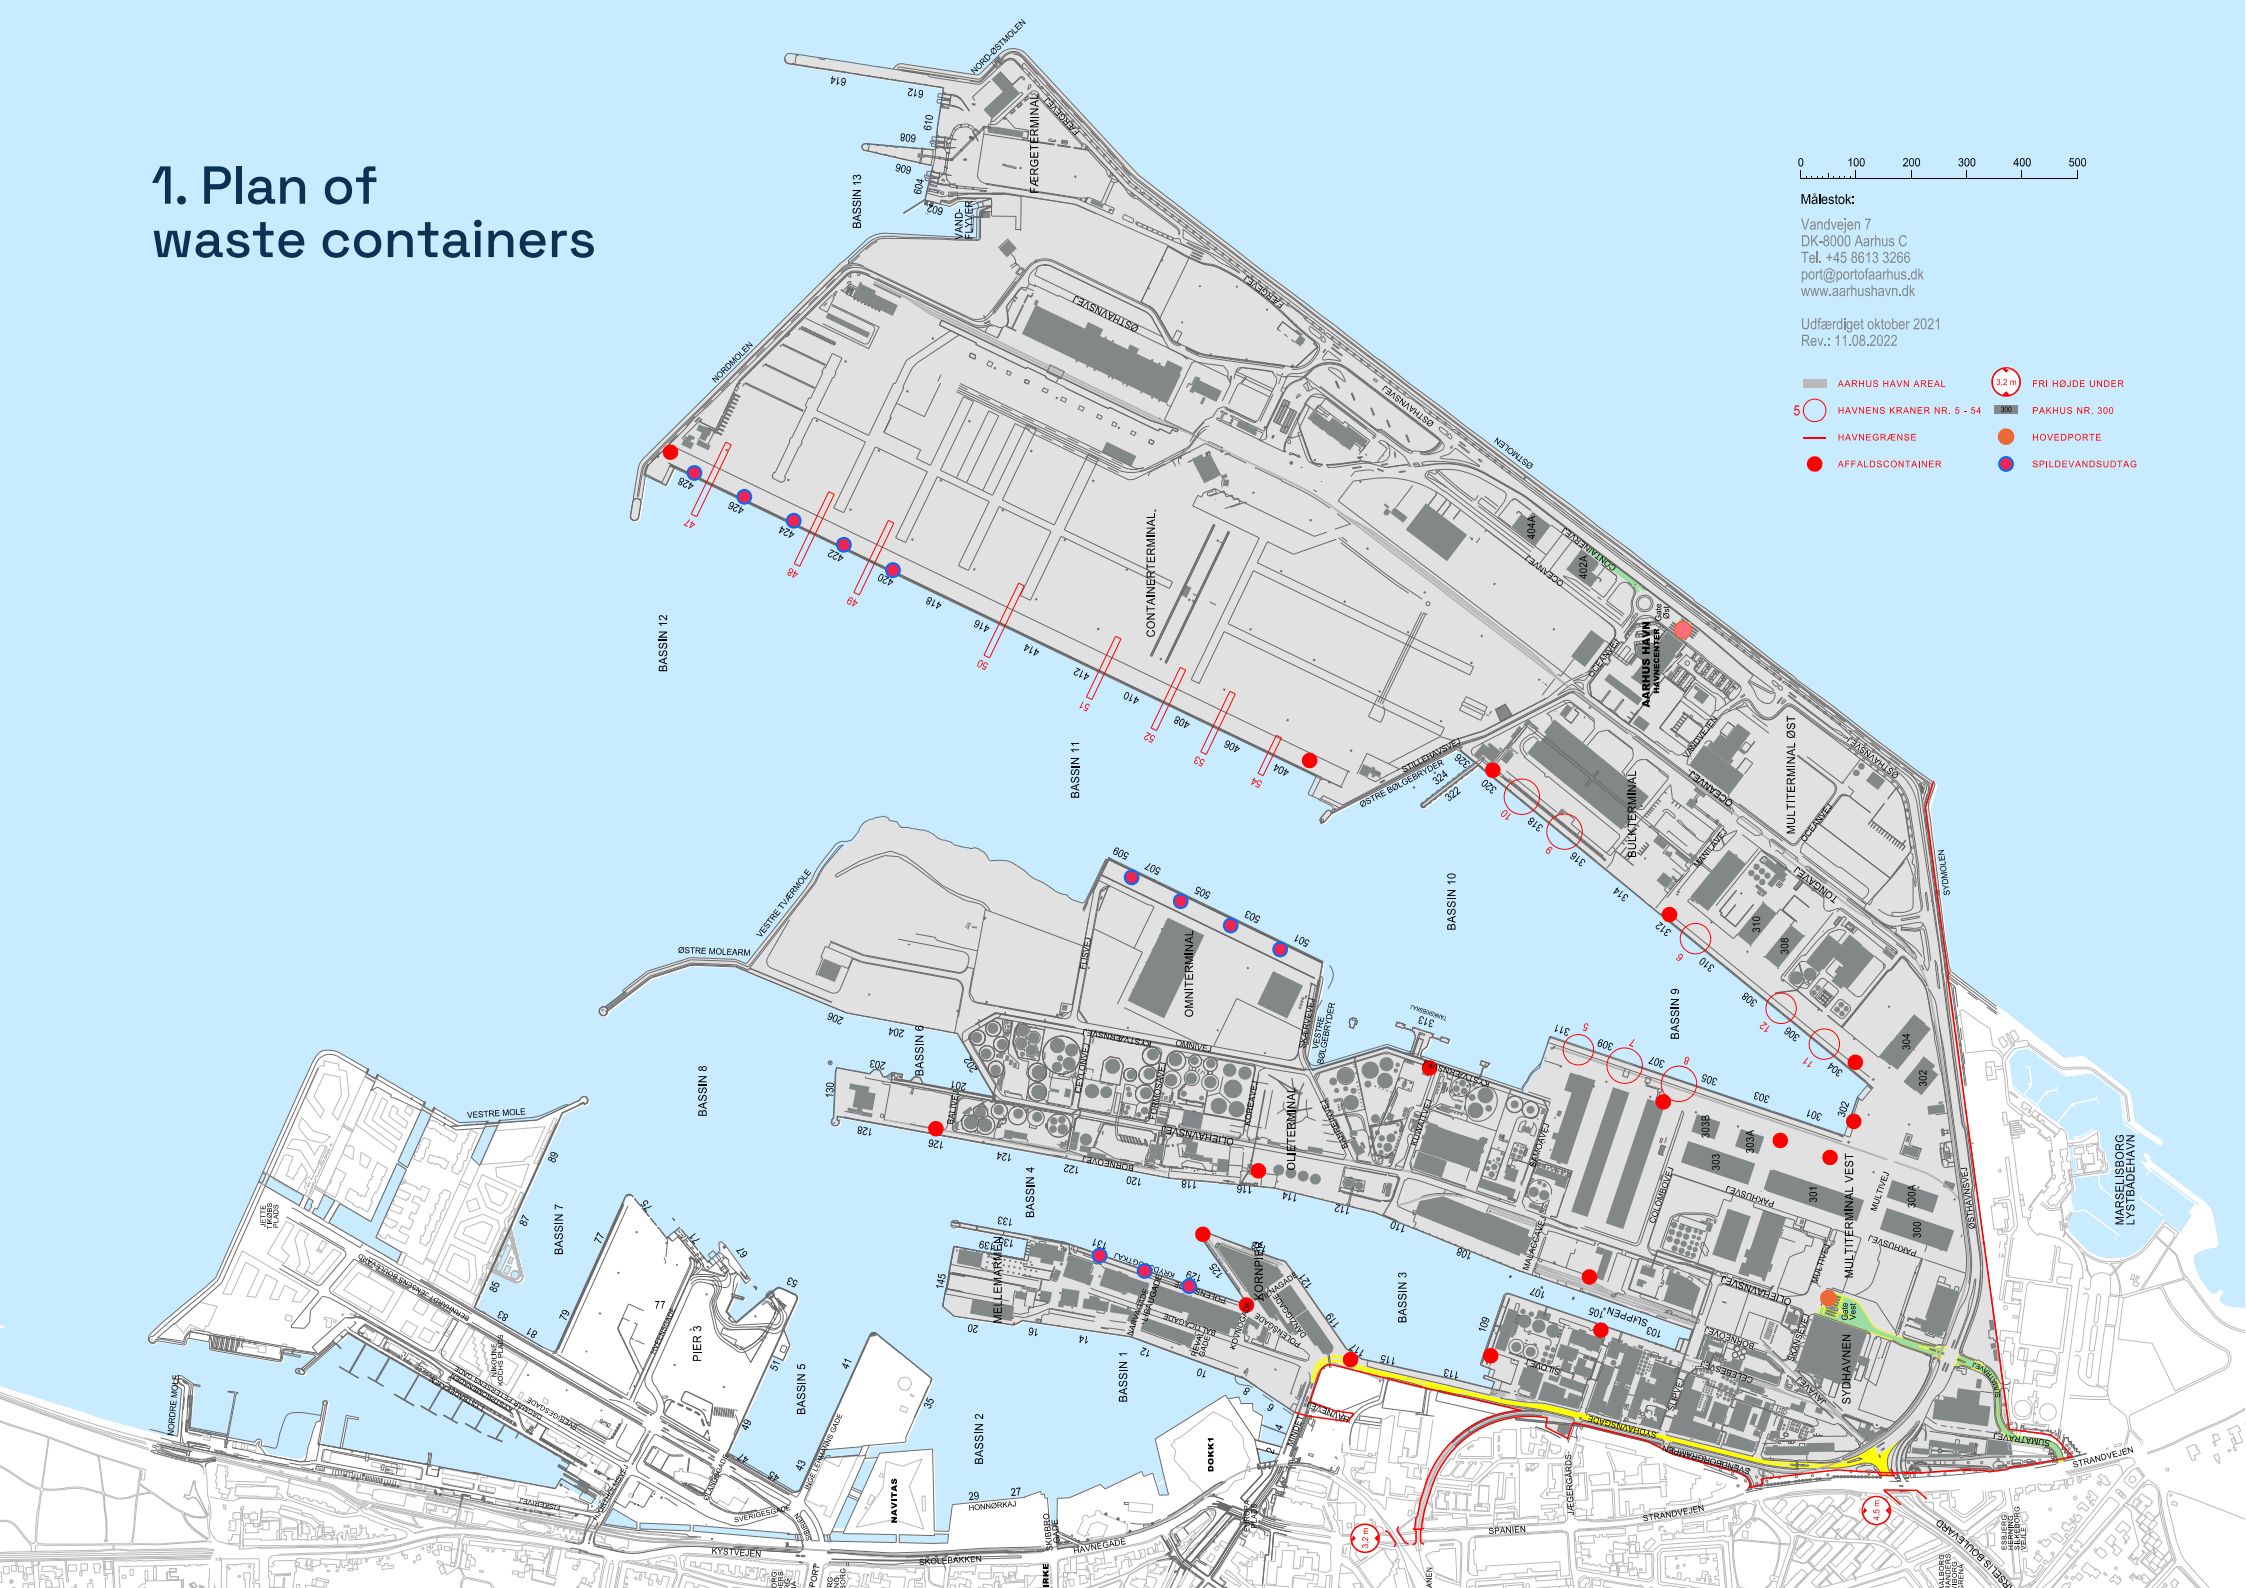

2. About the Port of Aarhus

The Port of Aarhus is an independently managed municipal port run by a board of directors comprising 8 members, with the mayor acting as chair of the board. The port director acts as CEO. Financially, the port functions as an independent entity with no public funding.

Profits are invested back into the maintenance of the port infrastructure and in expanding the port area. The Port of Aarhus has approximately 97 employees (as at August 2020), whilst the roughly 150 private companies operating at the port employ several thousand workers. The port areas are continuously adapted to meet customers wants and needs. An approved long-term plan includes the possibility of further expanding the port.

2.1 Aim of rules on receiving waste

By establishing effective rules on receiving waste, the Port of Aarhus wishes to help to achieve a positive environmental impact by managing operational waste from ships responsibly.

The aim is to make it easy for ships which call at the port to deliver their waste in the port. This can help contribute to reducing marine environment pollution.

These rules will be reviewed continuously to ensure that there is sufficient capacity. Different solutions will be uncovered with respect to minimising the number of overflowing containers and increasing the amount of waste that is recycled.

2.2 Port management

The board of directors of the Port of Aarhus is responsible for preparing this plan for waste management in the port.

The Port of Aarhus is responsible for implementing and maintaining the plan. The rules on receiving waste are published on the port's





website at [www.aarhusport.dk](#) where the port's customers can view the rules in their entirety. The rules are also described in summary in the applicable terms and conditions of business of the Port of Aarhus.

The Port of Aarhus' Customer Centre can be contacted regarding the rules on receiving waste by calling 8613 3266.

2.3 Legal basis

Applicable national and international directives, regulations and recommendations:

- MARPOL Convention (the International Convention for the Prevention of Pollution from Ships 73/78). Entered into force on 1 July 1992, with subsequent additions;
- Directive 2000/59/EC of the European Parliament and of the Council of 27 November 2000 on port reception facilities for ship-generated waste and cargo residues with subsequent additions;
- Helsinki Convention (HELCOM) of 1992 with subsequent recommendations;
- Danish Executive Order no. 1165 of 25/11/2019 on protection of the marine environment;
- Danish Executive Order no. 1396 of 25/11/2016 on the port's plans and management of waste from ships;
- Applicable regulations of the Municipality of Aarhus regarding commercial waste.

2.4 Definitions

Operational wastes

Any and all forms of waste, including sewage, oil and domestic waste, and other wastes besides cargo residues that are produced whilst

the ship is in operation. The port shall take receipt of this waste according to the legislation under the “no special fee” scheme but only from ships paying port dues with a permit to be in port.

Cargo residues

Residues from cargos from the hold or tank after unloading and cleaning is complete, or other waste connected with the cargo.

Oily ballast water and tank washings

Water from the cargo and ballast tanks that is mixed with oil products.

3. Rules on receiving individual types of waste

Rules have been established for receiving the following types of waste.

3.1 Domestic waste and other solid waste

General

Domestic waste and other solid waste is received using containers. The containers are sized for galley waste and similar only. The disposal of environmentally hazardous waste and any payment due for such is agreed with the Customer Centre.

Containers for domestic waste are placed at fixed locations around the port and can be accessed 24/7. The plan of waste containers can be found on page 2. They are emptied at set intervals.

Extra containers may be requisitioned if the Customer Centre deems it necessary. Due to the risk of vermin, the majority of our containers are locked and must be unlocked before use. This is to ensure that the correct waste is placed in the correct containers, and that this is registered correctly.

Cruise ships

Cruise ships must always order containers separately, and these shall be placed by agreement. A 12 m³ container with built-in waste sorting is provided to cruise ships free of charge. Waste which exceeds this container is paid for by the ship.

Fee

The part of a ship's waste that is related to its operation is collected for “no special fee” provided the amount of such waste is reasonable with respect to both the size of the ship and its normal voyage.

Collections of unreasonably large amounts shall be charged according to the tariffs set at any time by the Port of Aarhus.

The Port of Aarhus requires at least 24 hours' notice for providing separate containers. The requesting party is responsible for the correctness of the information provided.

3.2 Sewage

General

Sewage pipes can be connected to the public sewage system (Marselis Renseanlæg) directly at the receiving well by

quay 129-131 + kaj 420-422-424-426-428 + quay 501-503-505-507-509. At other quays, sewage can be delivered to road tankers located alongside the ship.

Sewage must be pumped ashore by the ship's own pumps.

Connection

Standard dimensions for flanges between receiving facility's pipelines and ships' sewage discharge pipelines - see Sec. 7.1 Standard flanges.


Delivery to receiving wells

(quays 129-131 + 420-422-424-426-428 + 501-503-505-507-509). There are ~100 m internal distance between the receiving wells and quay. Port of Aarhus staff will assign a receiving well. The ship must provide, assemble, connect/disconnect and monitor pump hoses, connection flanges etc. from the ship to the receiving well during pumping.

Quay 129-131: A maximum of 80-100 m³/hour may be delivered to the quayside receiving well.

Quays 420-428 and 501-509: A maximum of 30 m³/hour may be delivered to the quayside receiving well.

Nordic Oily Waste can provide, assemble, connect/disconnect pumping hoses, connection flanges etc. on behalf of ships for a fee. The ship must still oversee the pumping. To order pumping hoses etc., contact Nordic Oily Waste on 59 57 85 60 or by e-mailing info@nowaste.dk in good time and at least 24 hours before collection. Remark: A surcharge is applied outside of normal working hours (weekdays from 7:00-15:00).

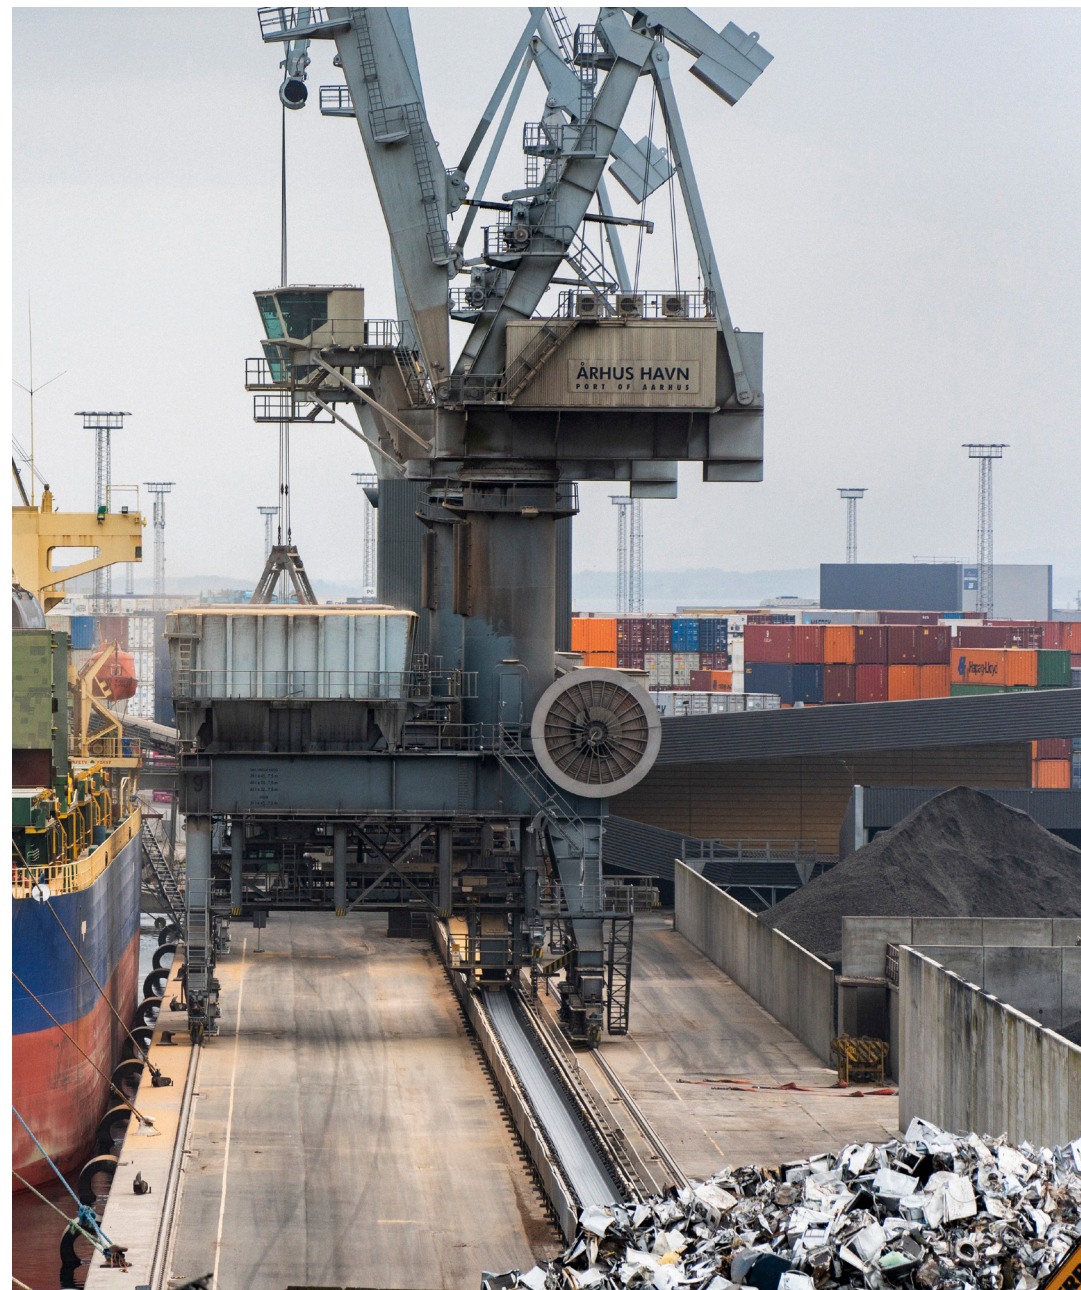

Delivery to tankers

Sewage collection in tankers is arranged by contacting Nordic Oily Waste on 59 57 85 60 or by e-mailing info@nowaste.dk in good time and at least 24 hours before collection.

For deliveries to tankers, the ship shall pay the tanker fees. Sewage is received according to the no special fee rules.

Collection is usually during the port's working hours, weekdays from 7:15 to 15:00. However, ships that only call at the port outside of normal working hours can have their waste collected for an additional fee.

Cruise ships

The sewage form under Sec. 7.3 must be signed by the ship and sent to the Port of Aarhus at no later than 24 hours before delivery of sewage begins.

It must be ensured that the ship adjusts/throttles pumping immediately in the event that the public system becomes overloaded. Consequently, it must be possible for Port of Aarhus staff to contact the relevant ship's officer throughout pumping.

Fee

Reasonable amounts, defined as the amount a ship will have accumulated since its last port of call under normal operation, may be delivered at no cost (no special fee).

3.3 Sewage sludge

General

Sewage sludge from the ship's cleaning system is delivered

exclusively to road tankers which are driven by approved recipients. Sludge must not be pumped to receiving wells under any circumstances. Sewage collection is arranged by contacting Nordic Oily Waste on 59 57 85 60 or by e-mailing info@nowaste.dk in good time and at least 24 hours before collection.

Fee

Reasonable amounts, defined as the amount a ship will have accumulated since its last port of call under normal operation, may be delivered at no cost (no special fee). Collection of sewage sludge beyond "no special fee" - quantities charged according to applicable current price.

3.4 Oil mixtures and residues

General

Slop water is collected using a tanker. Oil mixtures and residues containing petrochemicals, Class I and II hazardous products or emulsifying substances cannot be received.

Collection is usually during the port's working hours, weekdays from 7:00 to 15:00. However, ships that only call at the port outside of normal working hours can have their waste collected for an additional fee.

Sewage collection is arranged by contacting Nordic Oily Waste on 59 57 85 60 or by e-mailing info@nowaste.dk in good time and at least 24 hours before collection. Oil mixtures and residues must be pumped ashore using the ship's own pumps and at a minimum of 9 m³ per hour.



Fee

Collection is subject to “no special fee” provided the amount of such waste is reasonable with respect to both the size of the ship and its normal voyage.

Collections of unreasonably large amounts or collections outside of normal working hours are paid for as follows.

Maximum quantities for delivery according to “no special fee”:
Max. 5 m³ when the last port of call lies east of the line from Wilhelmshaven – Kristiansand and max. 10 m³ when the last port of call lies west of the same line.

Receipt of amounts in excess of the above shall be charged according to the relevant current price. If pumping speed is not adhered to, the extra time involved shall be charged according to the relevant current price. However, extra time cannot be expected to exceed 1 hour.

If slop oil is to be pumped ashore, the entire length of time involved is charged at the relevant current price. Expenses incurred due to delays or because the ship was not ready at the agreed time etc. shall be paid by the ship.

Connection

Regarding standard dimensions for flanges between receiving facility’s pipelines and ships’ discharge pipelines for oily mixtures from engine room bilges - see Sec. 7.1 Standard flanges.

3.5 Cargo residues

The Port of Aarhus does not take receipt of cargo residues but can refer users to a company able to receive and deliver car-

go residues to a centre approved by the public authorities for receipt and processing. Payment for such processing cannot be charged to the Port of Aarhus.

3.6 Oily ballast water and tank washings

The Port of Aarhus does not take receipt of oily ballast water and tank washings but can direct users to companies which handle the offloading or receiving of oil. Payment for such processing cannot be charged to the Port of Aarhus.

4. General provisions

All waste collections must be ordered in good time and according to the schedule indicated below under Sec. 2.1.1 – 2.1.2 – 2.1.3.

These orders are placed via SafeSeaNet.

Tariffs for ships exempt from port dues

Ships that do not normally pay port dues shall pay for all services referred to and described in this Section.

5. Waste management

Waste delivered at the Port of Aarhus is processed as follows:

Domestic waste:

Driven away for incineration, other types of solid waste driven to relevant treatment facility.

Handled by:

Johs. Sørensen & Sønner Aarhus A/S Sintrupvej 13, 8220 Brabrand.

Environmental waste:

Driven to the Port of Aarhus environmental centre and sorted by Port of Aarhus employees, and sent to approved environmental treatment companies.

Handled by:

Johs. Sørensen & Sønner Aarhus A/S Sintrupvej 13, 8220 Brabrand.

Sewage:

Collected by:

Nordic Oily Waste A/S
Oliehavnsvej 18
8000 Aarhus C

Recipient:

Marselisborg rensningsanlæg

Slop water (oily sewage):

Driven to approved environmental treatment company

Collected by:

Nordic Oily Waste A/S
Oliehavnsvej 18
8000 Aarhus C

Recipient:

Nordic Oily Waste A/S
Oliehavnsvej 18
8000 Aarhus C

6. General information about the rules on receiving waste

6.1 Liability

The ship's owner is responsible for the correctness of all information provided by the ship's master regarding waste, type, composition, amount, time of collection, and for damages that are due to errors or defects in own material when delivering waste.

6.2 Making a complaint

If the ship is of the opinion that sufficient facilities have not been provided, a complaint is made directly to the Port of Aarhus.

If the ship's master or agent wishes to draw the environmental authorities' attention to the inadequacy or lack of facilities, please refer to Sec. 7.2 Complaints form. The completed form is sent to the Port of Aarhus which forwards the complaint to the Danish Environmental Protection Agency (Miljøstyrelsen).

6.3 Consultation with users

The Port of Aarhus invites a number of the port's regular users to an annual discussion on the effectiveness of the rules on receiving waste.

6.4 Coming into force

These rules come into force in December 2020 and replace previous rules regarding the receipt of waste from ships.

7. Flange specifications and forms

7.1 Standard flanges

Standard dimensions for flanges between receiving facility's pipelines and ships' sewage discharge pipelines	
Description:	Dimensions:
Exterior diameter	210 mm
Interior diameter	Equivalent to exterior diameter of pipe.
Bolt ring diameter	170 mm
Flange cutouts	4 holes with a diameter of 18 mm which shall be connected at equal intervals to a bolt ring with the dimensions above cut to the flange circumference. The width of the cutout shall be 18 mm.
Flange thickness	16 mm
Nuts and bolts:	Qty. and diameter: 4, each 16 mm in diameters and of appropriate length.
The flange must fit a pipe with an internal diameter of up to 100 mm and shall be made of steel or an equivalent material with a smooth surface. The flange and accompanying packing must be able to withstand a working pressure of 6 kg/cm ² .	

Standard dimensions for flanges between receiving facility's pipelines and ships' discharge pipelines for oily mixtures from engine room bilges	
Description:	Dimensions:
Exterior diameter	215 mm
Interior diameter	Equivalent to exterior diameter of pipe.
Bolt ring diameter	183 mm
Flange cutouts	6 holes with a diameter of 22 mm which shall be connected at equal intervals to a bolt ring with the dimensions above cut to the flange circumference. The width of the cutout shall be 22 mm.
Flange thickness	20 mm
Nuts and bolts:	Qty. and diameter: 6, each 20 mm in diameters and of appropriate length.
The flange must fit a pipe with an internal diameter of up to 125 mm and shall be made of steel or an equivalent material with a smooth surface. The flange and accompanying packing must be able to withstand a working pressure of 6 kg/cm ² .	

7.2 Complaints form

Complaint regarding insufficient receiving facilities:

Suggested improvements:

Comments:

Kind regards,

--

Yes, I would like to be contacted in order to discuss the above by

phone:	or e-mail:
--------	------------

The Port of Aarhus will forward a copy of this complaint to the Danish Environmental Protection Agency.

7.3 Sewage from cruise ships

Name of ship:	
Berth No.:	
IMO number:	
Contact info for pumping officer (mobile): (if pumping must be stopped immediately).	

Type of treatment system:	
Traditional onboard sewage treatment plant/Marine sanitation device (STP/MSD)	
Advanced wastewater treatment plant (AWTP)	
Other	

Volume (Estimated Volume m³):		
Untreated Sewage:		
Treated Sewage:		
Grey Water:		
Treated Sewage and Grey Water (Mix)	Total:	
	Black Water (part):	
	Grey Water (part):	

Sewage sludge/Bio-residuals:	
IMPORTANT: Sewage Sludge/Bio-residuals may not be discharged to the reception facilities (municipal treatment plant) but shall be discharged into tankers.	

- Berth 129-131 Maximum discharge rate: 80-100 m³/hr.
- Berth 501-509 Maximum discharge rate: 30 m³/hr.

I hereby declare that Sewage/Wastewater pumped ashore is free from contamination of other waste or products, such as oily waste, chemicals, or other substances that can be harmful to the sewage treatment plant and the marine environment.

Delivery Date:	
Time:	
Name / Signature:	

Vandvejen 7
DK-8000 Aarhus C

Tel. +45 86 13 32 66
port@portofaarhus.dk
www.portofaarhus.dk

PORT OF AARHUS