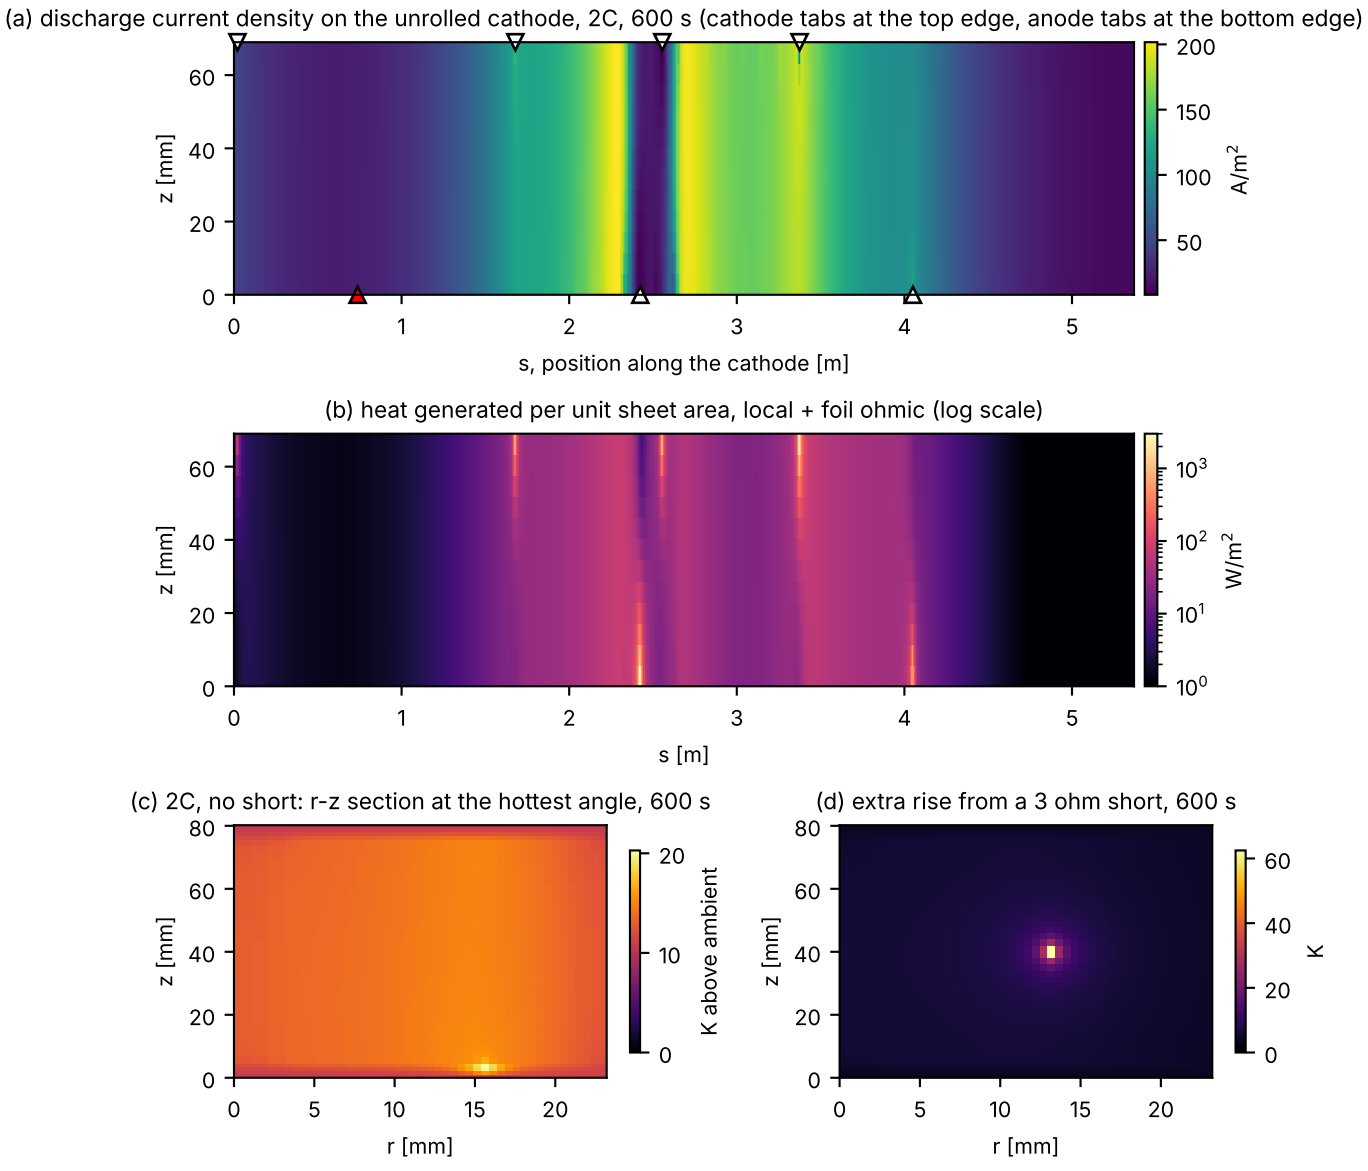

(a) discharge current density on the unrolled cathode, 2C, 600 s (cathode tabs at the top edge, anode tabs at the bottom edge)
z [mm]
s, position along the cathode [m]
A/m²
(b) heat generated per unit sheet area, local + foil ohmic (log scale)
z [mm]
s [m]
W/m²
(c) 2C, no short: r-z section at the hottest angle, 600 s
z [mm]
r [mm]
K above ambient
(d) extra rise from a 3 ohm short, 600 s
z [mm]
r [mm]
K