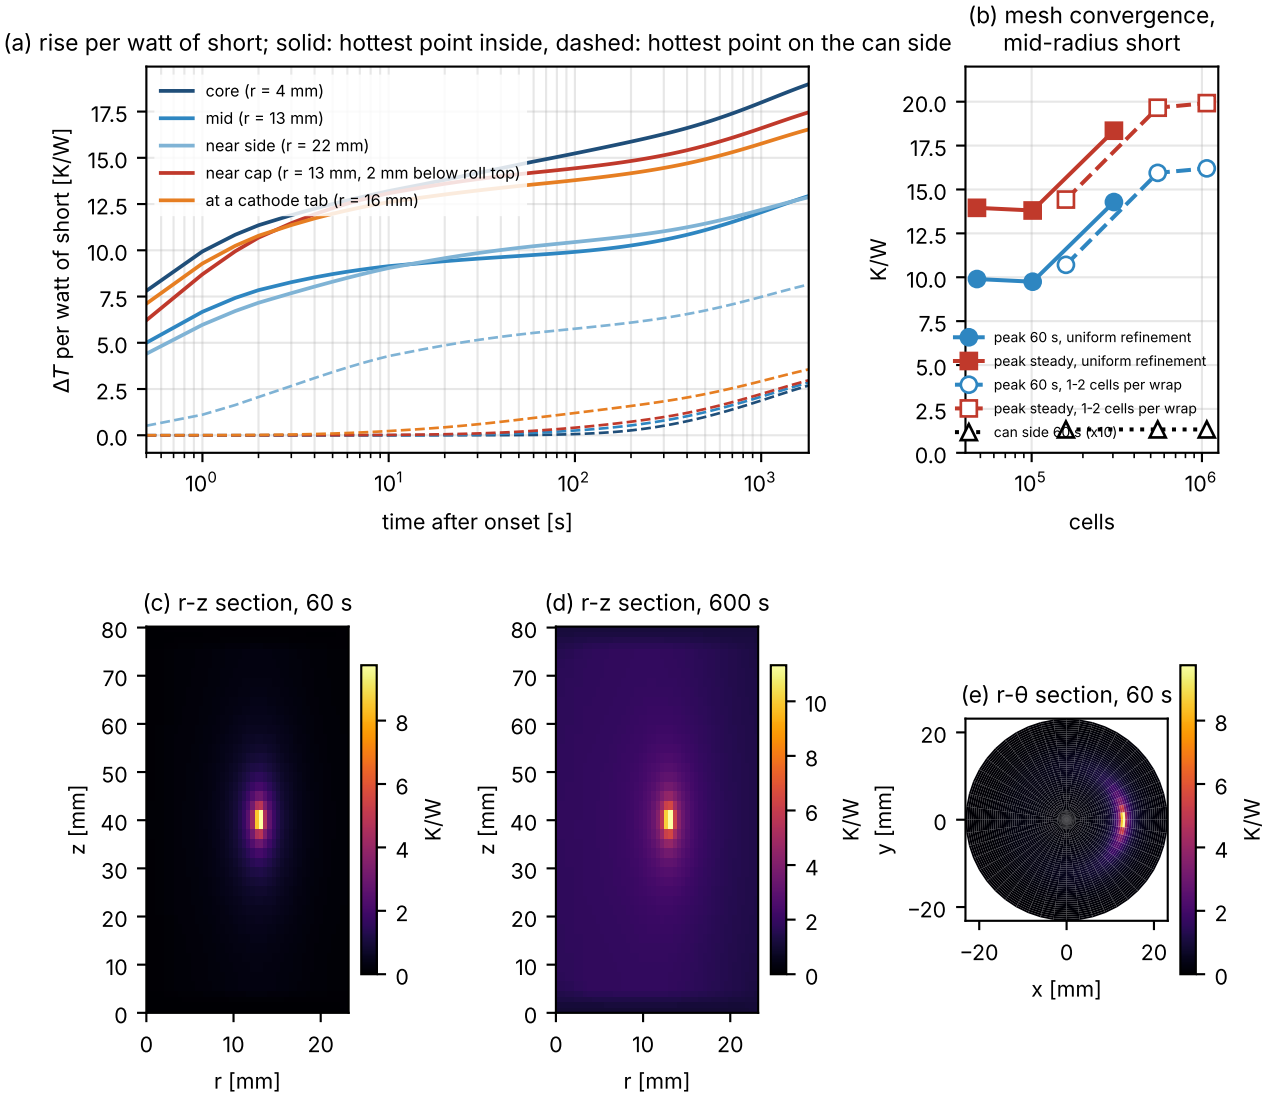

(a) rise per watt of short; solid: hottest point inside, dashed: hottest point on the can side
core (r = 4 mm)
mid (r = 13 mm)
near side (r = 22 mm)
near cap (r = 13 mm, 2 mm below roll top)
at a cathode tab (r = 16 mm)
ΔT per watt of short [K/W]
time after onset [s]
(b) mesh convergence, mid-radius short
K/W
cells
peak 60 s, uniform refinement
peak steady, uniform refinement
peak 60 s, 1-2 cells per wrap
peak steady, 1-2 cells per wrap
can side 60 s (×10)
(c) r-z section, 60 s
z [mm]
r [mm]
K/W
(d) r-z section, 600 s
z [mm]
r [mm]
K/W
(e) r-θ section, 60 s
y [mm]
x [mm]
K/W