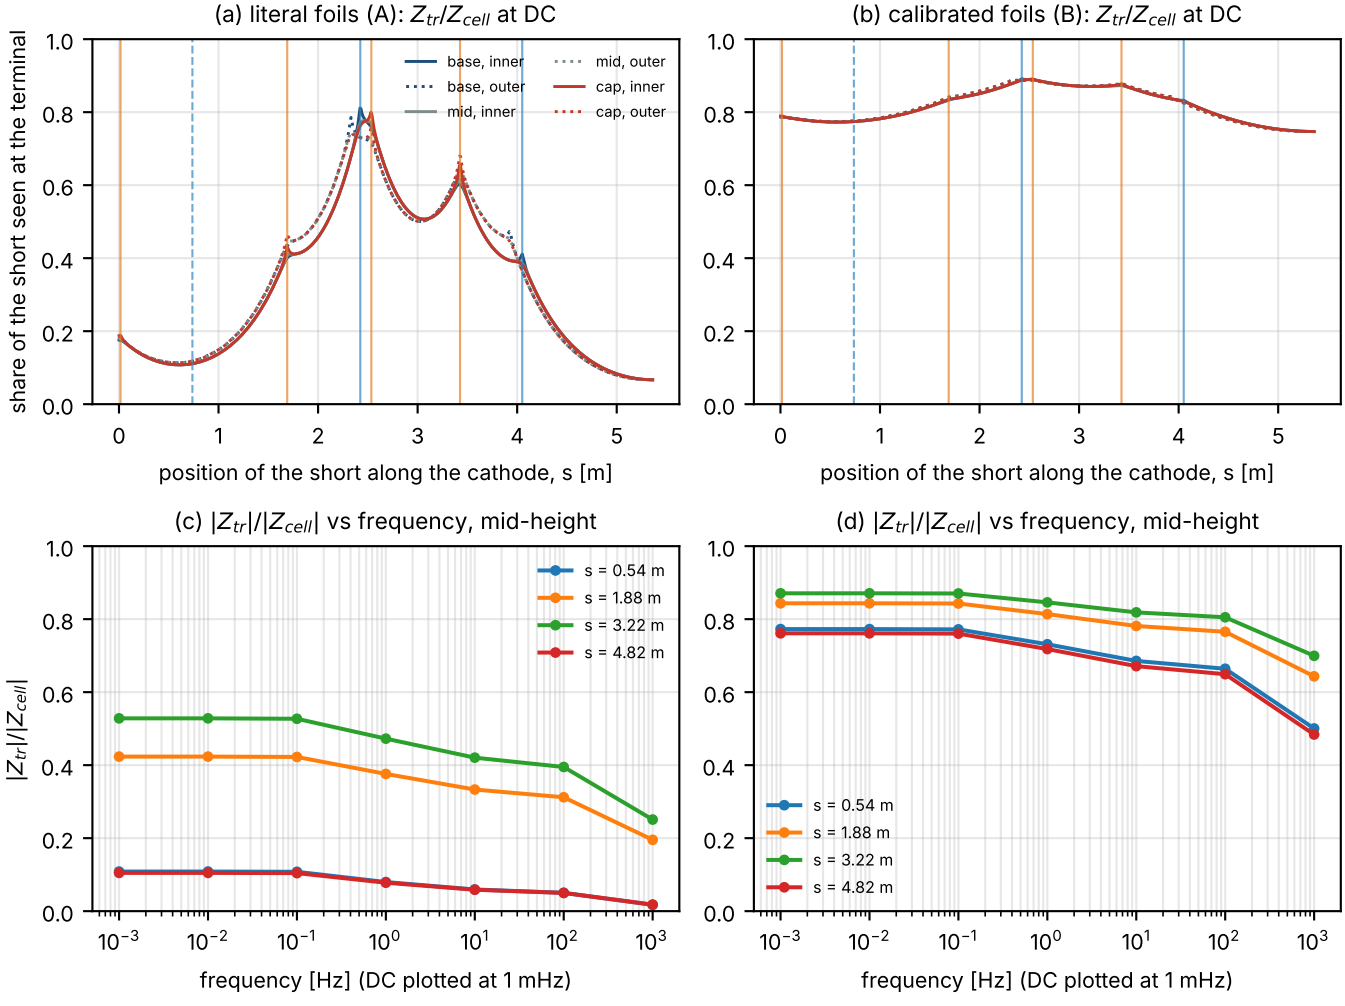
(a) literal foils (A): Z_{tr}/Z_{cell} at DC
(b) calibrated foils (B): Z_{tr}/Z_{cell} at DC
share of the short seen at the terminal
position of the short along the cathode, s [m]
base, inner
base, outer
mid, inner
mid, outer
cap, inner
cap, outer
(c) $|Z_{tr}|/|Z_{cell}|$ vs frequency, mid-height
(d) $|Z_{tr}|/|Z_{cell}|$ vs frequency, mid-height
$|Z_{tr}|/|Z_{cell}|$
frequency [Hz] (DC plotted at 1 mHz)
s = 0.54 m
s = 1.88 m
s = 3.22 m
s = 4.82 m