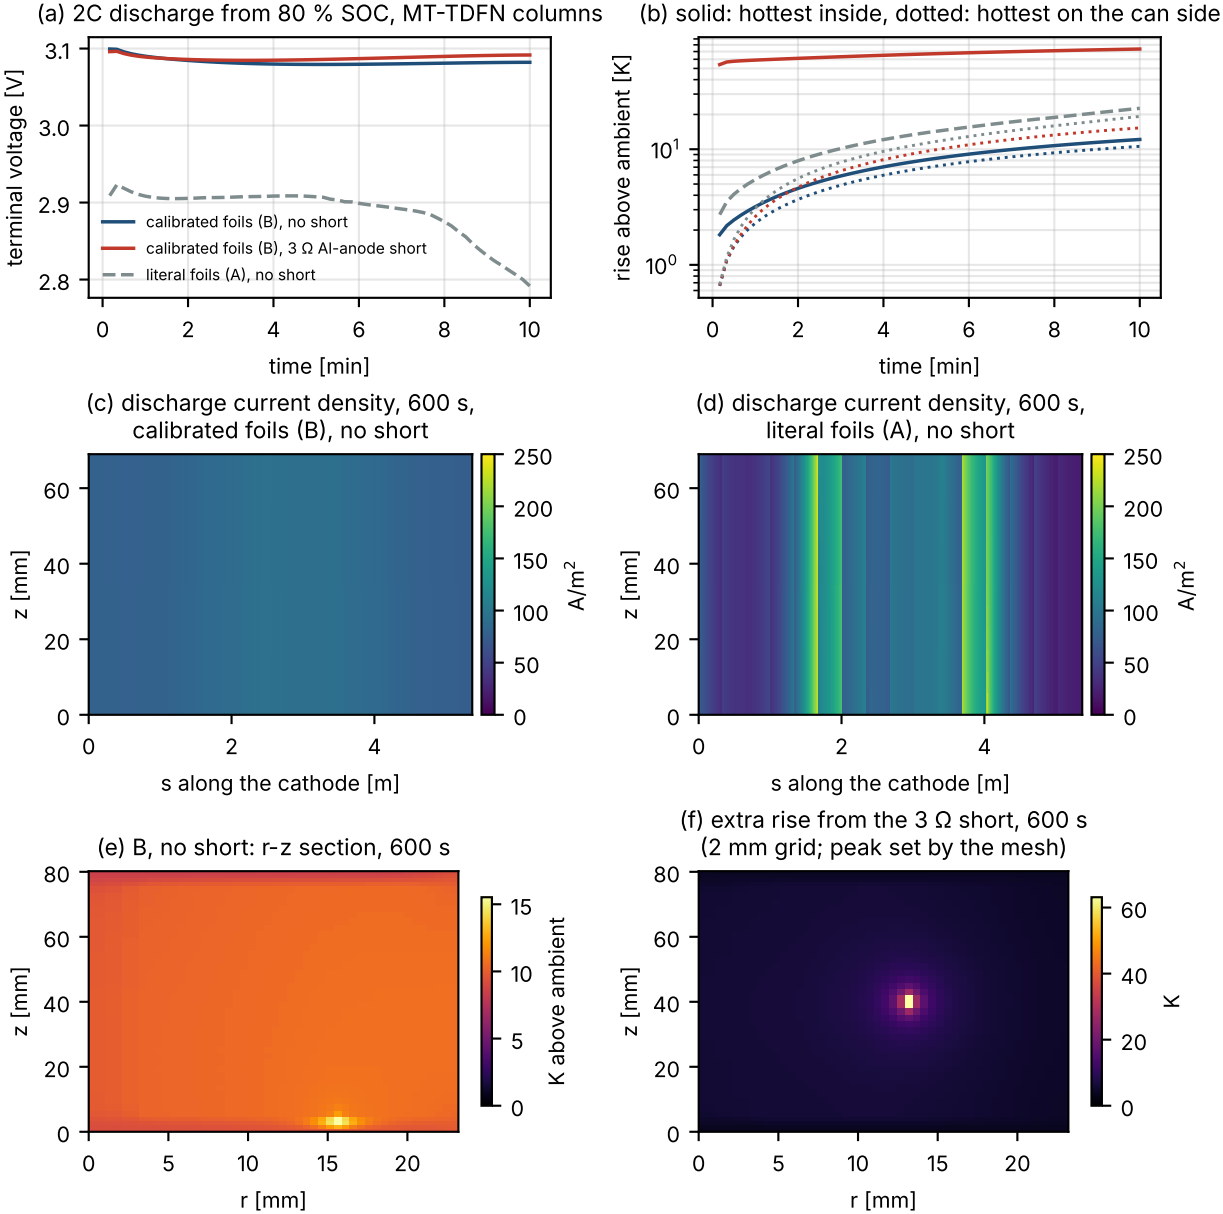

(a) 2C discharge from 80 % SOC, MT-TDFN columns
terminal voltage [V]
time [min]
calibrated foils (B), no short
calibrated foils (B), 3 Ω Al-anode short
literal foils (A), no short
(b) solid: hottest inside, dotted: hottest on the can side
rise above ambient [K]
time [min]
(c) discharge current density, 600 s,
calibrated foils (B), no short
z [mm]
s along the cathode [m]
A/m²
(d) discharge current density, 600 s,
literal foils (A), no short
z [mm]
s along the cathode [m]
A/m²
(e) B, no short: r-z section, 600 s
z [mm]
r [mm]
K above ambient
(f) extra rise from the 3 Ω short, 600 s
(2 mm grid; peak set by the mesh)
z [mm]
r [mm]
K