
CALIFORNIA BEARING RATIO - AS1289.6.1.1

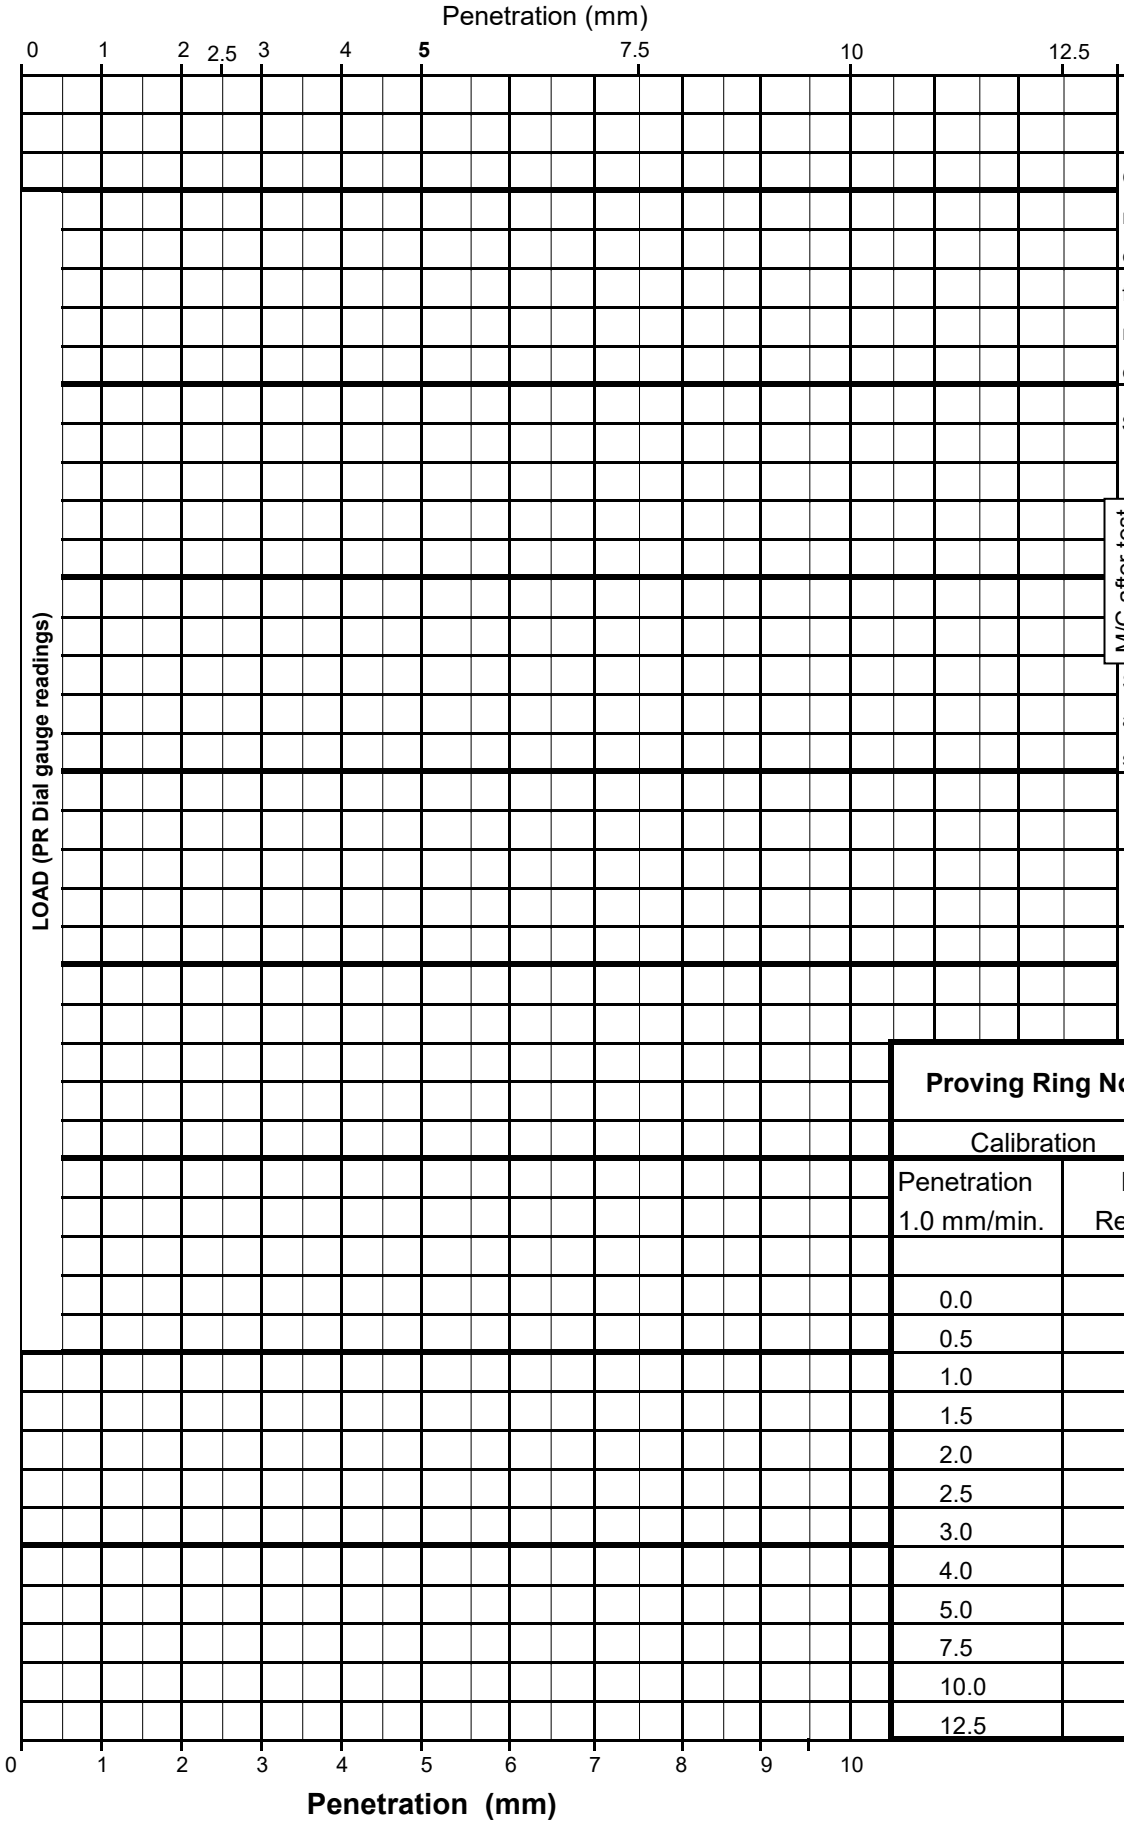

Summary		
Optmum moisture content	%	
field moisture content	%	
Surcharge	kg	
M/C after test: p mm	%	
M/C after test: hole mple	%	
Swell after soaking	%	
2.5 mm	**%**	
5.0 mm	**%**	
C.B.R value	%	

Proving Ring No.			
Calibration			
Penetration 1.0 mm/min.	Dial Reading		Load N
0.0			
0.5			
1.0			
1.5			
2.0			
2.5			
3.0			
4.0			
5.0			
7.5			
10.0			
12.5			