Chapter 22

Network Layer: Delivery, Forwarding, and Routing

Recall-Switch Function

- Learning
- Flooding
- Forwarding (Store and forward, cut-through, Fragment Free)
- Filtering

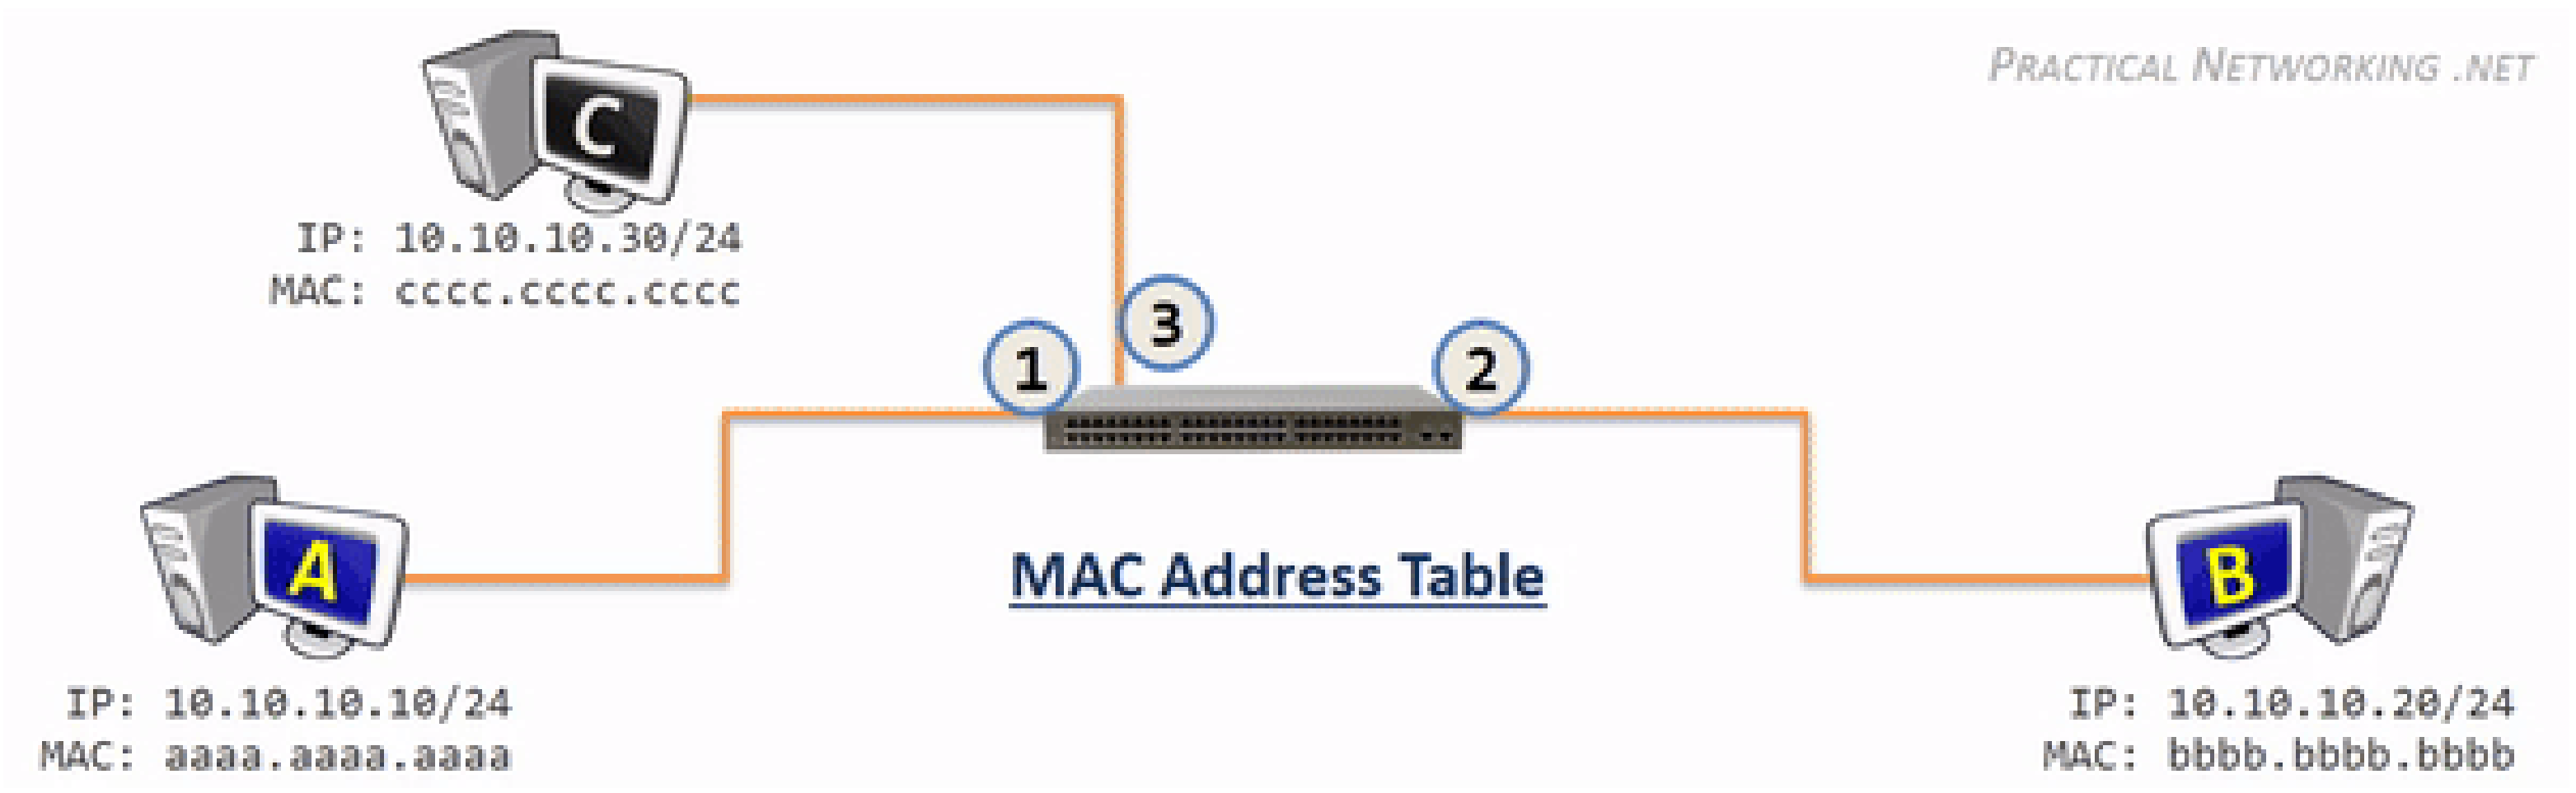

https://www.practicalnetworking.net/series/packet-traveling/host-to-host-through-a-switch/

- **Delivery** refers to the way a packet is handled by the underlying networks under the control of the network layer
- **Forwarding** refers to the way a packet is delivered to the next station
- **Routing** refers the way routing tables are created to help in forwarding
- **Routing protocols** are used to continuously update the routing tables that are consulted forwarding and routing

22-1 DELIVERY

The network layer supervises the handling of the packets by the underlying physical networks. We define this handling as the delivery of a packet.

Topics discussed in this section:

Direct Versus Indirect Delivery

Figure 22.1 *Direct and indirect delivery*

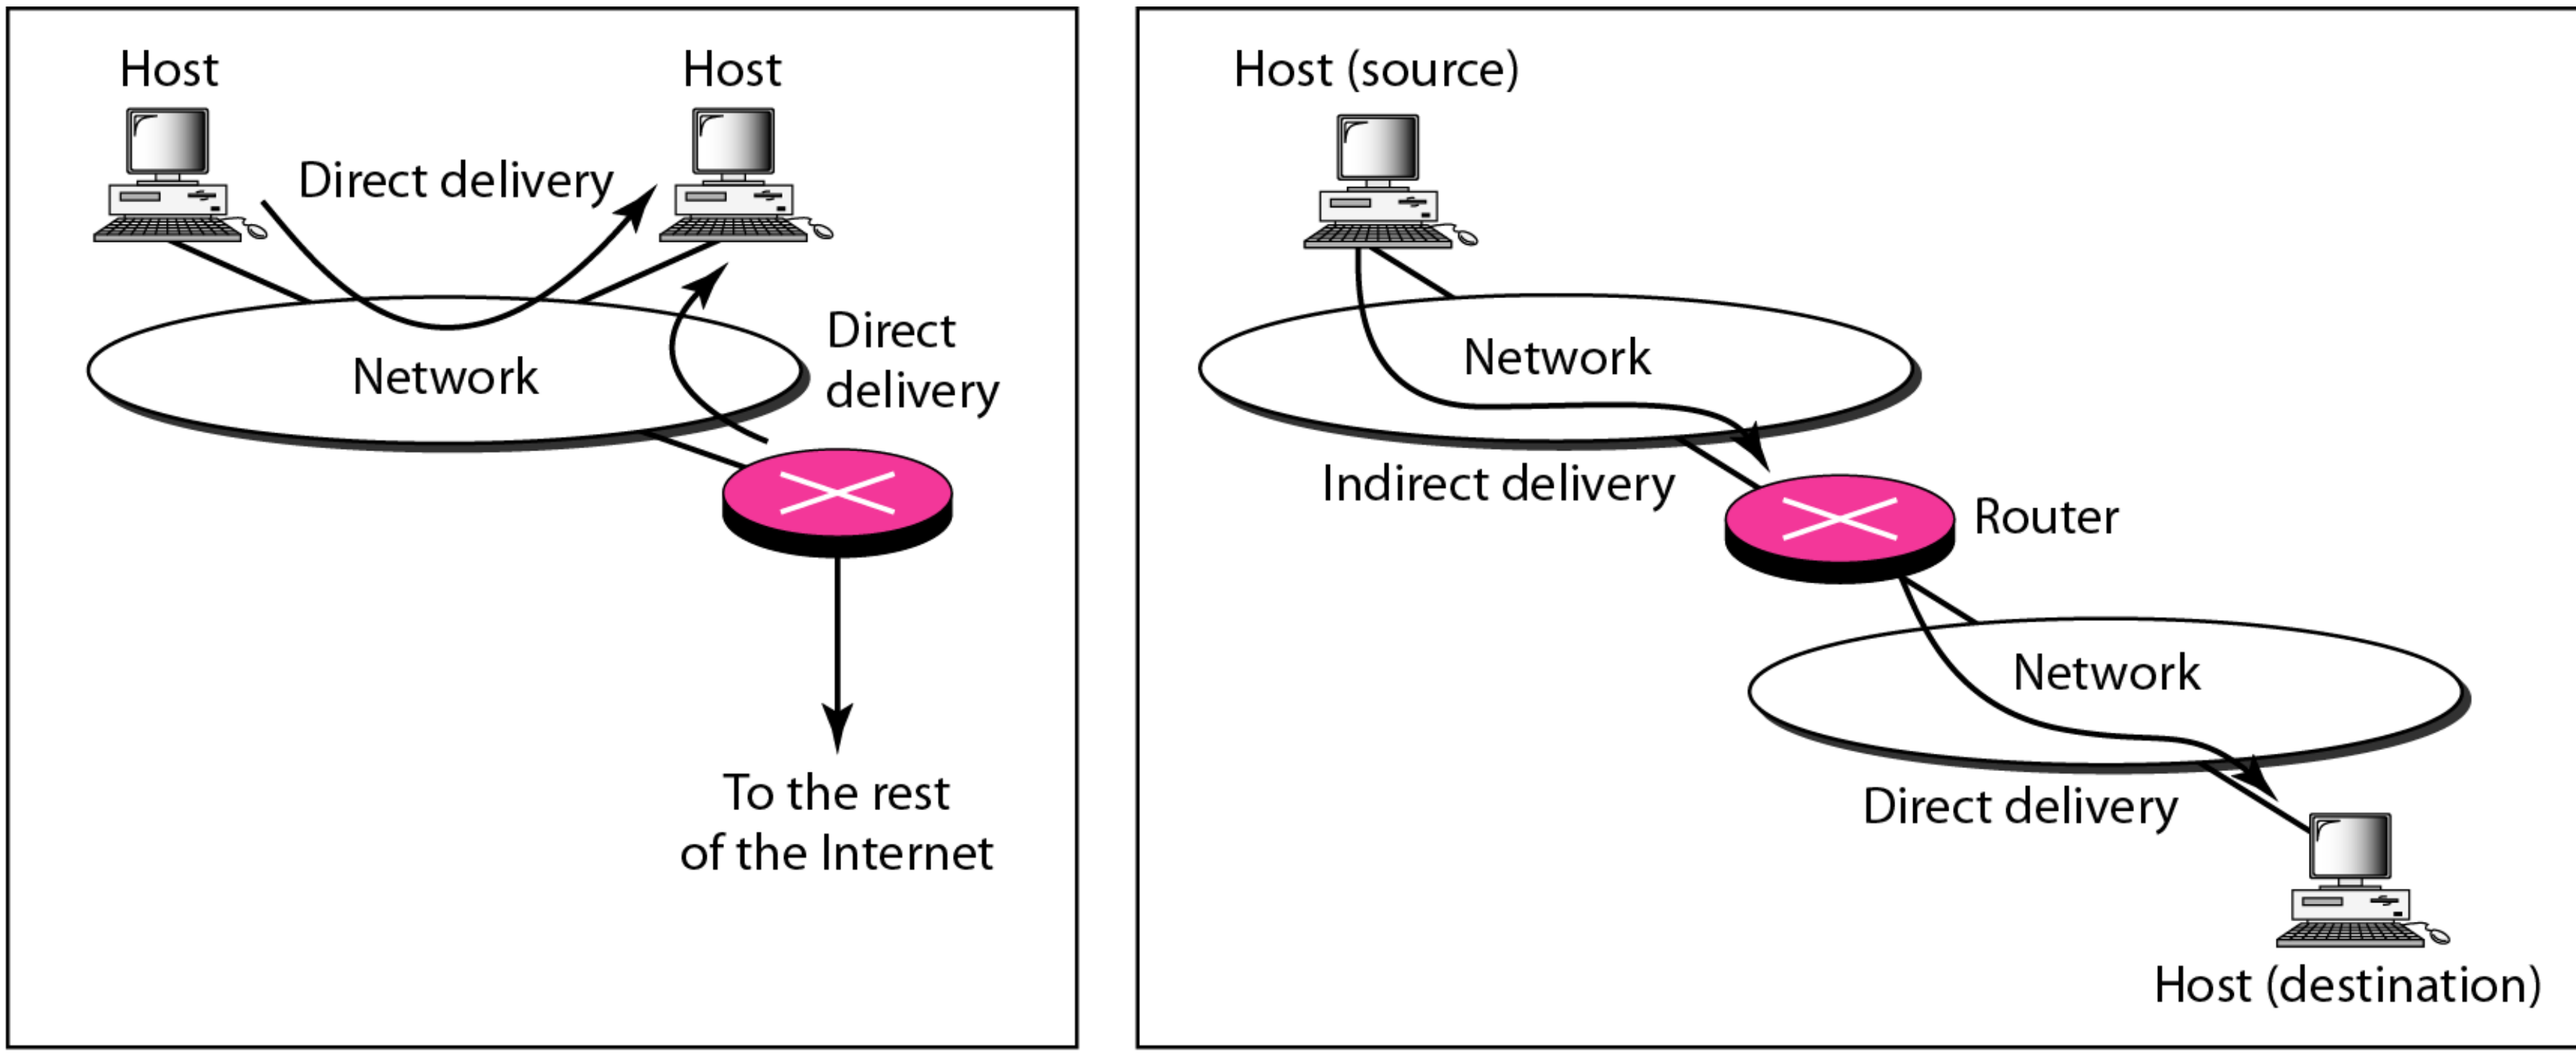

a. Direct delivery

b. Indirect and direct delivery

22-2 FORWARDING

Forwarding means to place the packet in its route to its destination. Forwarding requires a host or a router to have a routing table. When a host has a packet to send or when a router has received a packet to be forwarded, it looks at this table to find the route to the final destination.

Topics discussed in this section:

Forwarding Techniques
Forwarding Process
Routing Table

Figure 22.2 *Route method versus next-hop method*

a. Routing tables based on route

Routing table for host A

Destination	Route
Host B	R1, R2, host B

Routing table for R1

Destination	Route
Host B	R2, host B

Routing table for R2

Destination	Route
Host B	Host B

b. Routing tables based on next hop

Routing table for host A

Destination	Next hop
Host B	R1

Routing table for R1

Destination	Next hop
Host B	R2

Routing table for R2

Destination	Next hop
Host B	---

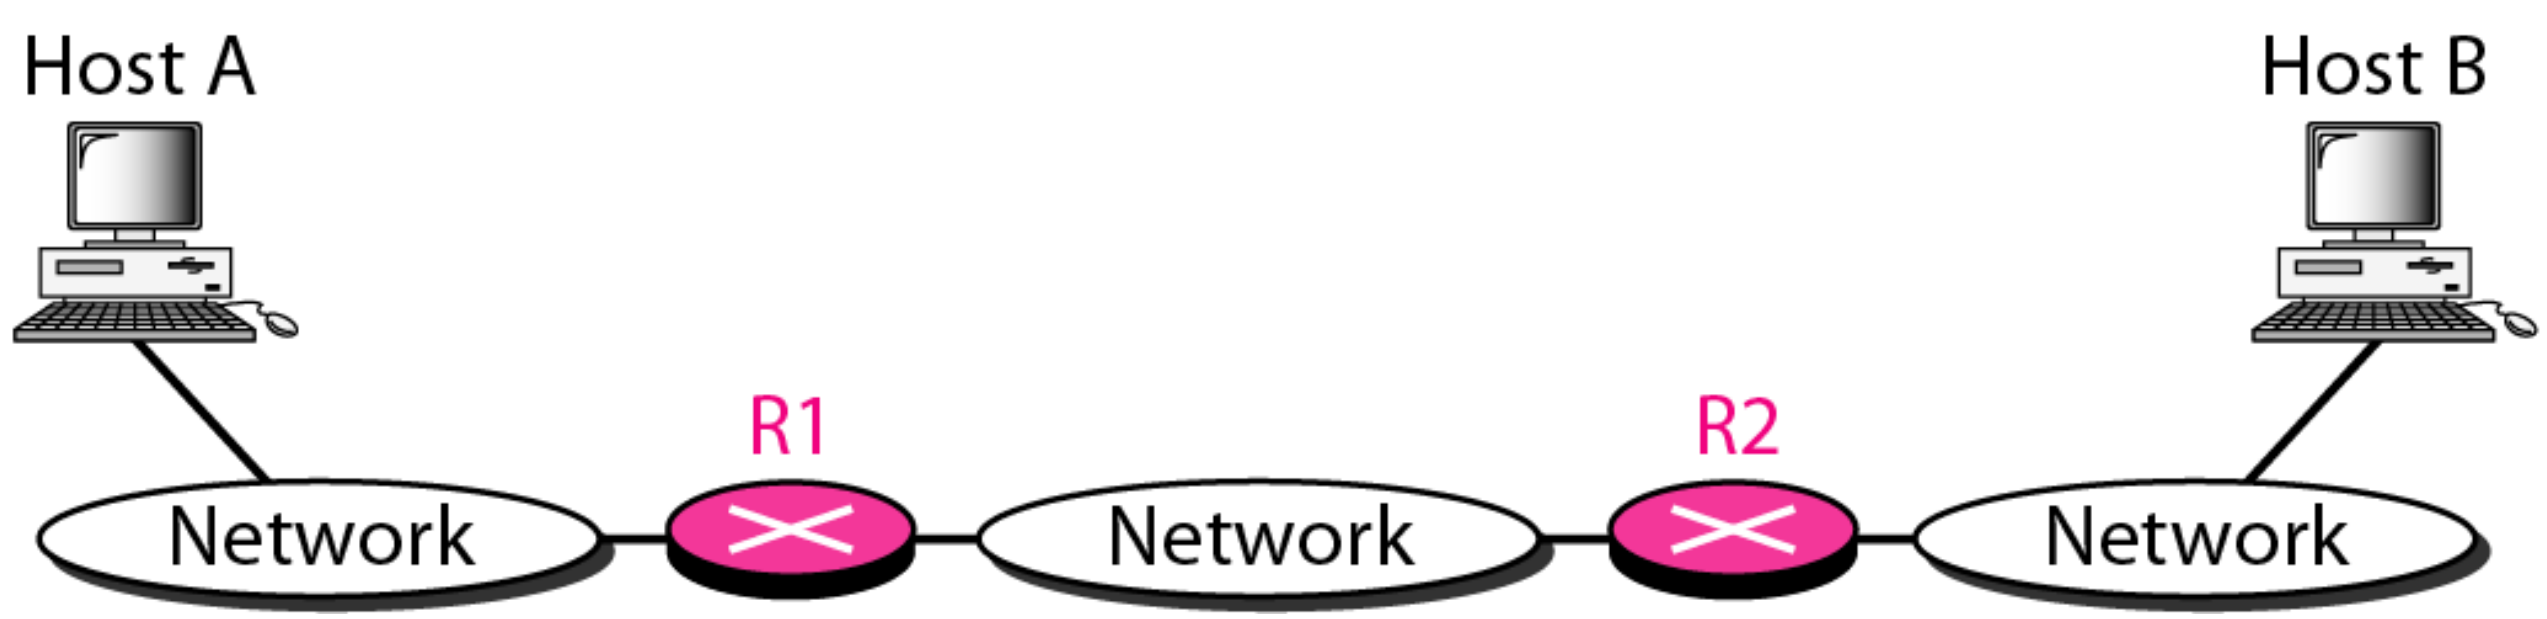

Figure 22.3 *Host-specific versus network-specific method*

Routing table for host S based on host-specific method

Destination	Next hop
A	R1
B	R1
C	R1
D	R1

Routing table for host S based on network-specific method

Destination	Next hop
N2	R1

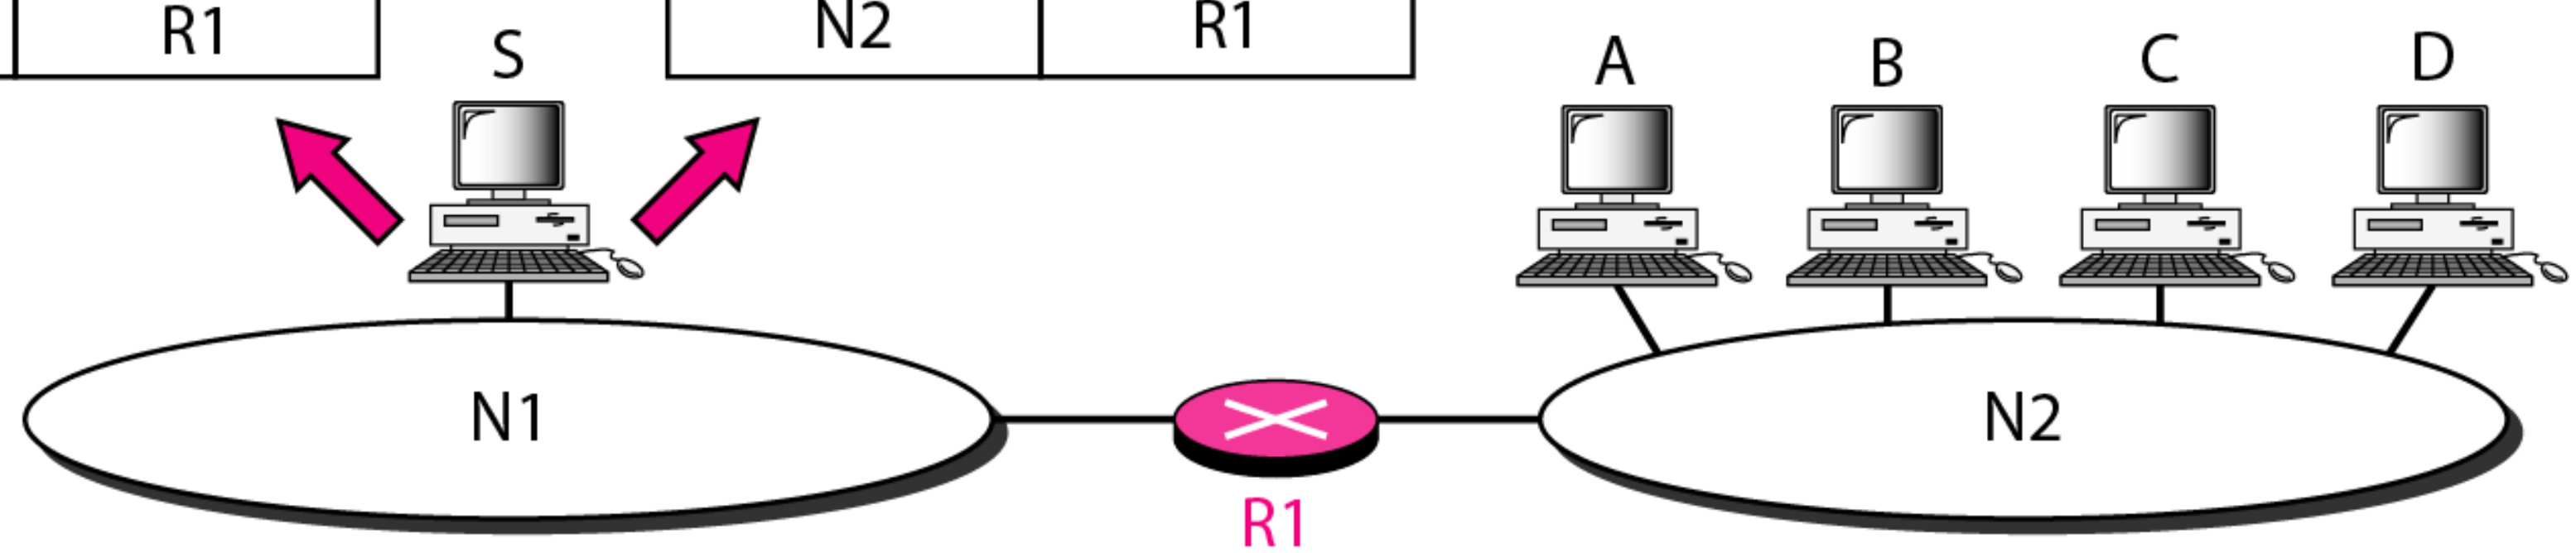

Figure 22.4 *Default method*

Destination	Next hop
N2	R1
Any other	R2

Routing table for host A

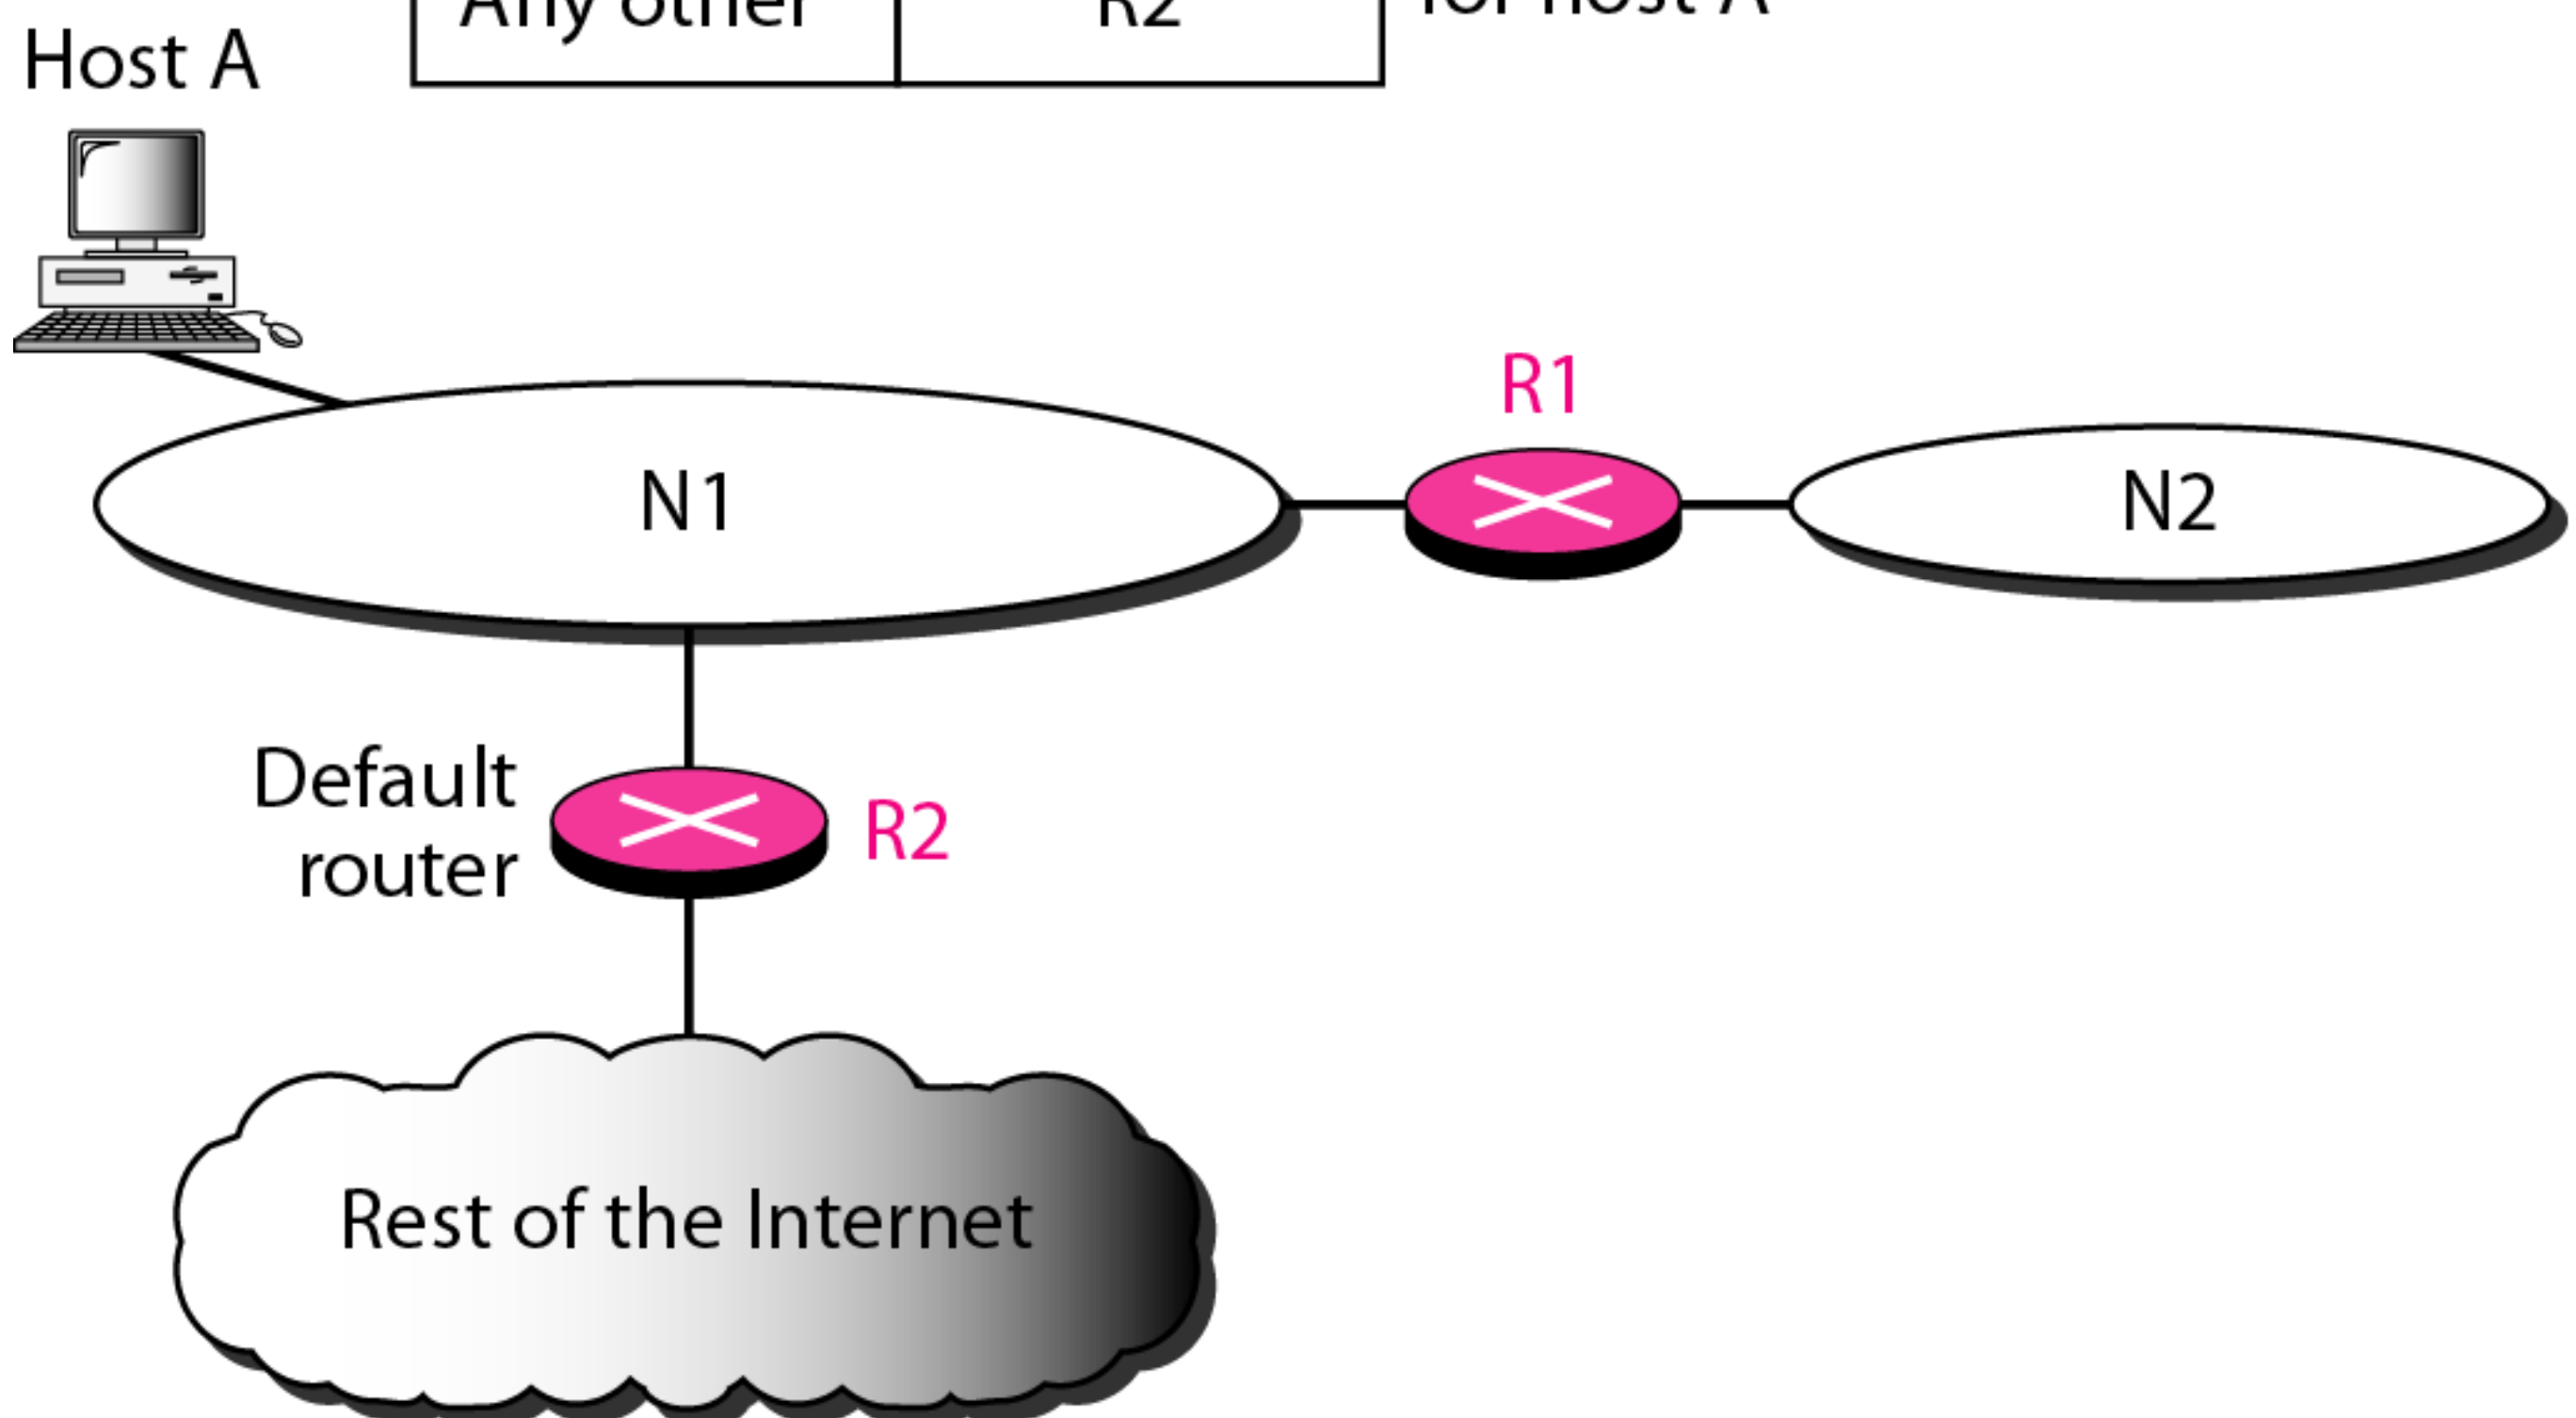

Normally default network address: 0.0.0.0

Figure 22.5 *Simplified forwarding module in classless address*

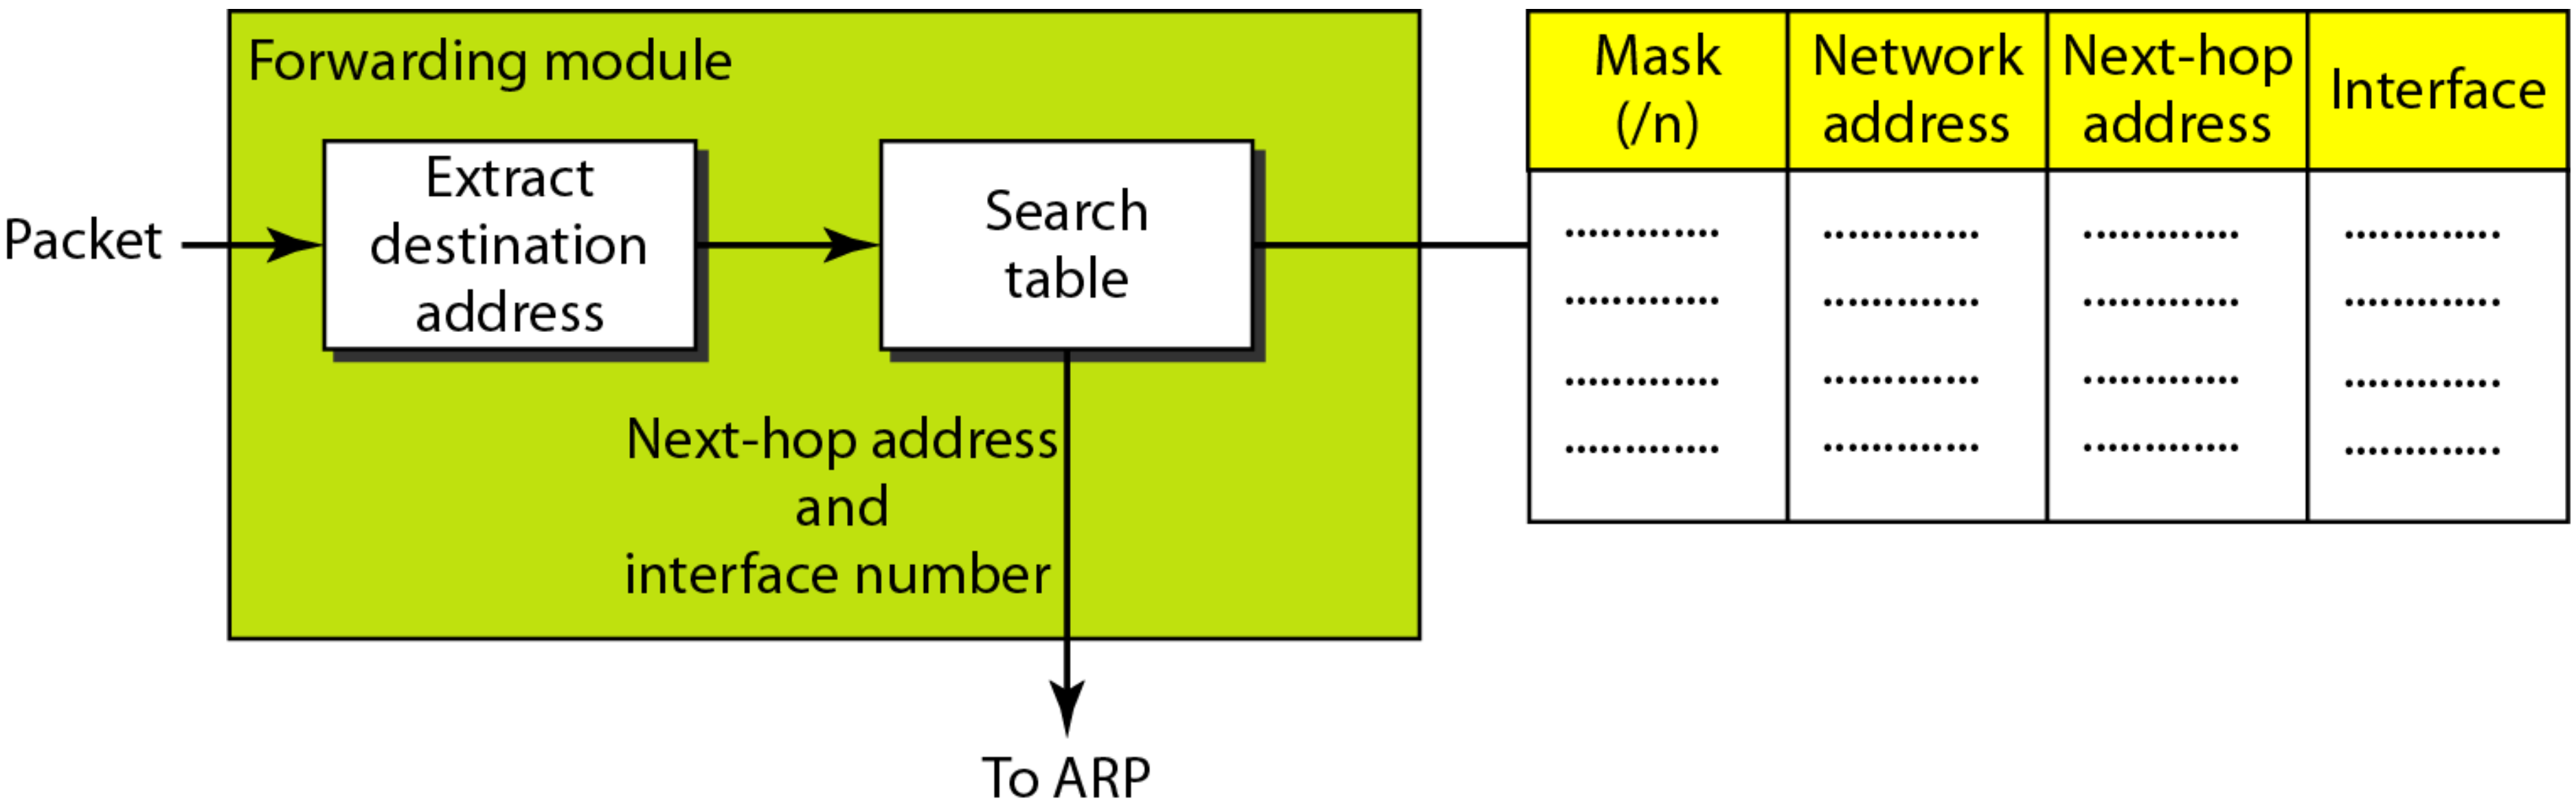

Note

In classless addressing, we need at least four columns in a routing table.

Example 22.1

Make a routing table for router R1, using the configuration in Figure 22.6.

Solution

Table 22.1 shows the corresponding table.

Figure 22.6 *Configuration for Example 22.1*

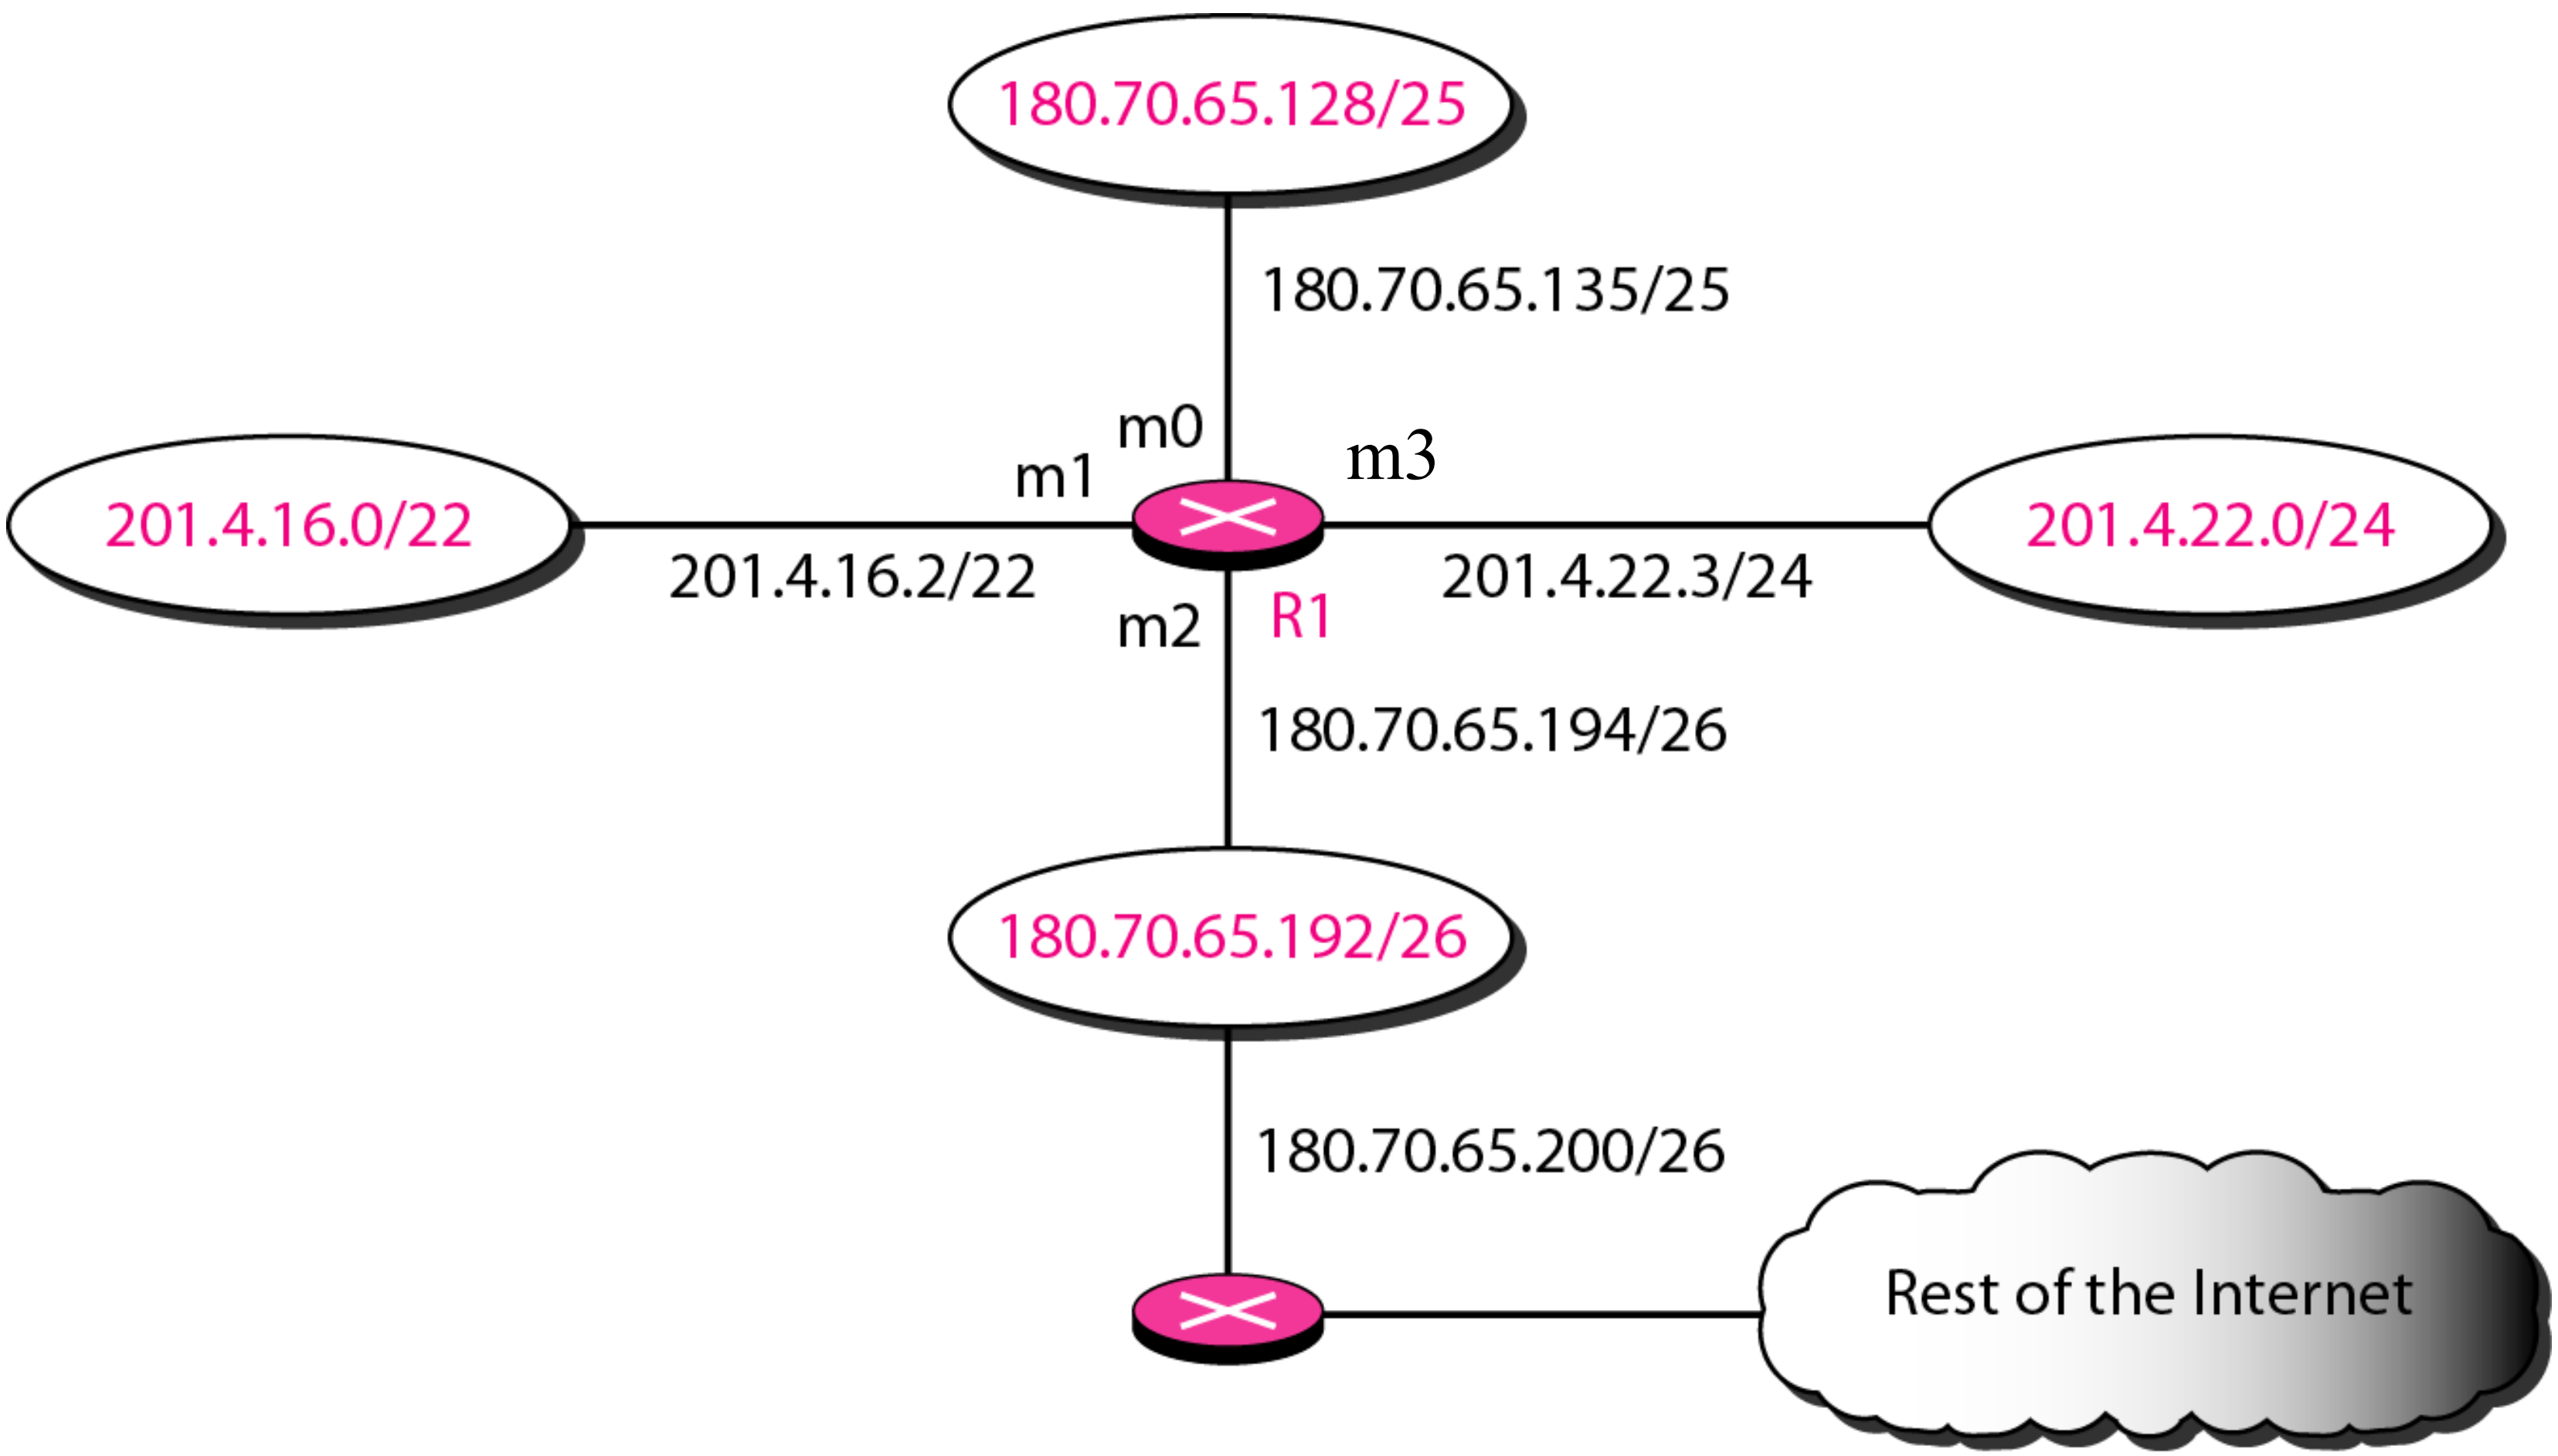

Table 22.1 ***Routing table for router R1 in Figure 22.6***

Mask	*Network Address*	*Next Hop*	*Interface*
/26	180.70.65.192	—	m2
/25	180.70.65.128	—	m0
/24	201.4.22.0	—	m3
/22	201.4.16.0	....	m1
Any	Any	180.70.65.200	m2

Example 22.2

Show the forwarding process if a packet arrives at R1 in Figure 22.6 with the destination address 180.70.65.140.

Solution

The router performs the following steps:

1. ***The first mask (/26) is applied to the destination address. The result is 180.70.65.128, which does not match the corresponding network address.***
2. ***The second mask (/25) is applied to the destination address. The result is 180.70.65.128, which matches the corresponding network address. The next-hop address and the interface number m0 are passed to ARP for further processing.***

Example 22.3

Show the forwarding process if a packet arrives at R1 in Figure 22.6 with the destination address 201.4.22.35.

Solution

The router performs the following steps:

1. ***The first mask (/26) is applied to the destination address. The result is 201.4.22.0, which does not match the corresponding network address.***
2. ***The second mask (/25) is applied to the destination address. The result is 201.4.22.0, which does not match the corresponding network address (row 2).***

Example 22.3 (continued)

3. ***The third mask (/24) is applied to the destination address. The result is 201.4.22.0, which matches the corresponding network address. The destination address of the packet and the interface number m3 are passed to ARP.***

Example 22.4

Show the forwarding process if a packet arrives at R1 in Figure 22.6 with the destination address 18.24.32.78.

Solution

This time all masks are applied, one by one, to the destination address, but no matching network address is found. When it reaches the end of the table, the module gives the next-hop address 180.70.65.200 and interface number m2 to ARP. This is probably an outgoing package that needs to be sent, via the default router, to someplace else in the Internet.

Figure 22.7 *Address aggregation*

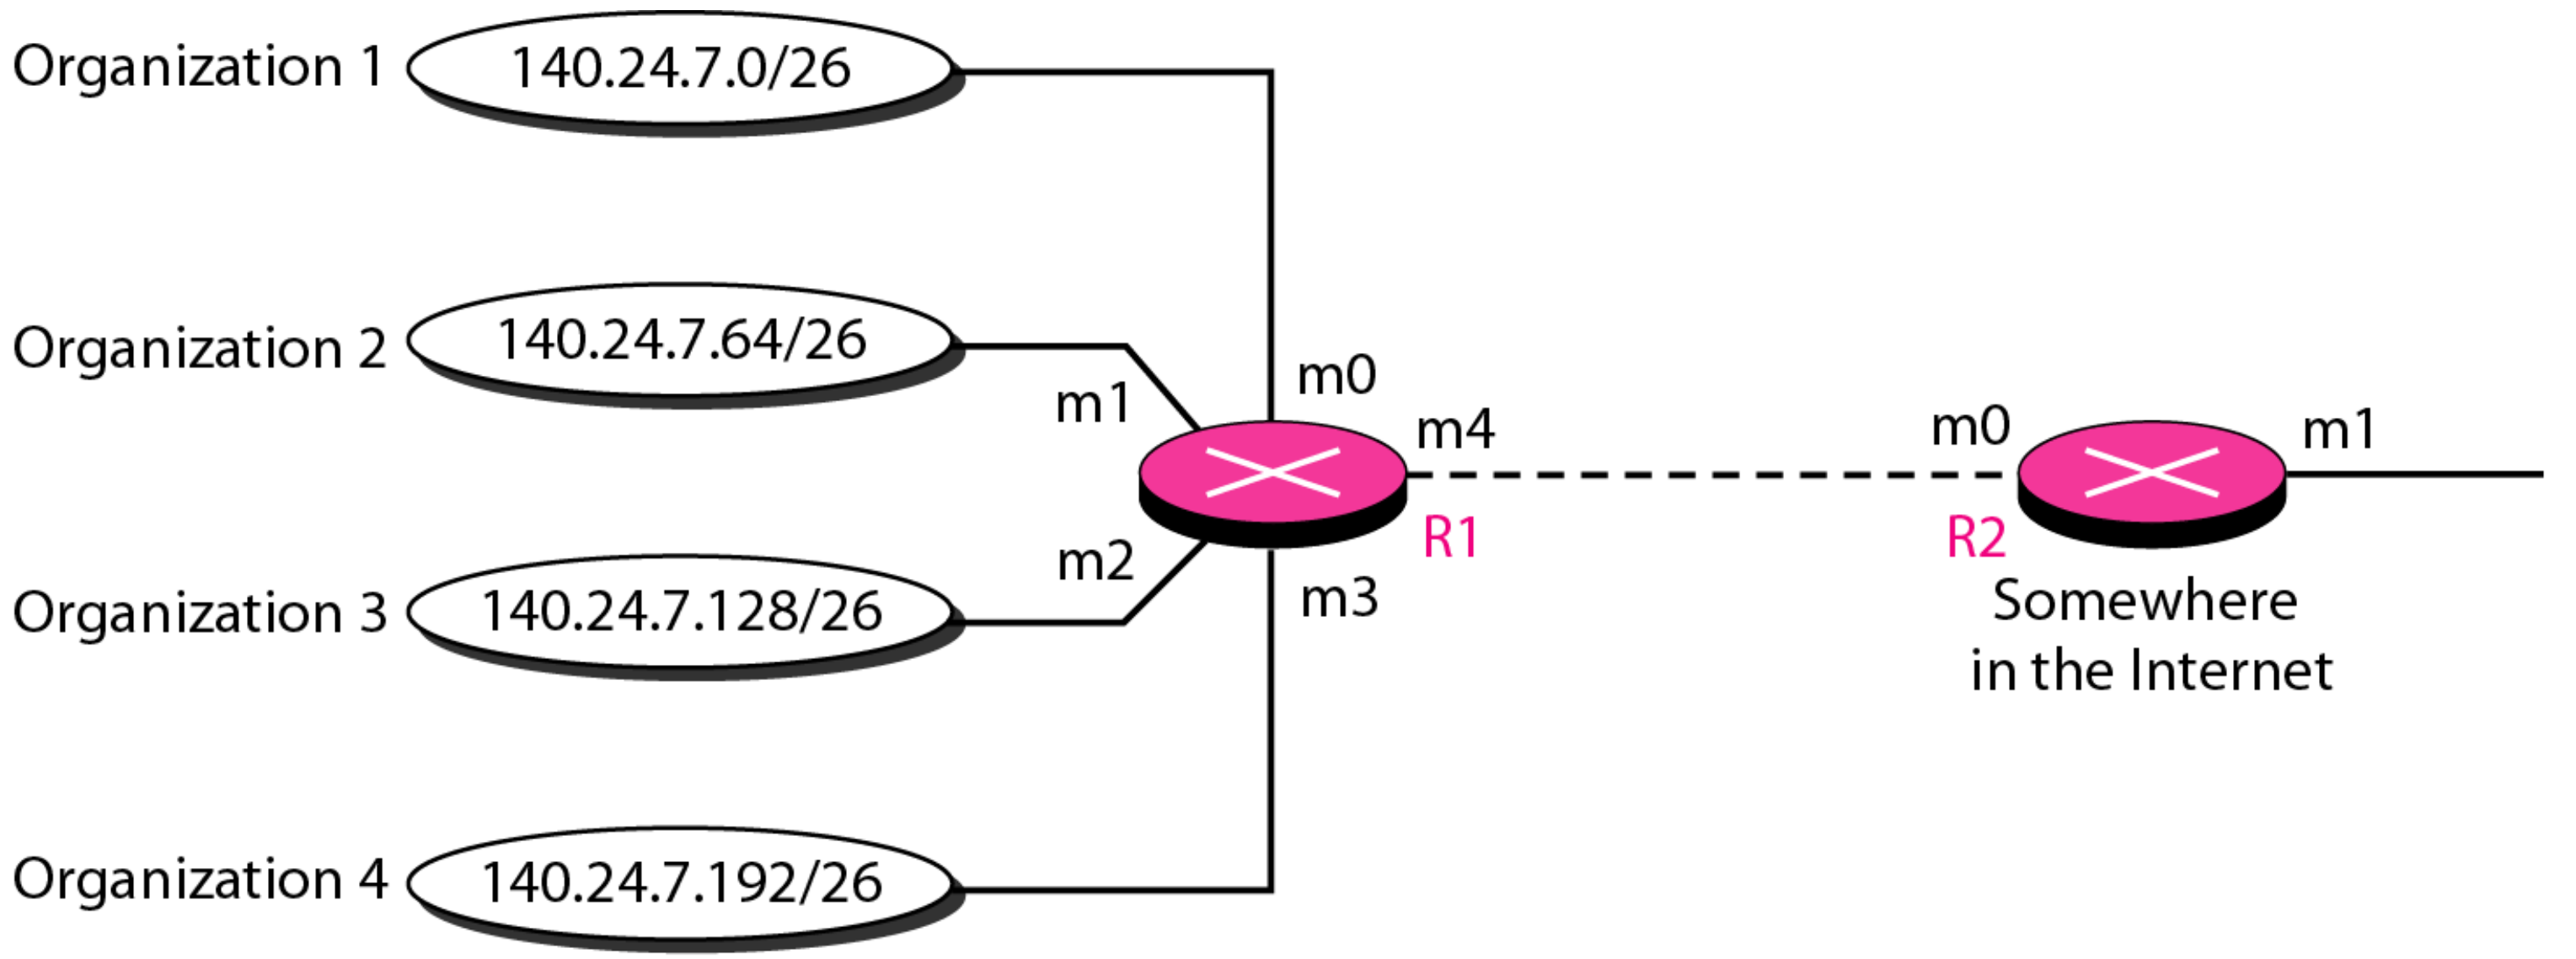

Mask	Network address	Next-hop address	Interface
/26	140.24.7.0	----------	m0
/26	140.24.7.64	----------	m1
/26	140.24.7.128	----------	m2
/26	140.24.7.192	----------	m3
/0	0.0.0.0	Default	m4

Routing table for R1

Mask	Network address	Next-hop address	Interface
/24	140.24.7.0	----------	m0
/0	0.0.0.0	Default	m1

Routing table for R2

Figure 22.8 *Longest mask matching*

Routing table for R2

Mask	Network address	Next-hop address	Interface
/26	140.24.7.192	----------	m1
/24	140.24.7.0	----------	m0
/??	???????	?????????	m1
/0	0.0.0.0	Default	m2

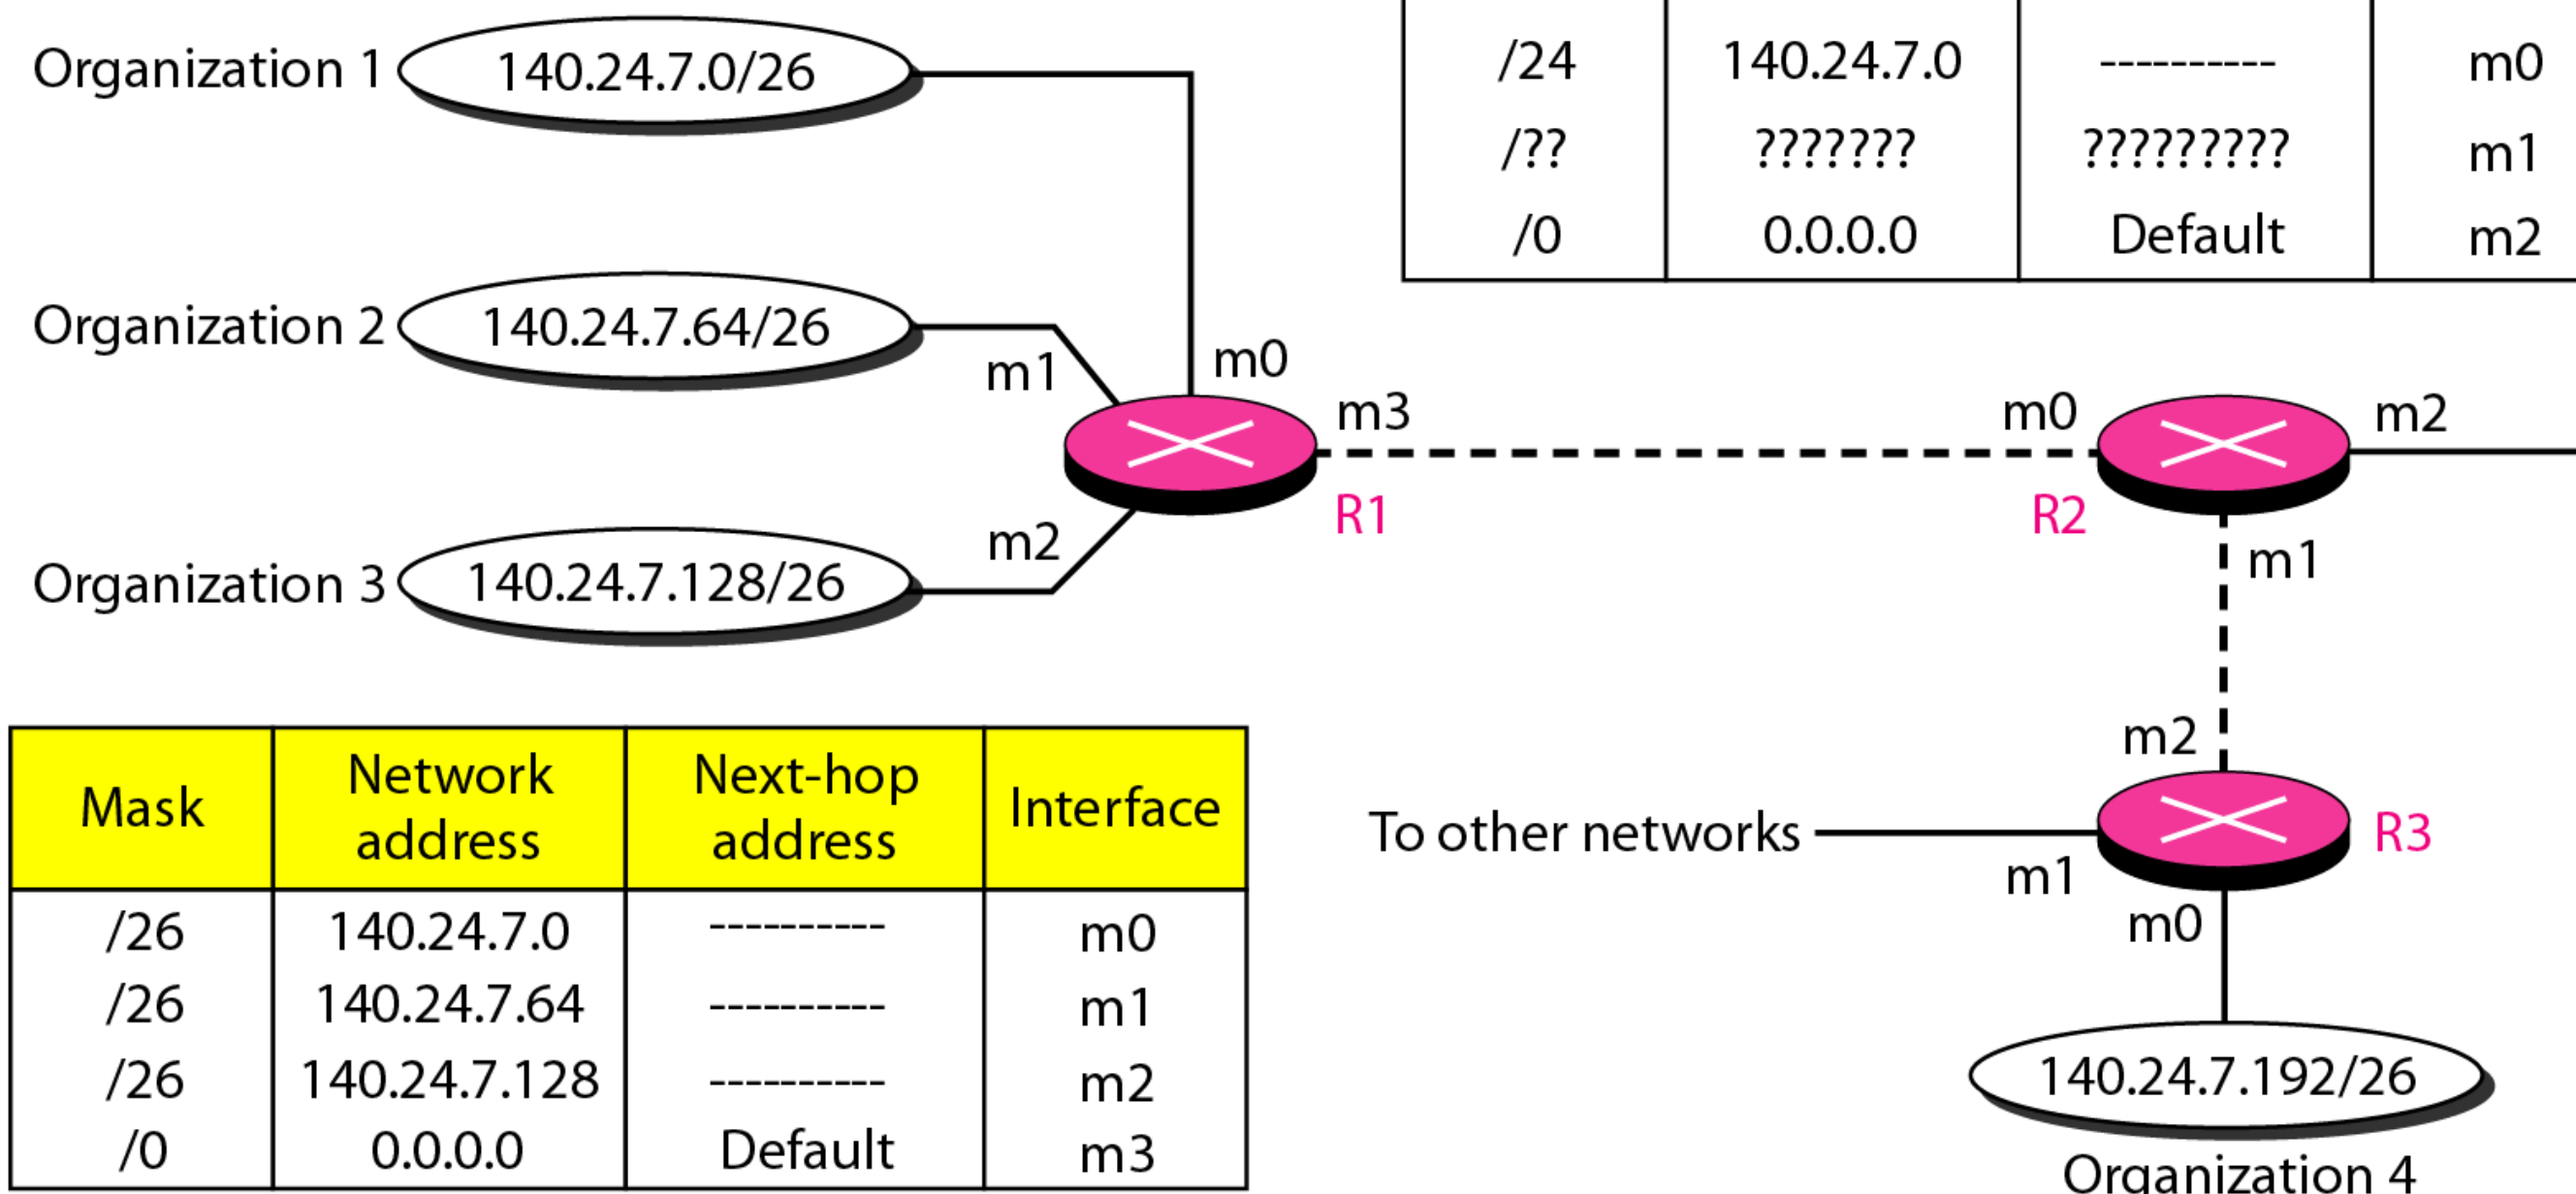

Mask	Network address	Next-hop address	Interface
/26	140.24.7.0	----------	m0
/26	140.24.7.64	----------	m1
/26	140.24.7.128	----------	m2
/0	0.0.0.0	Default	m3

Routing table for R1

Mask	Network address	Next-hop address	Interface
/26	140.24.7.192	----------	m0
/??	???????	?????????	m1
/0	0.0.0.0	Default	m2

Routing table for R3

Figure 22.10 *Common fields in a routing table*

Mask	Network address	Next-hop address	Interface	Flags	Reference count	Use
....	....	....	....	....	....	....

Flags: U (Up), G (Gateway), H (Host-specific), D (Added by redirection), M (Modified by redirection)

Reference Count: Number of users of this route at the moment

Use: Number of packets transmitted through this router for the corresponding destination

Example 22.6

One utility that can be used to find the contents of a routing table for a host or router is netstat in UNIX or LINUX. The next slide shows the list of the contents of a default server. We have used two options, r and n. The option r indicates that we are interested in the routing table, and the option n indicates that we are looking for numeric addresses. Note that this is a routing table for a host, not a router. Although we discussed the routing table for a router throughout the chapter, a host also needs a routing table.

Example 22.6 (continued)

$ netstat -rn

Kernel IP routing table

Destination	Gateway	Mask	Flags	Iface
153.18.16.0	0.0.0.0	255.255.240.0	U	eth0
127.0.0.0	0.0.0.0	255.0.0.0	U	lo
0.0.0.0	153.18.31.254	0.0.0.0	UG	eth0

The destination column here defines the network address. The term gateway used by UNIX is synonymous with router. This column actually defines the address of the next hop. The value 0.0.0.0 shows that the delivery is direct. The last entry has a flag of G, which means that the destination can be reached through a router (default router). The Iface defines the interface.

Example 22.6 (continued)

More information about the IP address and physical address of the server can be found by using the ifconfig command on the given interface (eth0).

```
$ ifconfig eth0
eth0   Link encap:Ethernet  HWaddr 00:B0:D0:DF:09:5D
inet addr:153.18.17.11  Bcast:153.18.31.255  Mask:255.255.240.0
. . .
```

Figure 22.11 *Configuration of the server for Example 22.6*

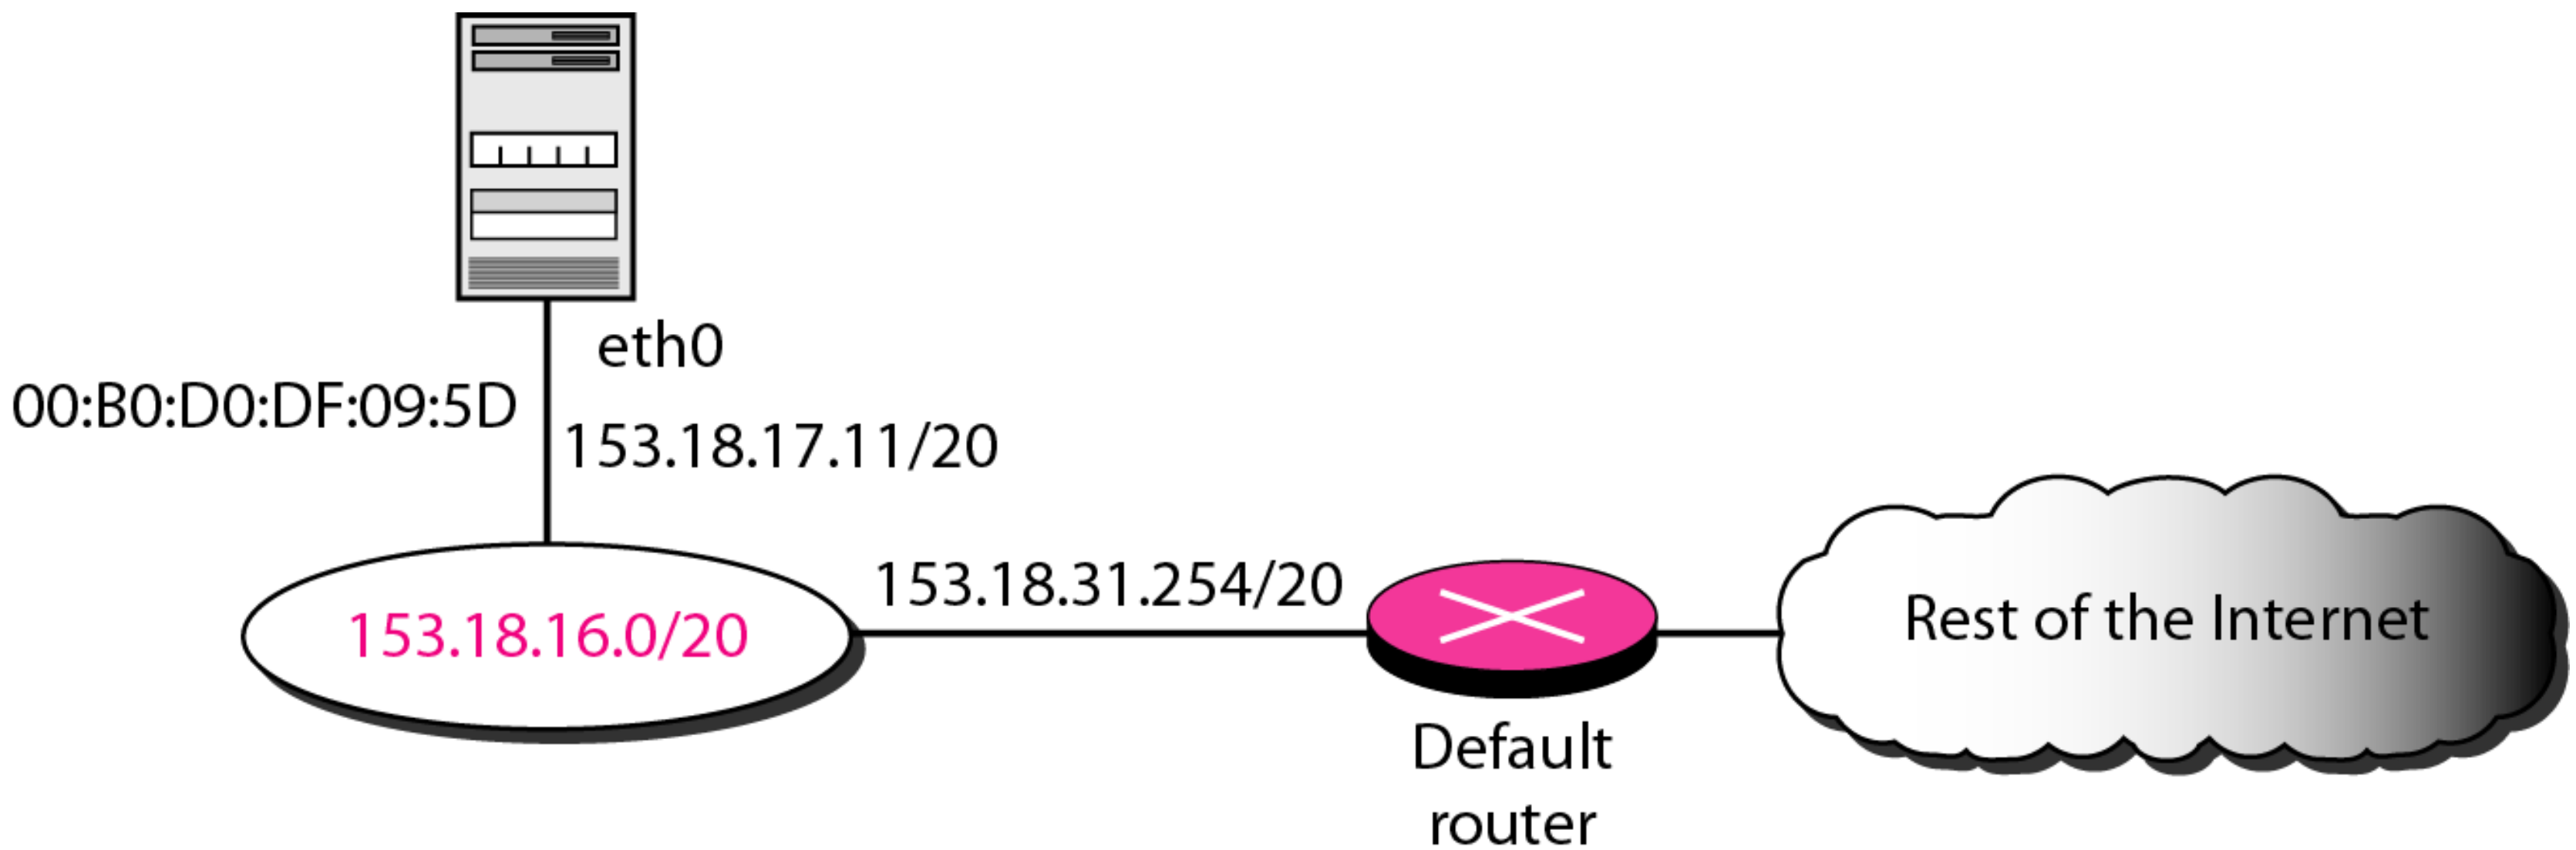

22-3 UNICAST ROUTING PROTOCOLS

A routing table can be either static or dynamic. A static table is one with manual entries. A dynamic table is one that is updated automatically when there is a change somewhere in the Internet. A routing protocol is a combination of rules and procedures that lets routers in the Internet inform each other of changes.

Topics discussed in this section:

Optimization
Intra- and Interdomain Routing
Distance Vector Routing and RIP
Link State Routing and OSPF
Path Vector Routing and BGP

Routing Protocol

- Routing protocol created in response to the demand of dynamic routing tables
- It allows routers to share whatever they know about the Internet and their neighborhood

Unicast vs Multicast Routing

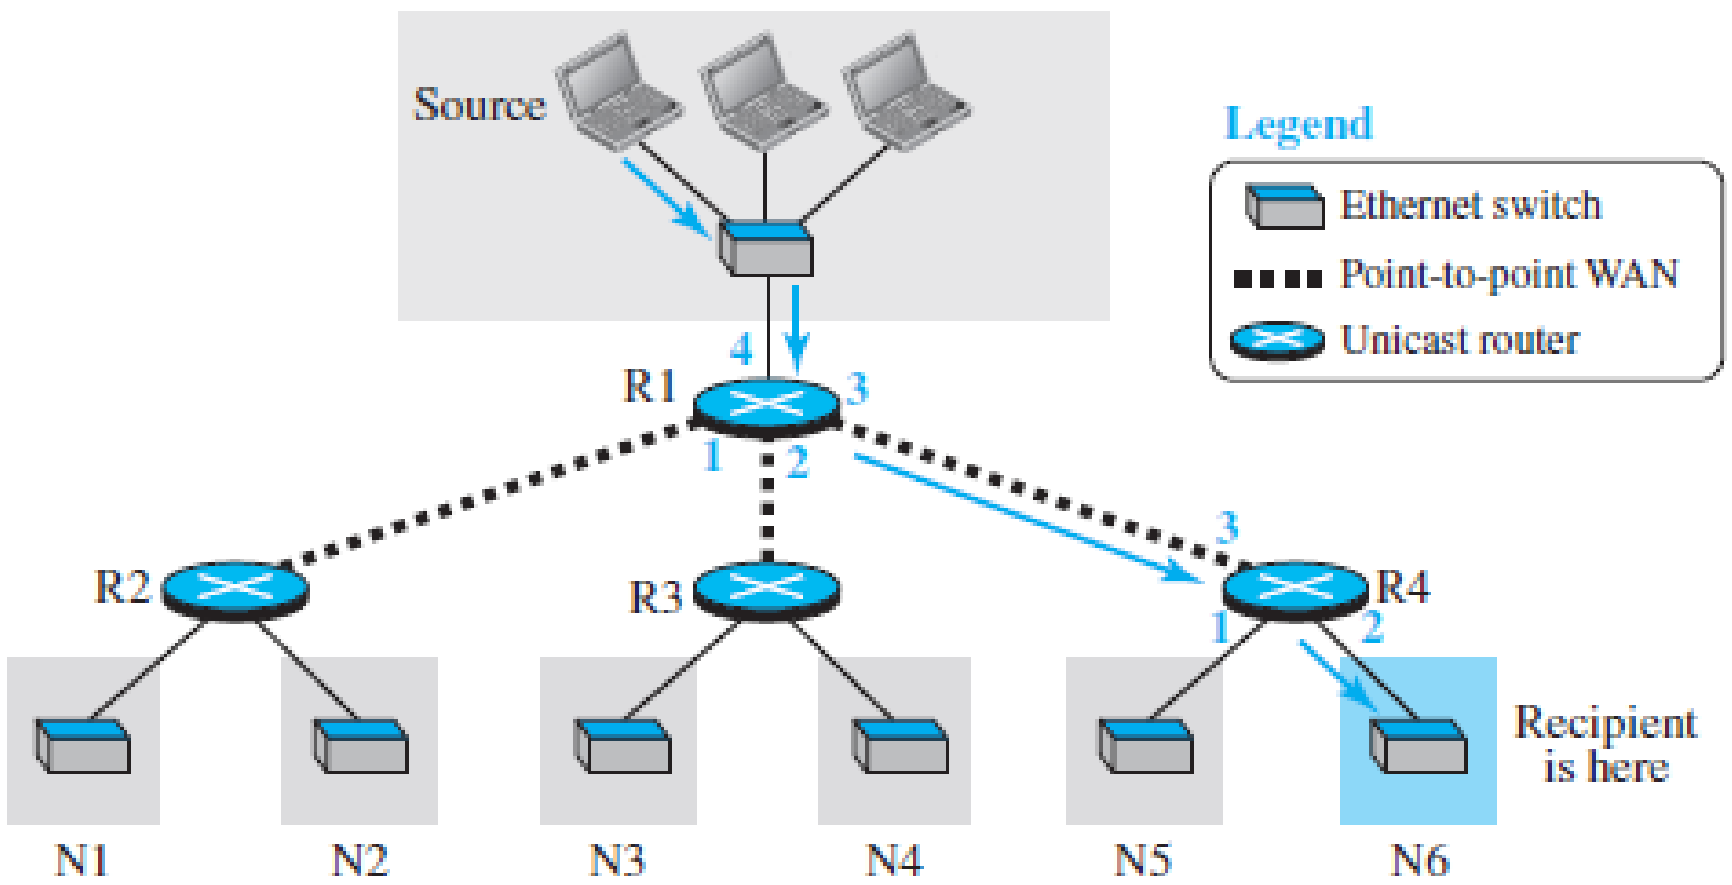

In unicast routing, each router in the domain has a table that defines a shortest path tree to possible destinations (one source-one destination)

In multicast routing, each involved router needs to construct a shortest path tree for each group (one source-group of destination)

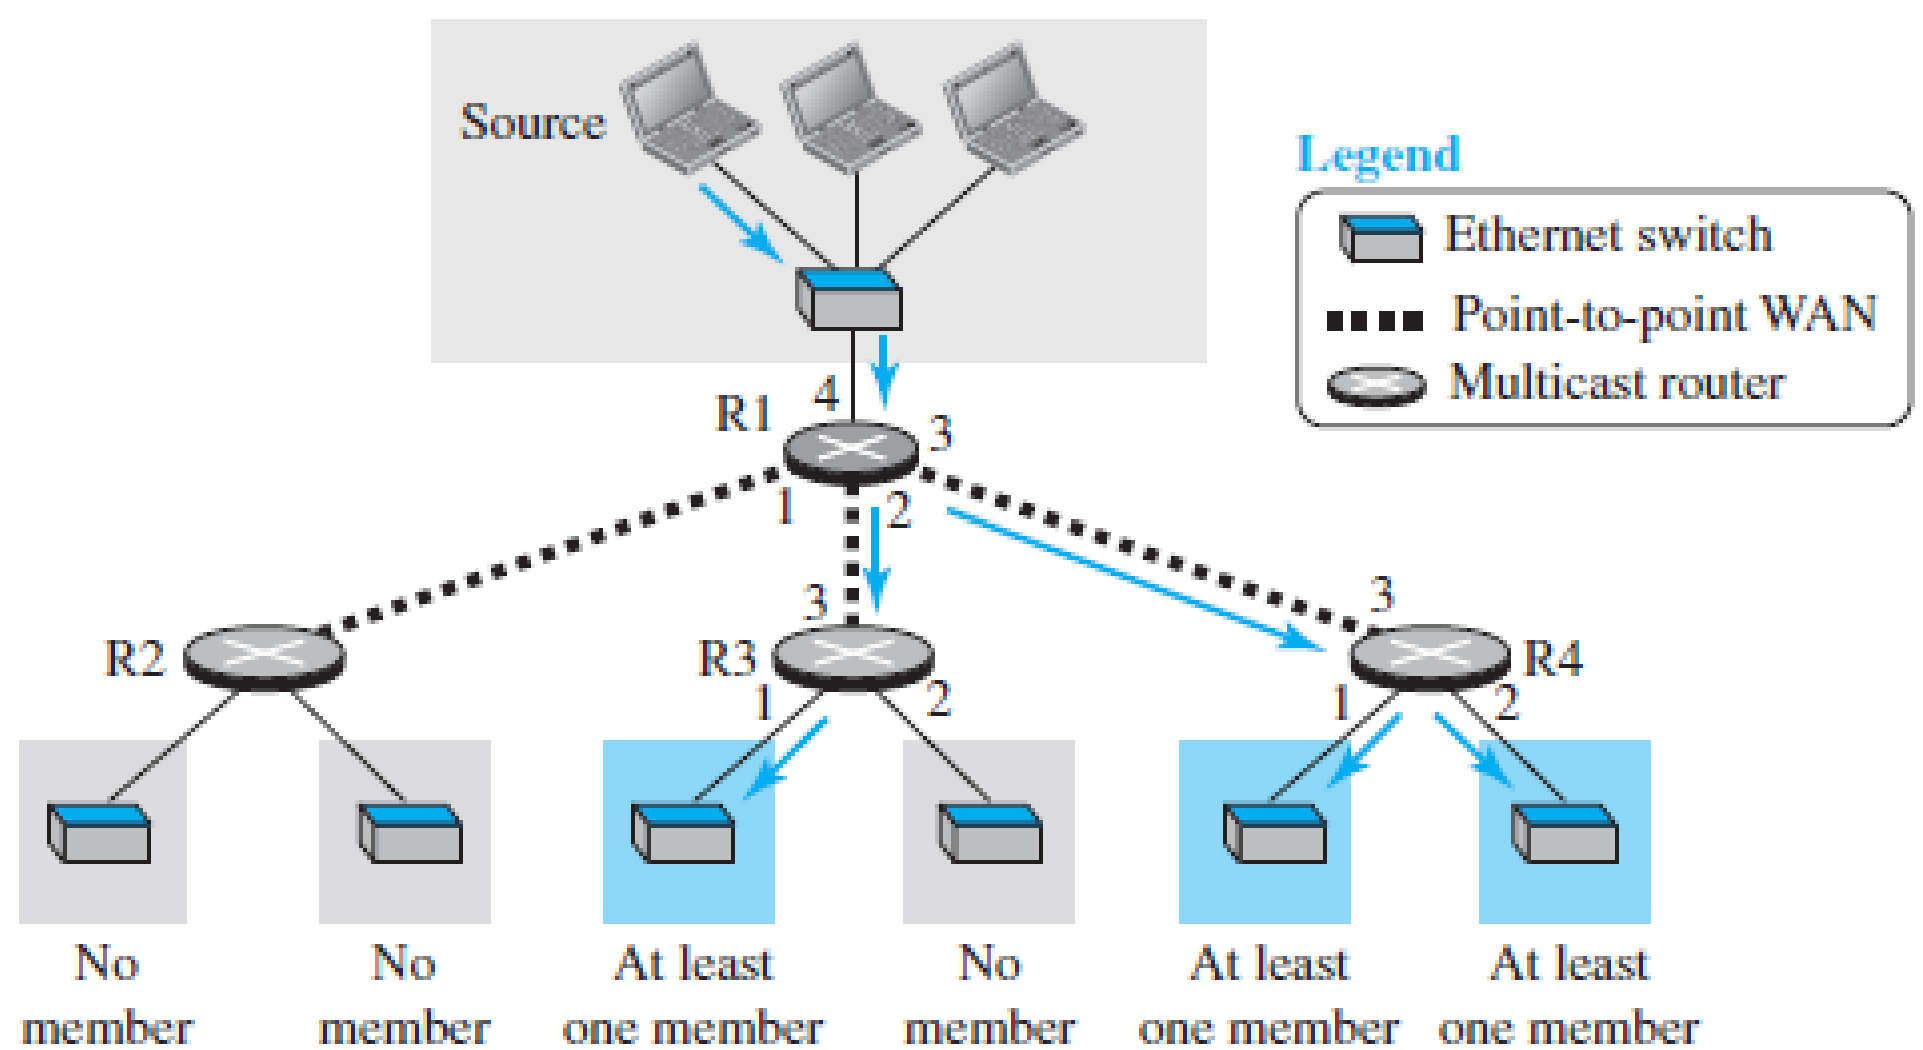

Figure 22.12 *Autonomous systems*

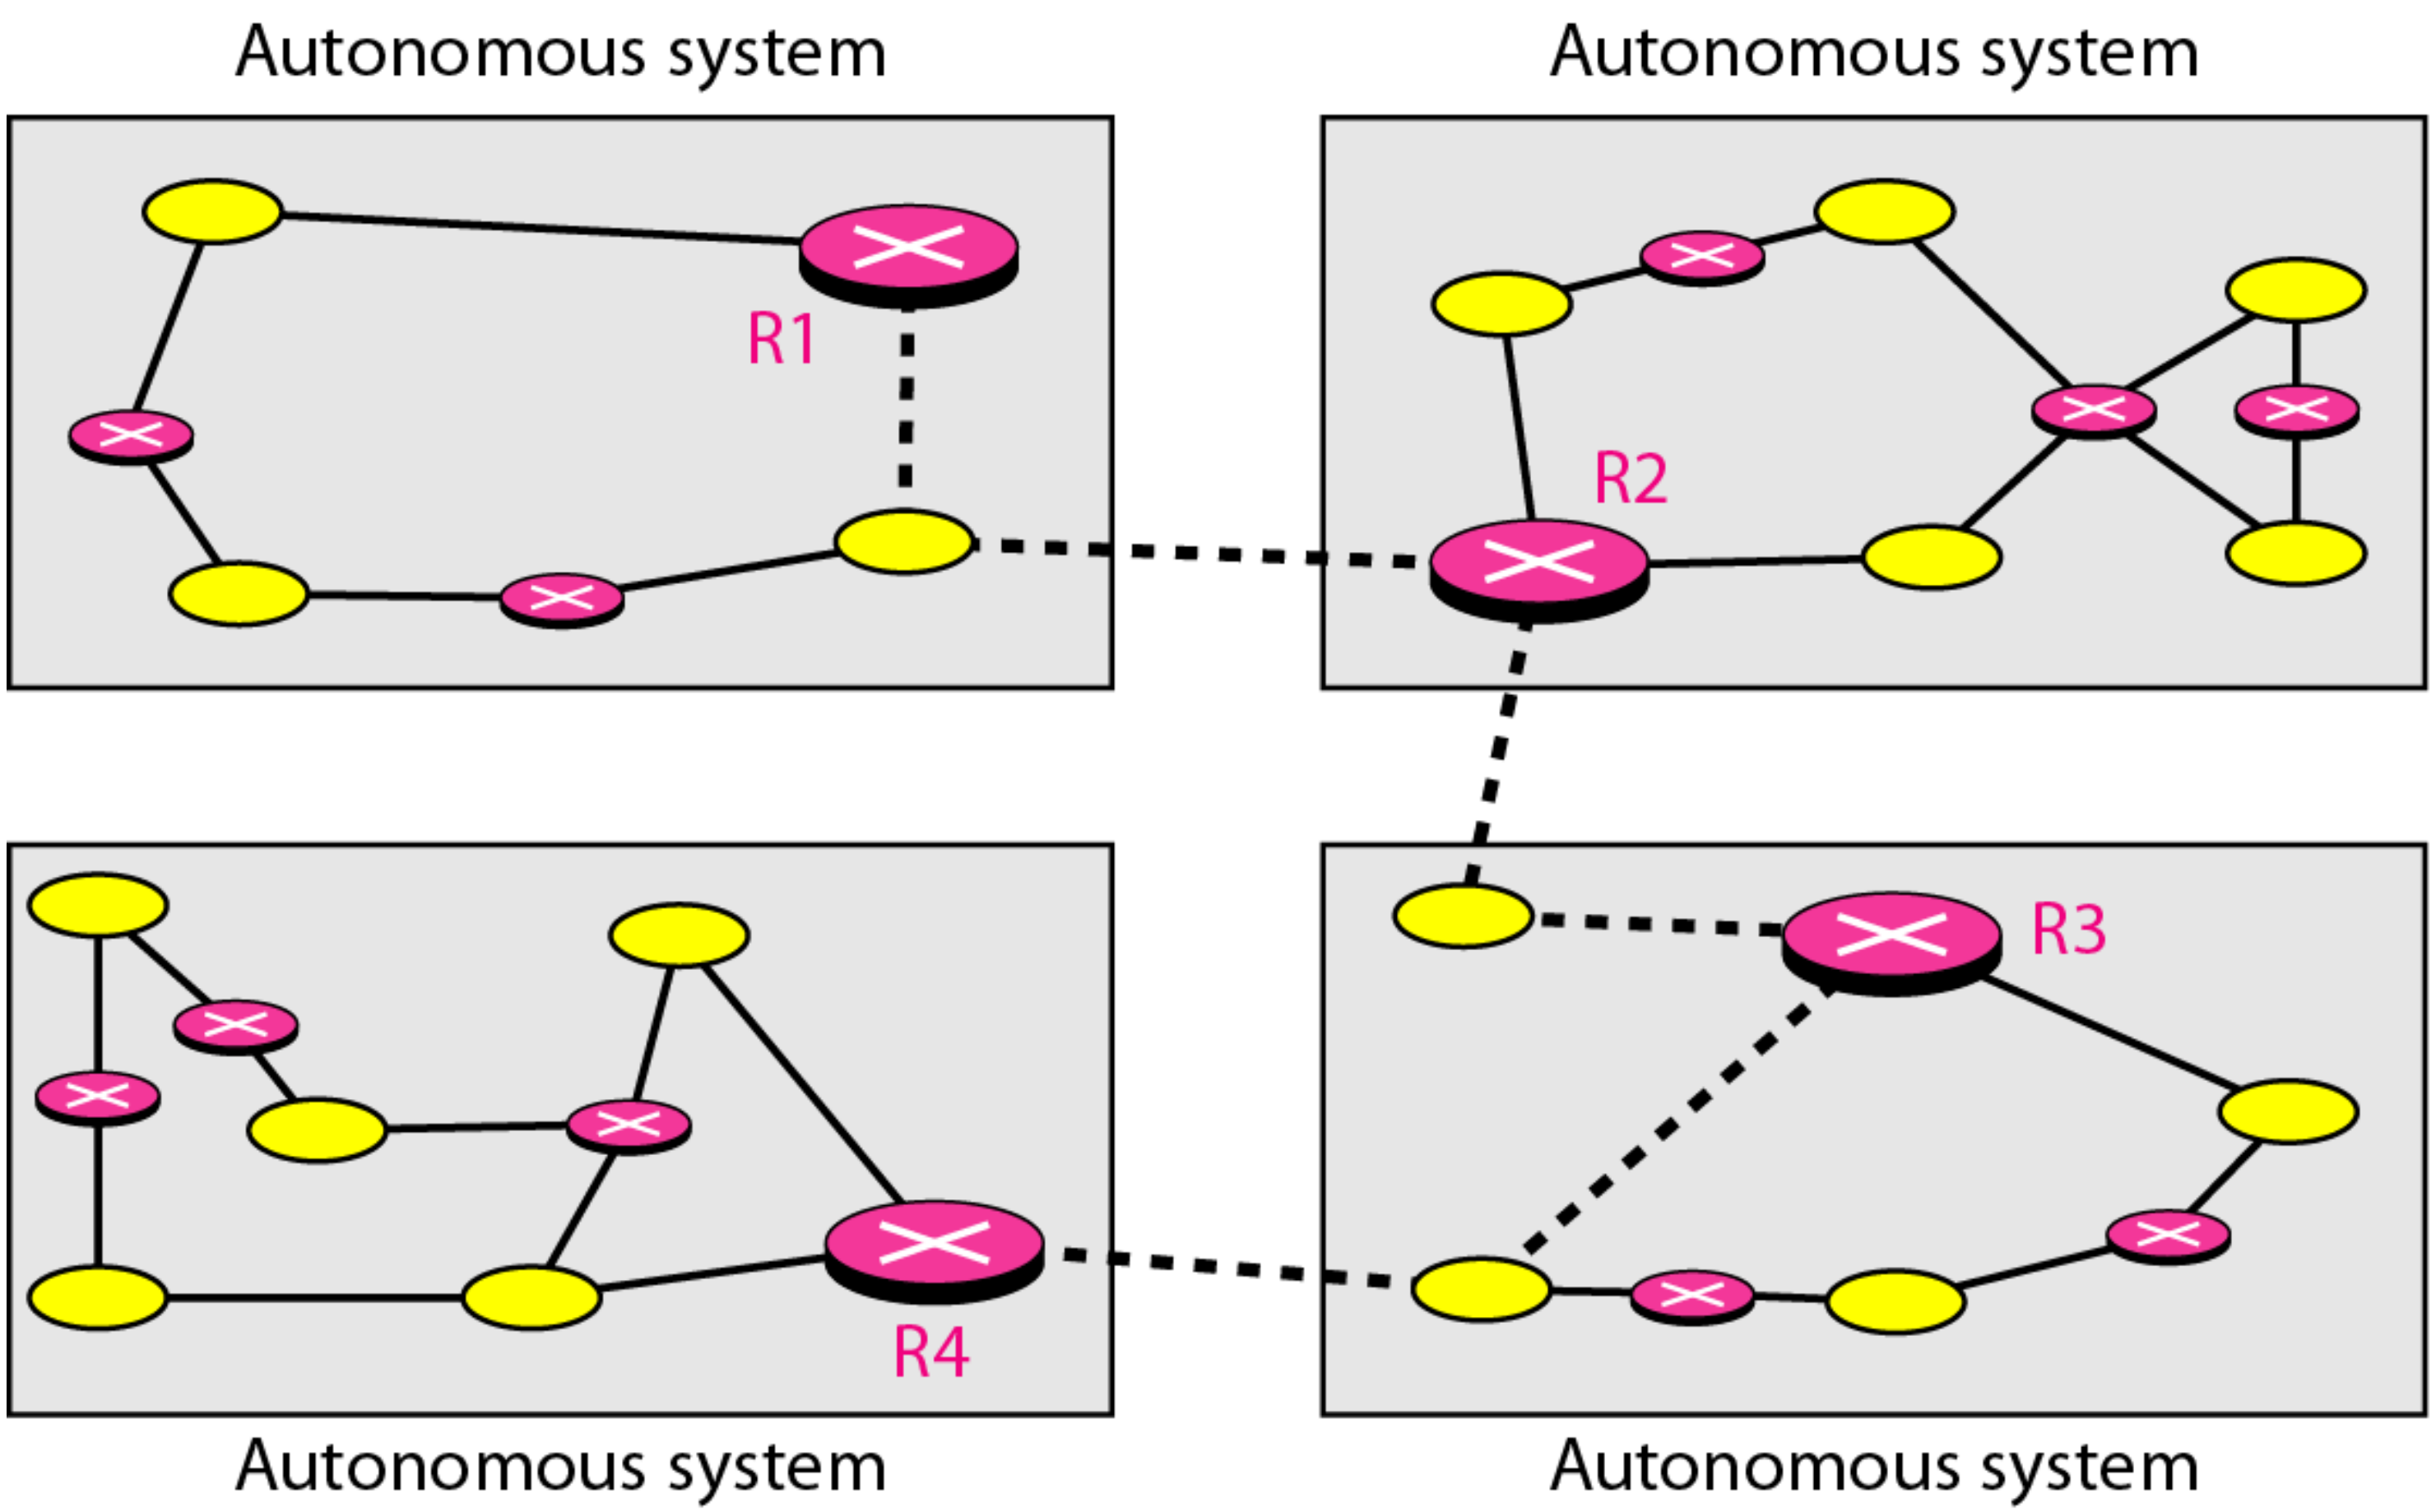

AS: group of networks and routers under the authority of a single administration

Figure 22.13 *Popular routing protocols*

Intradomain: Routing inside an autonomous system

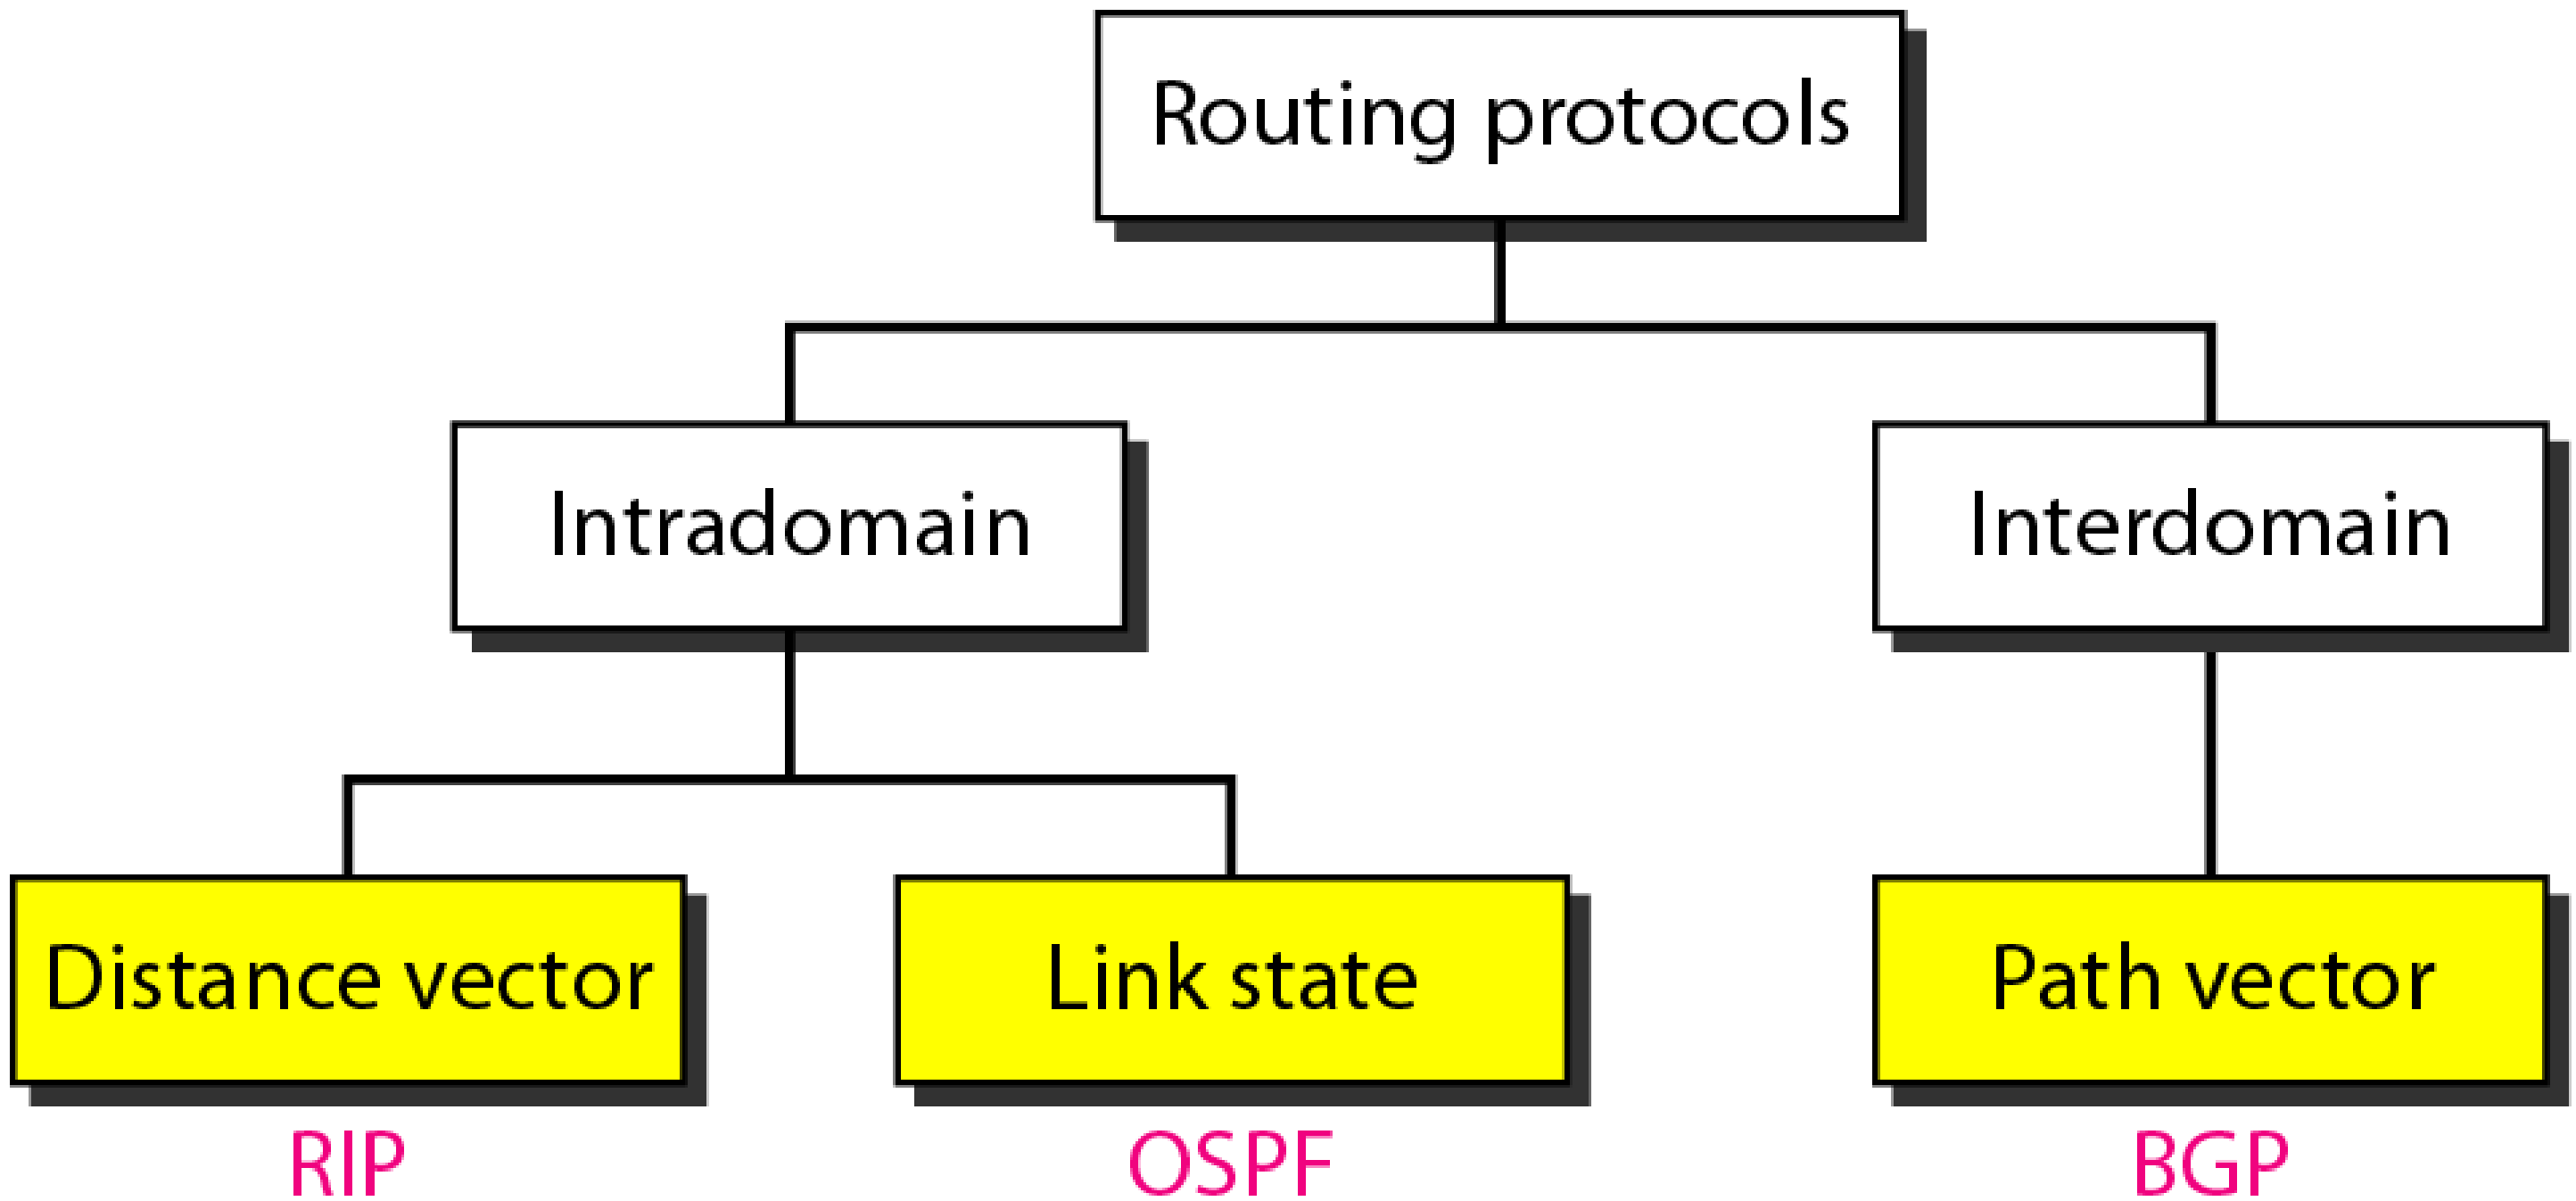

Interdomain: Routing between autonomous systems

Figure 22.14 *Distance vector routing tables*

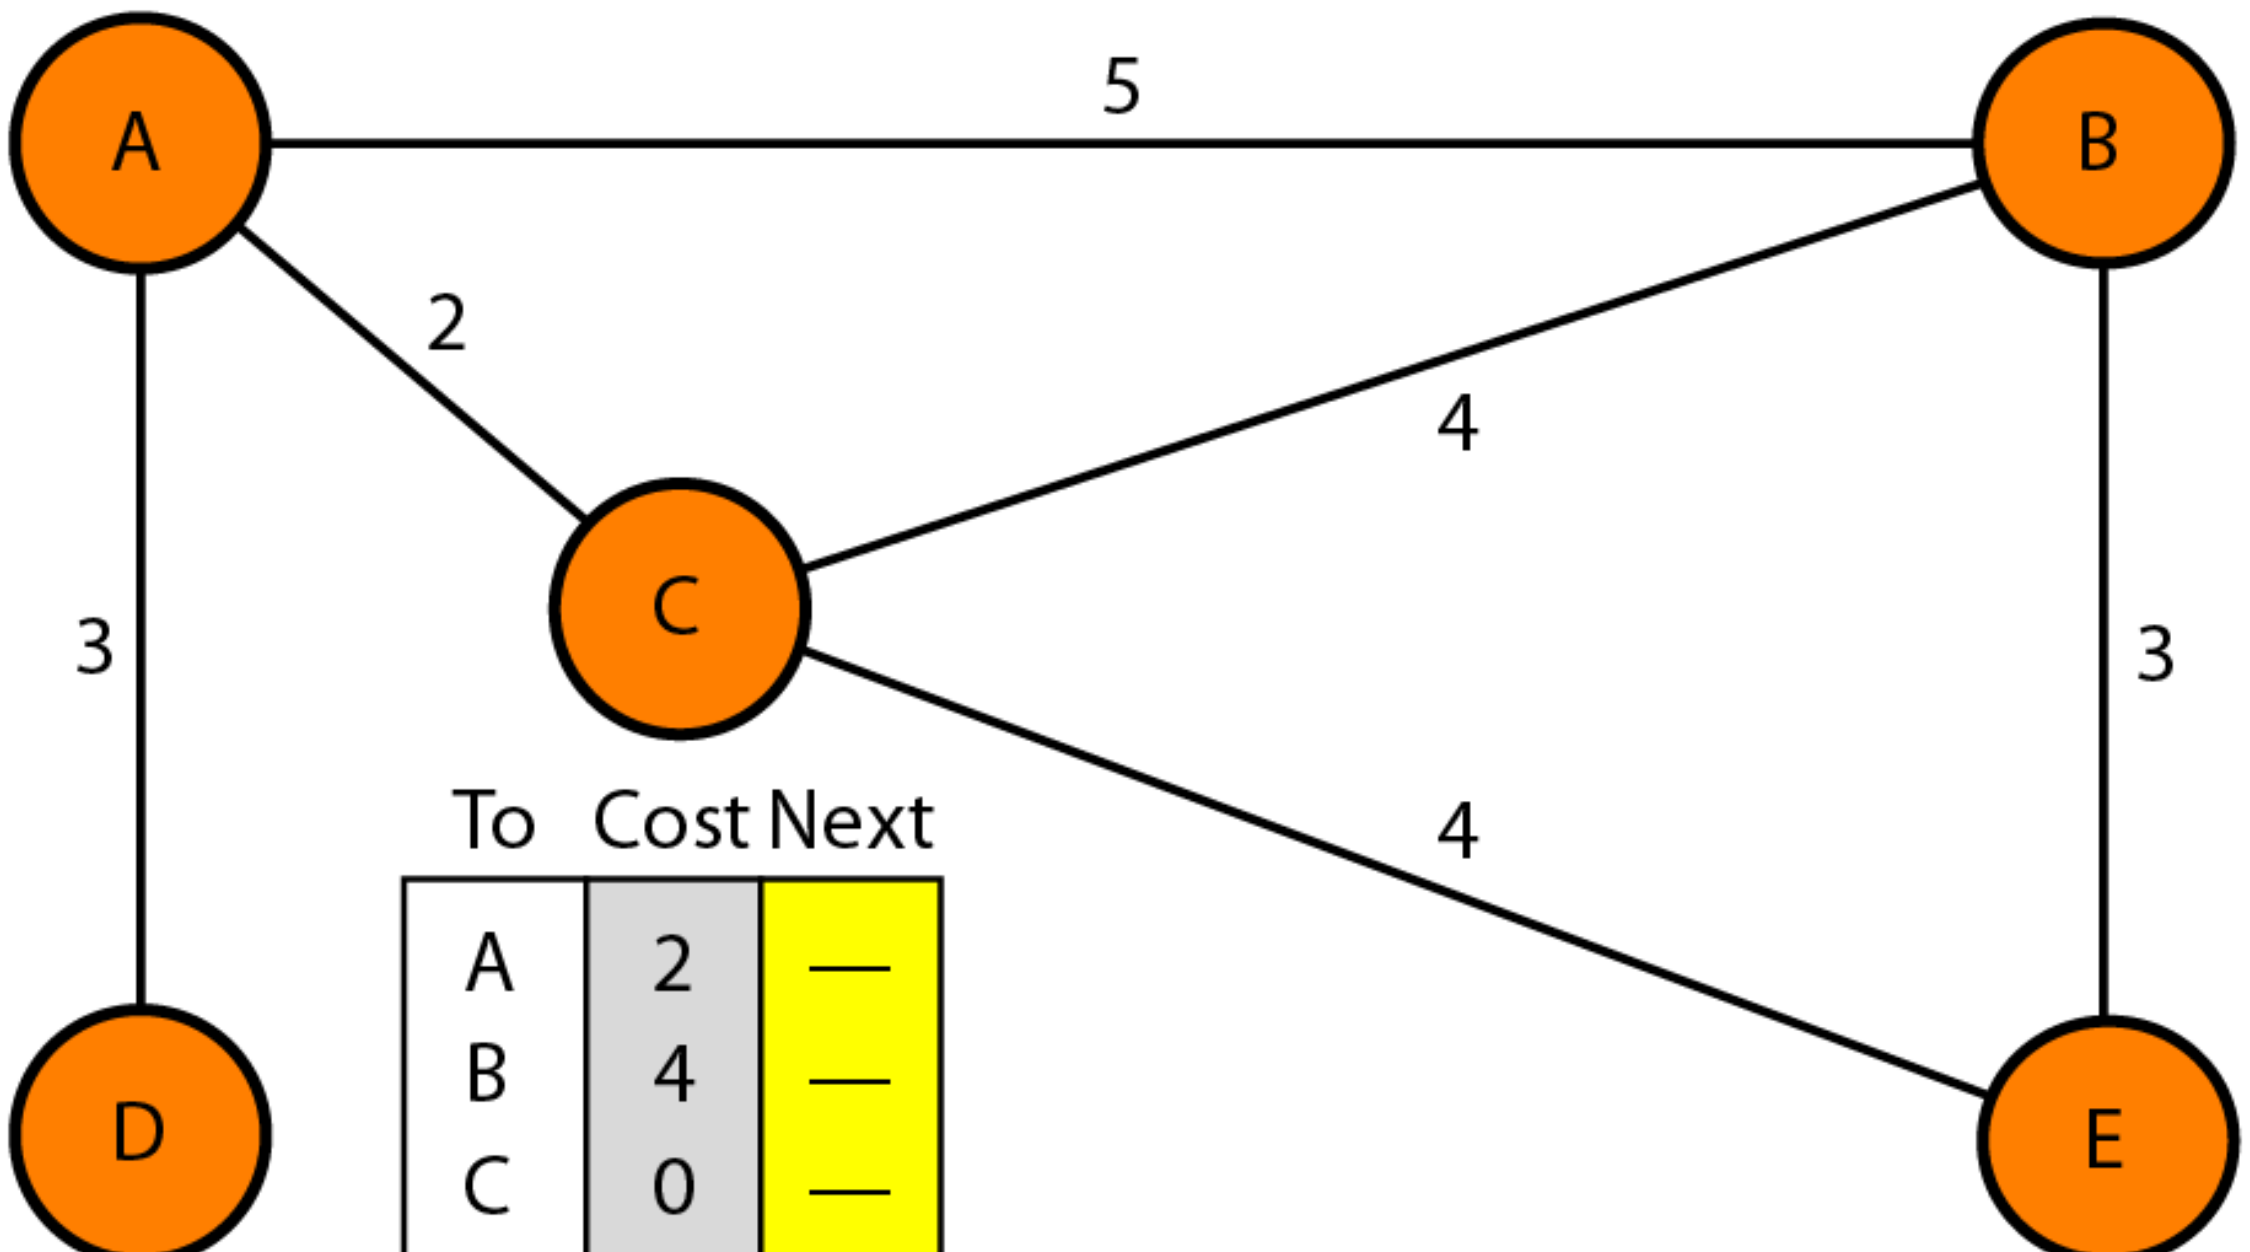

A's table

To	Cost	Next
A	0	—
B	5	—
C	2	—
D	3	—
E	6	C

B's table

To	Cost	Next
A	5	—
B	0	—
C	4	—
D	8	A
E	3	—

C's table

To	Cost	Next
A	2	—
B	4	—
C	0	—
D	5	A
E	4	—

D's table

To	Cost	Next
A	3	—
B	8	A
C	5	A
D	0	—
E	9	A

E's table

To	Cost	Next
A	6	C
B	3	—
C	4	—
D	9	C
E	0	—

Figure 22.15 *Initialization of tables in distance vector routing*

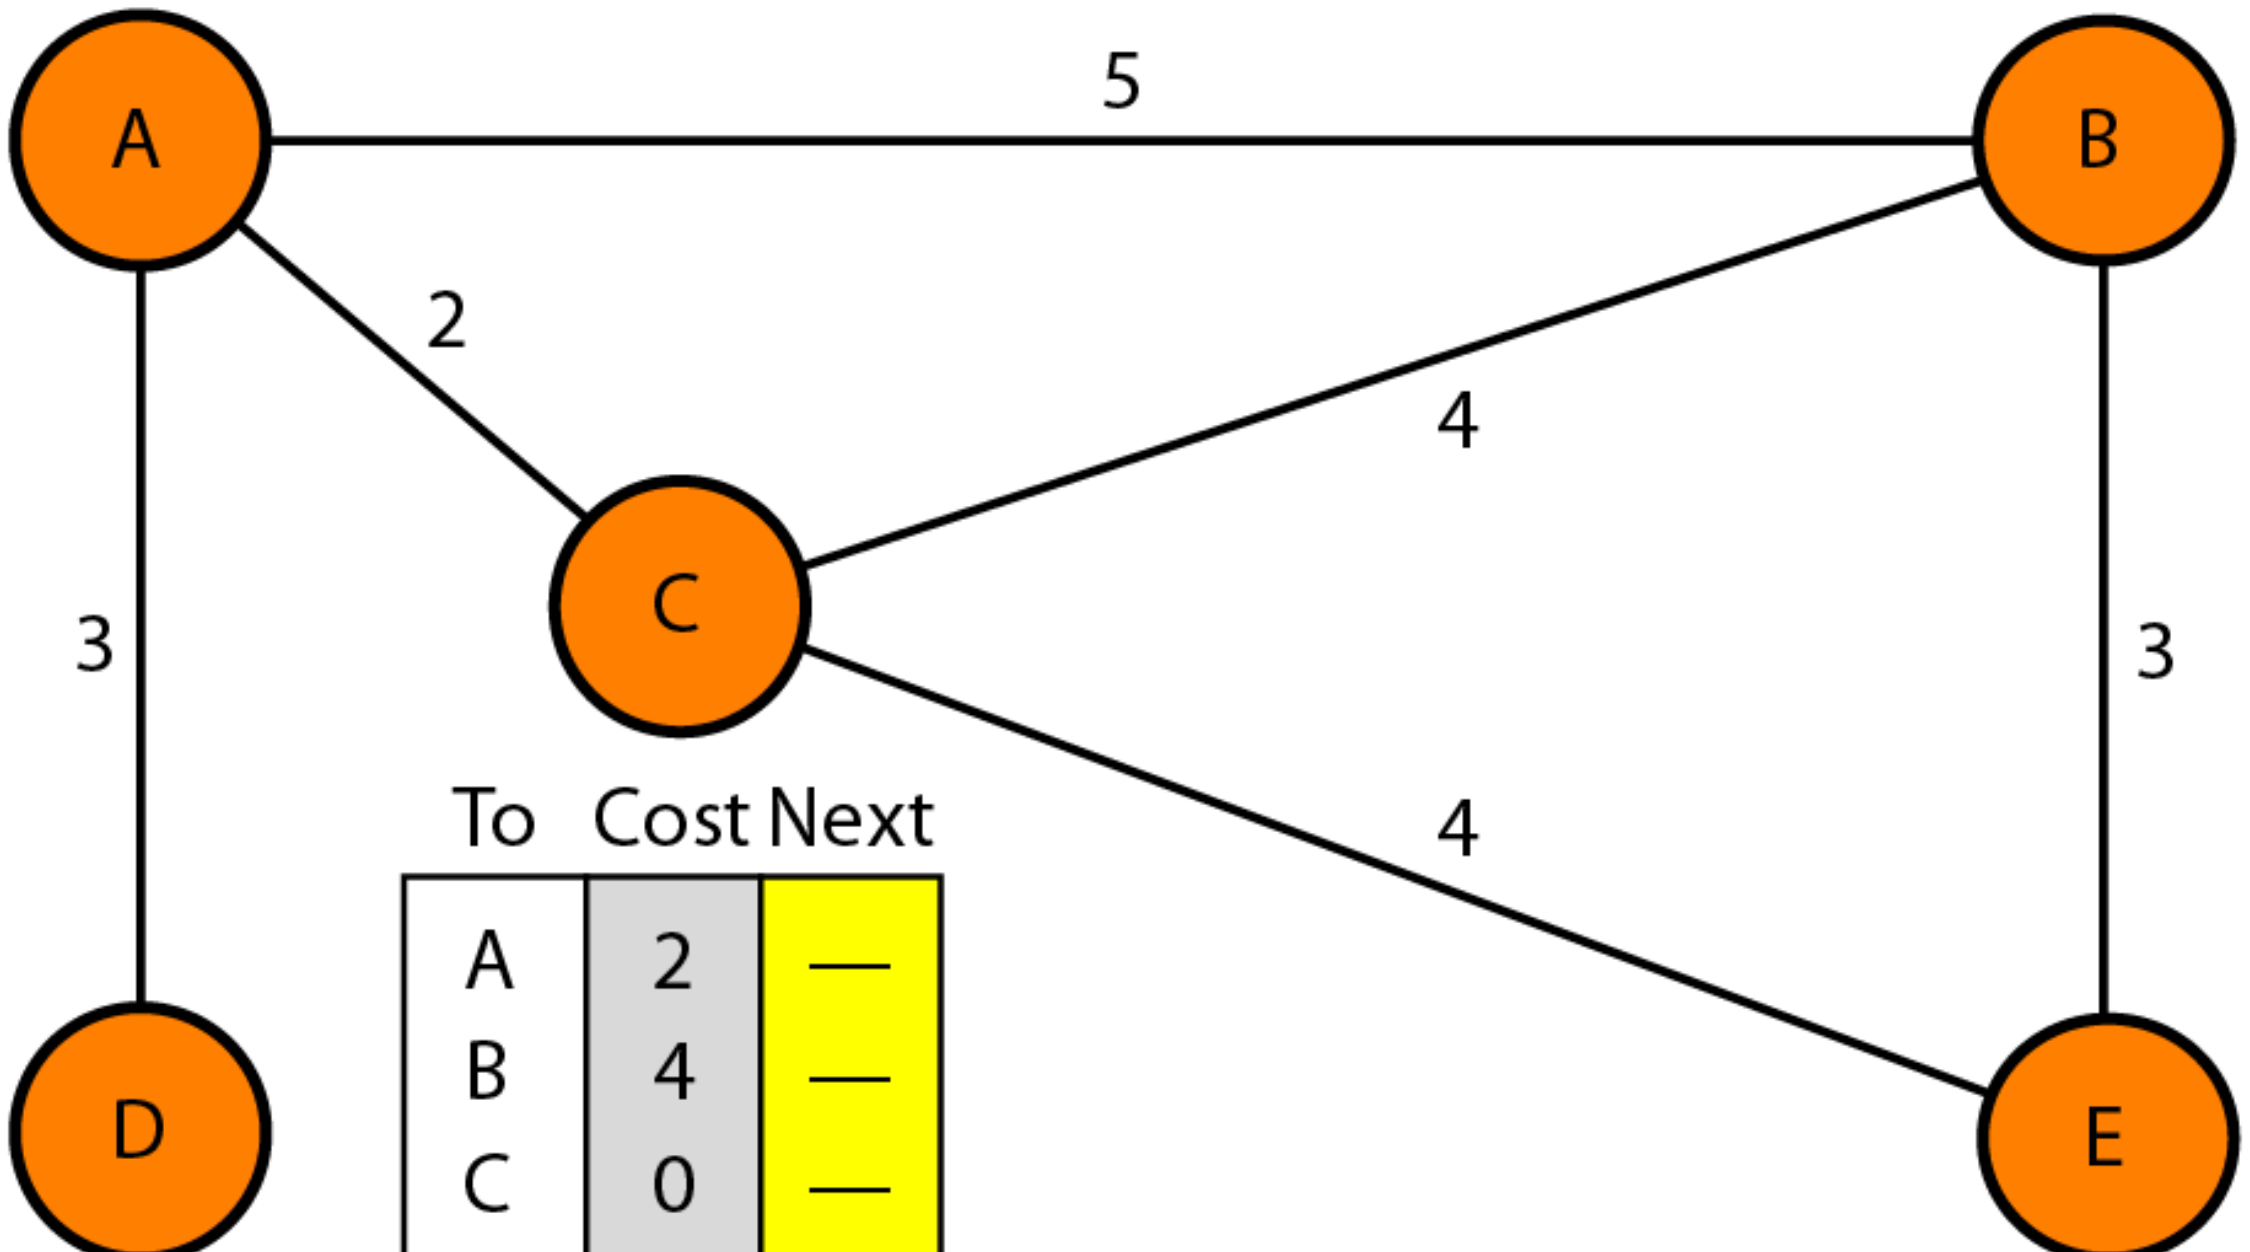

To	Cost	Next
A	0	—
B	5	—
C	2	—
D	3	—
E	∞	

A's table

To	Cost	Next
A	5	—
B	0	—
C	4	—
D	∞	
E	3	—

B's table

To	Cost	Next
A	2	—
B	4	—
C	0	—
D	∞	
E	4	—

C's table

To	Cost	Next
A	3	—
B	∞	
C	∞	
D	0	—
E	∞	

D's table

To	Cost	Next
A	∞	
B	3	B
C	4	C
D	∞	
E	0	D

E's table

Note

In distance vector routing, each node shares its routing table with its immediate neighbors periodically and when there is a change.

Figure 22.16 *Updating in distance vector routing*

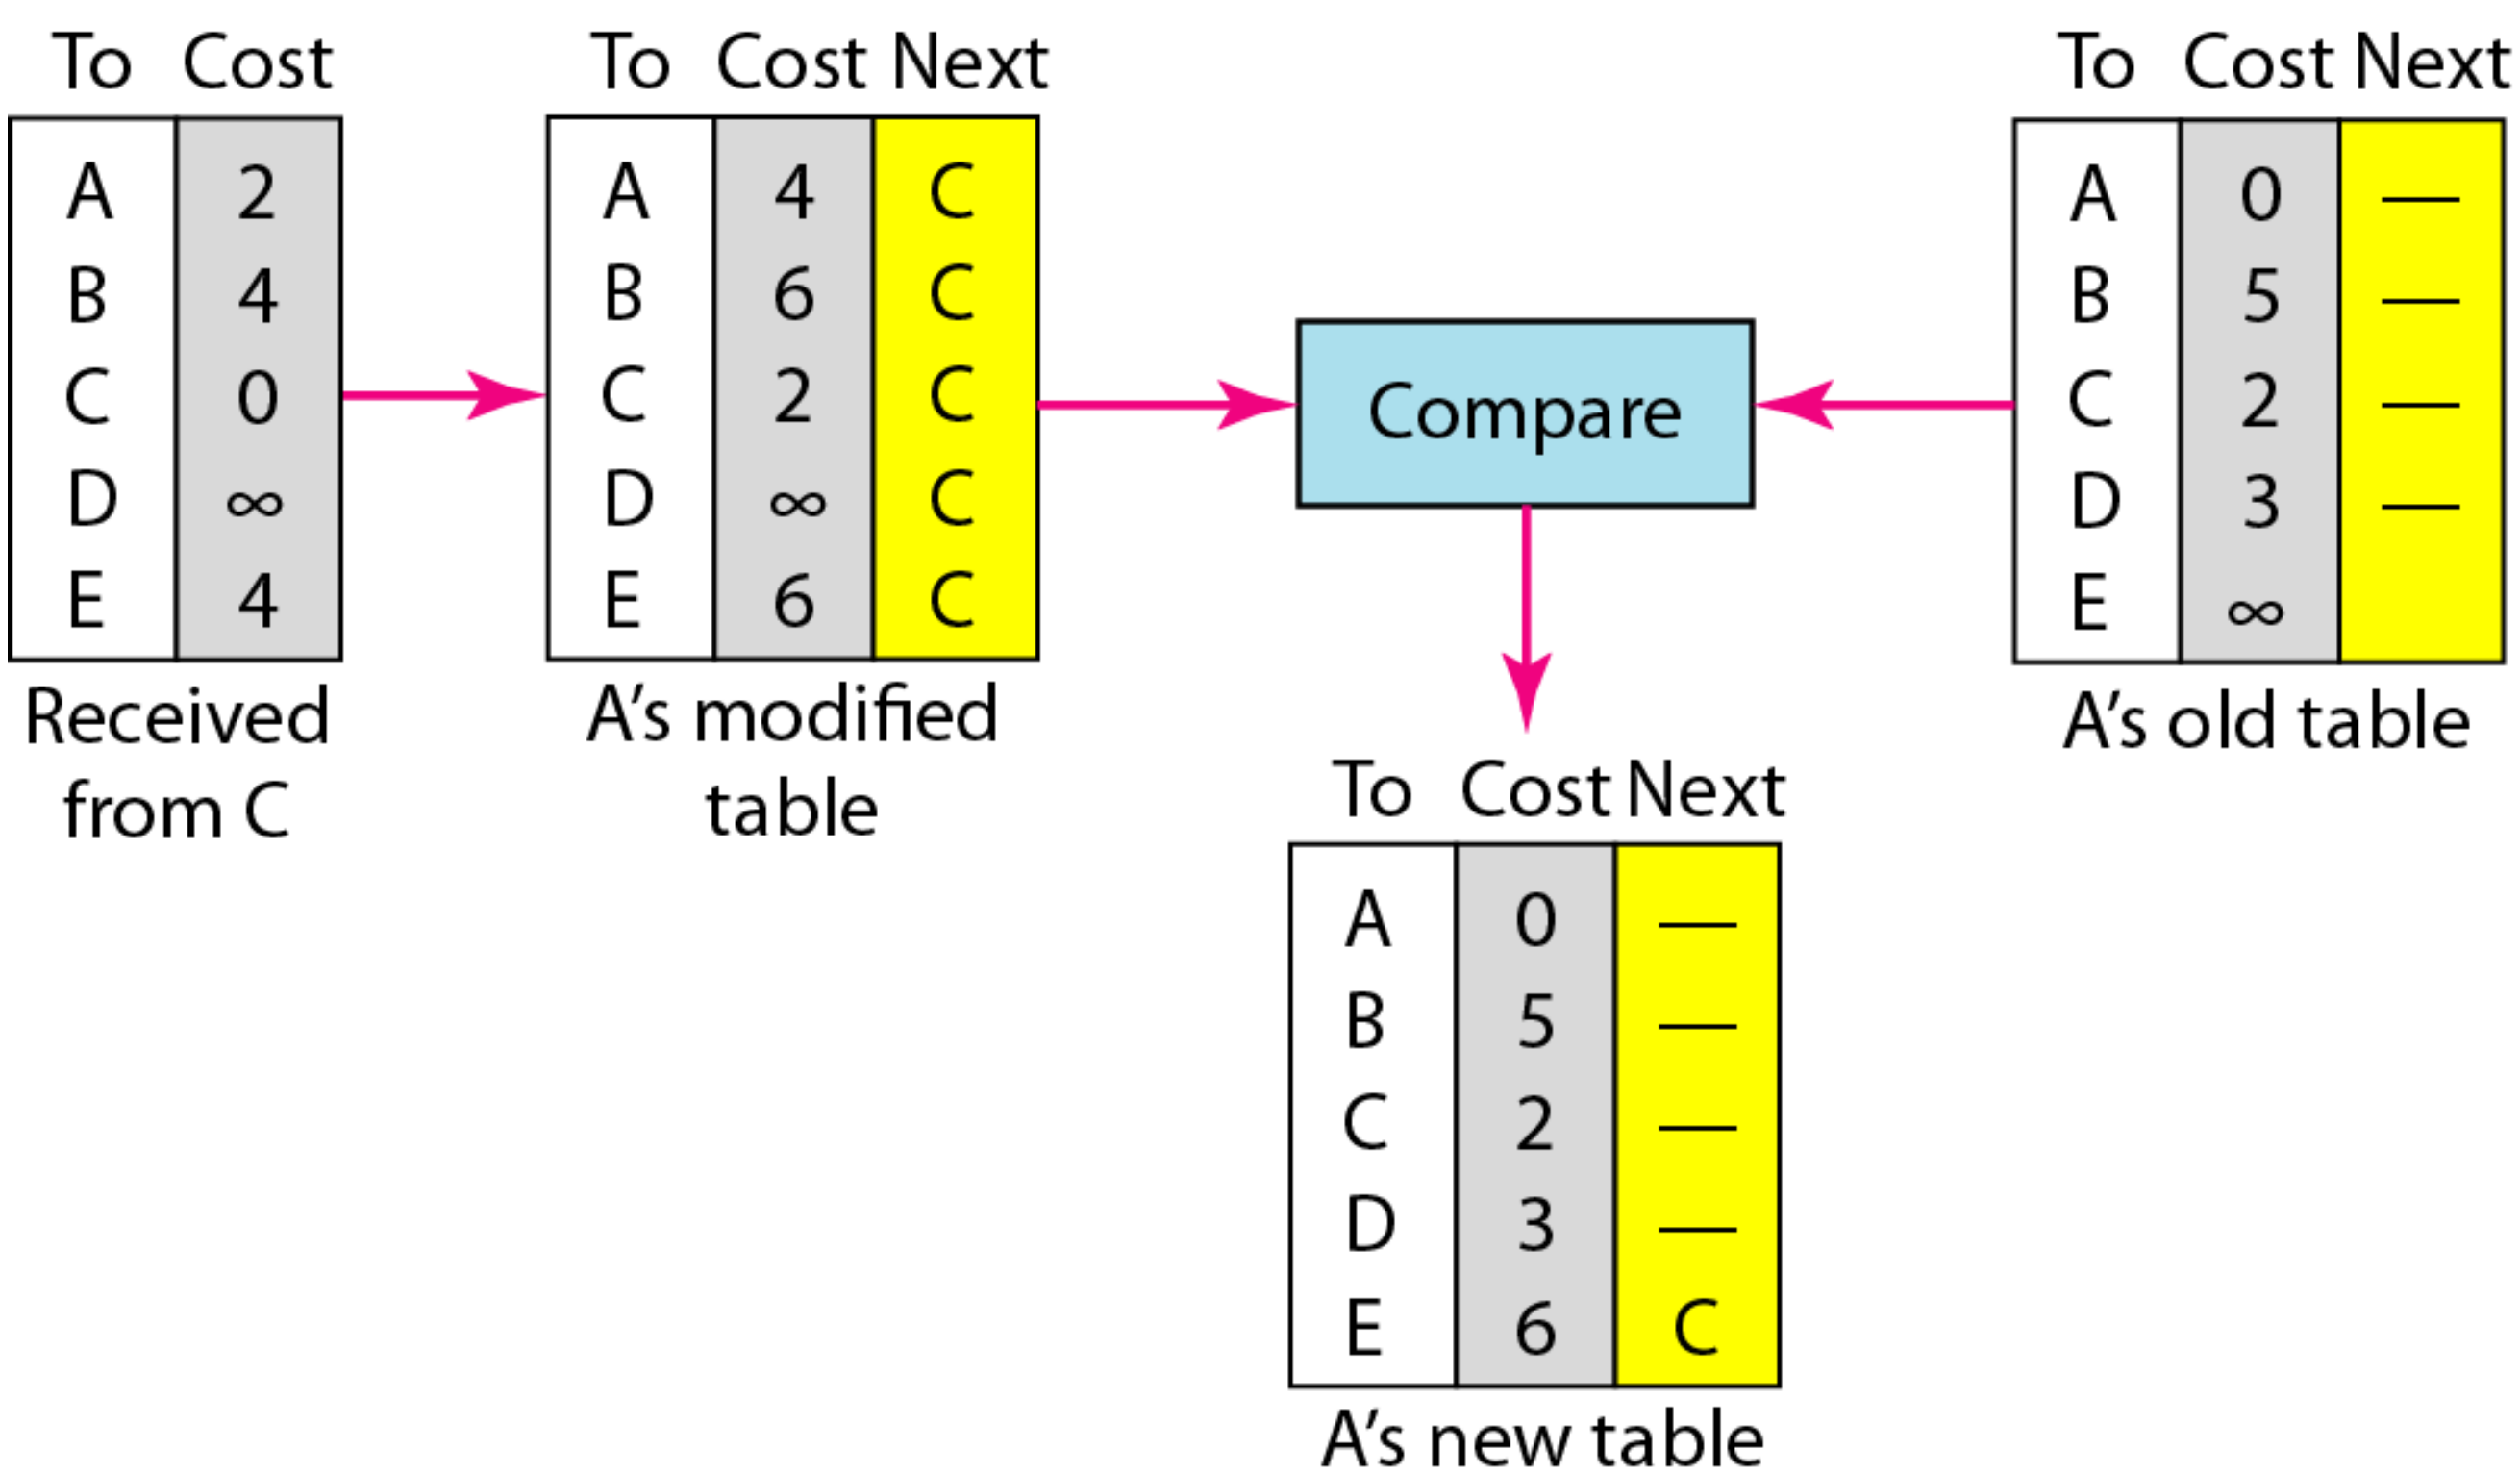

Figure 22.17 *Two-node instability*

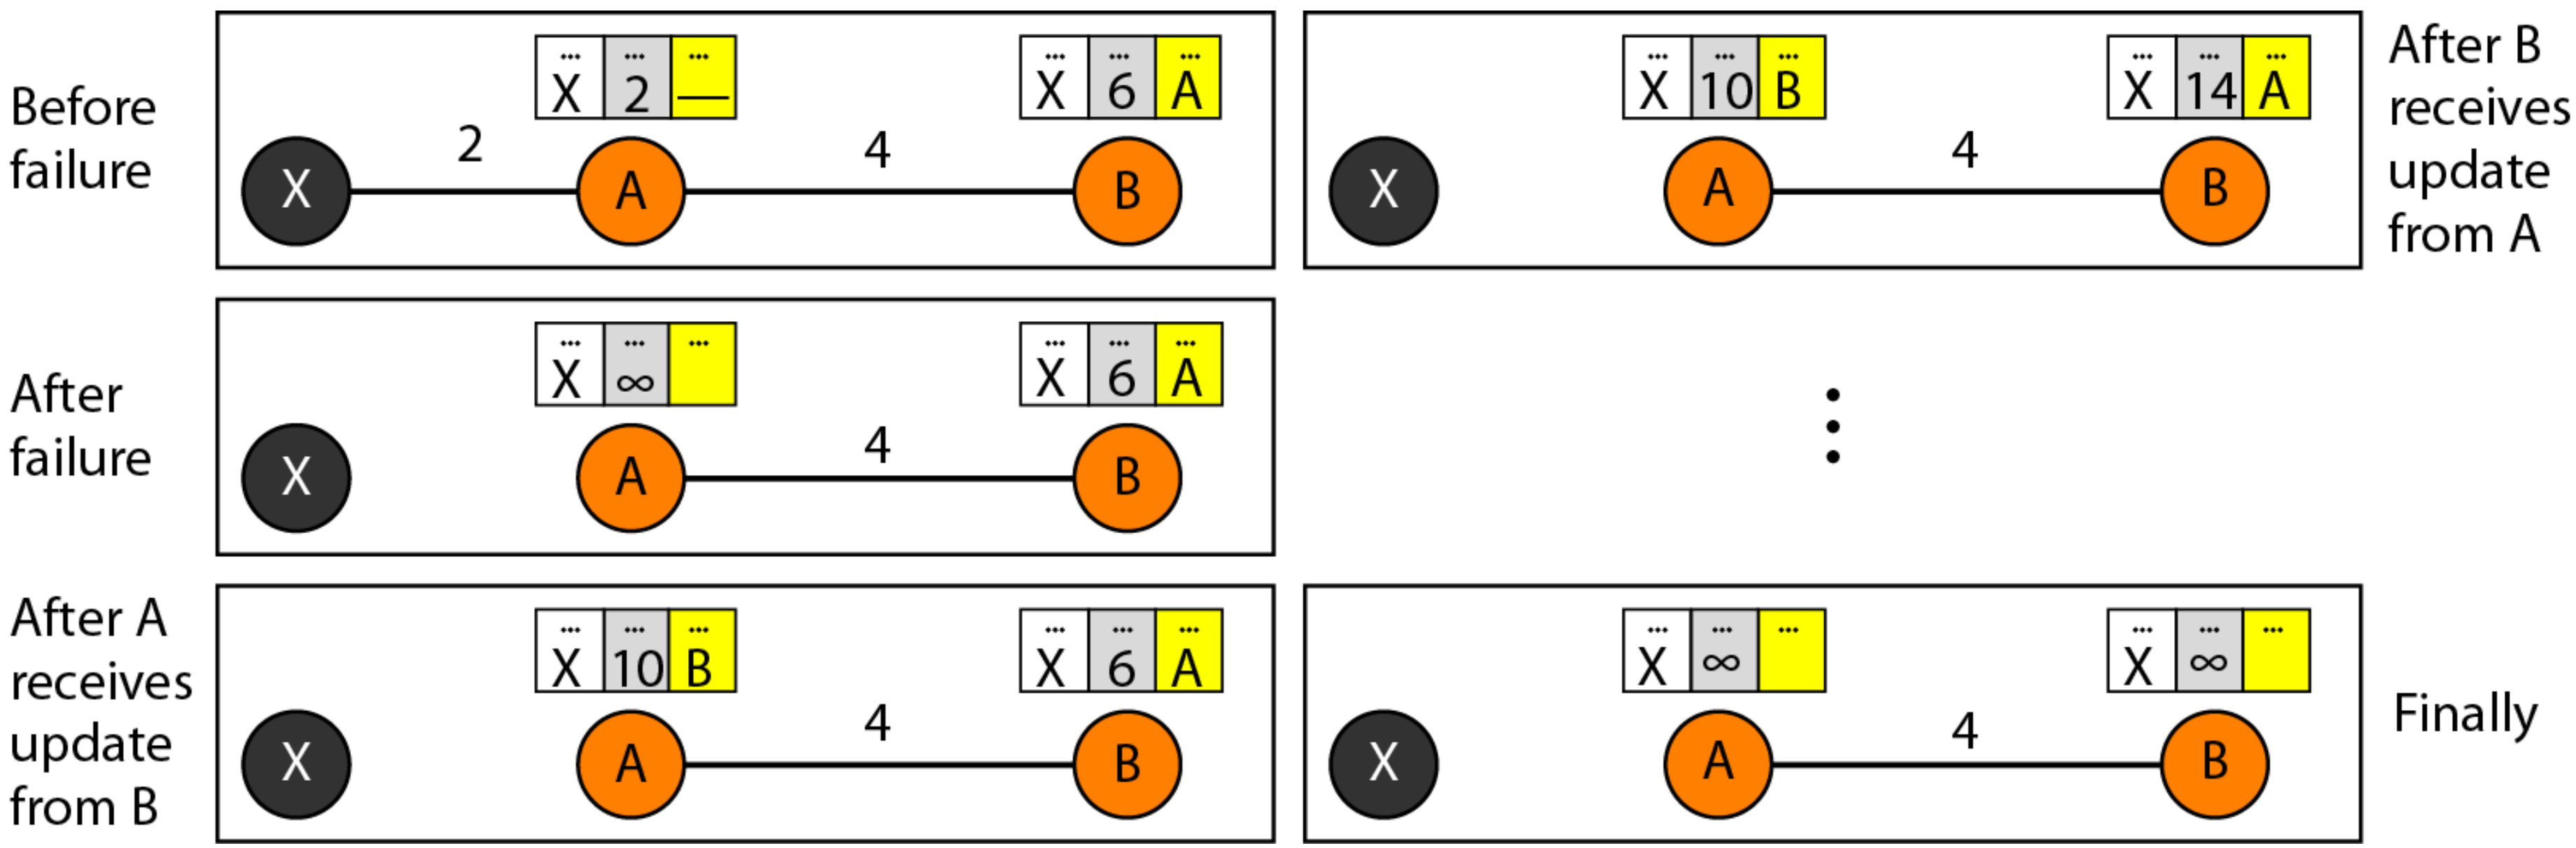

Figure 22.18 *Three-node instability*

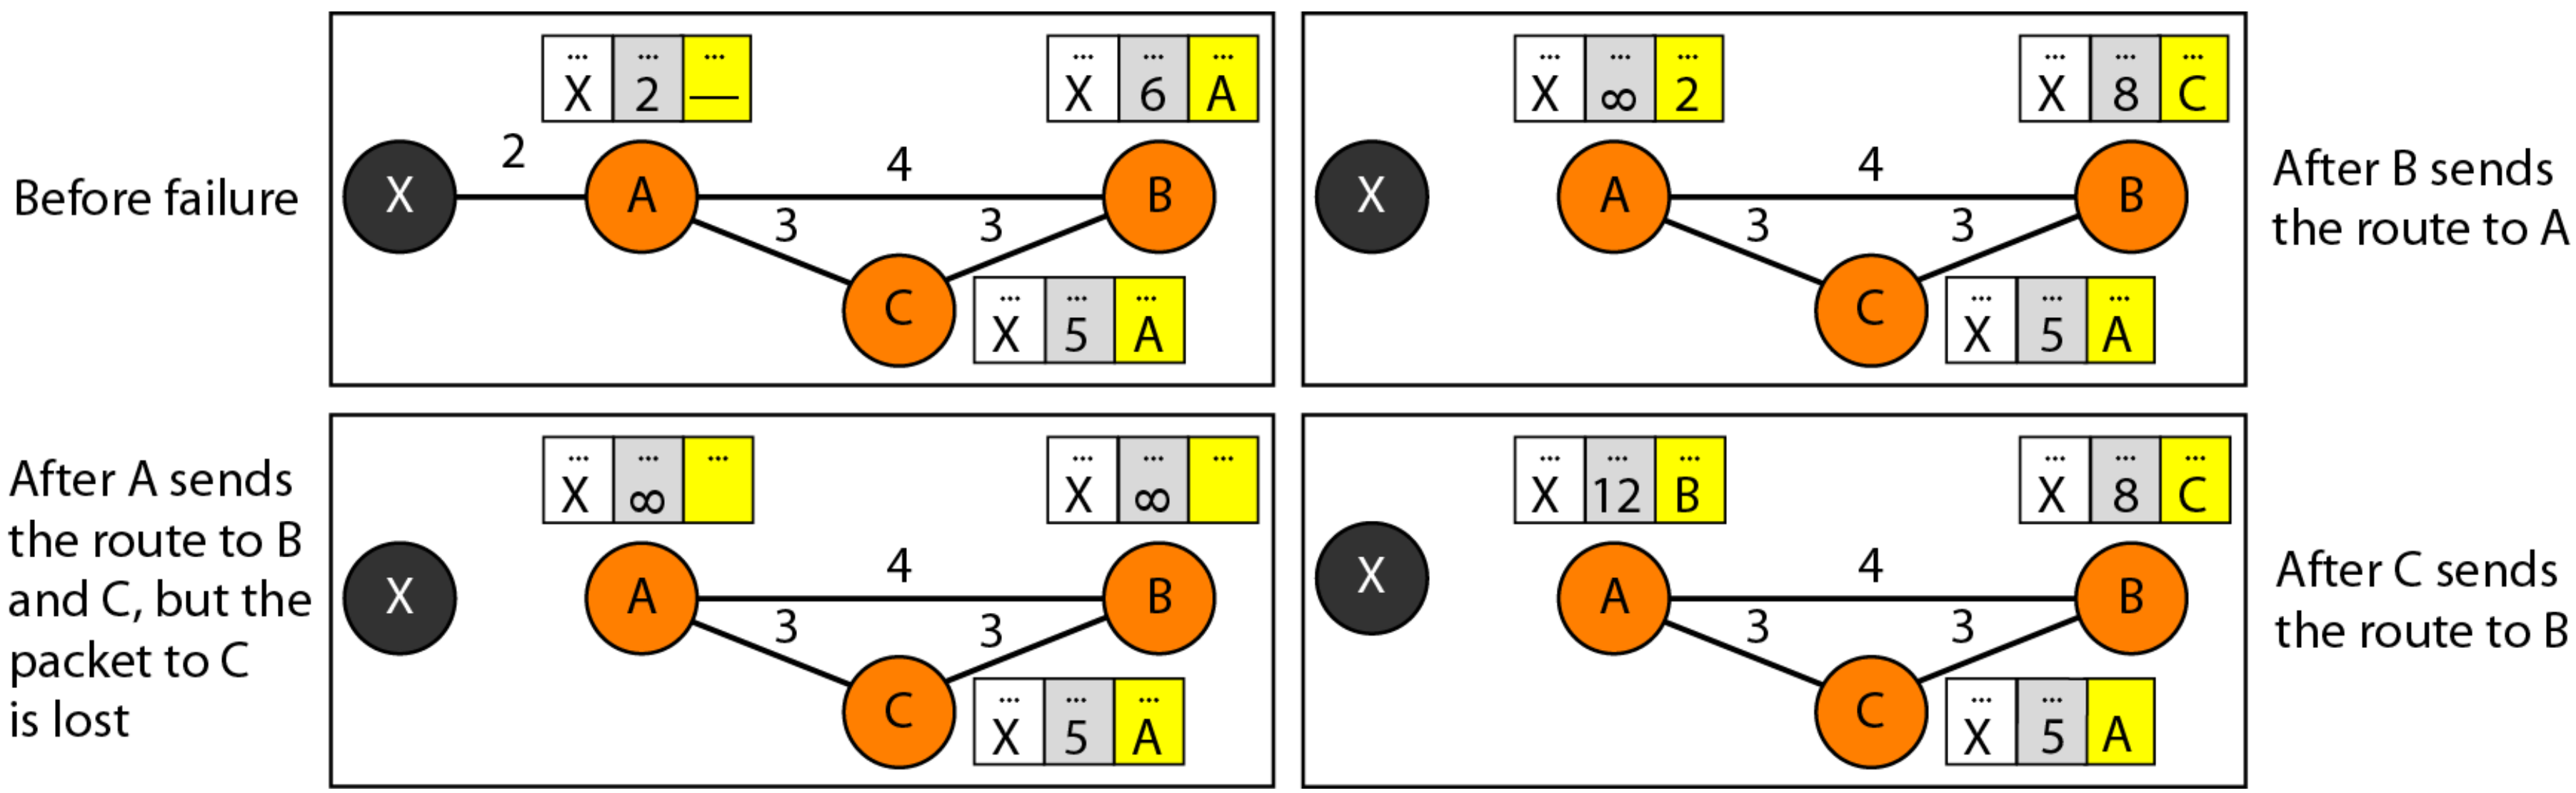

Figure 22.19 *Example of a domain using RIP*

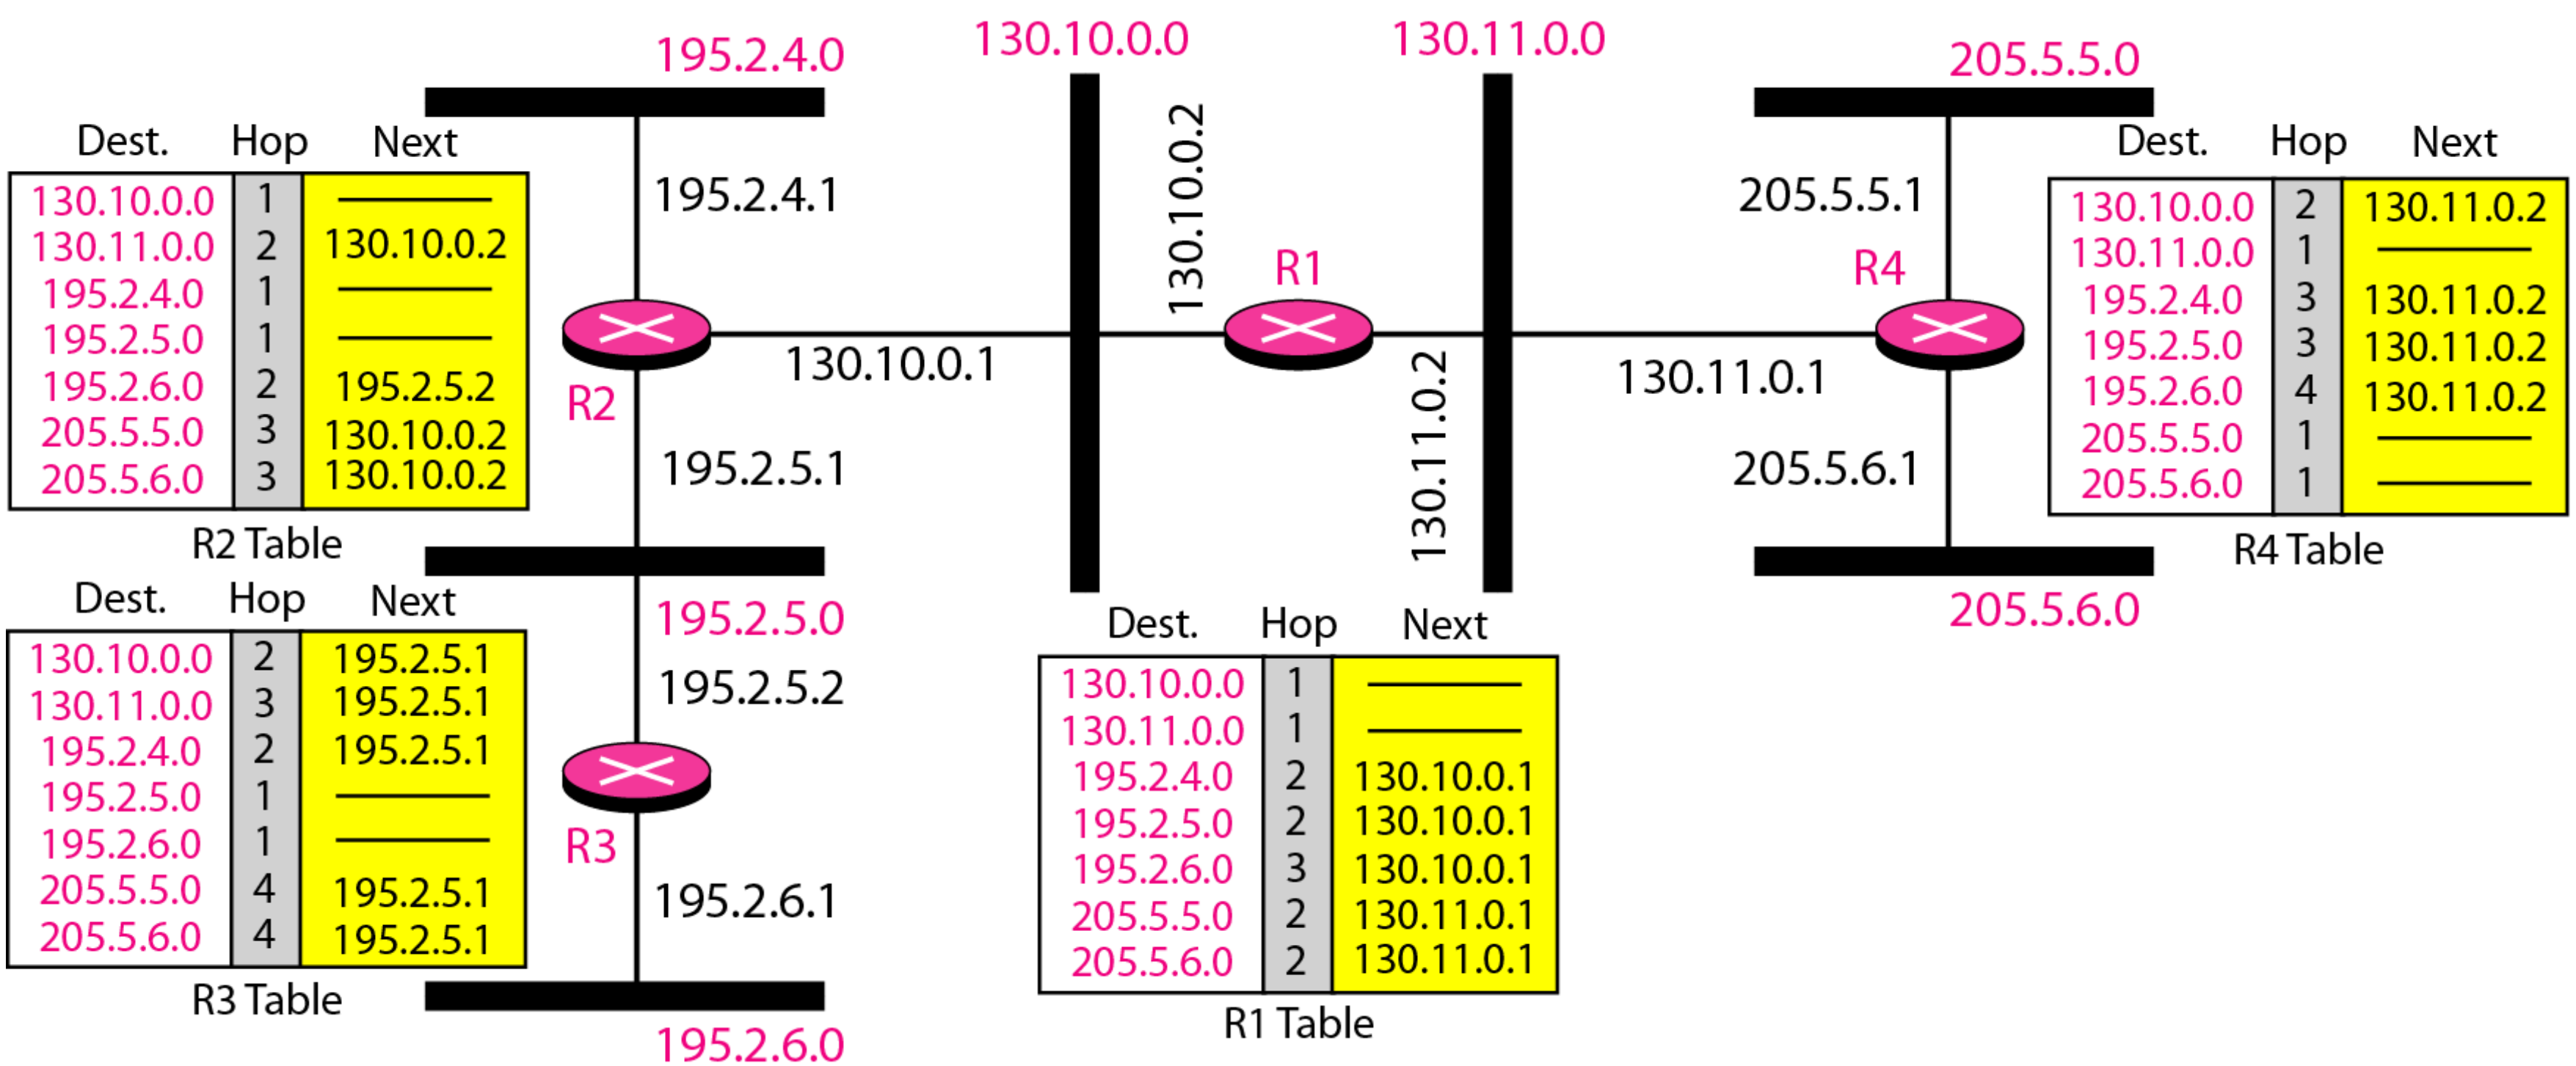

R2 Table

Dest.	Hop	Next
130.10.0.0	1	———
130.11.0.0	2	130.10.0.2
195.2.4.0	1	———
195.2.5.0	1	———
195.2.6.0	2	195.2.5.2
205.5.5.0	3	130.10.0.2
205.5.6.0	3	130.10.0.2

R3 Table

Dest.	Hop	Next
130.10.0.0	2	195.2.5.1
130.11.0.0	3	195.2.5.1
195.2.4.0	2	195.2.5.1
195.2.5.0	1	———
195.2.6.0	1	———
205.5.5.0	4	195.2.5.1
205.5.6.0	4	195.2.5.1

R1 Table

Dest.	Hop	Next
130.10.0.0	1	———
130.11.0.0	1	———
195.2.4.0	2	130.10.0.1
195.2.5.0	2	130.10.0.1
195.2.6.0	3	130.10.0.1
205.5.5.0	2	130.11.0.1
205.5.6.0	2	130.11.0.1

R4 Table

Dest.	Hop	Next
130.10.0.0	2	130.11.0.2
130.11.0.0	1	———
195.2.4.0	3	130.11.0.2
195.2.5.0	3	130.11.0.2
195.2.6.0	4	130.11.0.2
205.5.5.0	1	———
205.5.6.0	1	———

Figure 22.20 *Concept of link state routing*

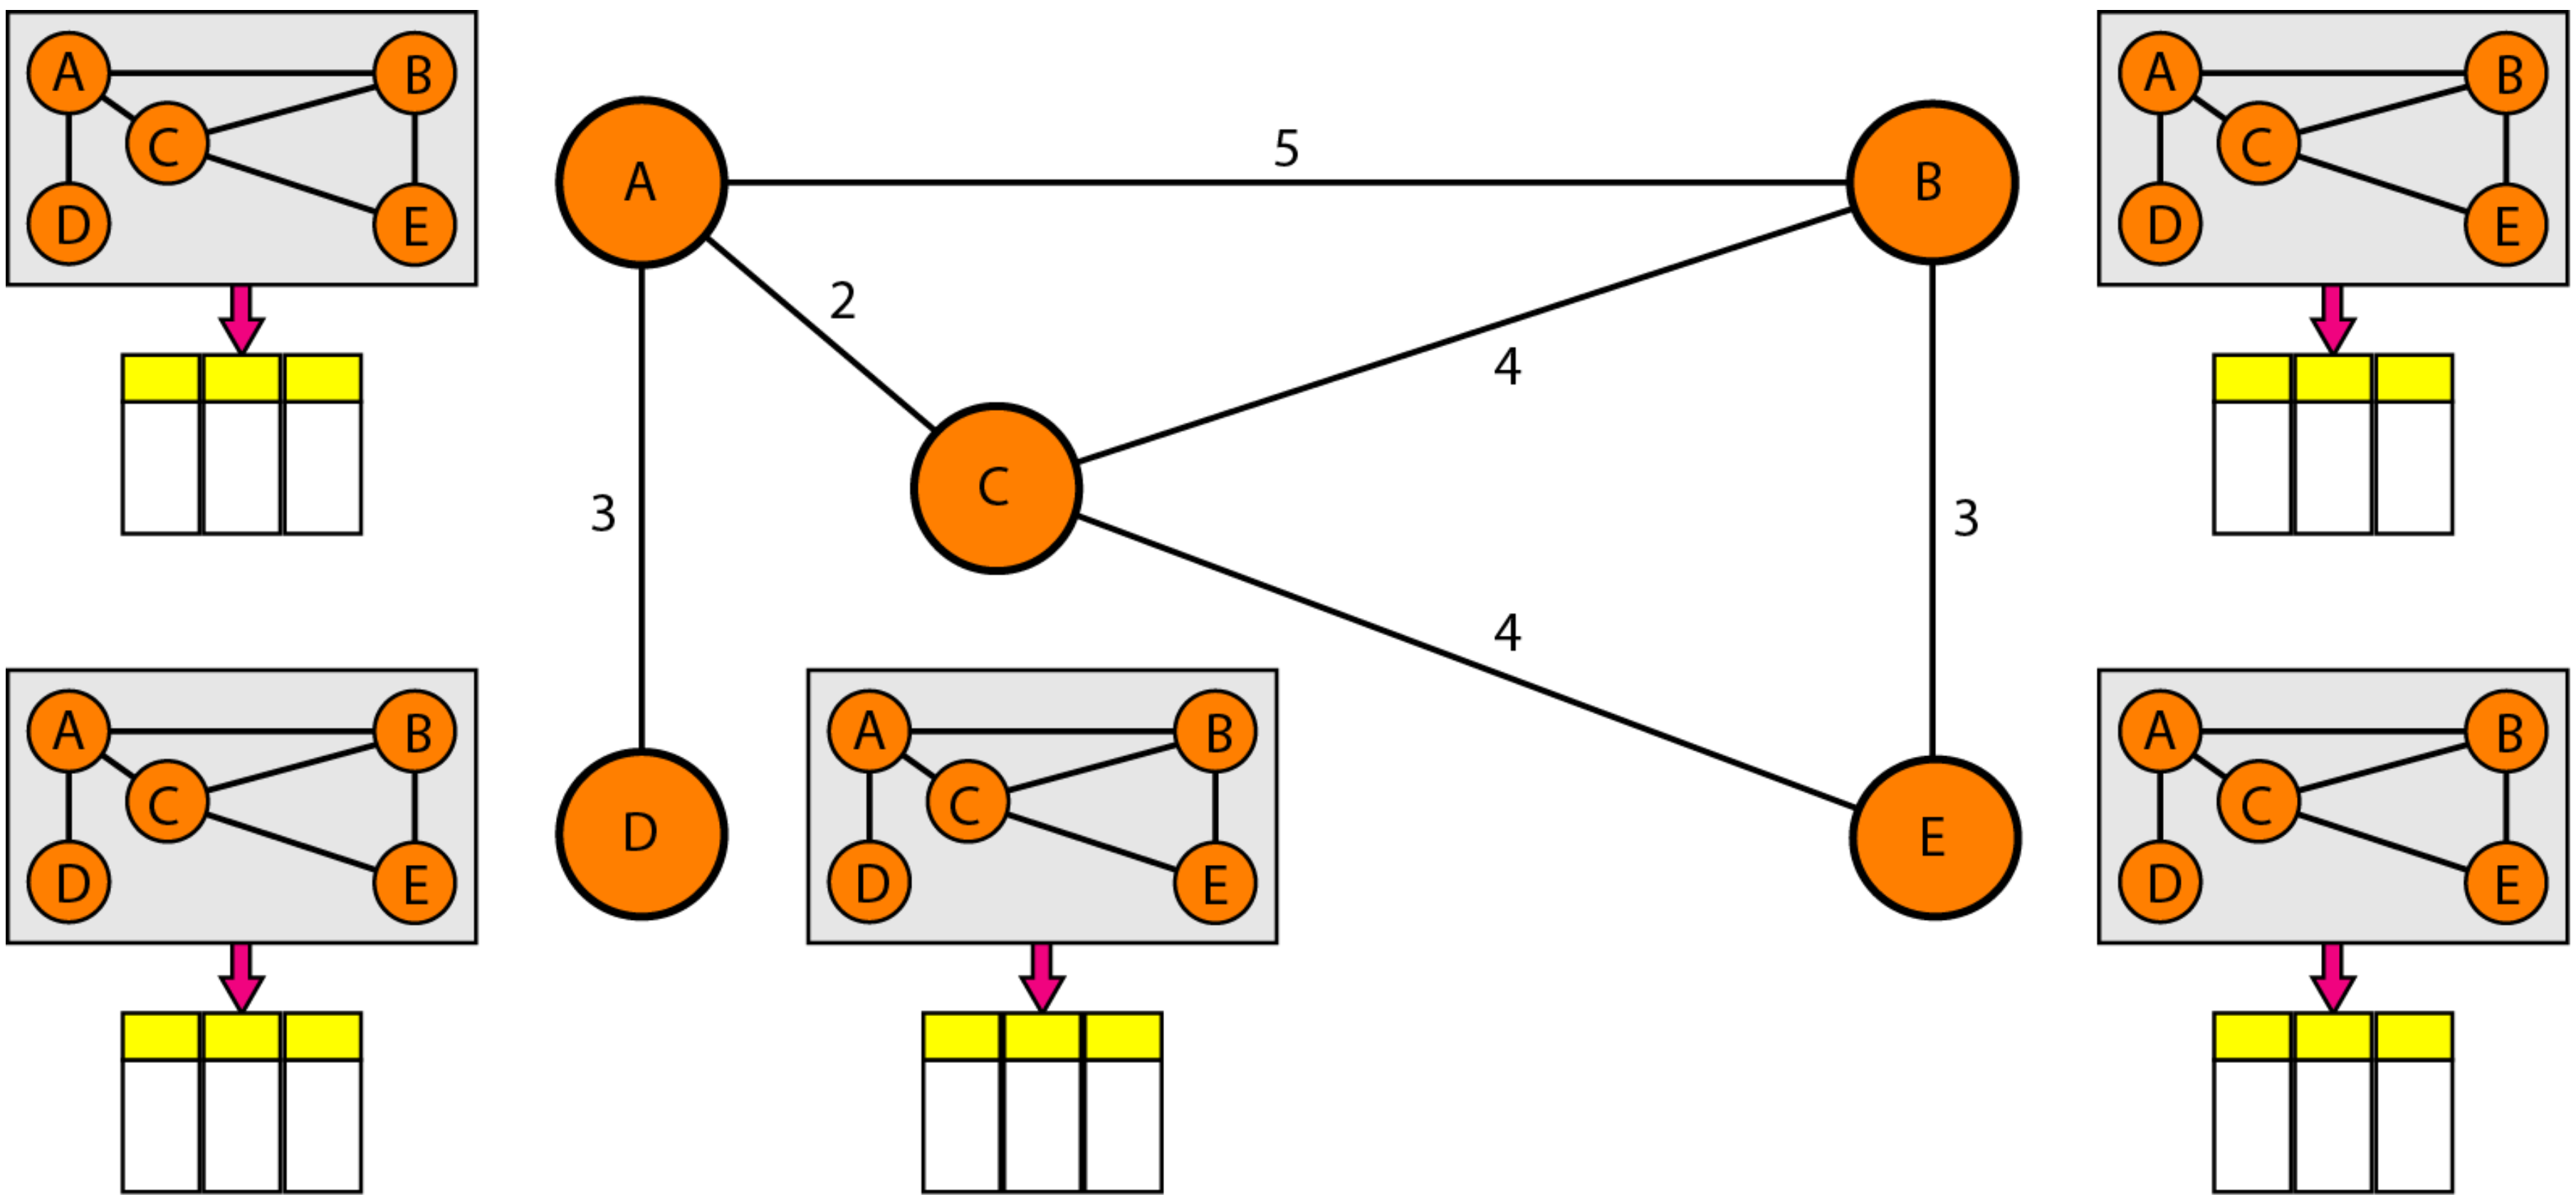

Figure 22.21 *Link state knowledge*

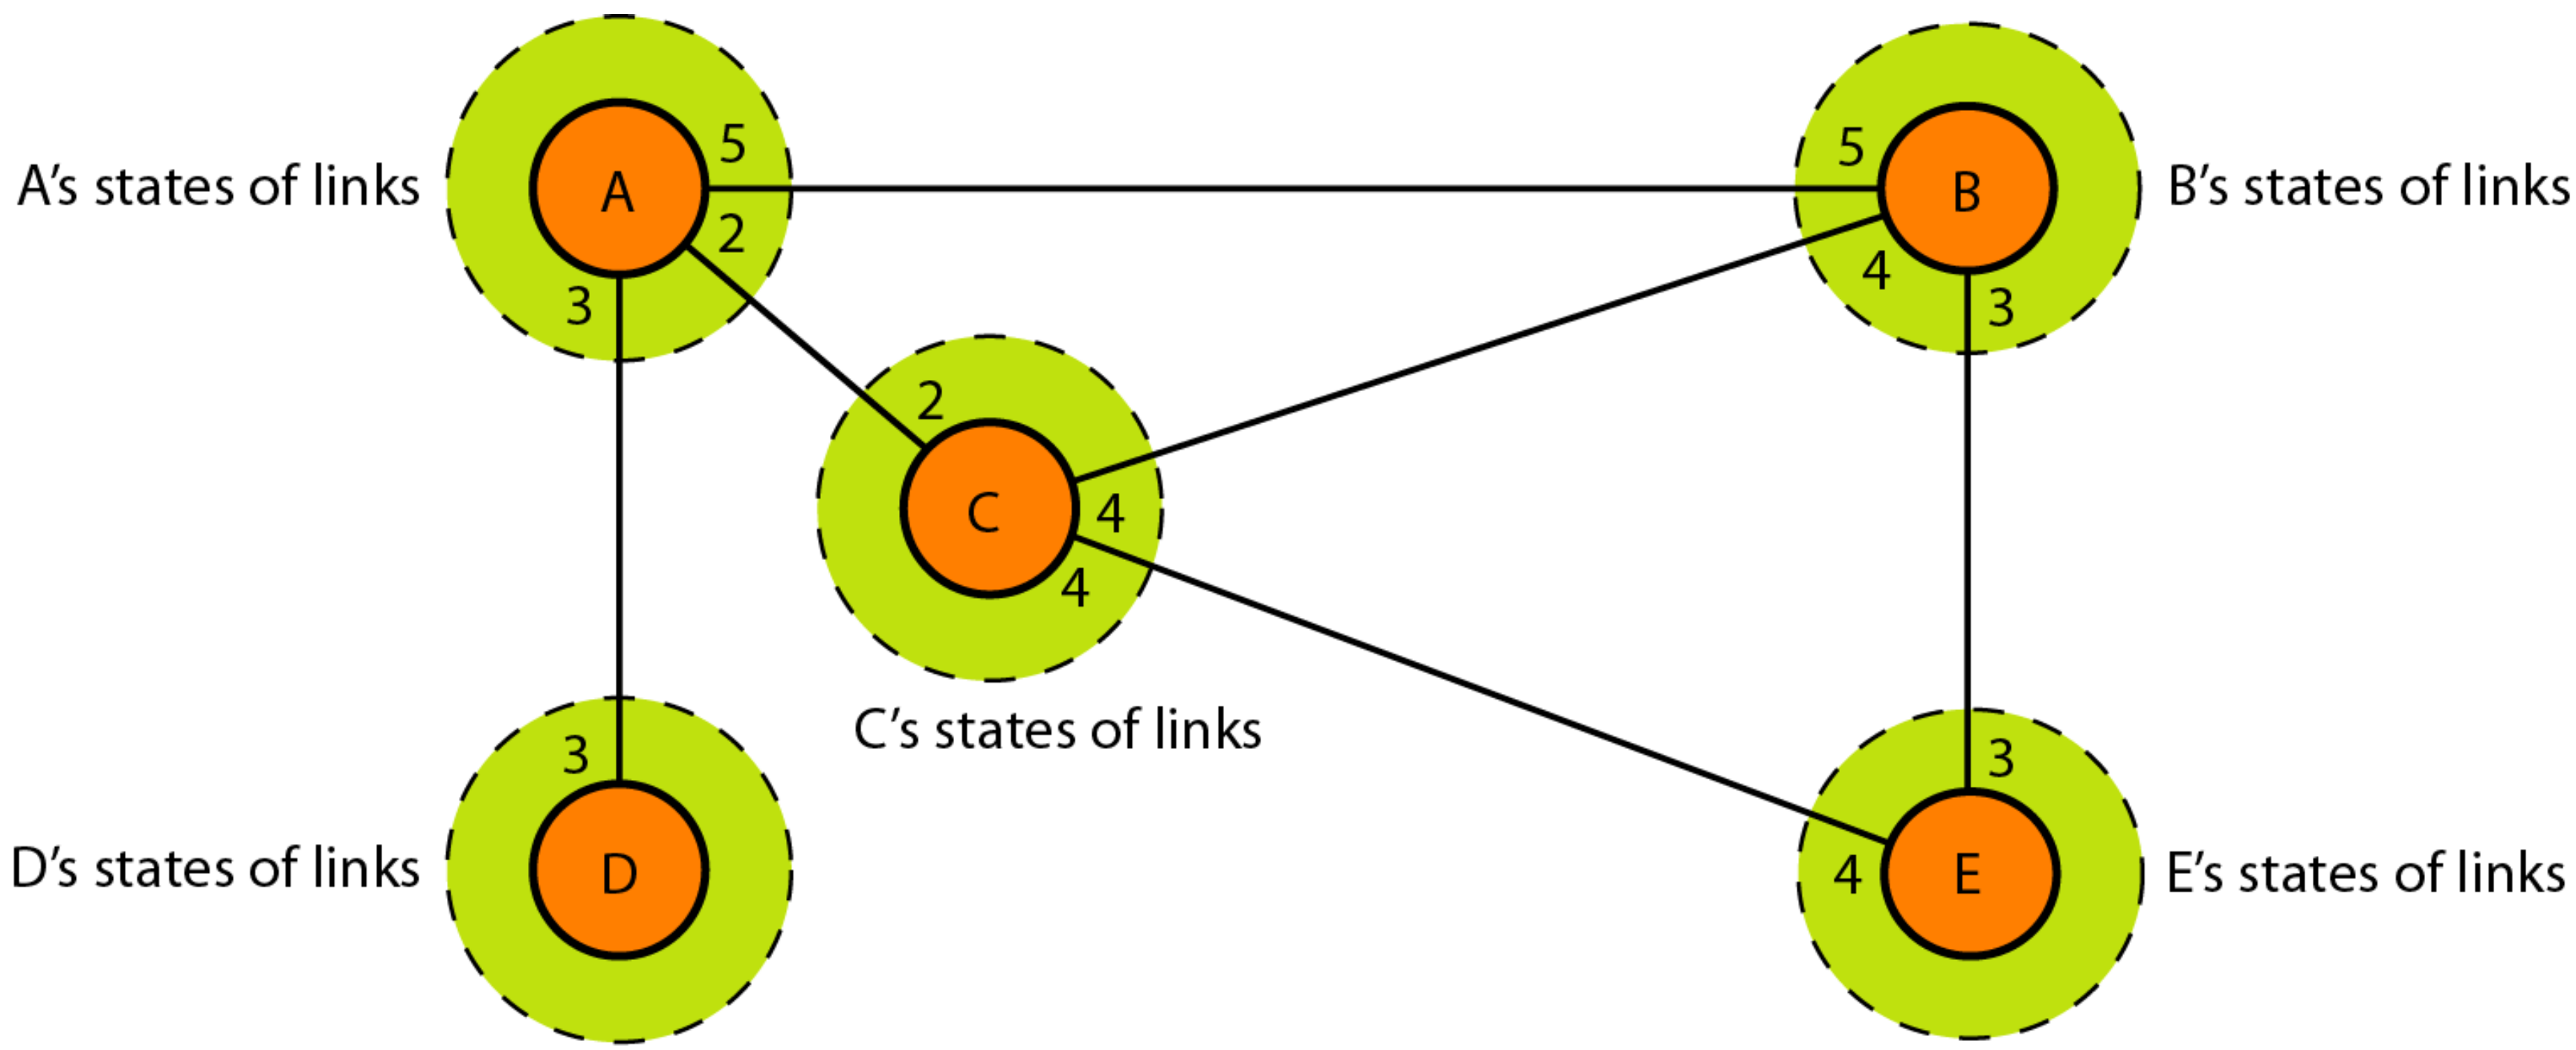

Figure 22.22 *Dijkstra algorithm*

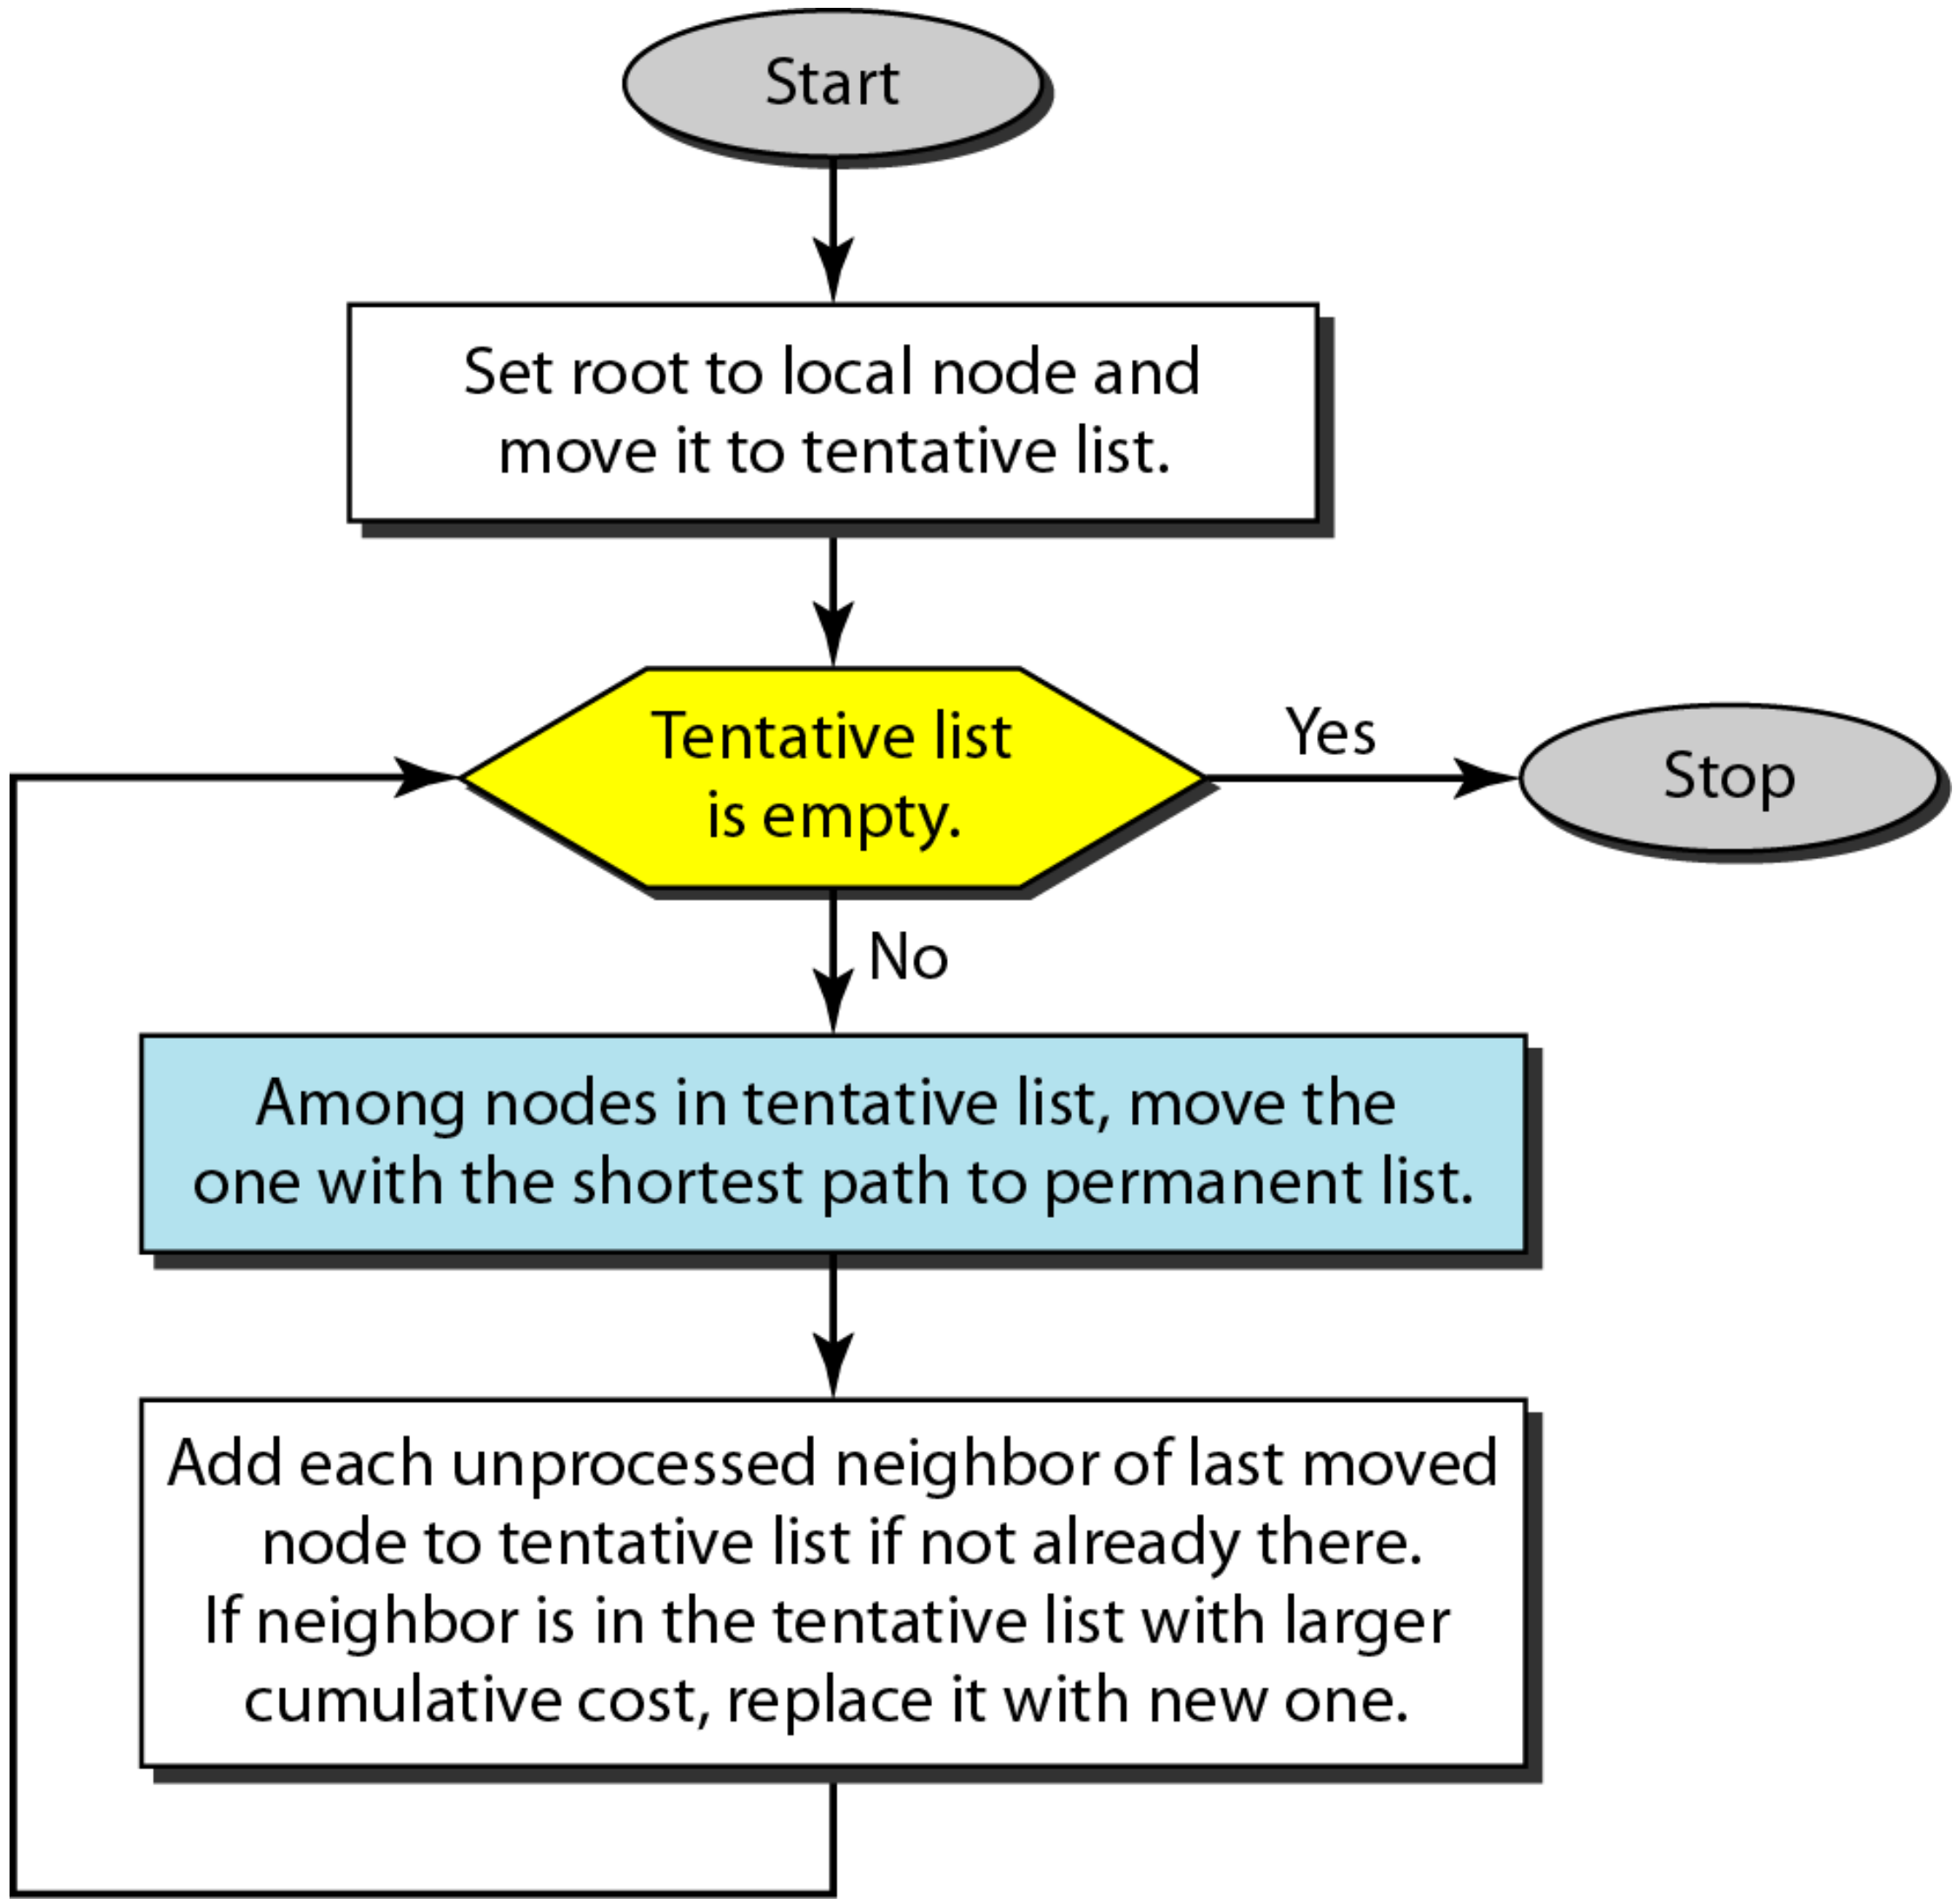

Figure 22.23 *Example of formation of shortest path tree*

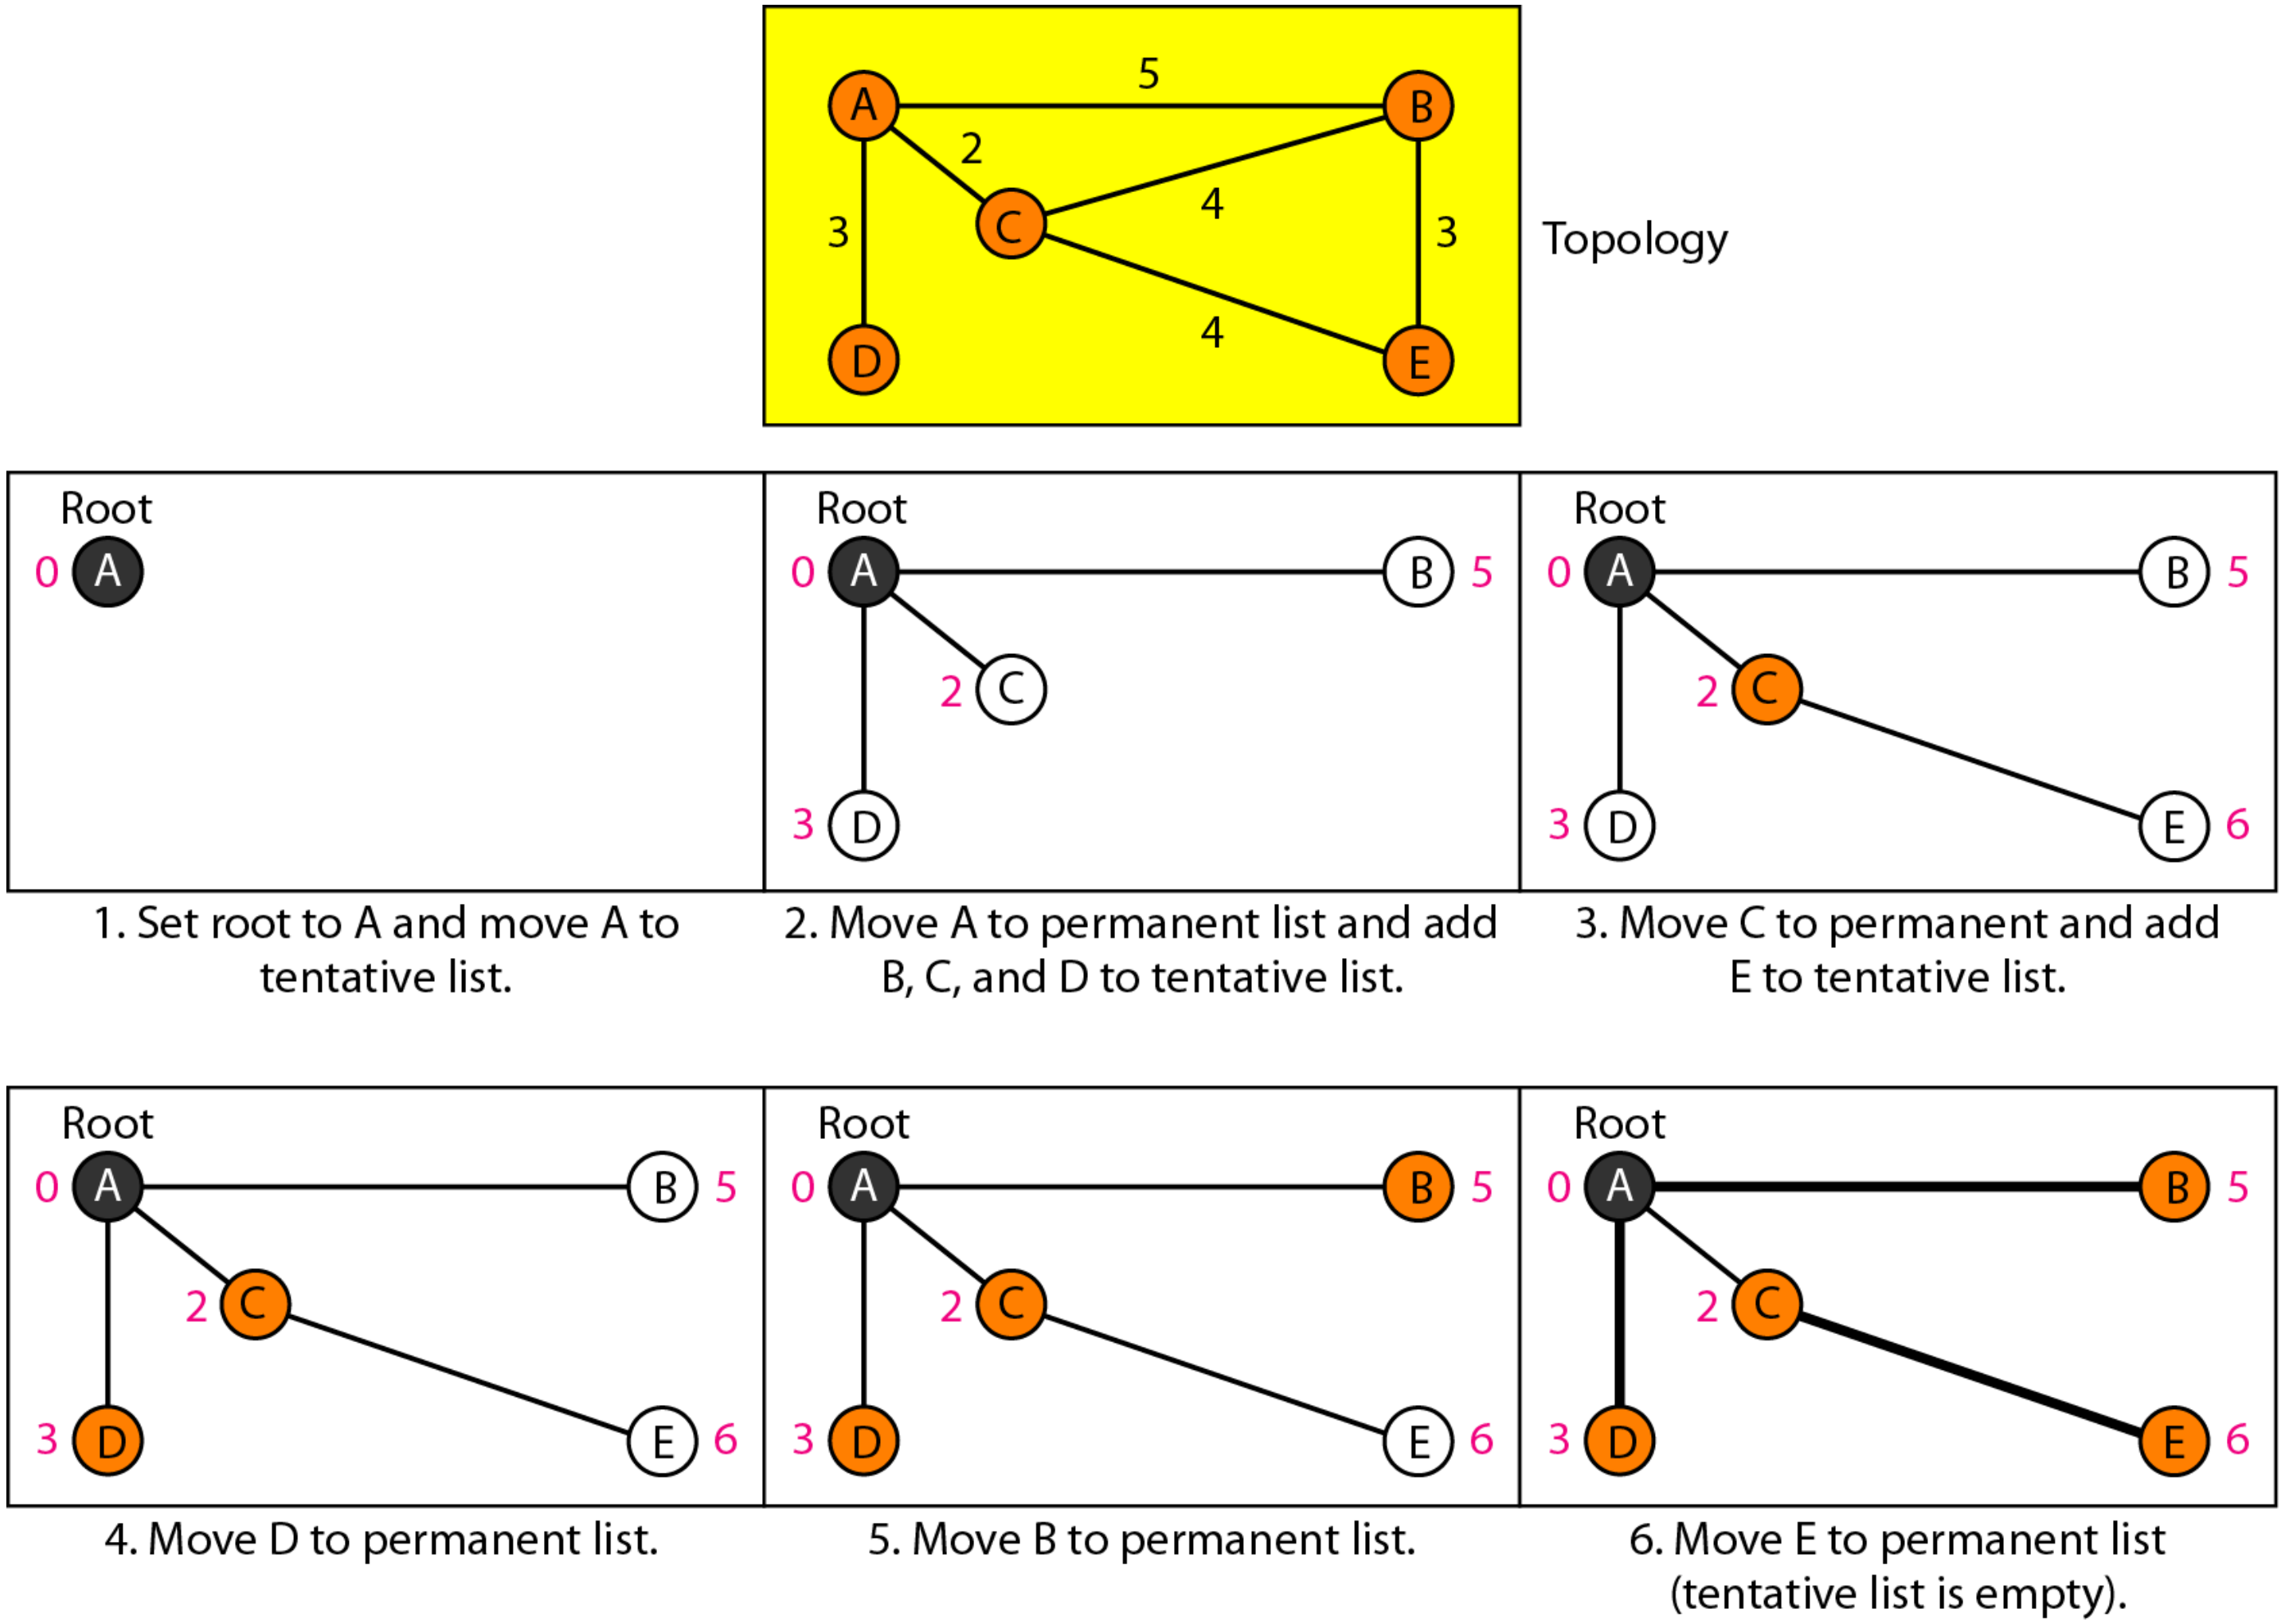

Table 22.2 ***Routing table for node A***

Node	*Cost*	*Next Router*
A	0	—
B	5	—
C	2	—
D	3	—
E	6	C

Figure 22.24 *Areas in an autonomous system*

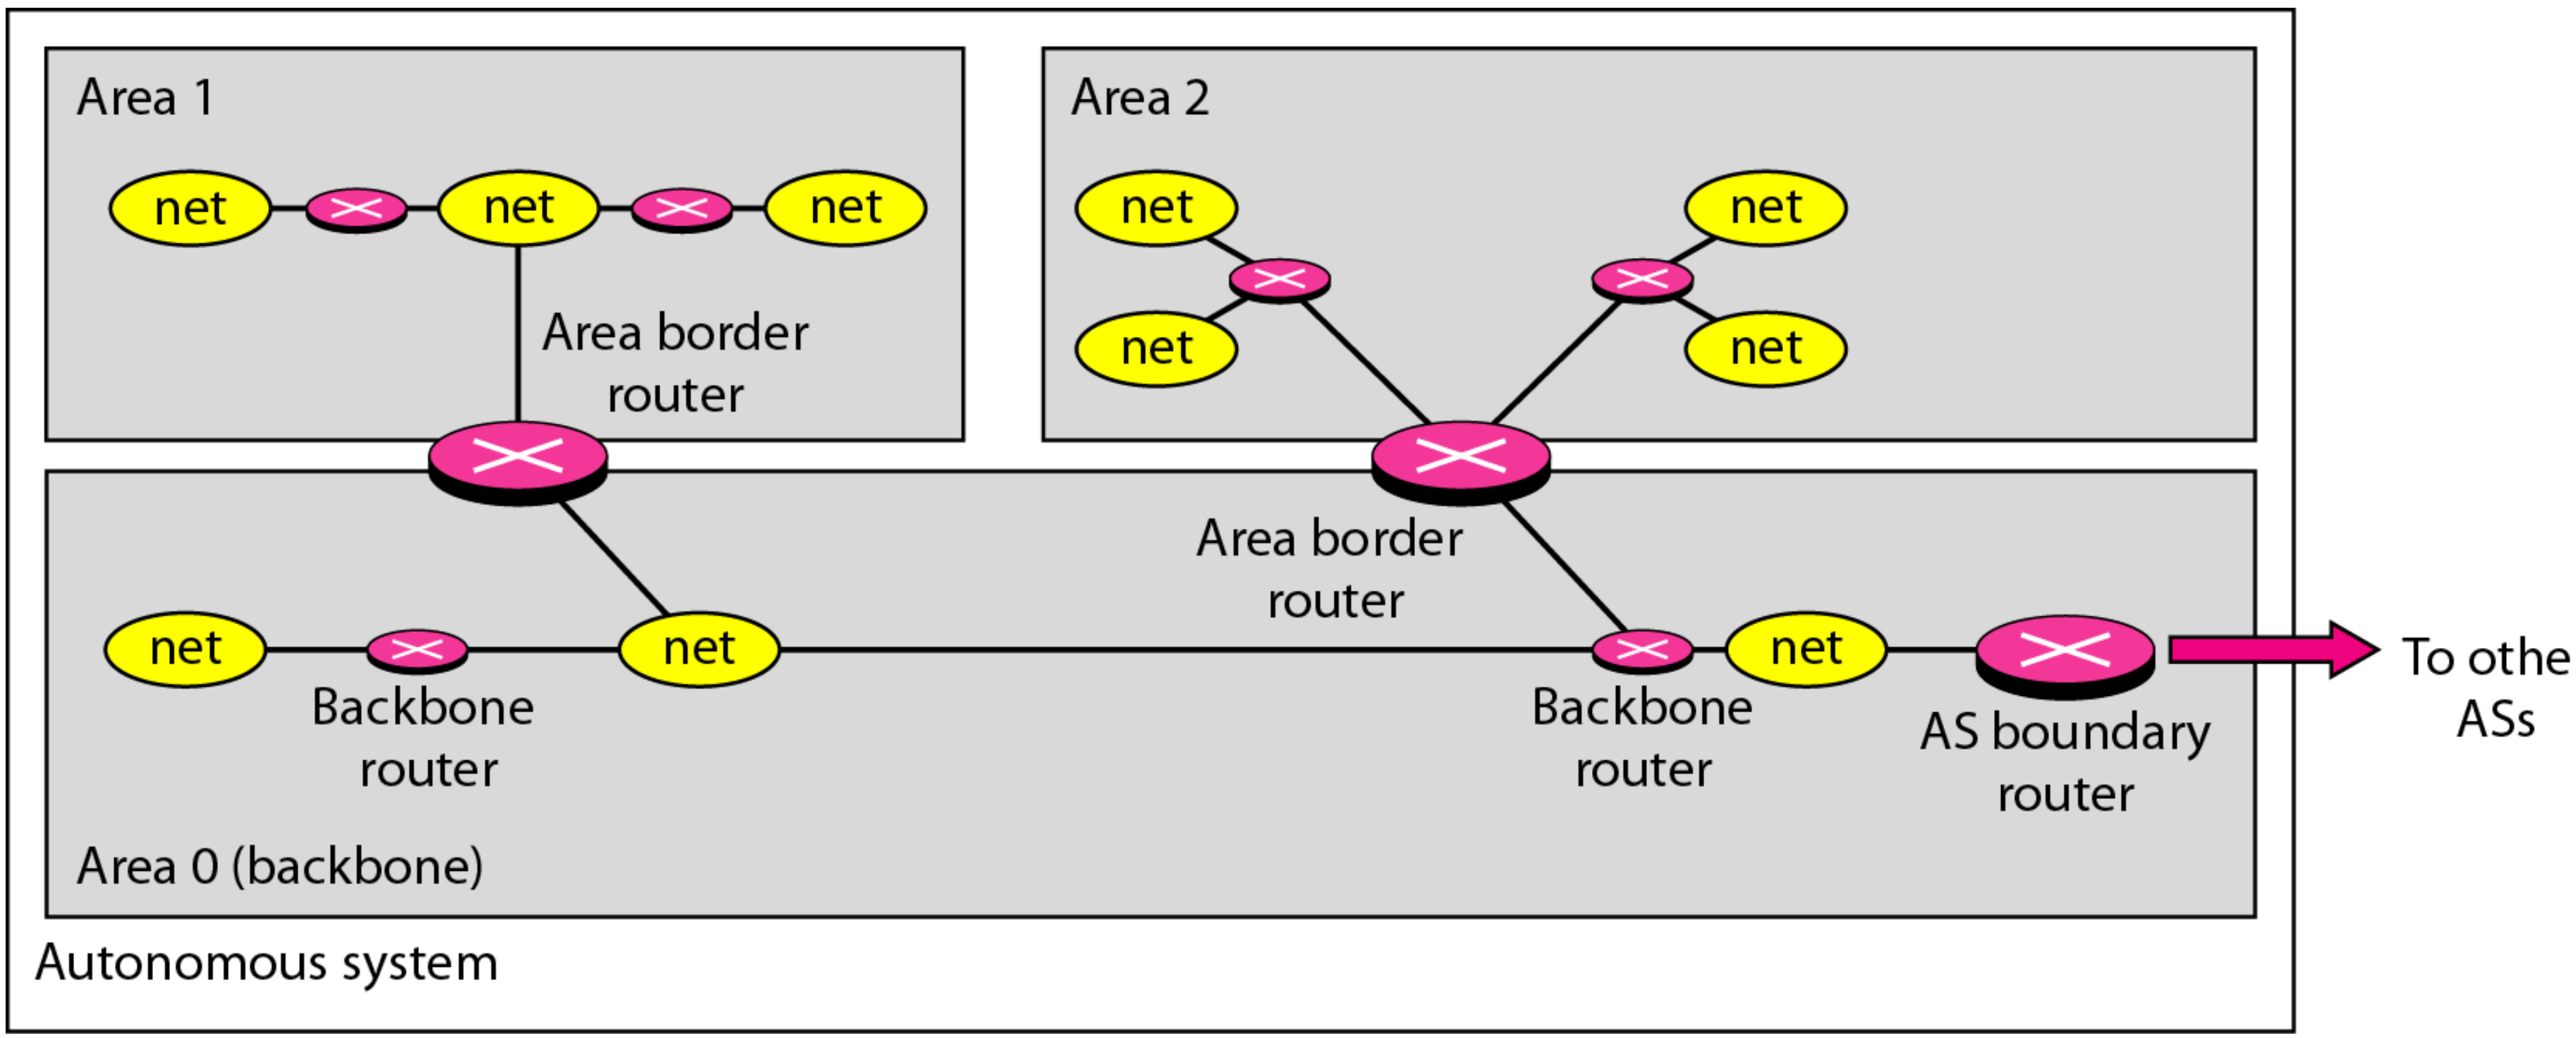

Figure 22.25 *Types of links*

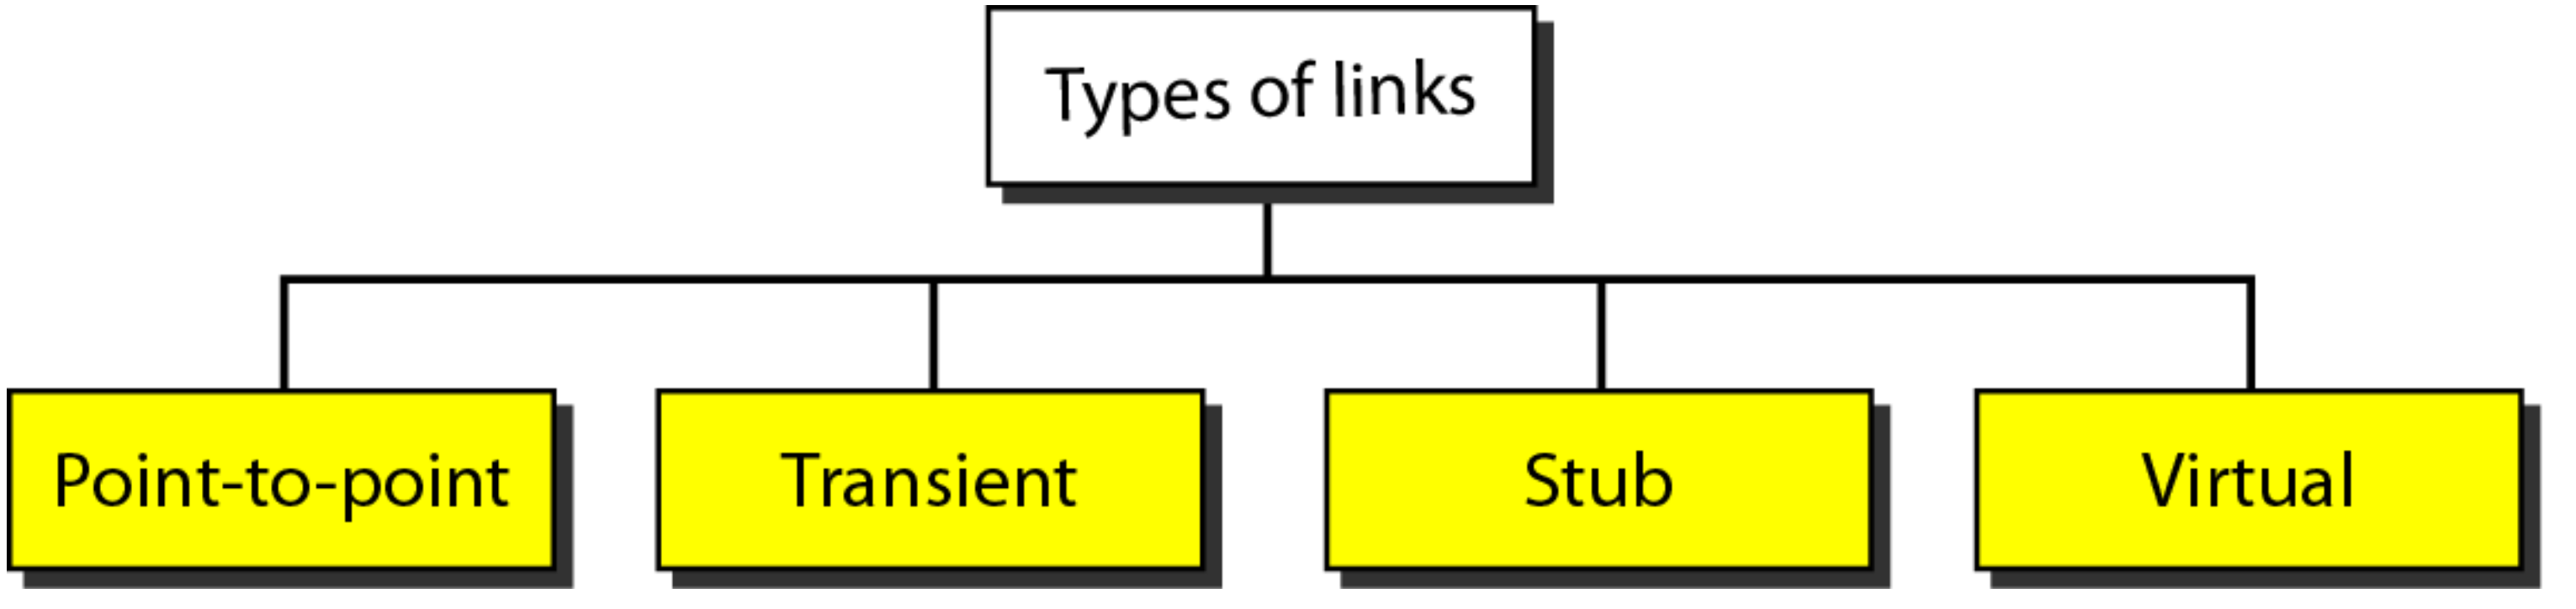

Figure 22.26 *Point-to-point link*

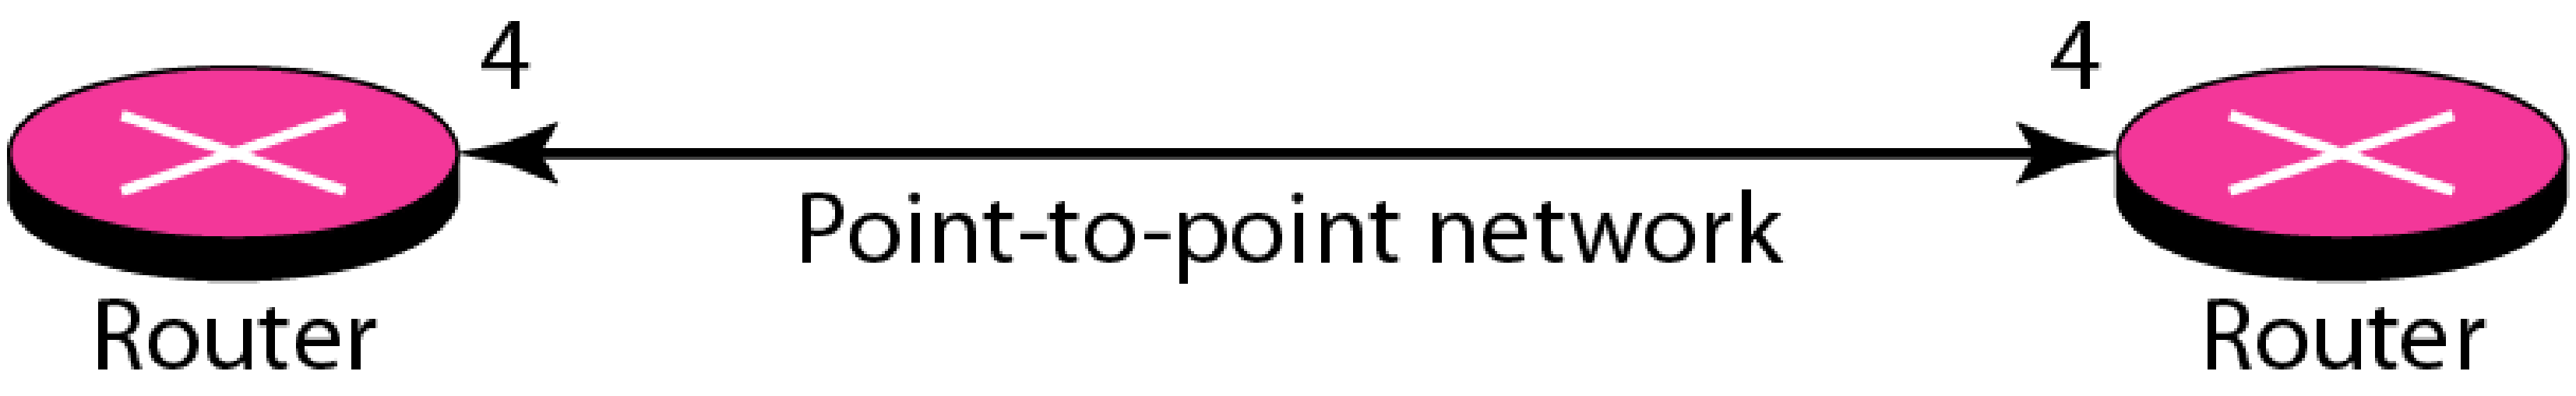

Figure 22.27 *Transient link*

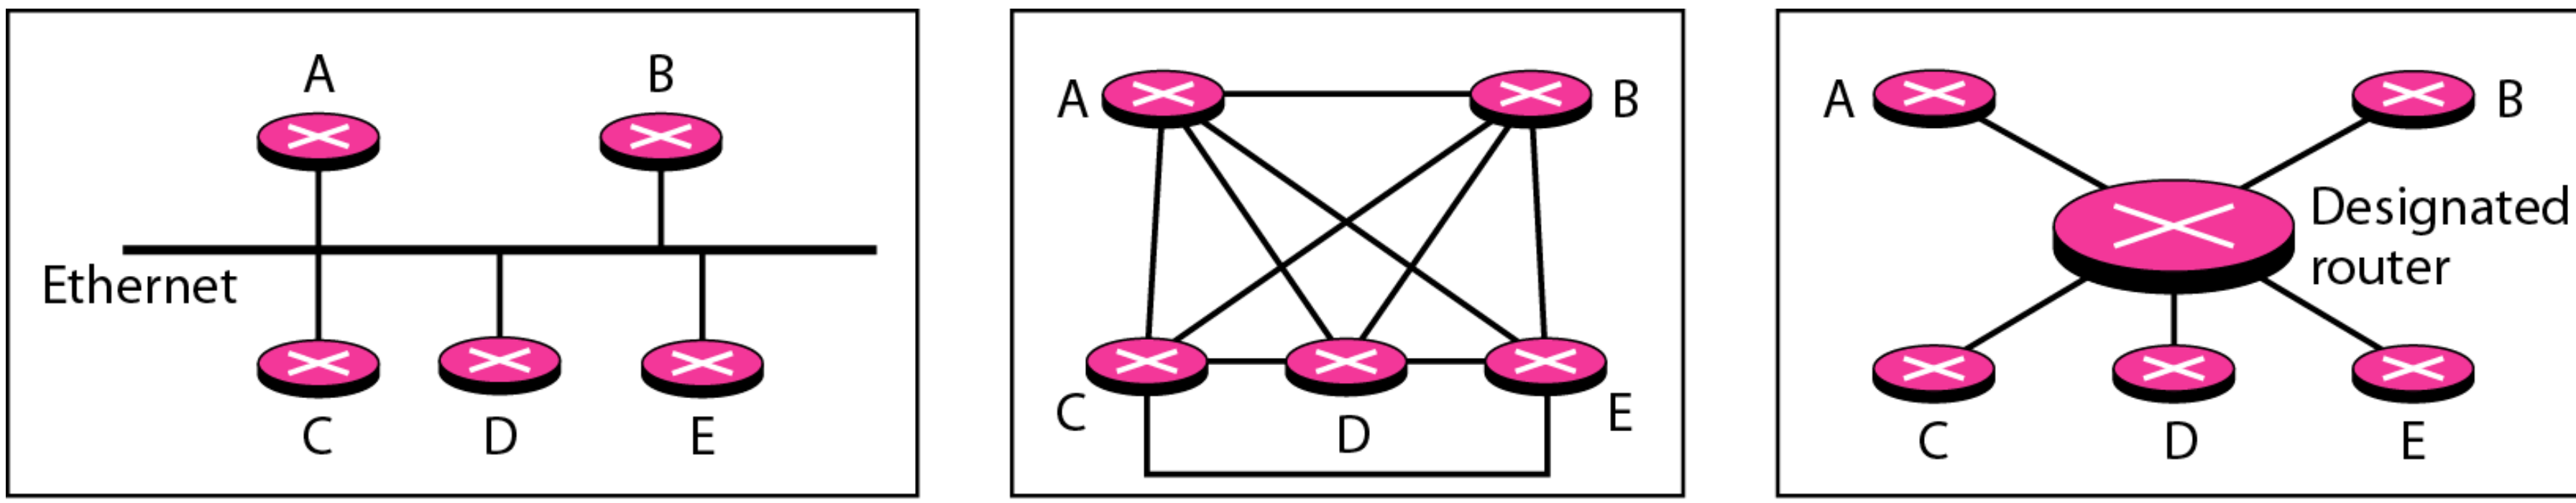

a. Transient network

b. Unrealistic representation

c. Realistic representation

Figure 22.28 *Stub link*

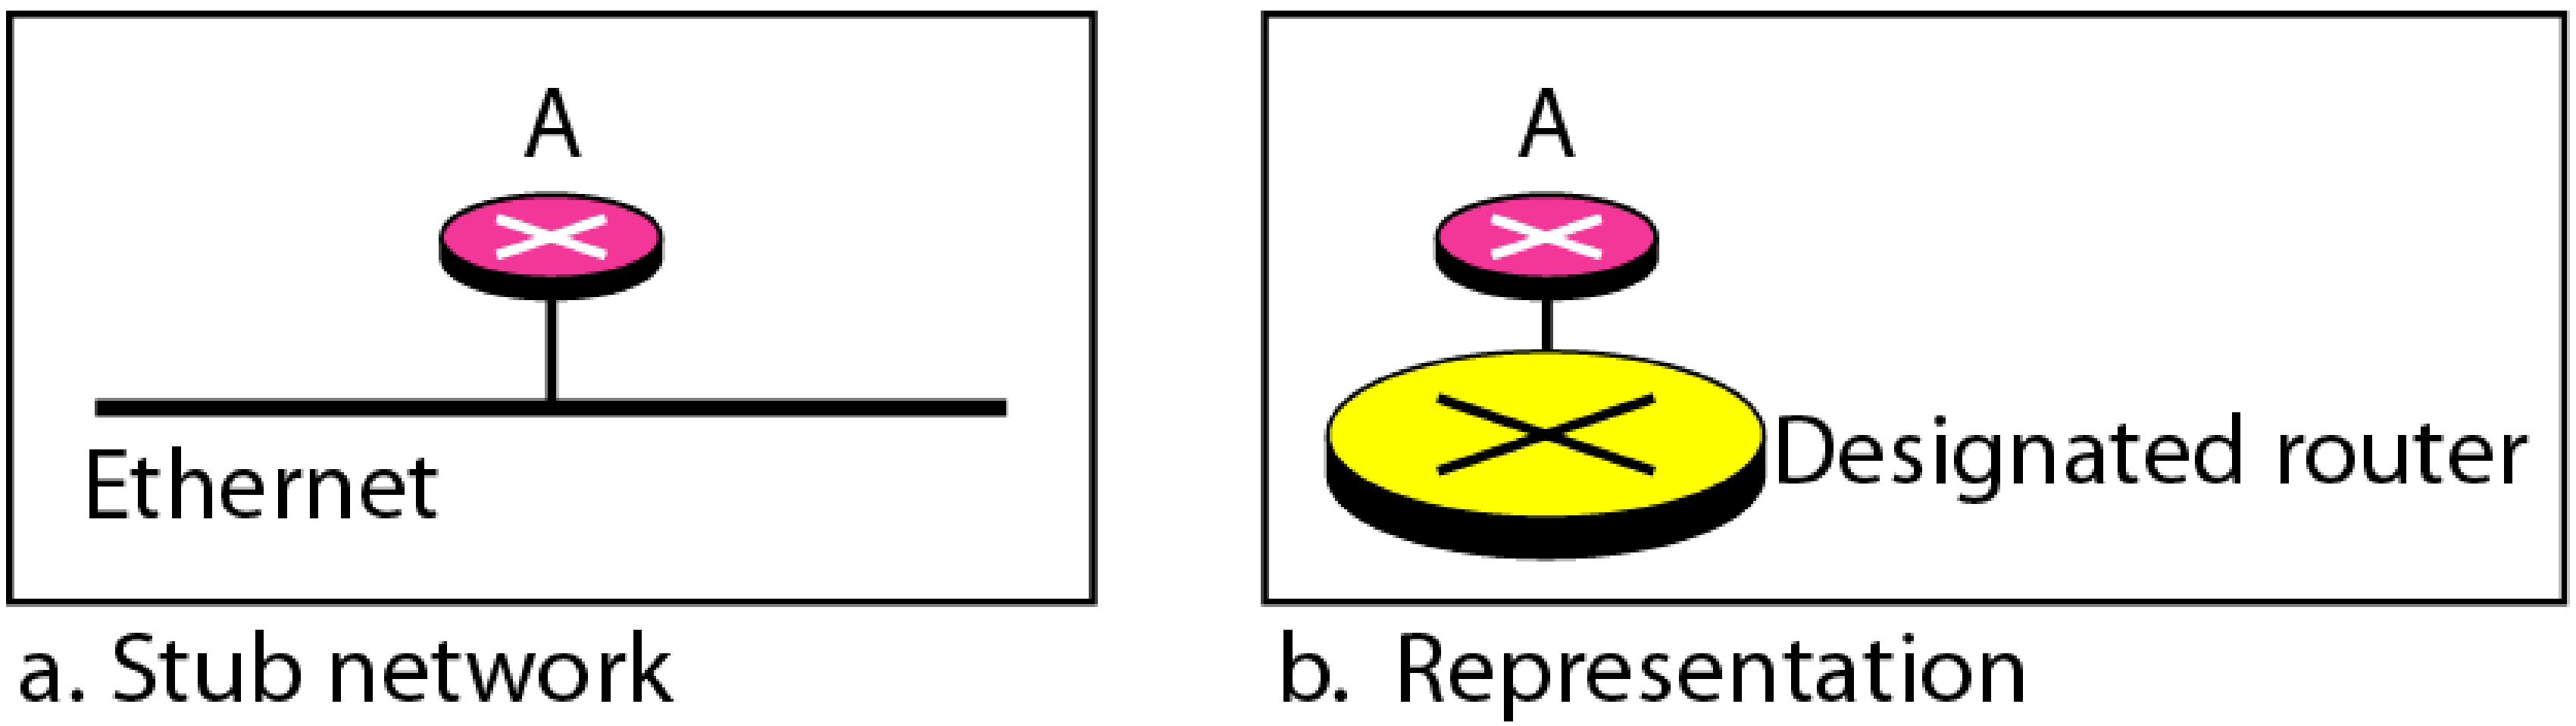

Figure 22.29 *Example of an AS and its graphical representation in OSPF*

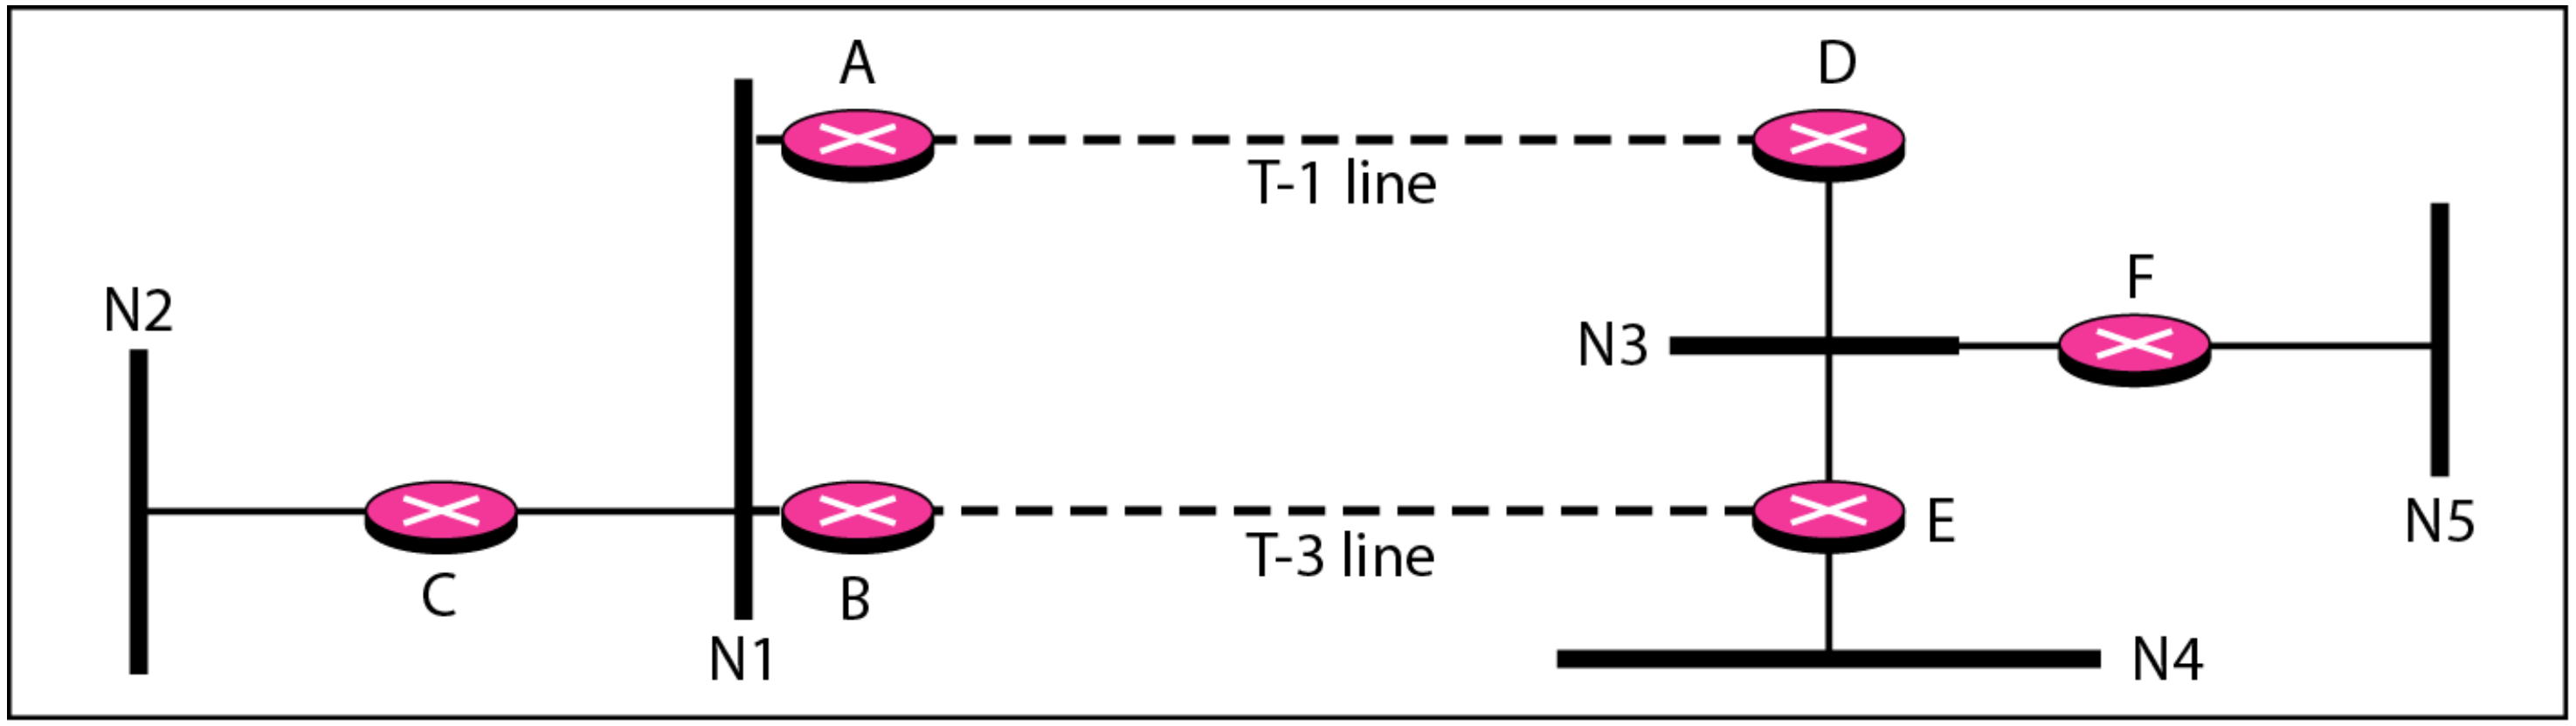

a. Autonomous system

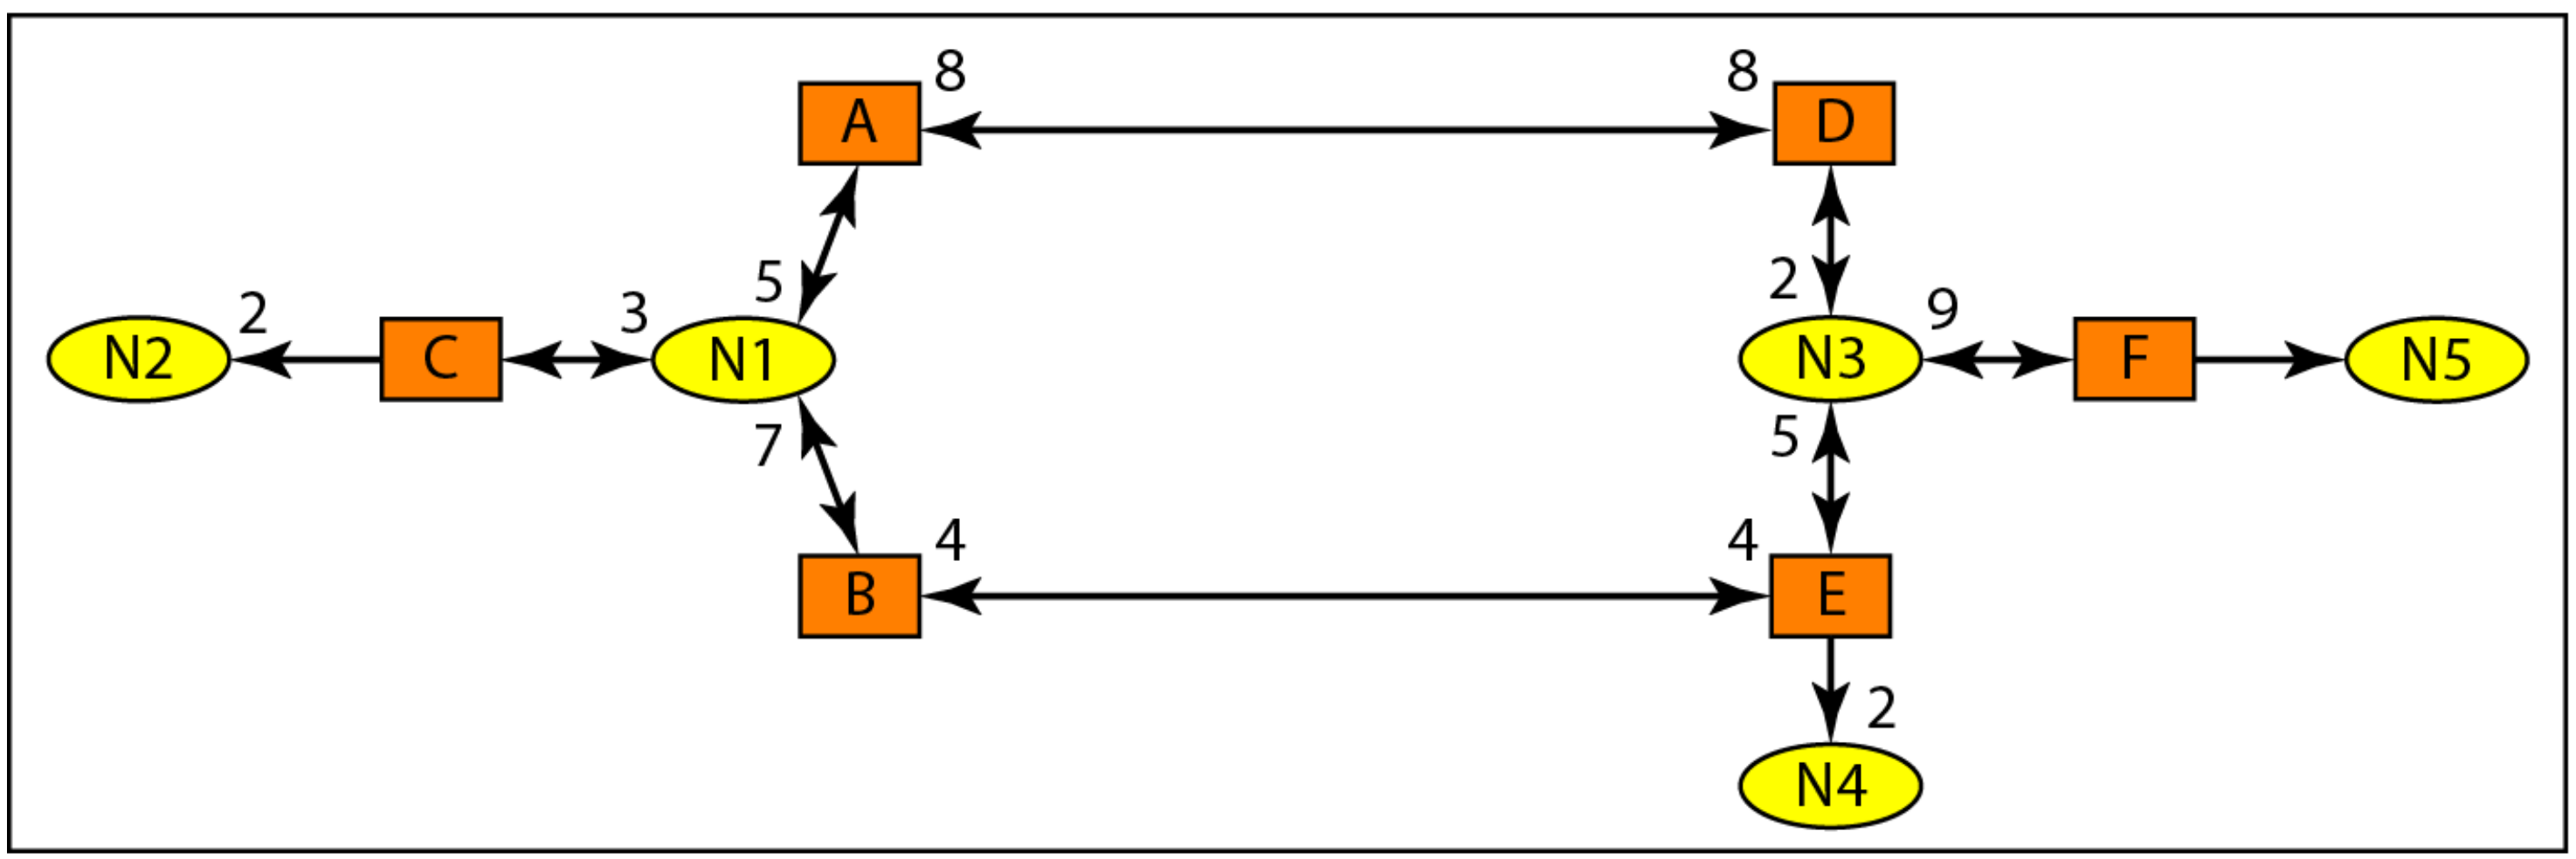

b. Graphical representation

Figure 22.30 *Initial routing tables in path vector routing*

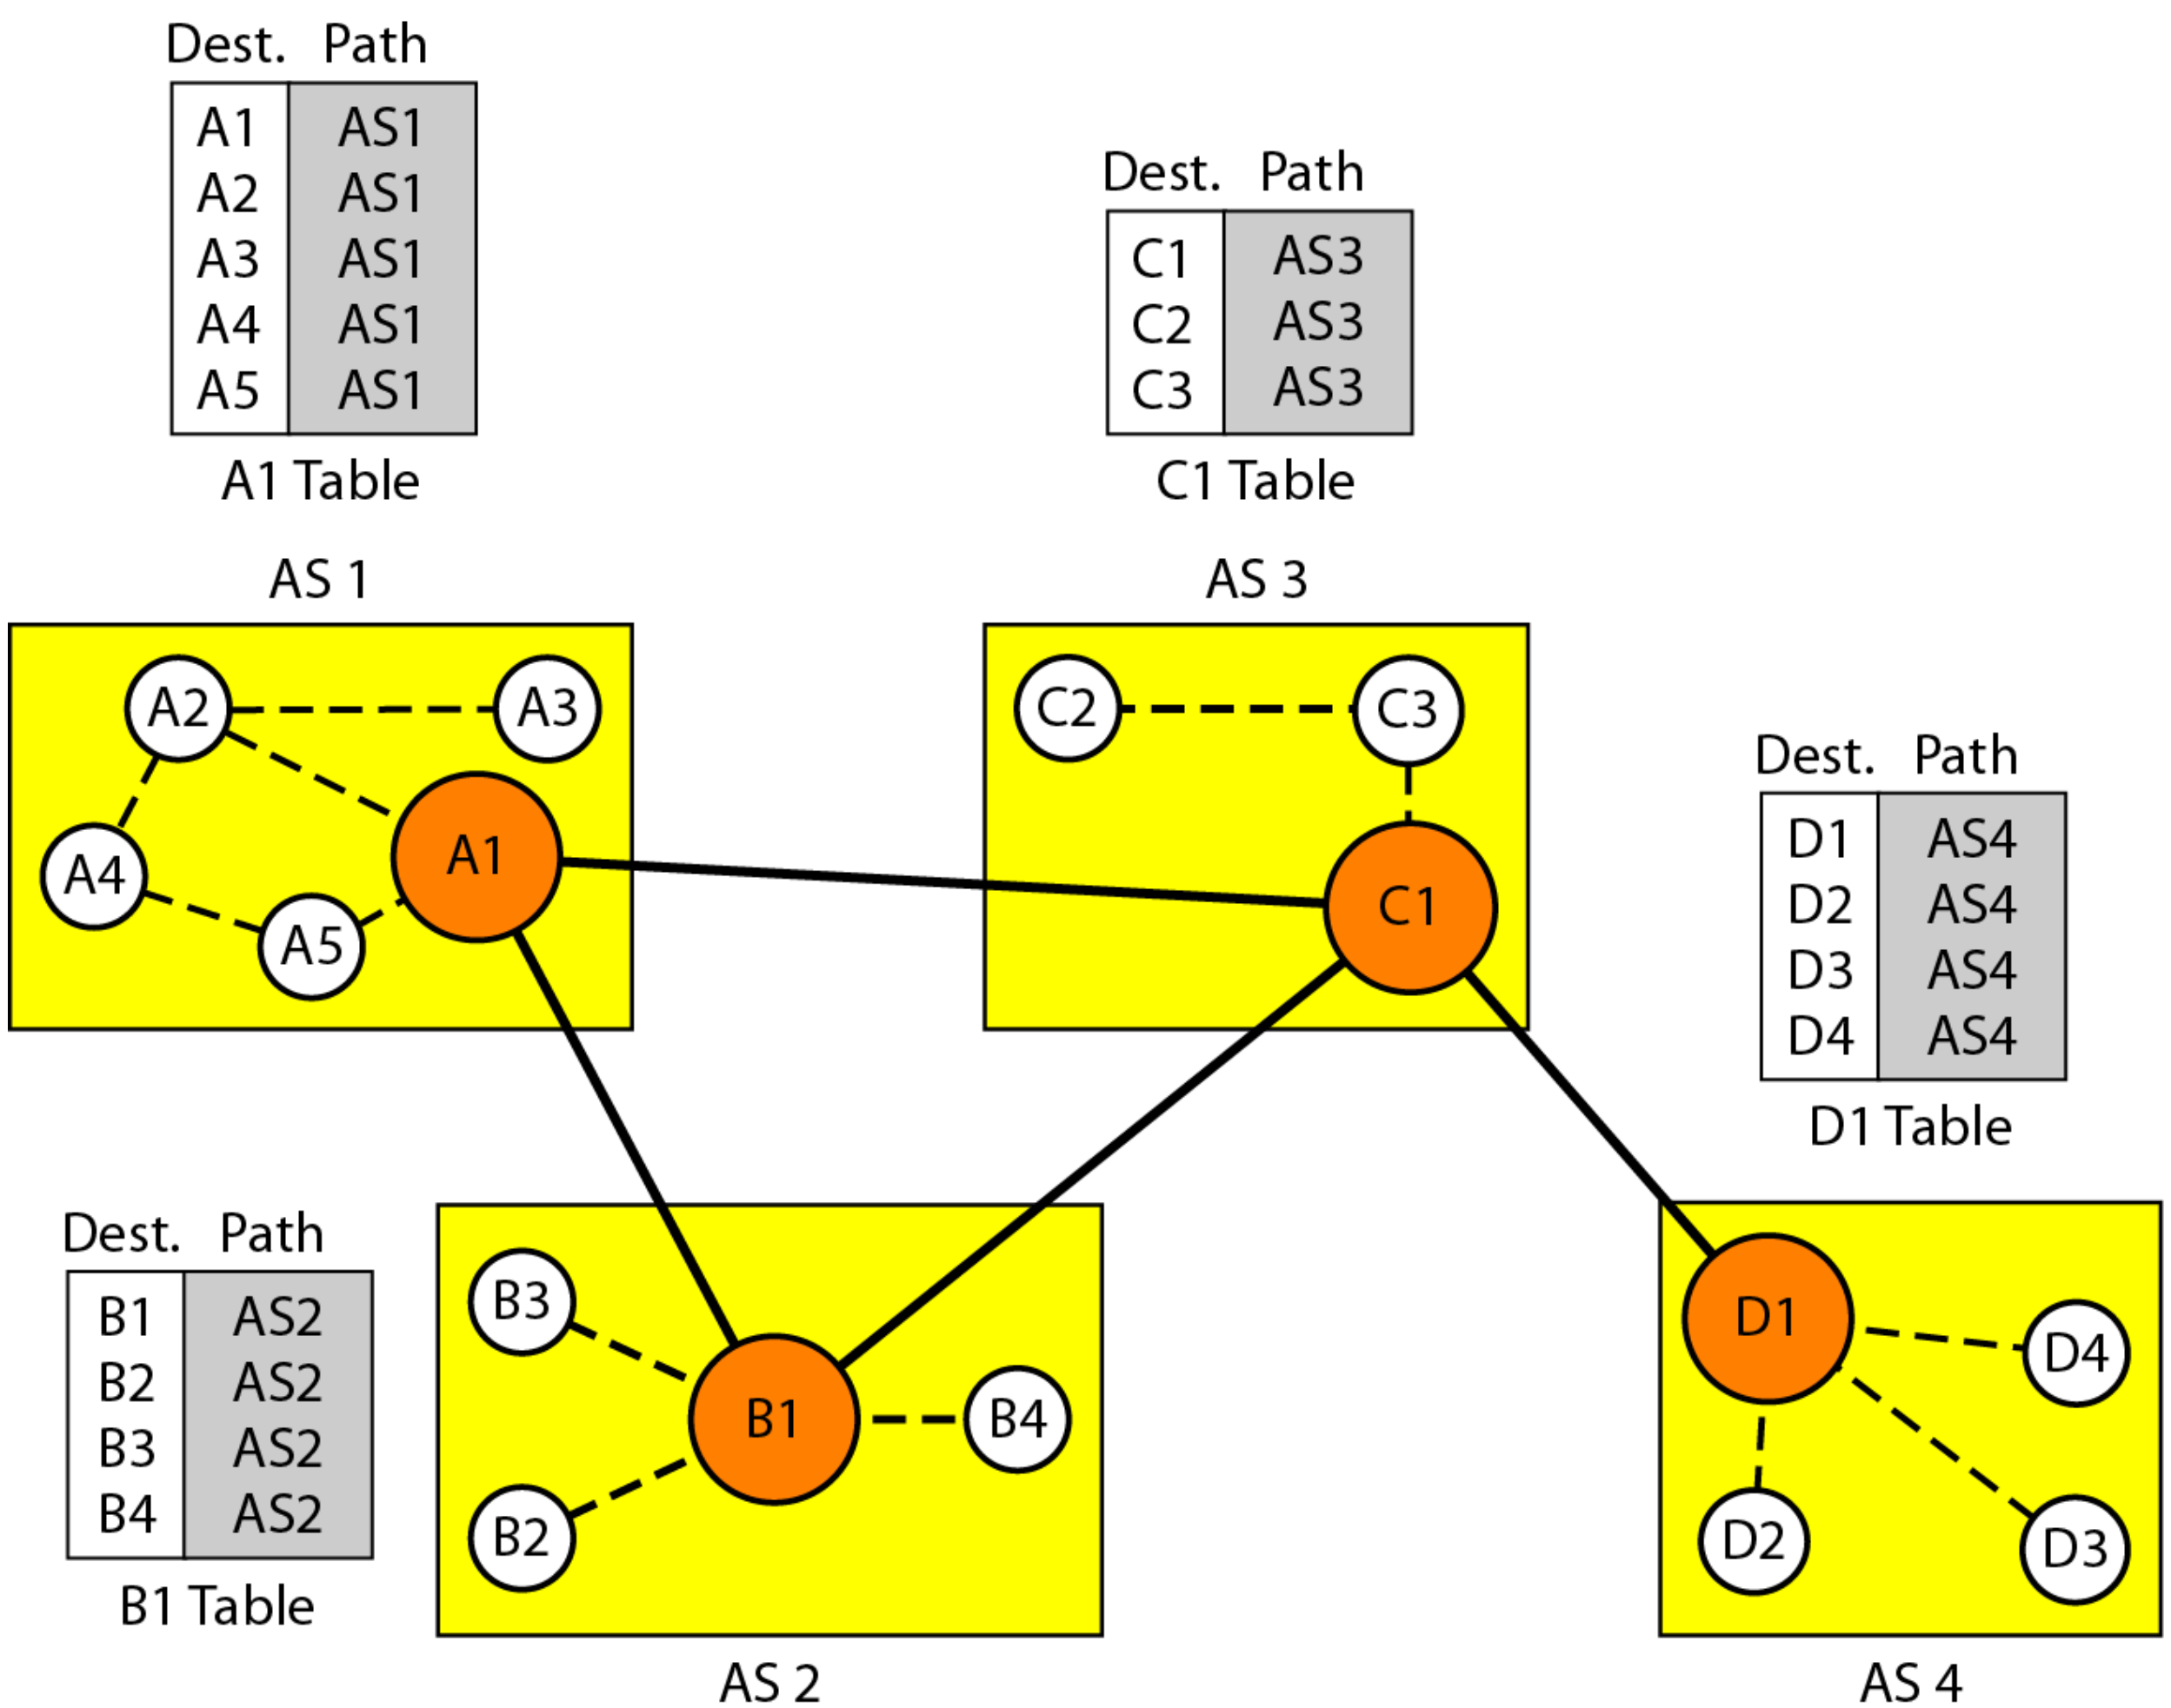

Figure 22.31 *Stabilized tables for three autonomous systems*

Dest.	Path
A1	AS1
…	
A5	AS1
B1	AS1-AS2
…	…
B4	AS1-AS2
C1	AS1-AS3
…	…
C3	AS1-AS3
D1	AS1-AS2-AS4
…	…
D4	AS1-AS2-AS4

A1 Table

Dest.	Path
A1	AS2-AS1
…	
A5	AS2-AS1
B1	AS2
…	…
B4	AS2
C1	AS2-AS3
…	…
C3	AS2-AS3
D1	AS2-AS3-AS4
…	…
D4	AS2-AS3-AS4

B1 Table

Dest.	Path
A1	AS3-AS1
…	
A5	AS3-AS1
B1	AS3-AS2
…	…
B4	AS3-AS2
C1	AS3
…	…
C3	AS3
D1	AS3-AS4
…	…
D4	AS3-AS4

C1 Table

Dest.	Path
A1	AS4-AS3-AS1
…	
A5	AS4-AS3-AS1
B1	AS4-AS3-AS2
…	…
B4	AS4-AS3-AS2
C1	AS4-AS3
…	…
C3	AS4-AS3
D1	AS4
…	…
D4	AS4

D1 Table

Figure 22.32 *Internal and external BGP sessions*

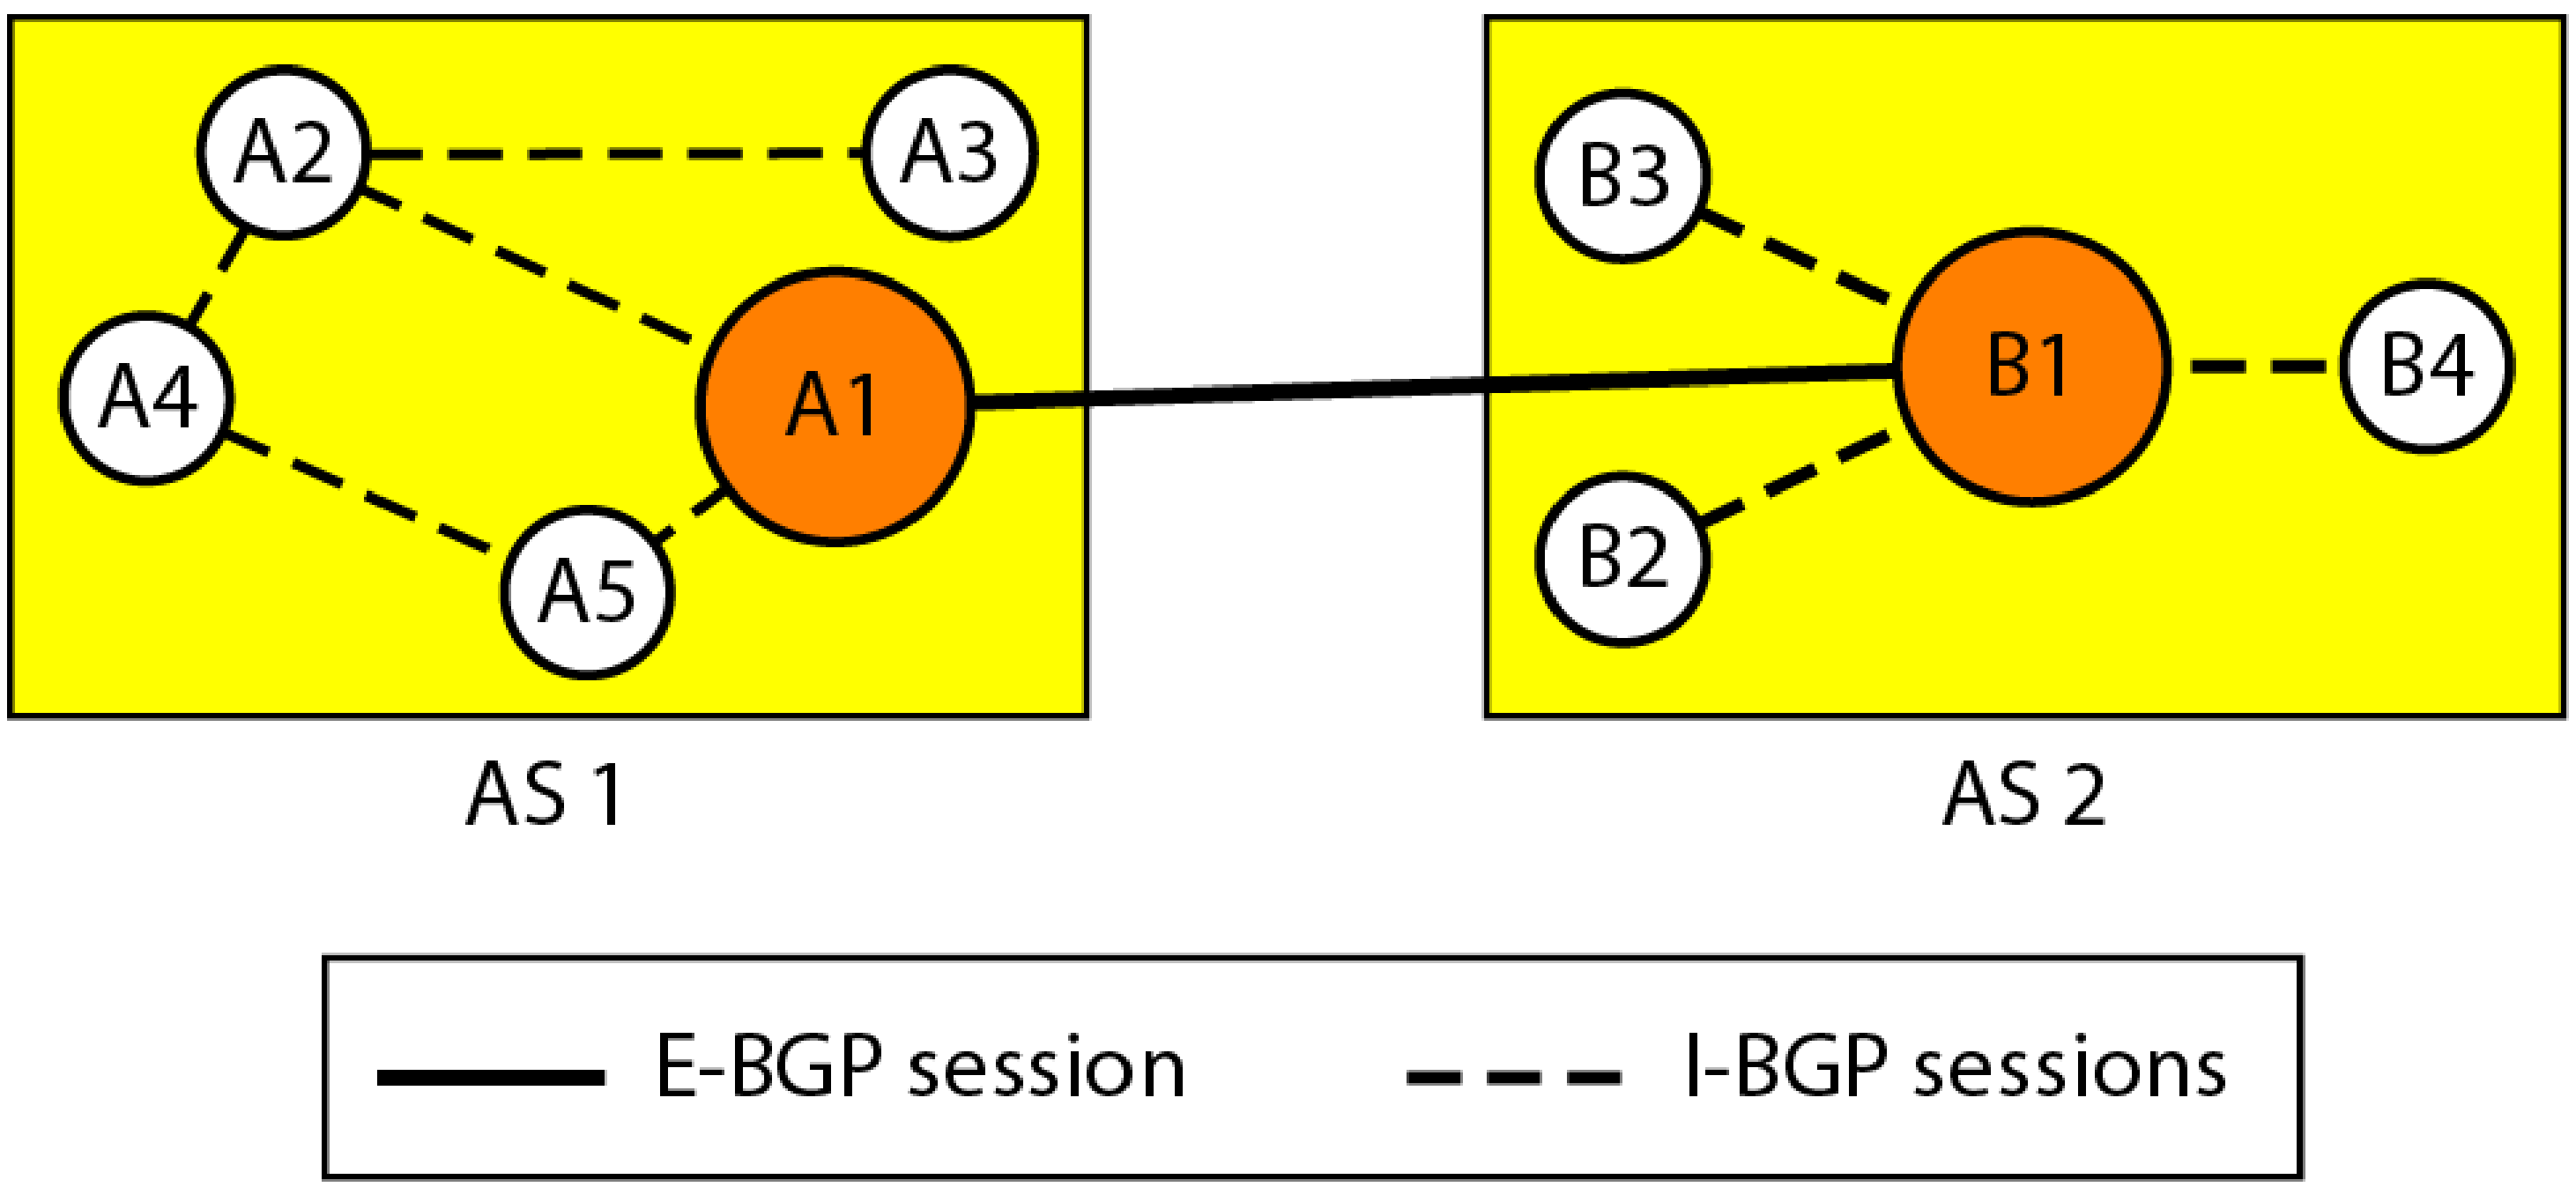

22-4 MULTICAST ROUTING PROTOCOLS

In this section, we discuss multicasting and multicast routing protocols.

Topics discussed in this section:

Unicast, Multicast, and Broadcast
Applications
Multicast Routing
Routing Protocols

Figure 22.33 *Unicasting*

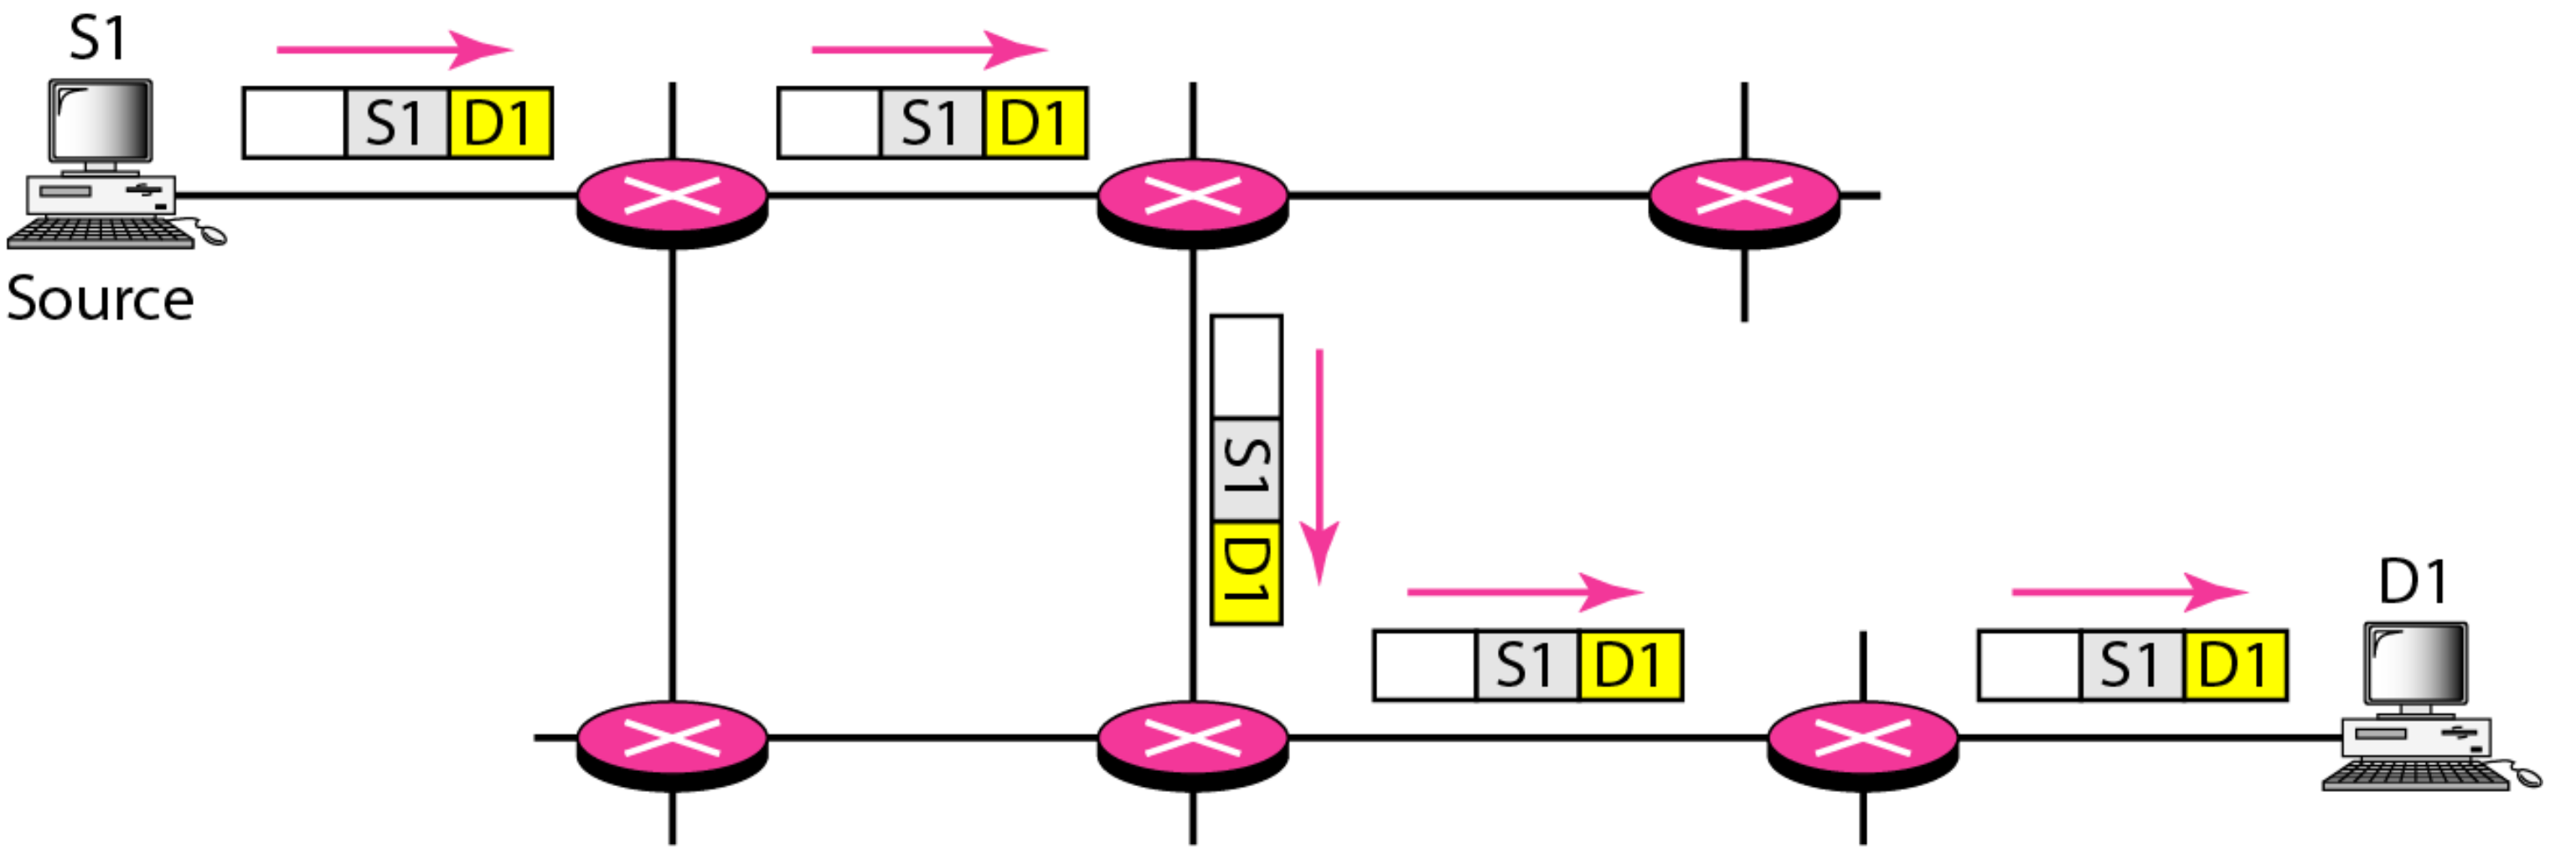

Note

In unicasting, the router forwards the received packet through only one of its interfaces.

Figure 22.34 *Multicasting*

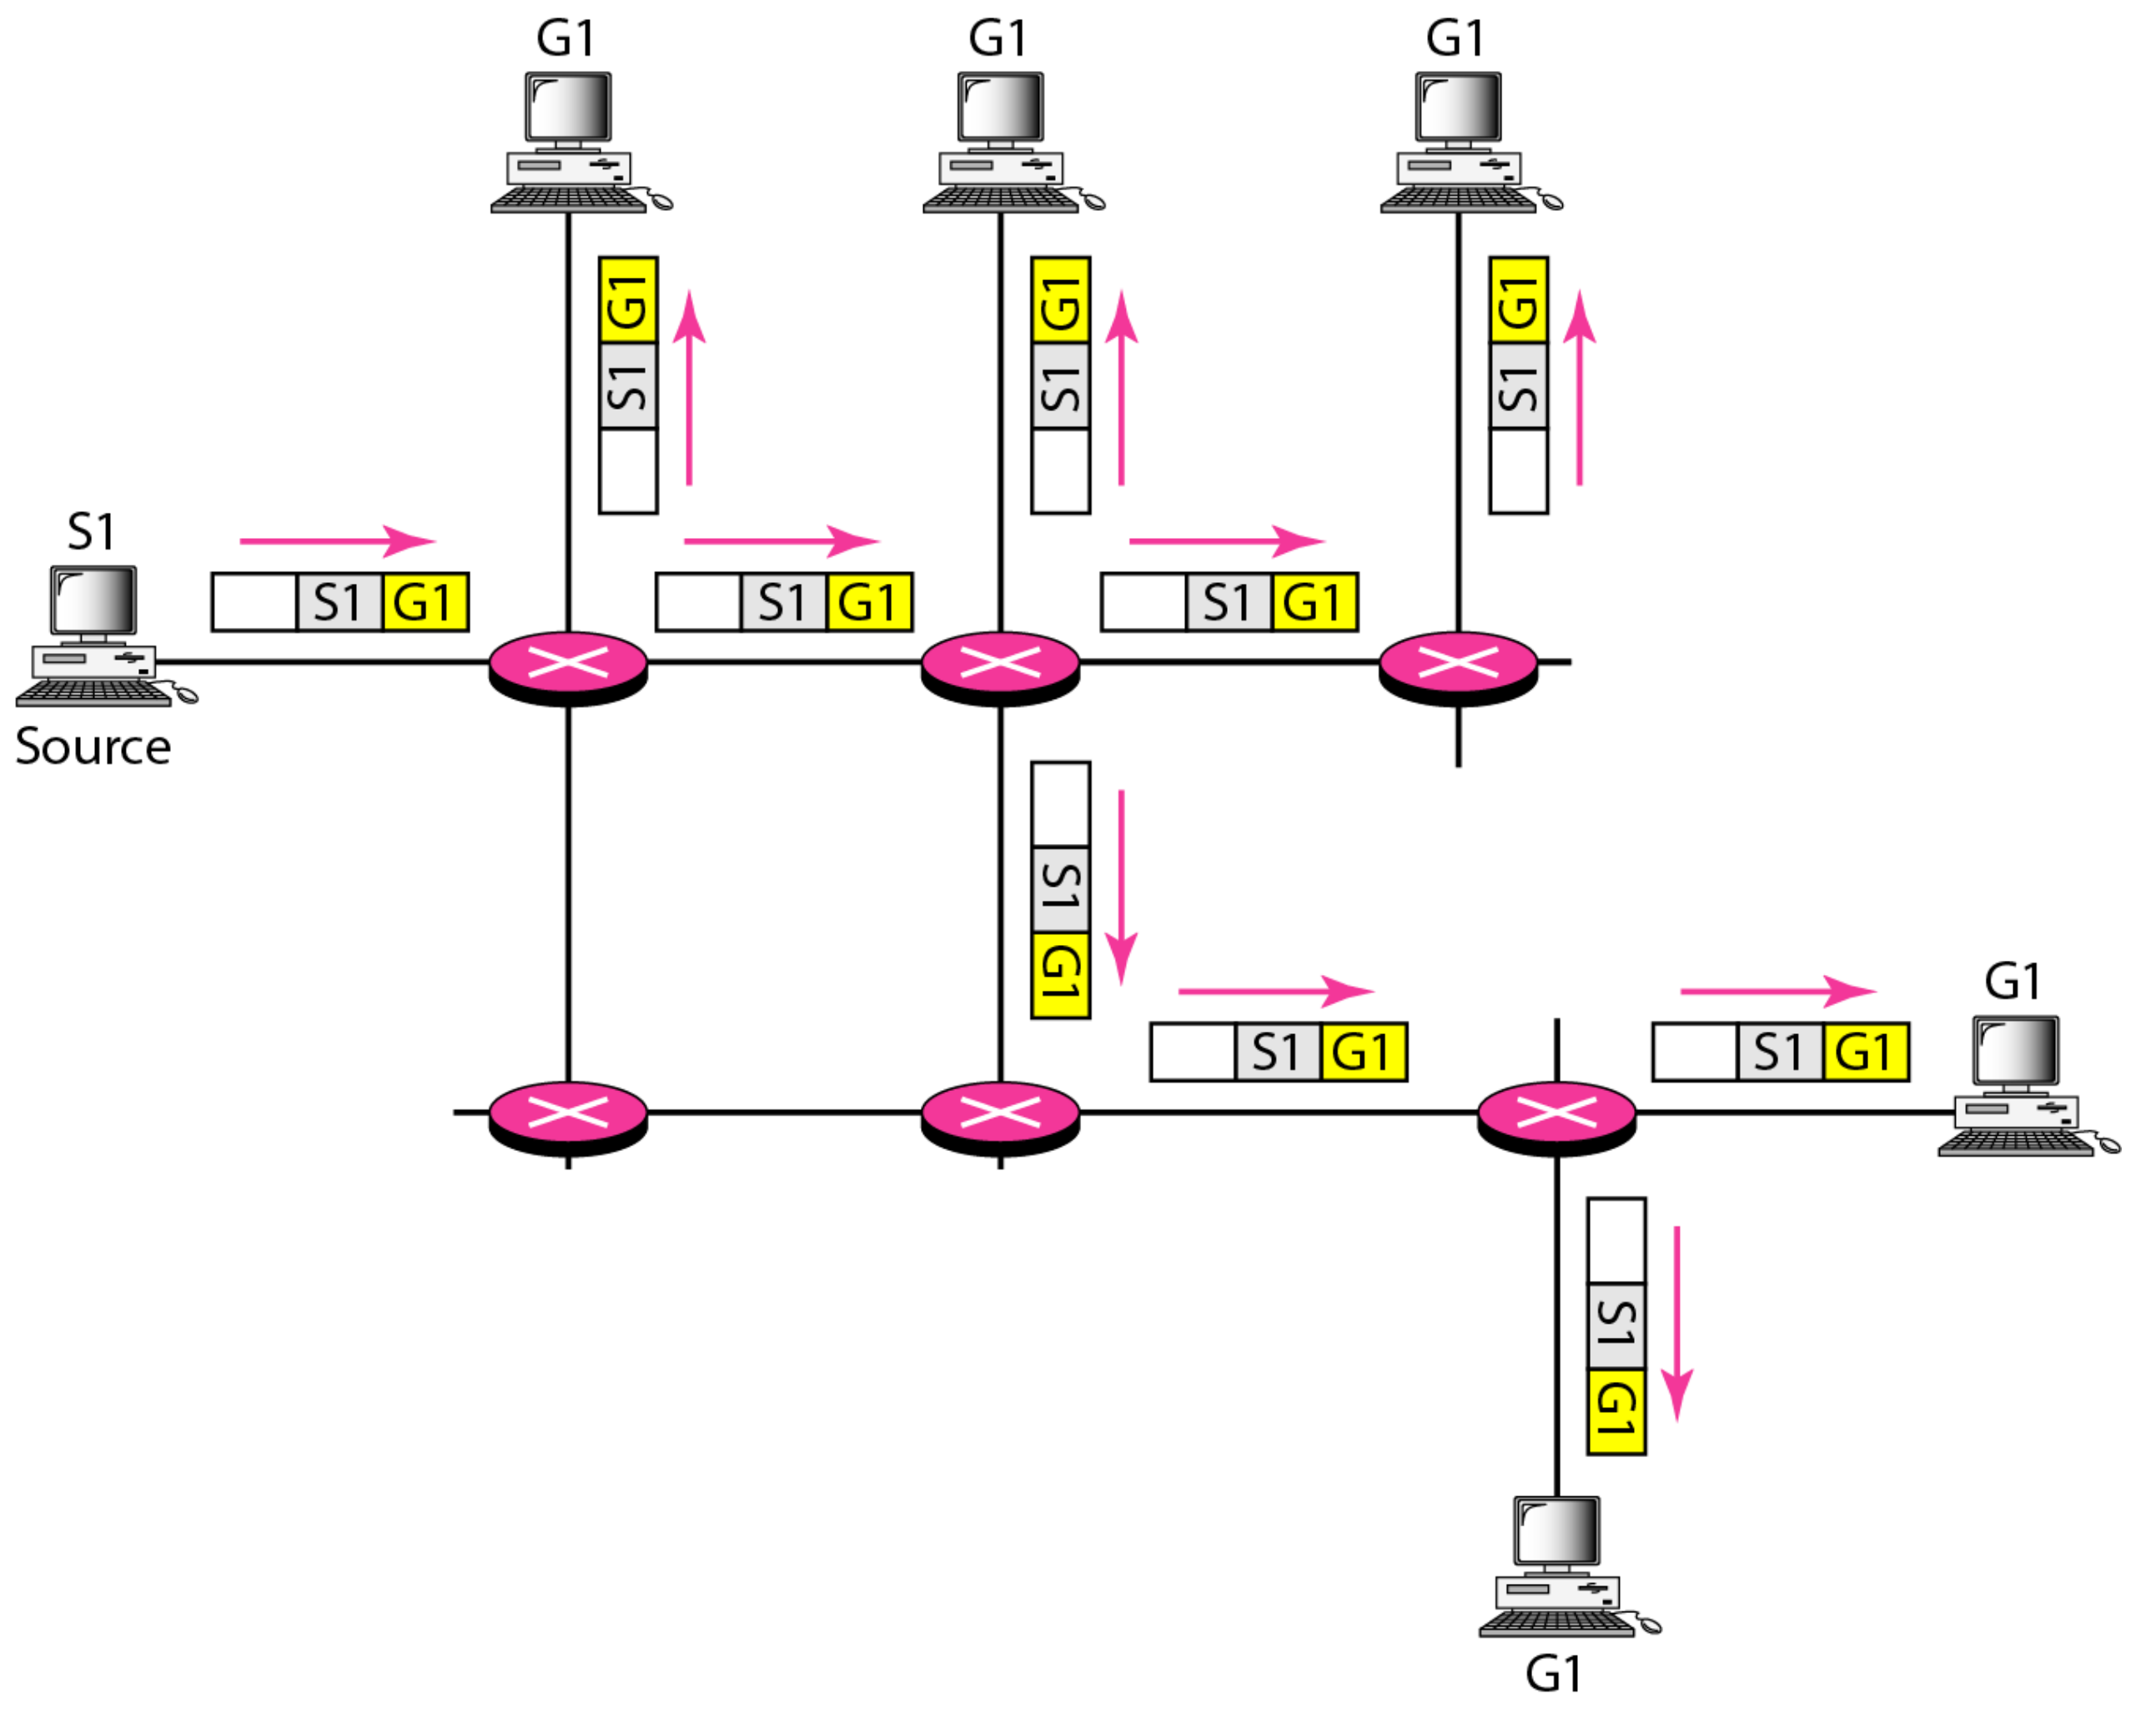

Note

In multicasting, the router may forward the received packet through several of its interfaces.

Figure 22.35 *Multicasting versus multiple unicasting*

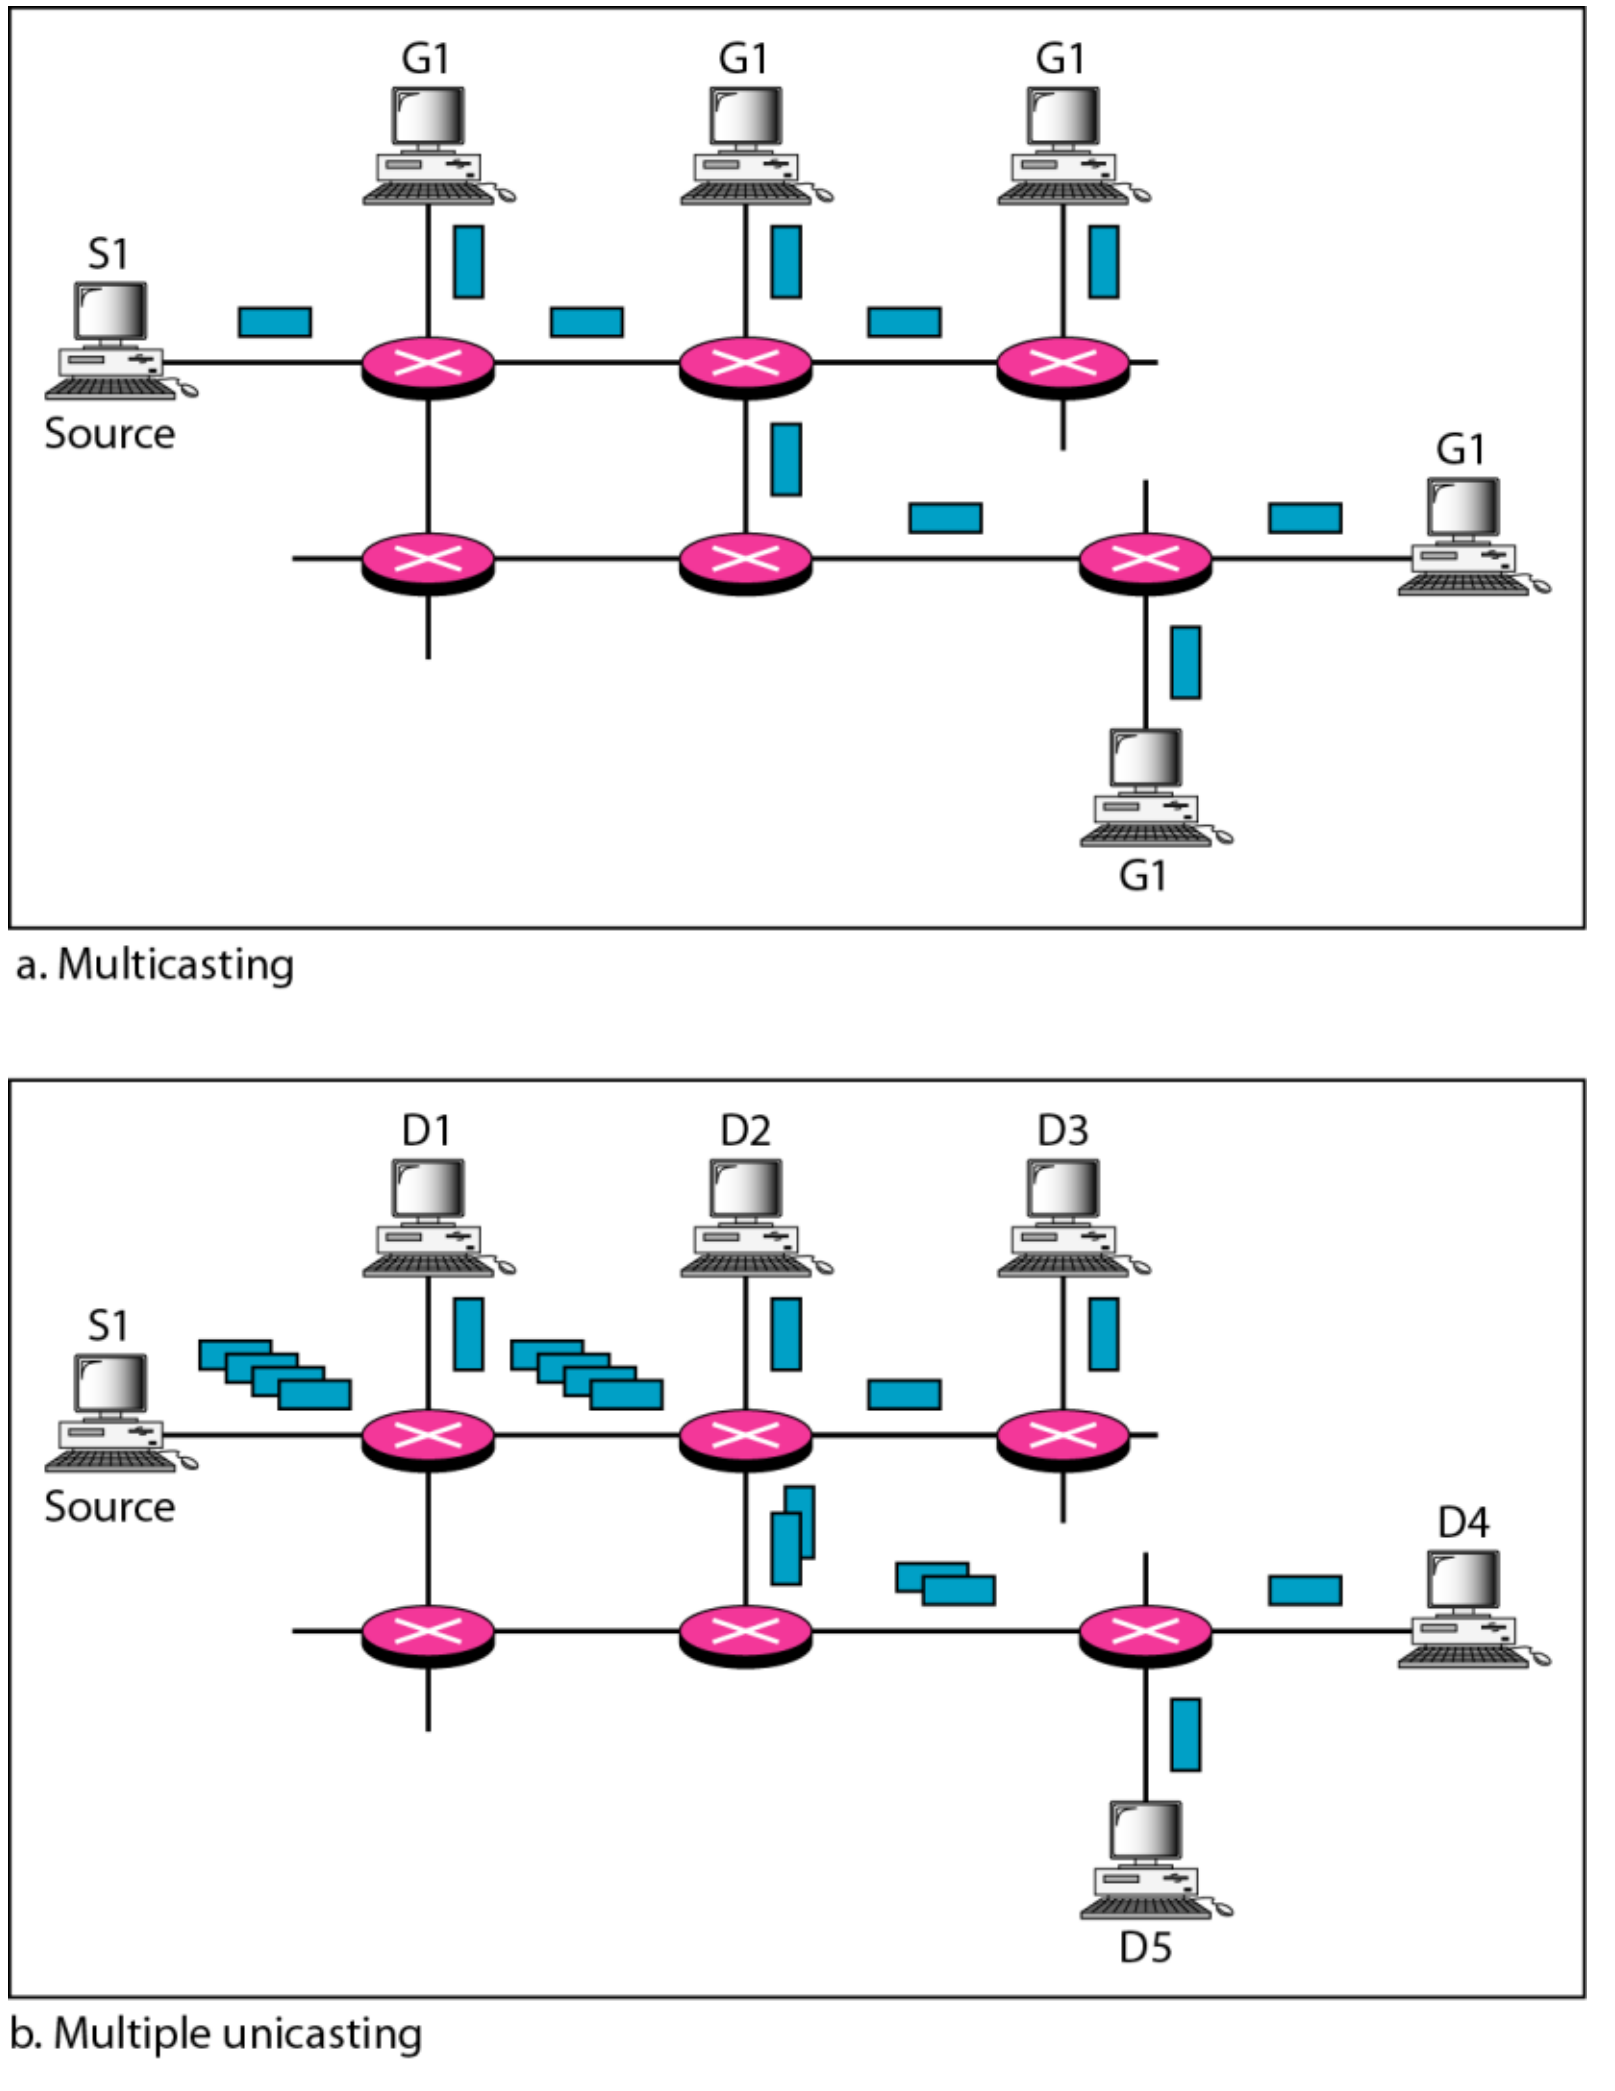

Note

Emulation of multicasting through multiple unicasting is not efficient and may create long delays, particularly with a large group.

Note

In unicast routing, each router in the domain has a table that defines a shortest path tree to possible destinations.

Figure 22.36 *Shortest path tree in unicast routing*

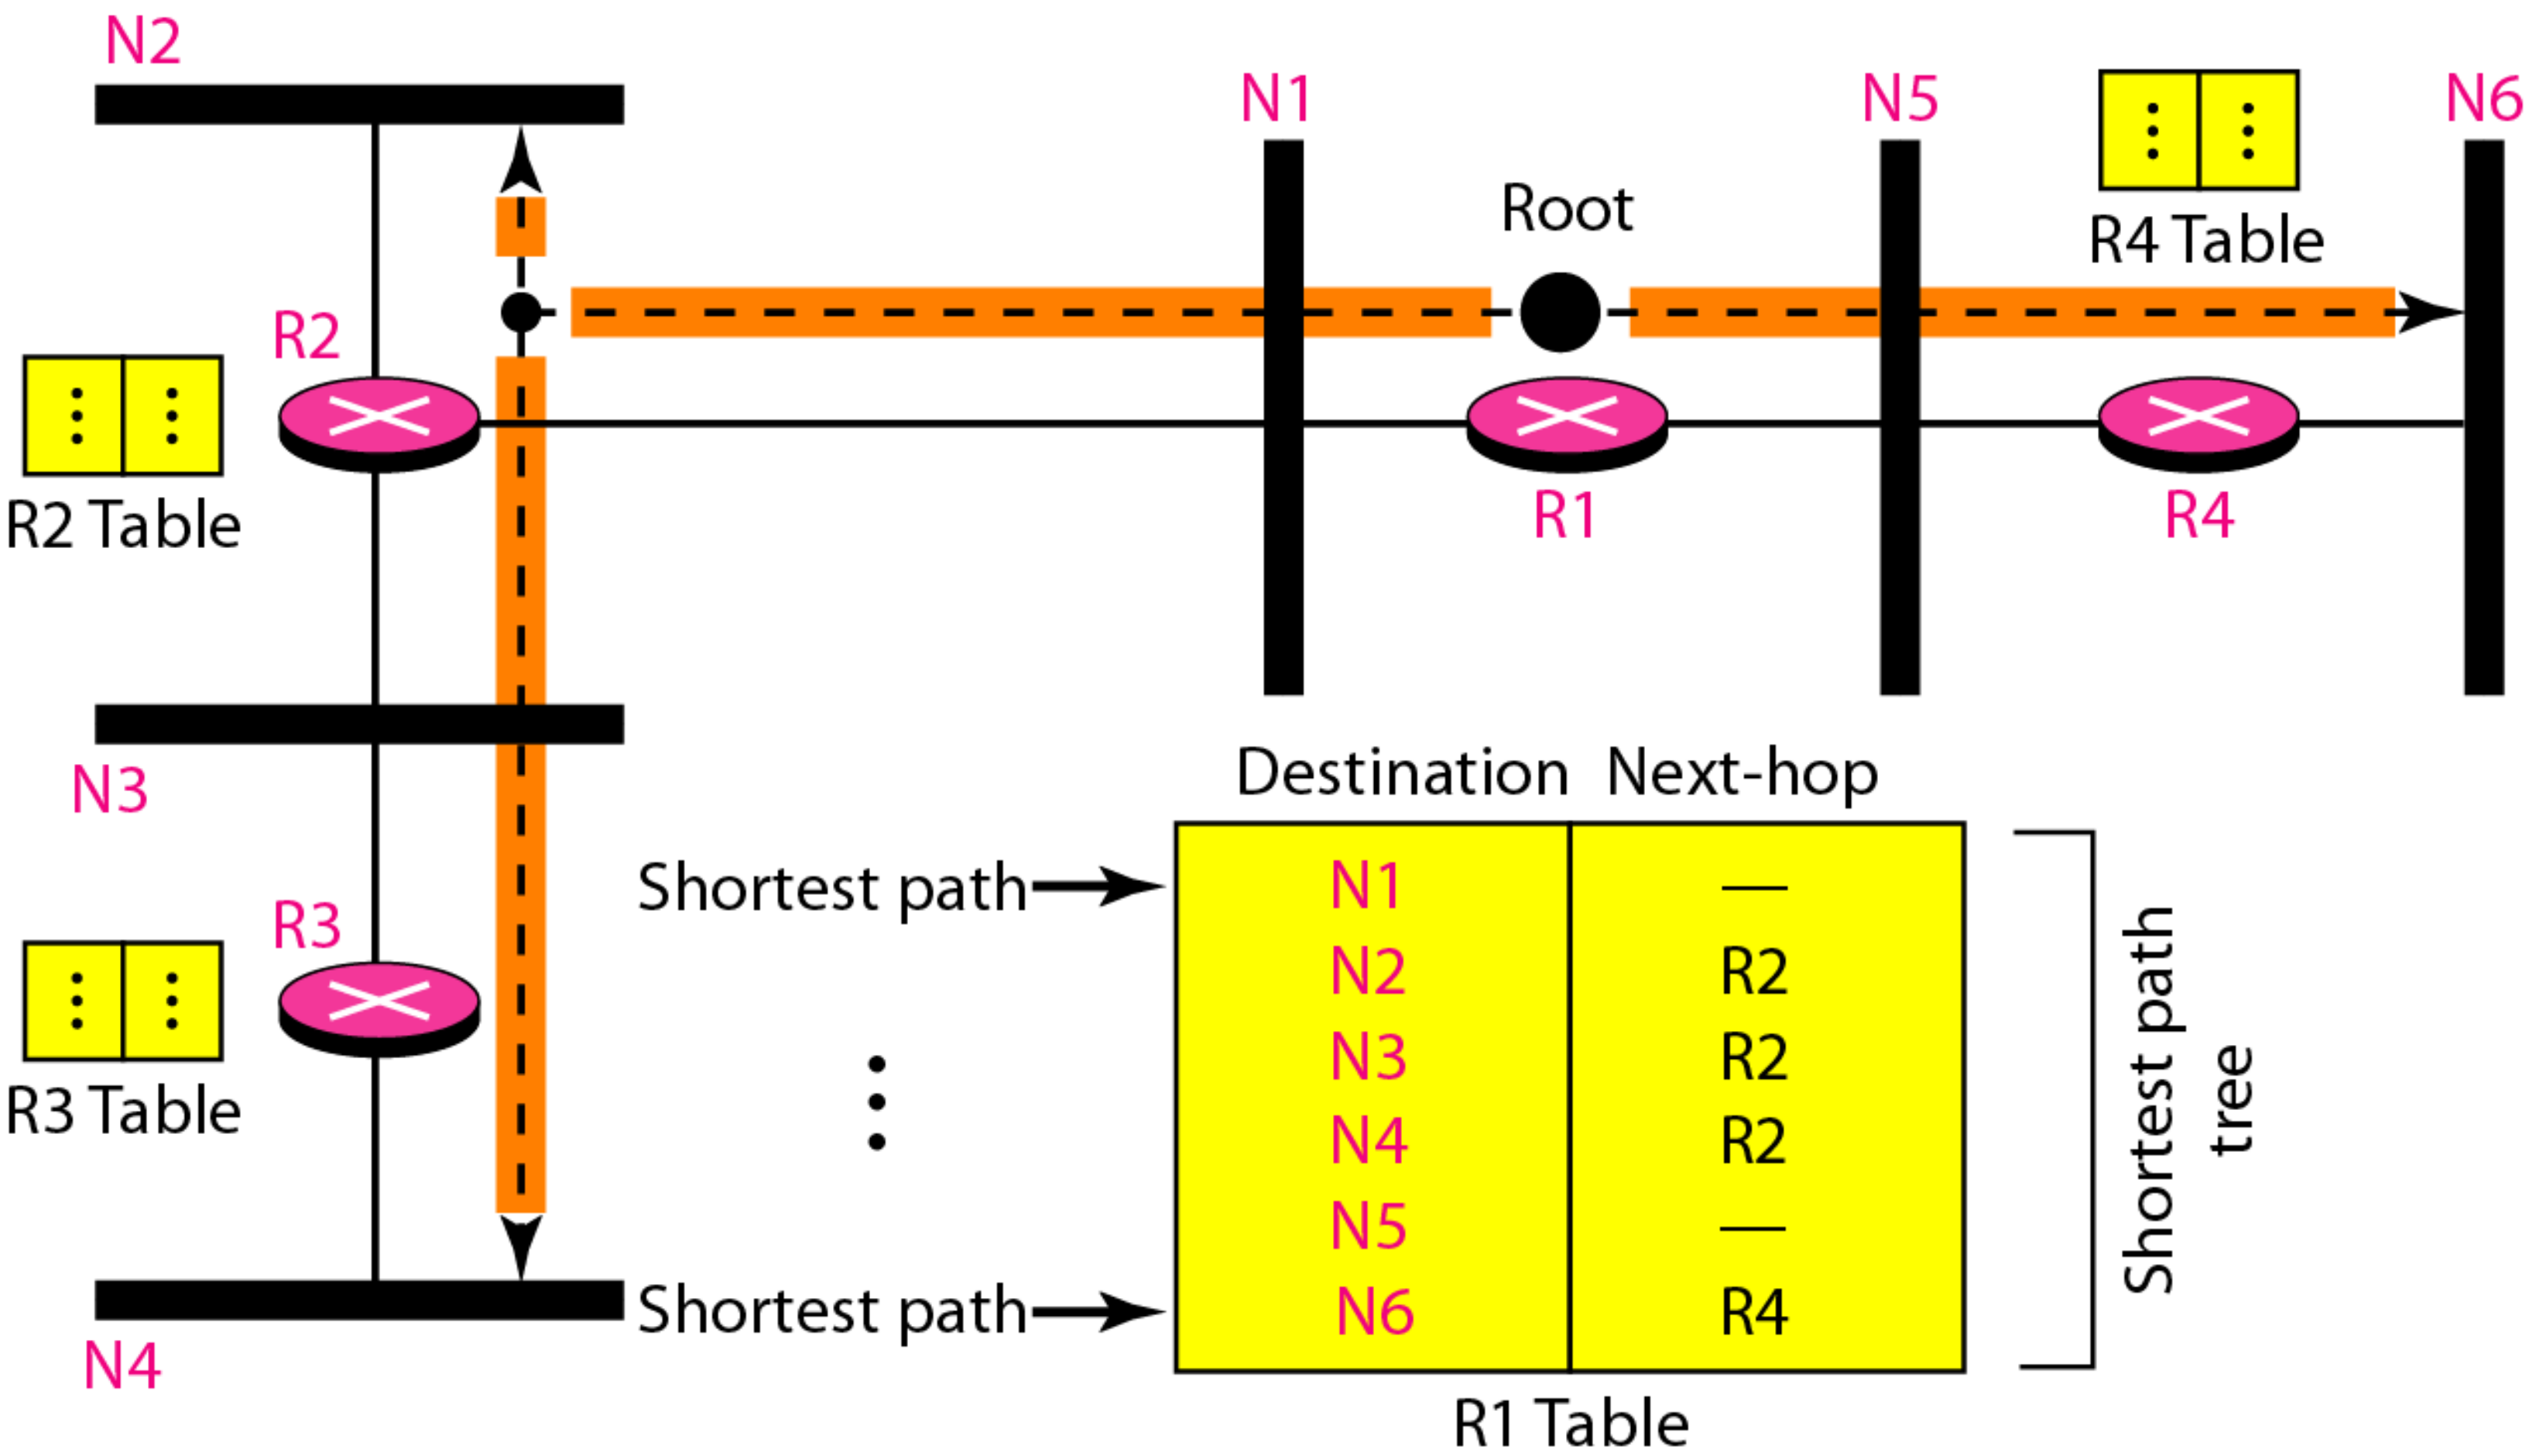

Note

In multicast routing, each involved router needs to construct a shortest path tree for each group.

Figure 22.37 *Source-based tree approach*

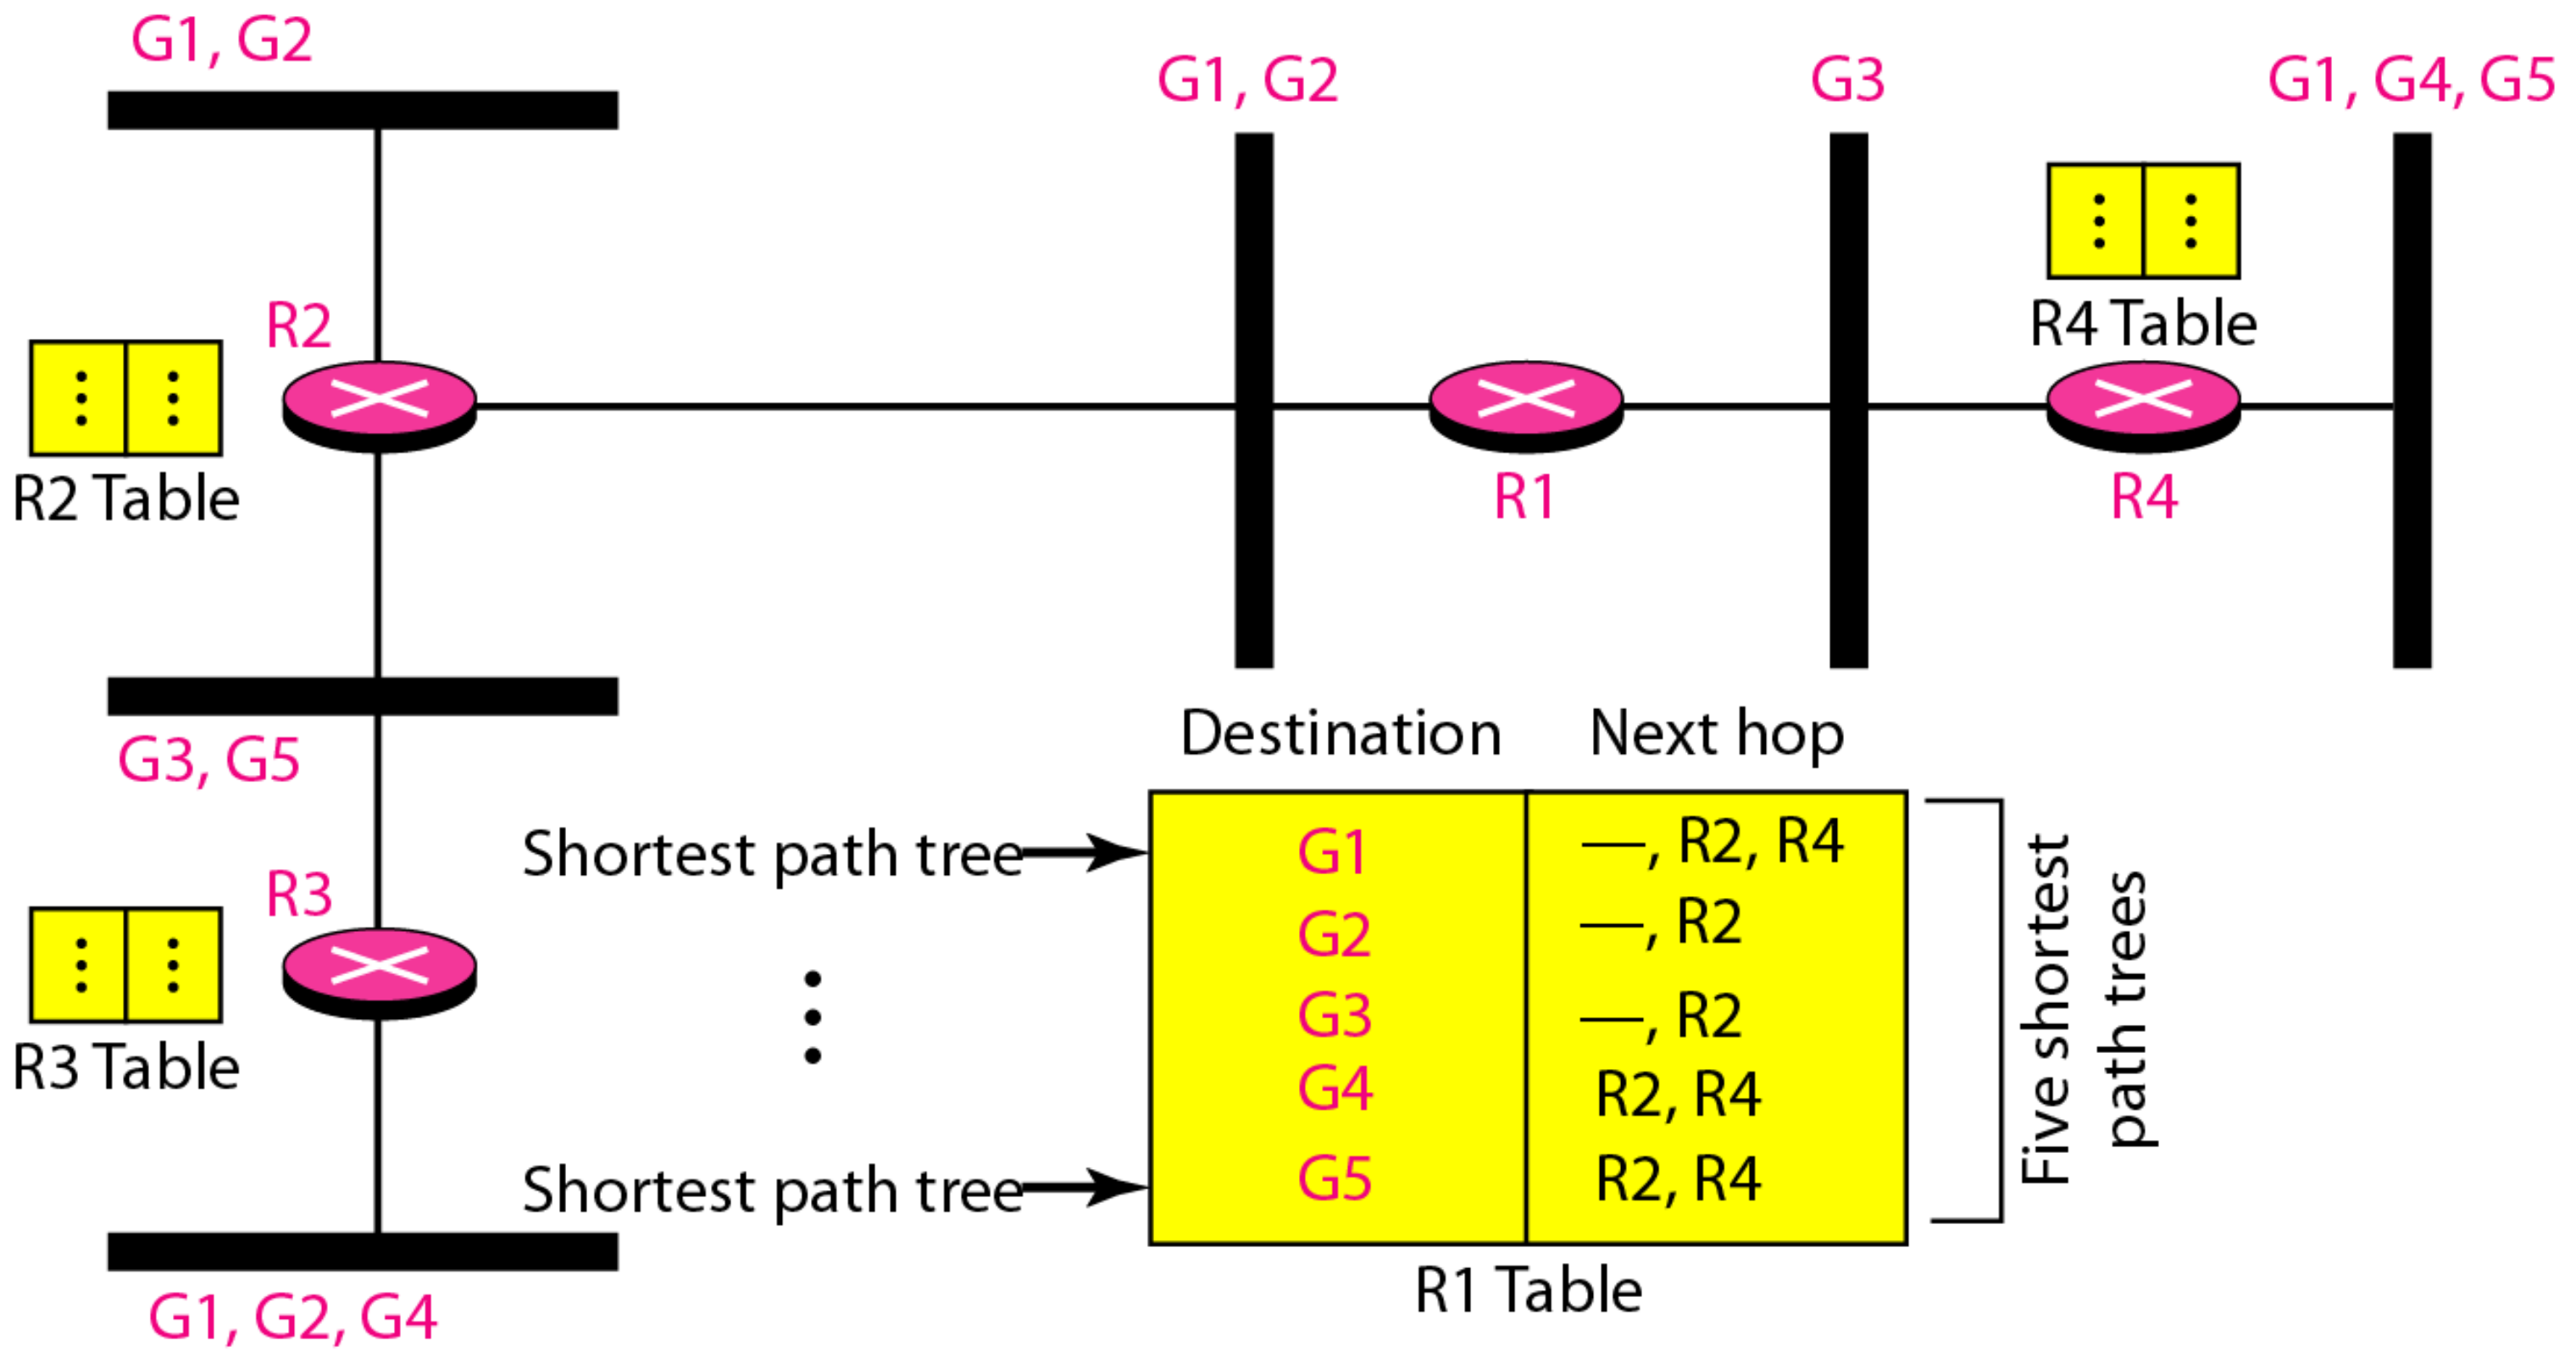

Note

In the source-based tree approach, each router needs to have one shortest path tree for each group.

Figure 22.38 *Group-shared tree approach*

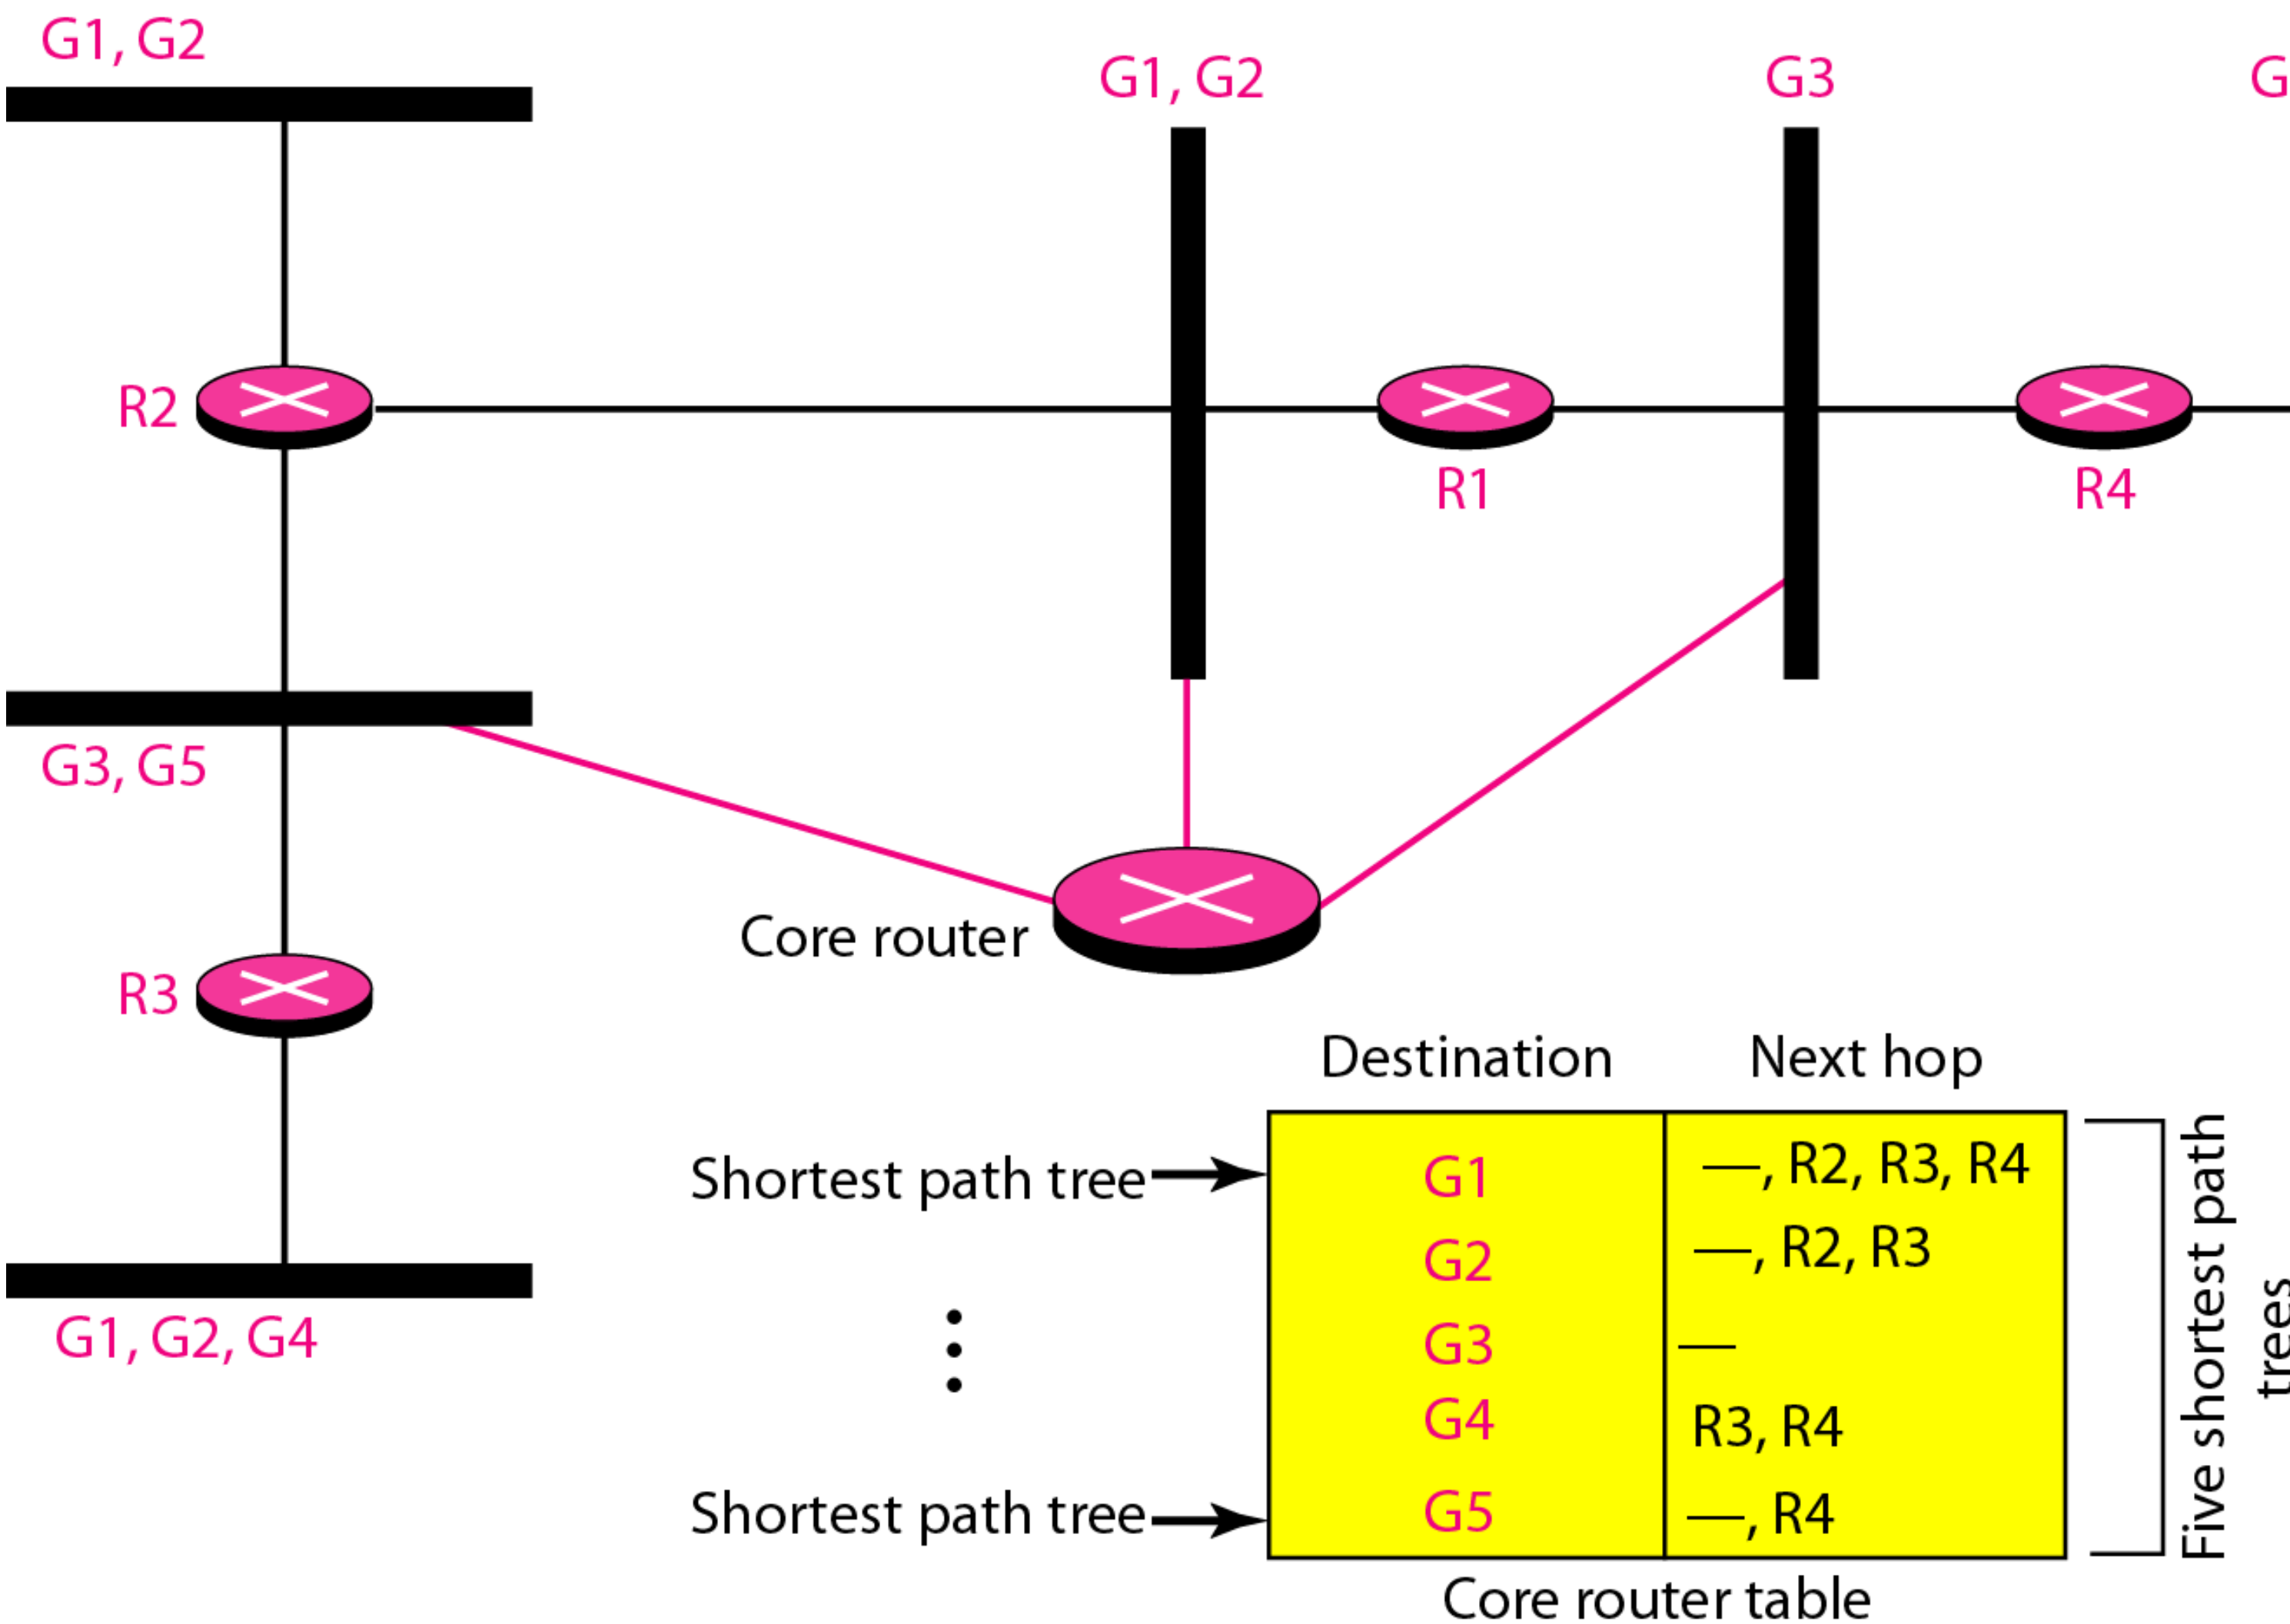

Destination	Next hop
G1	—, R2, R3, R4
G2	—, R2, R3
G3	—
G4	R3, R4
G5	—, R4

Note

In the group-shared tree approach, only the core router, which has a shortest path tree for each group, is involved in multicasting.

Figure 22.39 *Taxonomy of common multicast protocols*

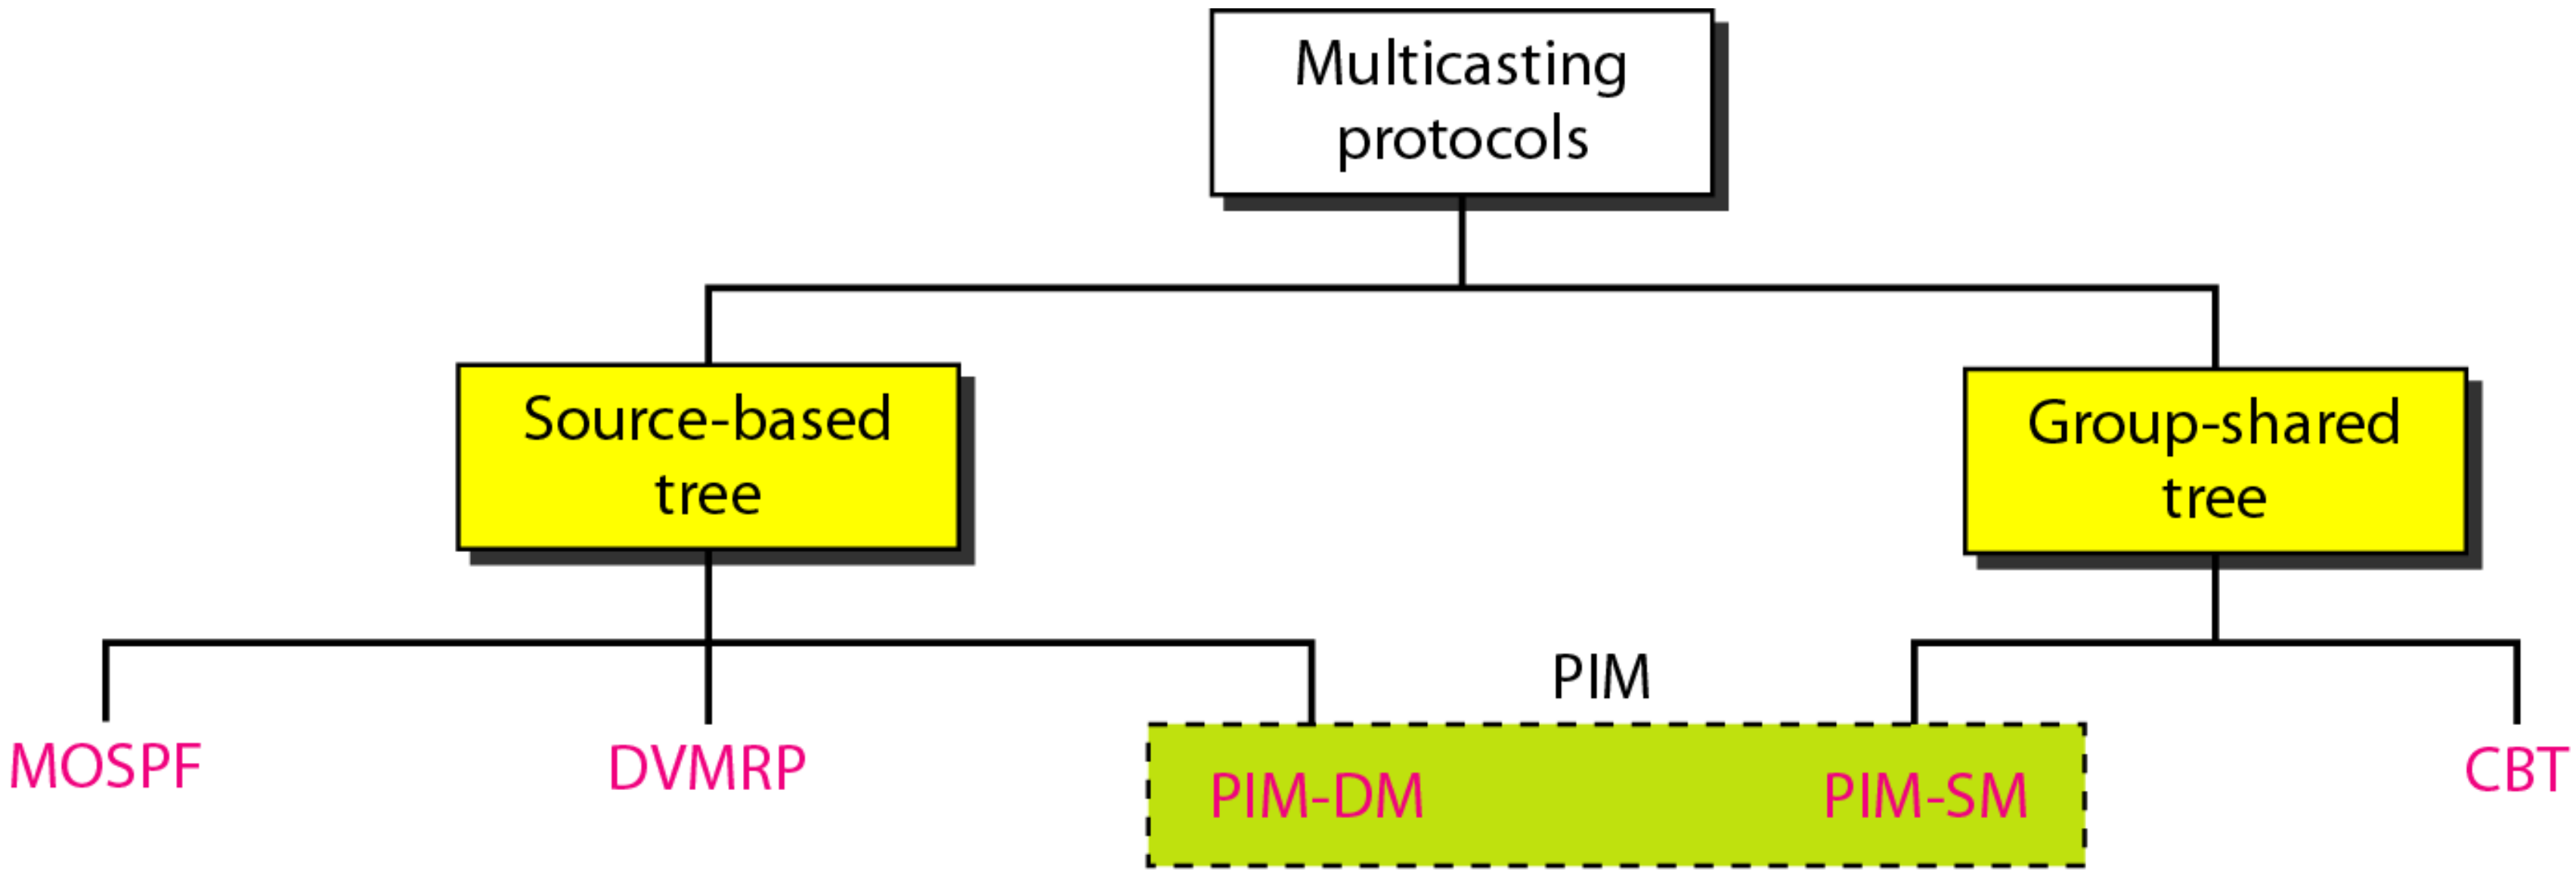

Note

Multicast link state routing uses the source-based tree approach.

Note

Flooding broadcasts packets, but creates loops in the systems.

Note

RPF eliminates the loop in the flooding process.

Figure 22.40 *Reverse path forwarding (RPF)*

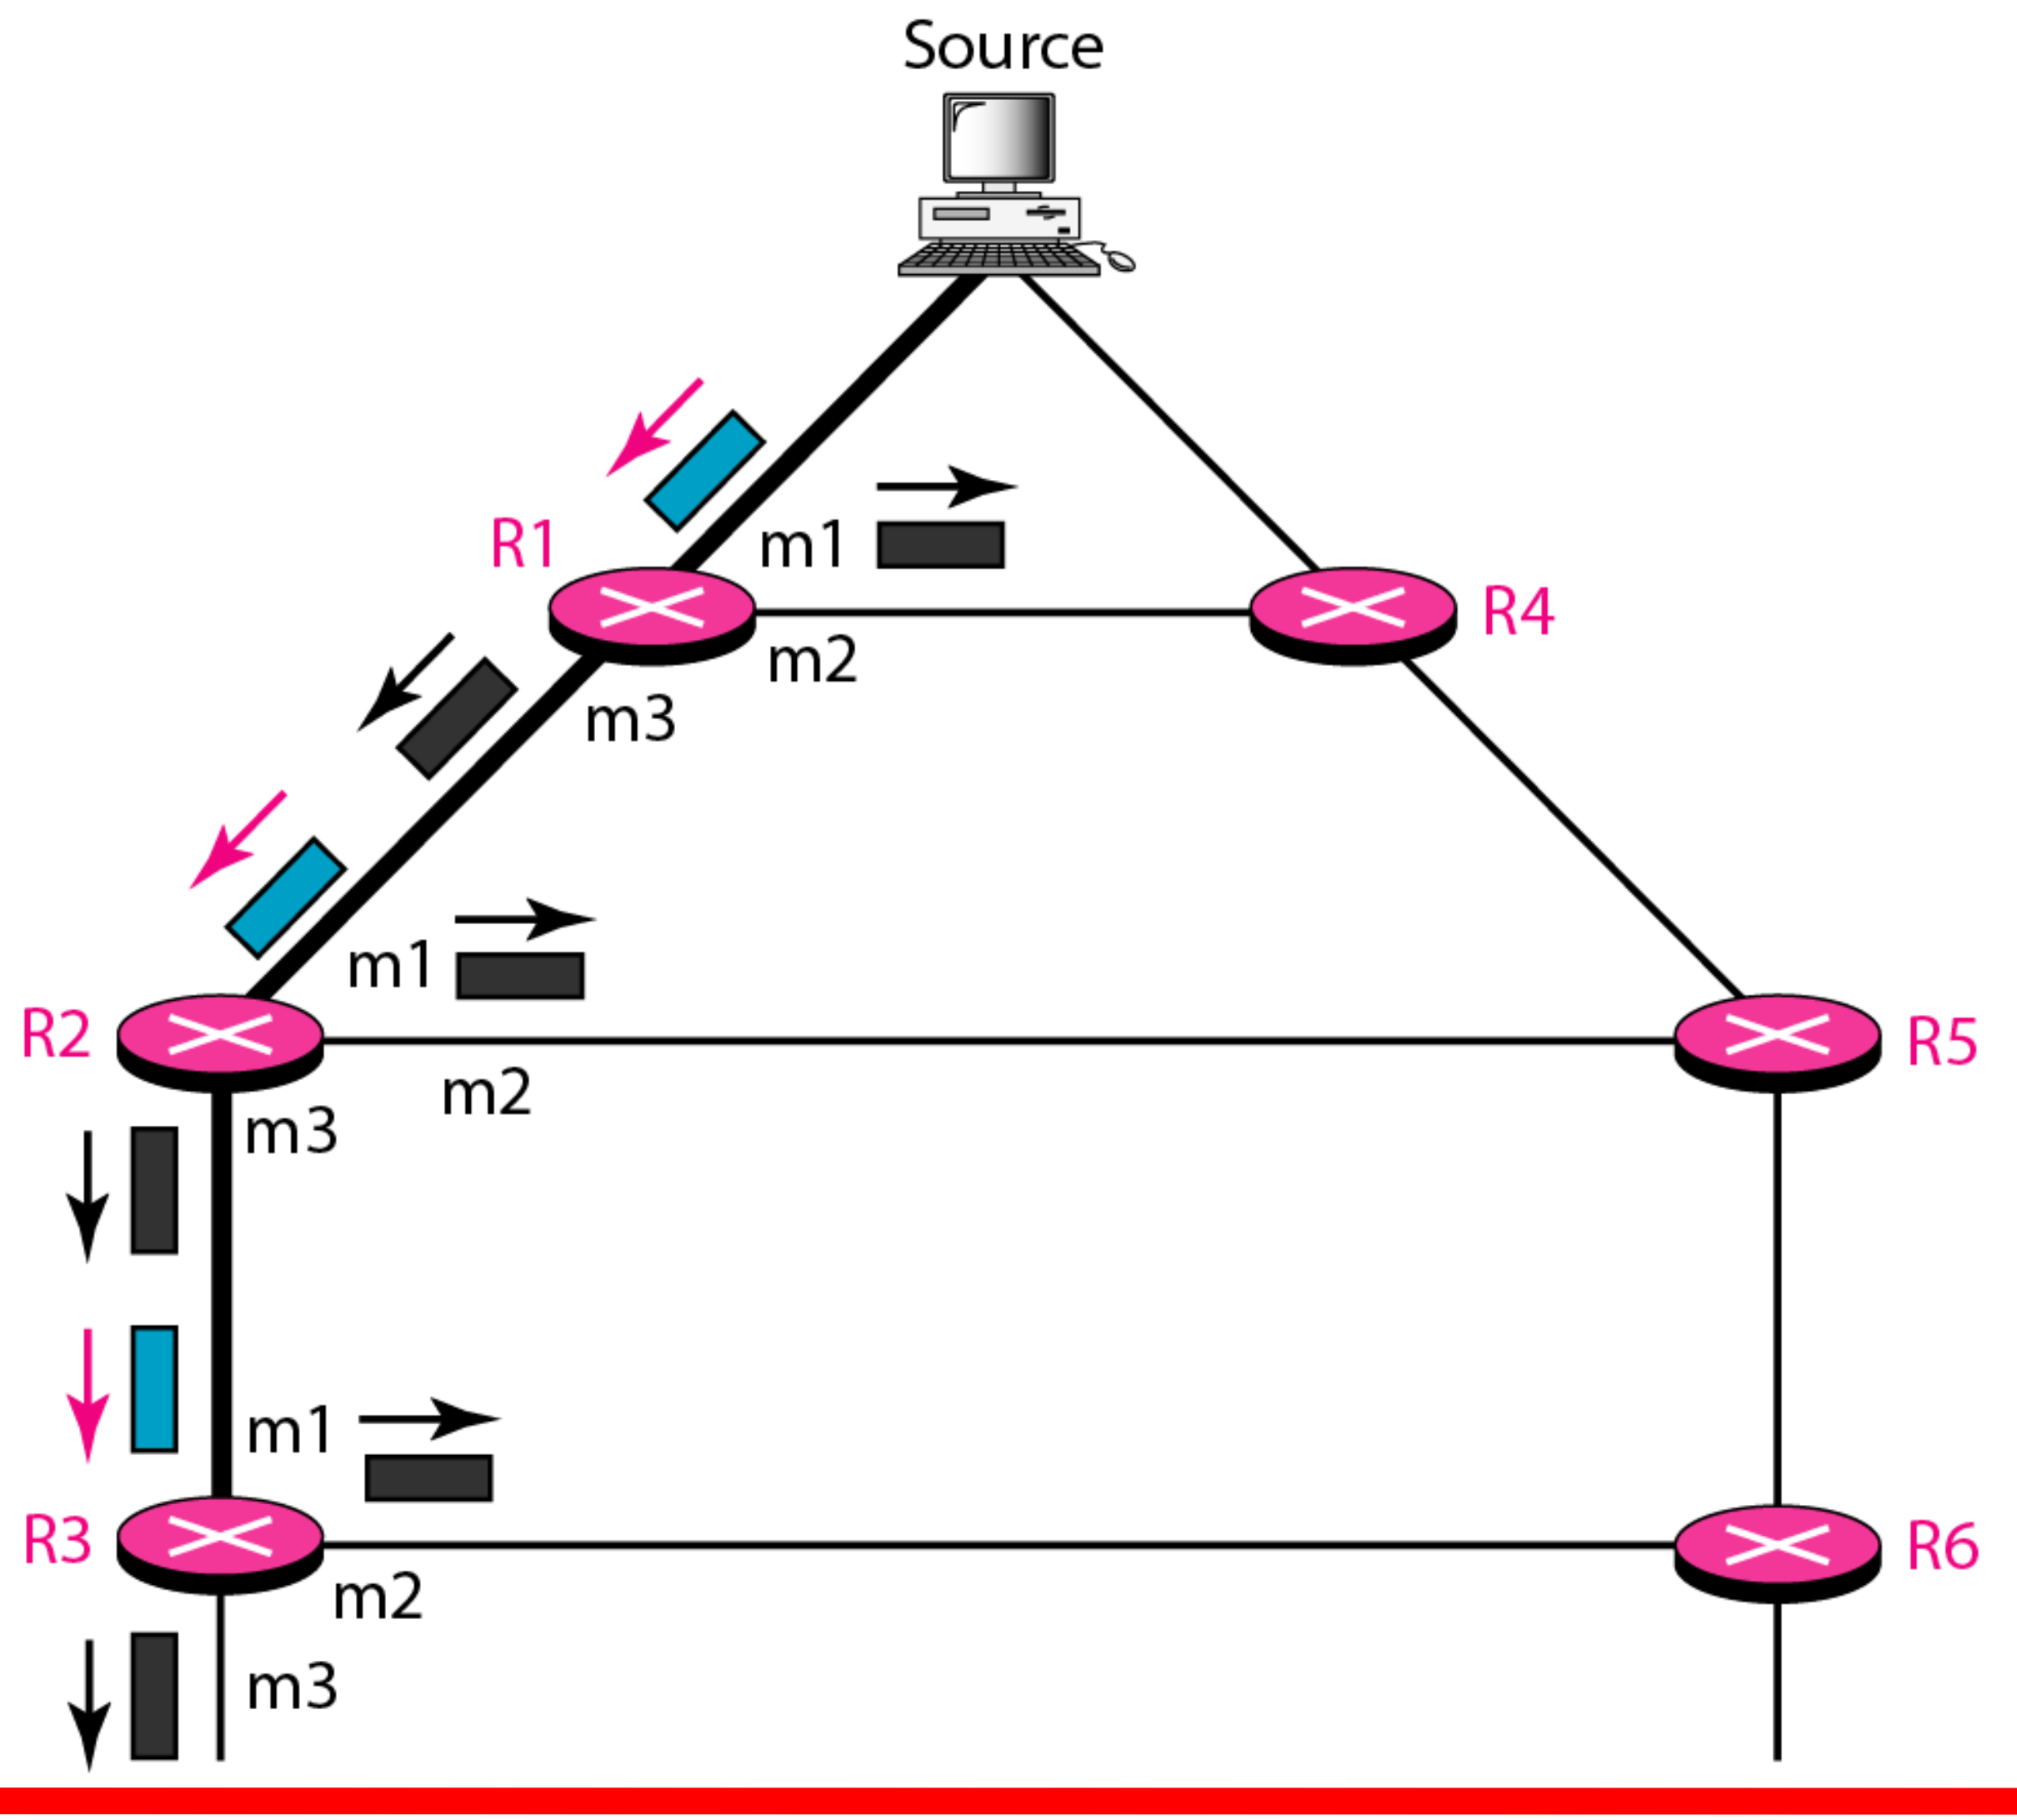

Figure 22.41 *Problem with RPF*

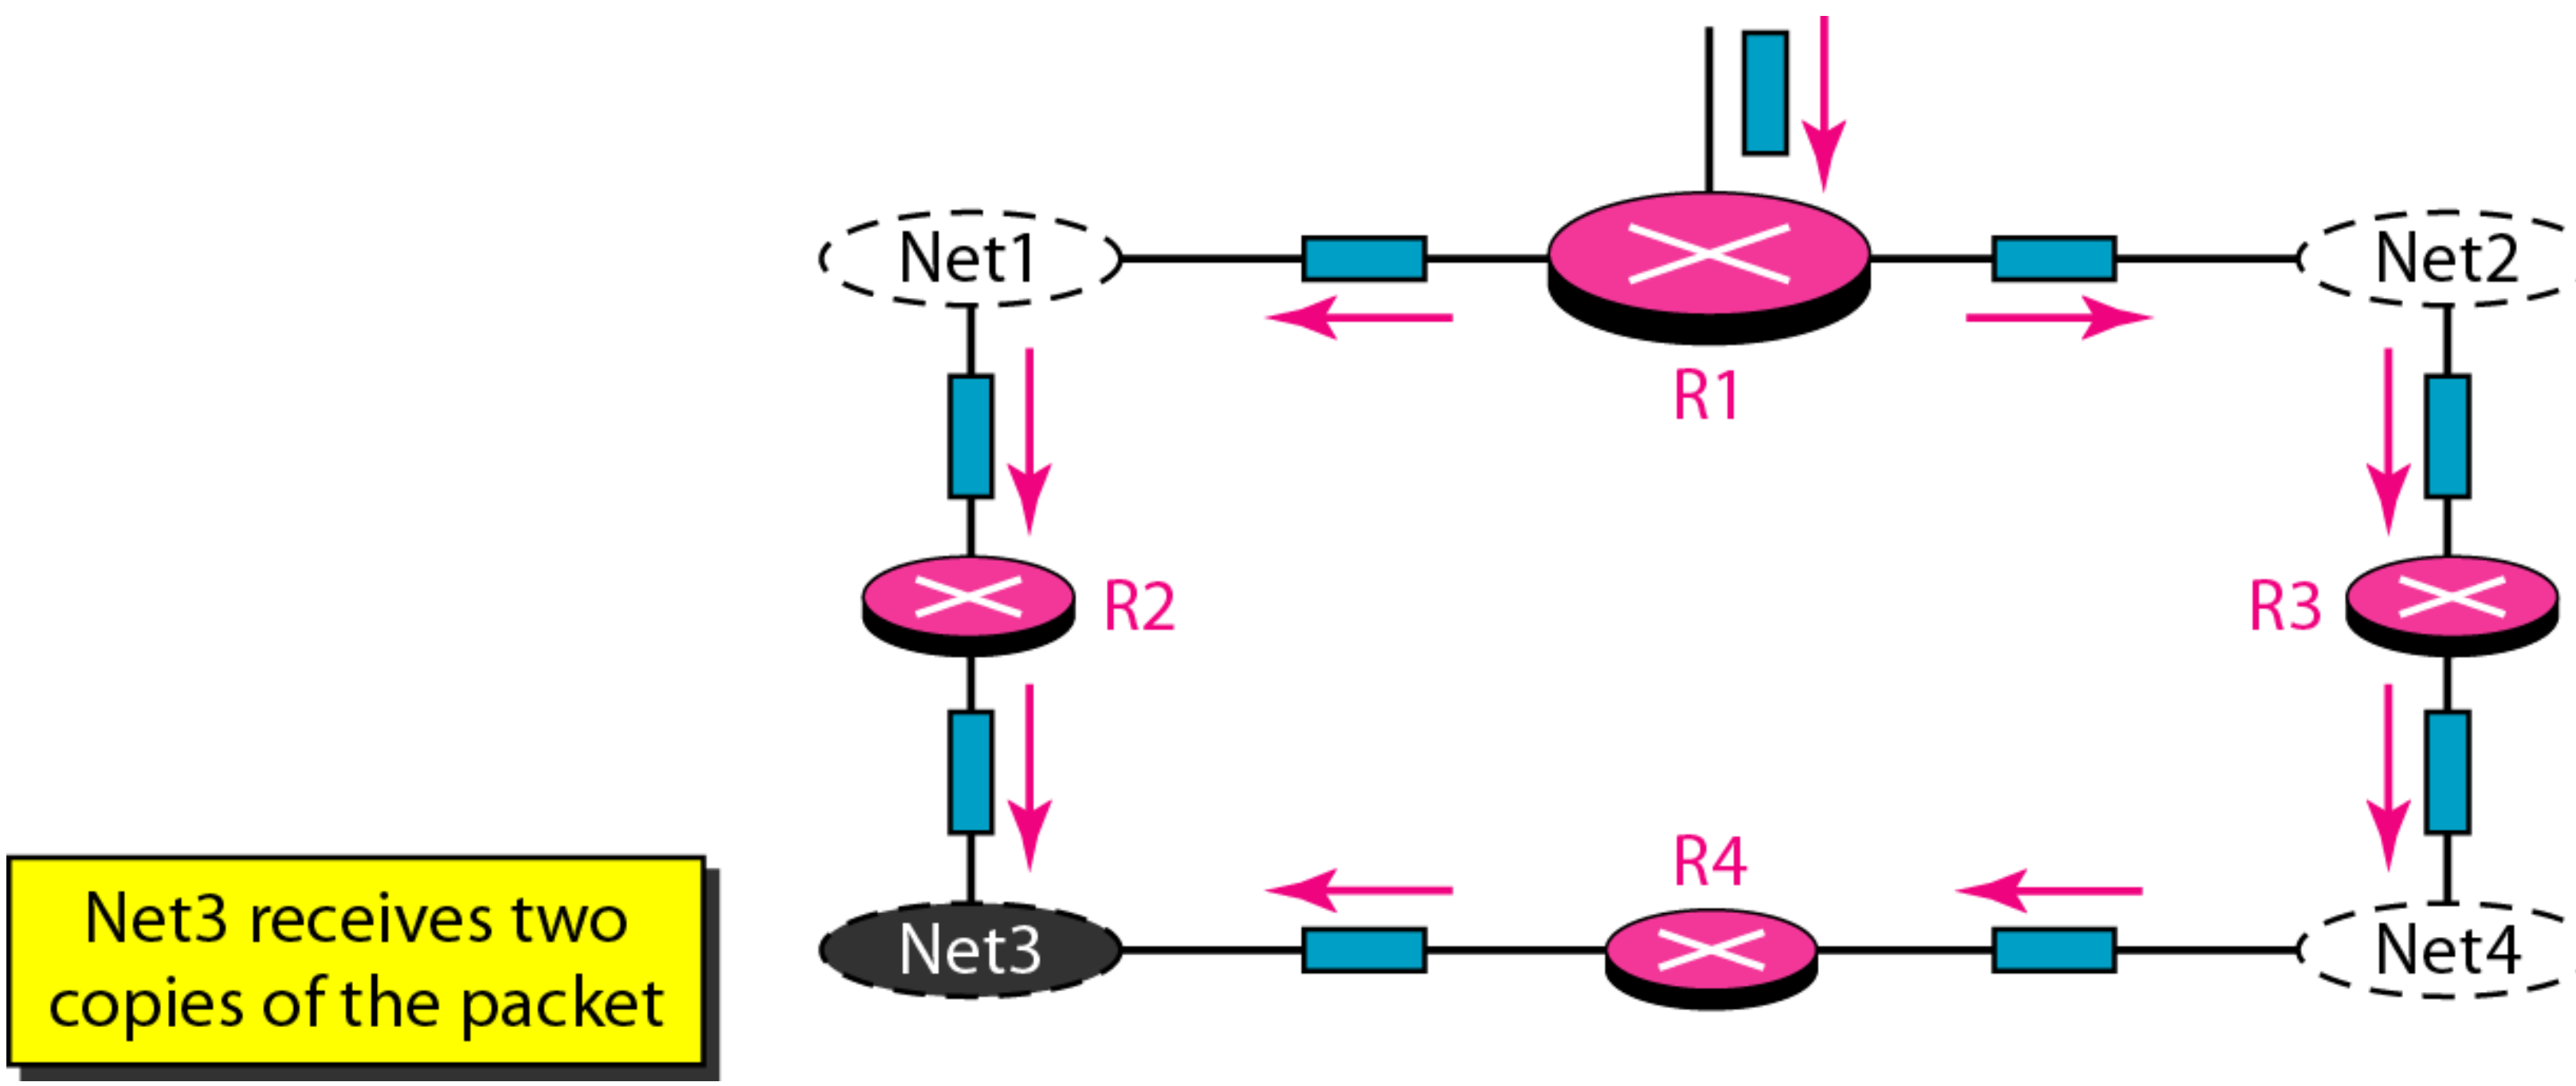

Figure 22.42 *RPF Versus RPB*

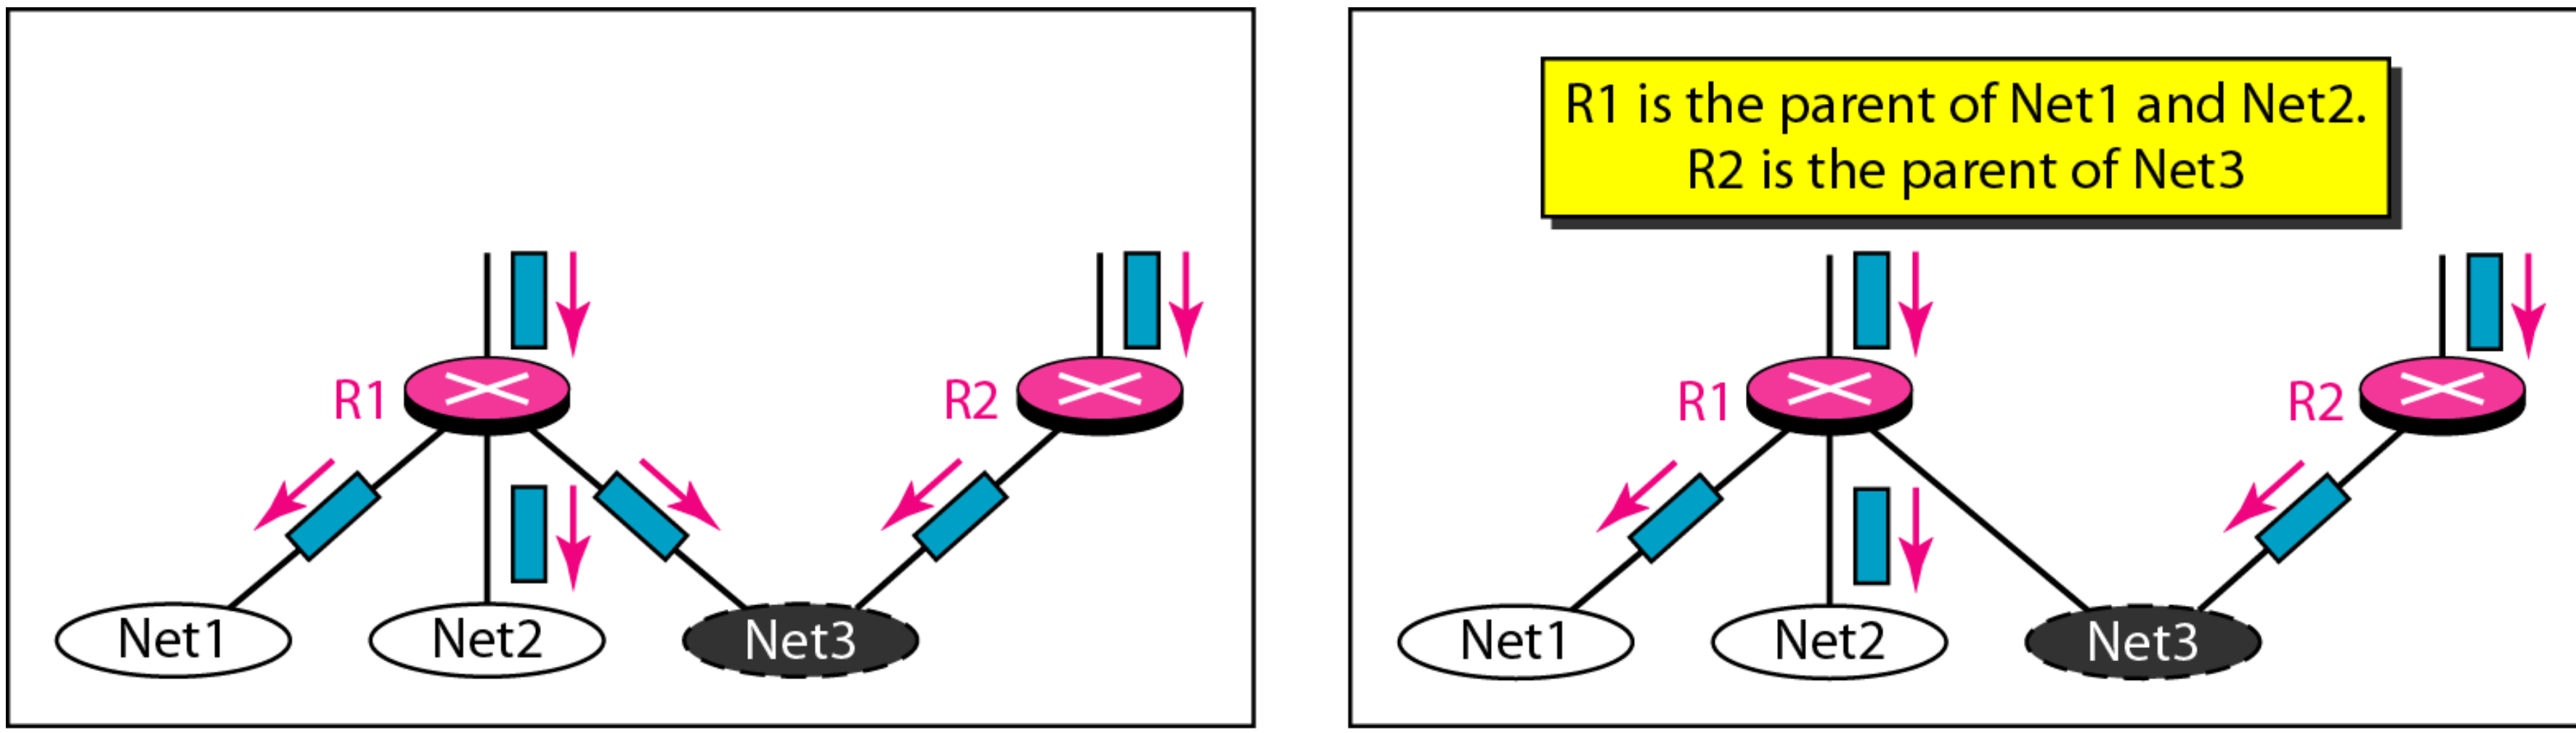

a. RPF b. RPB

Note

RPB creates a shortest path broadcast tree from the source to each destination. It guarantees that each destination receives one and only one copy of the packet.

Figure 22.43 *RPF, RPB, and RPM*

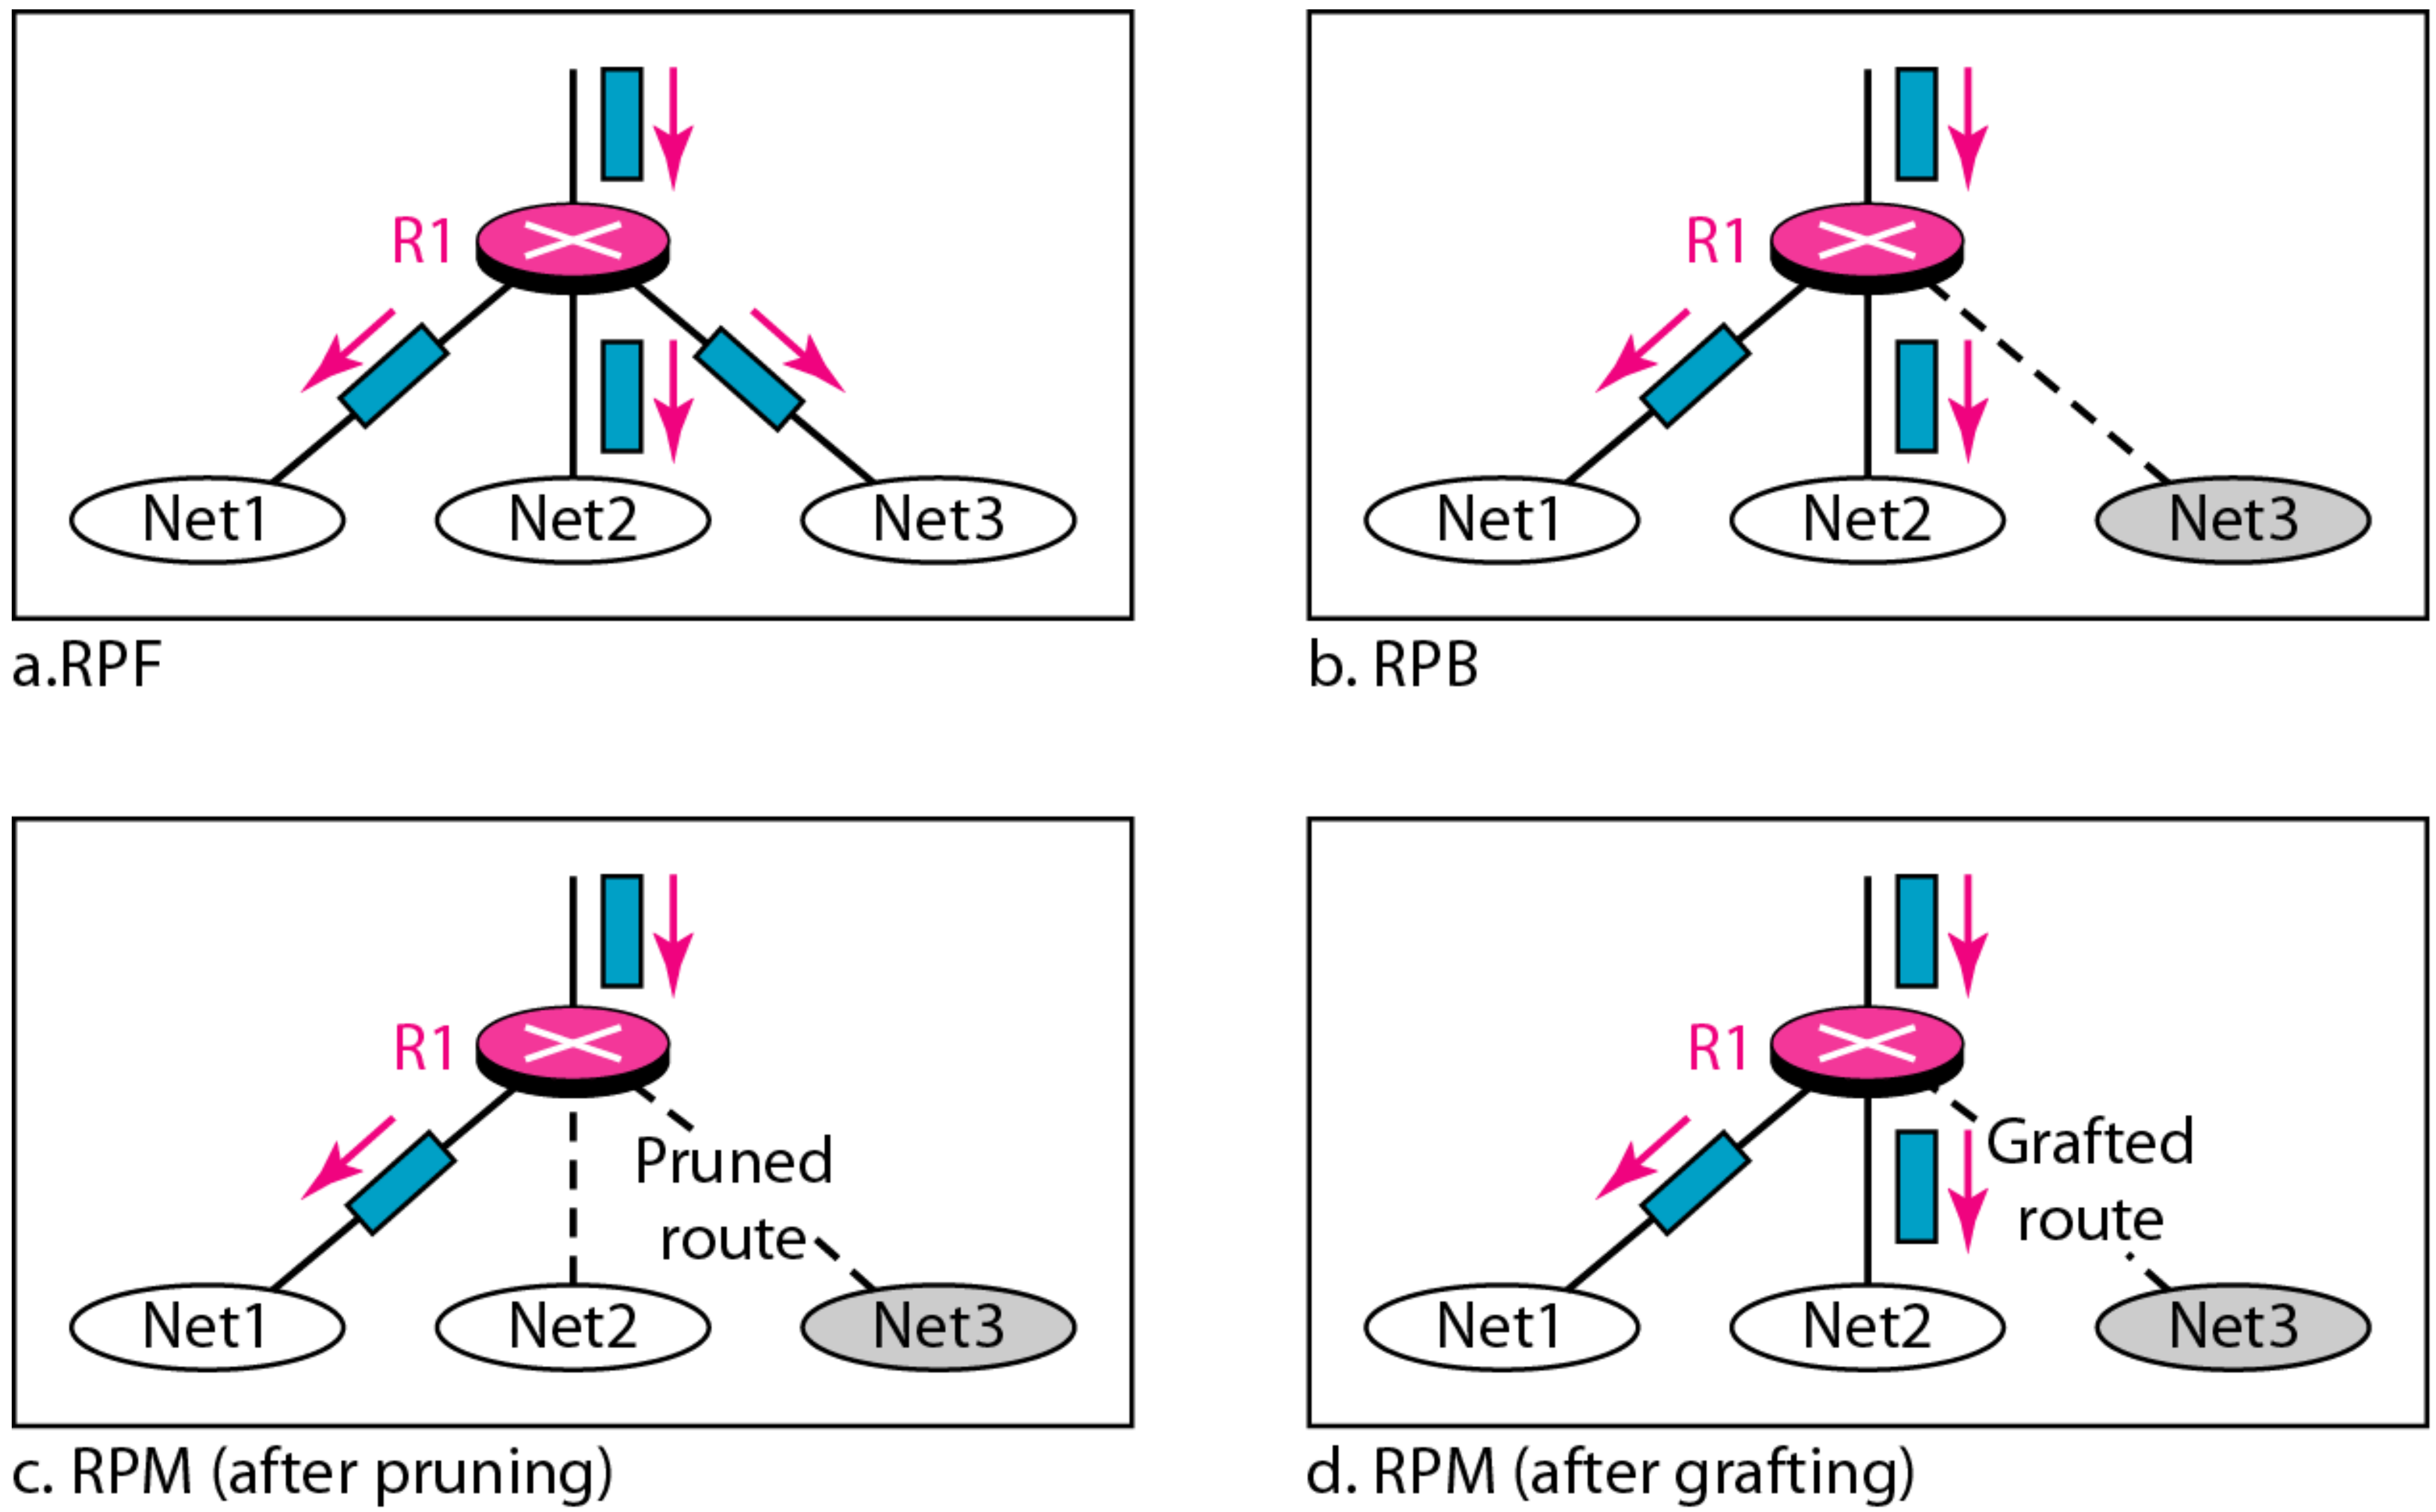

Note

RPM adds pruning and grafting to RPB to create a multicast shortest path tree that supports dynamic membership changes.

Figure 22.44 *Group-shared tree with rendezvous router*

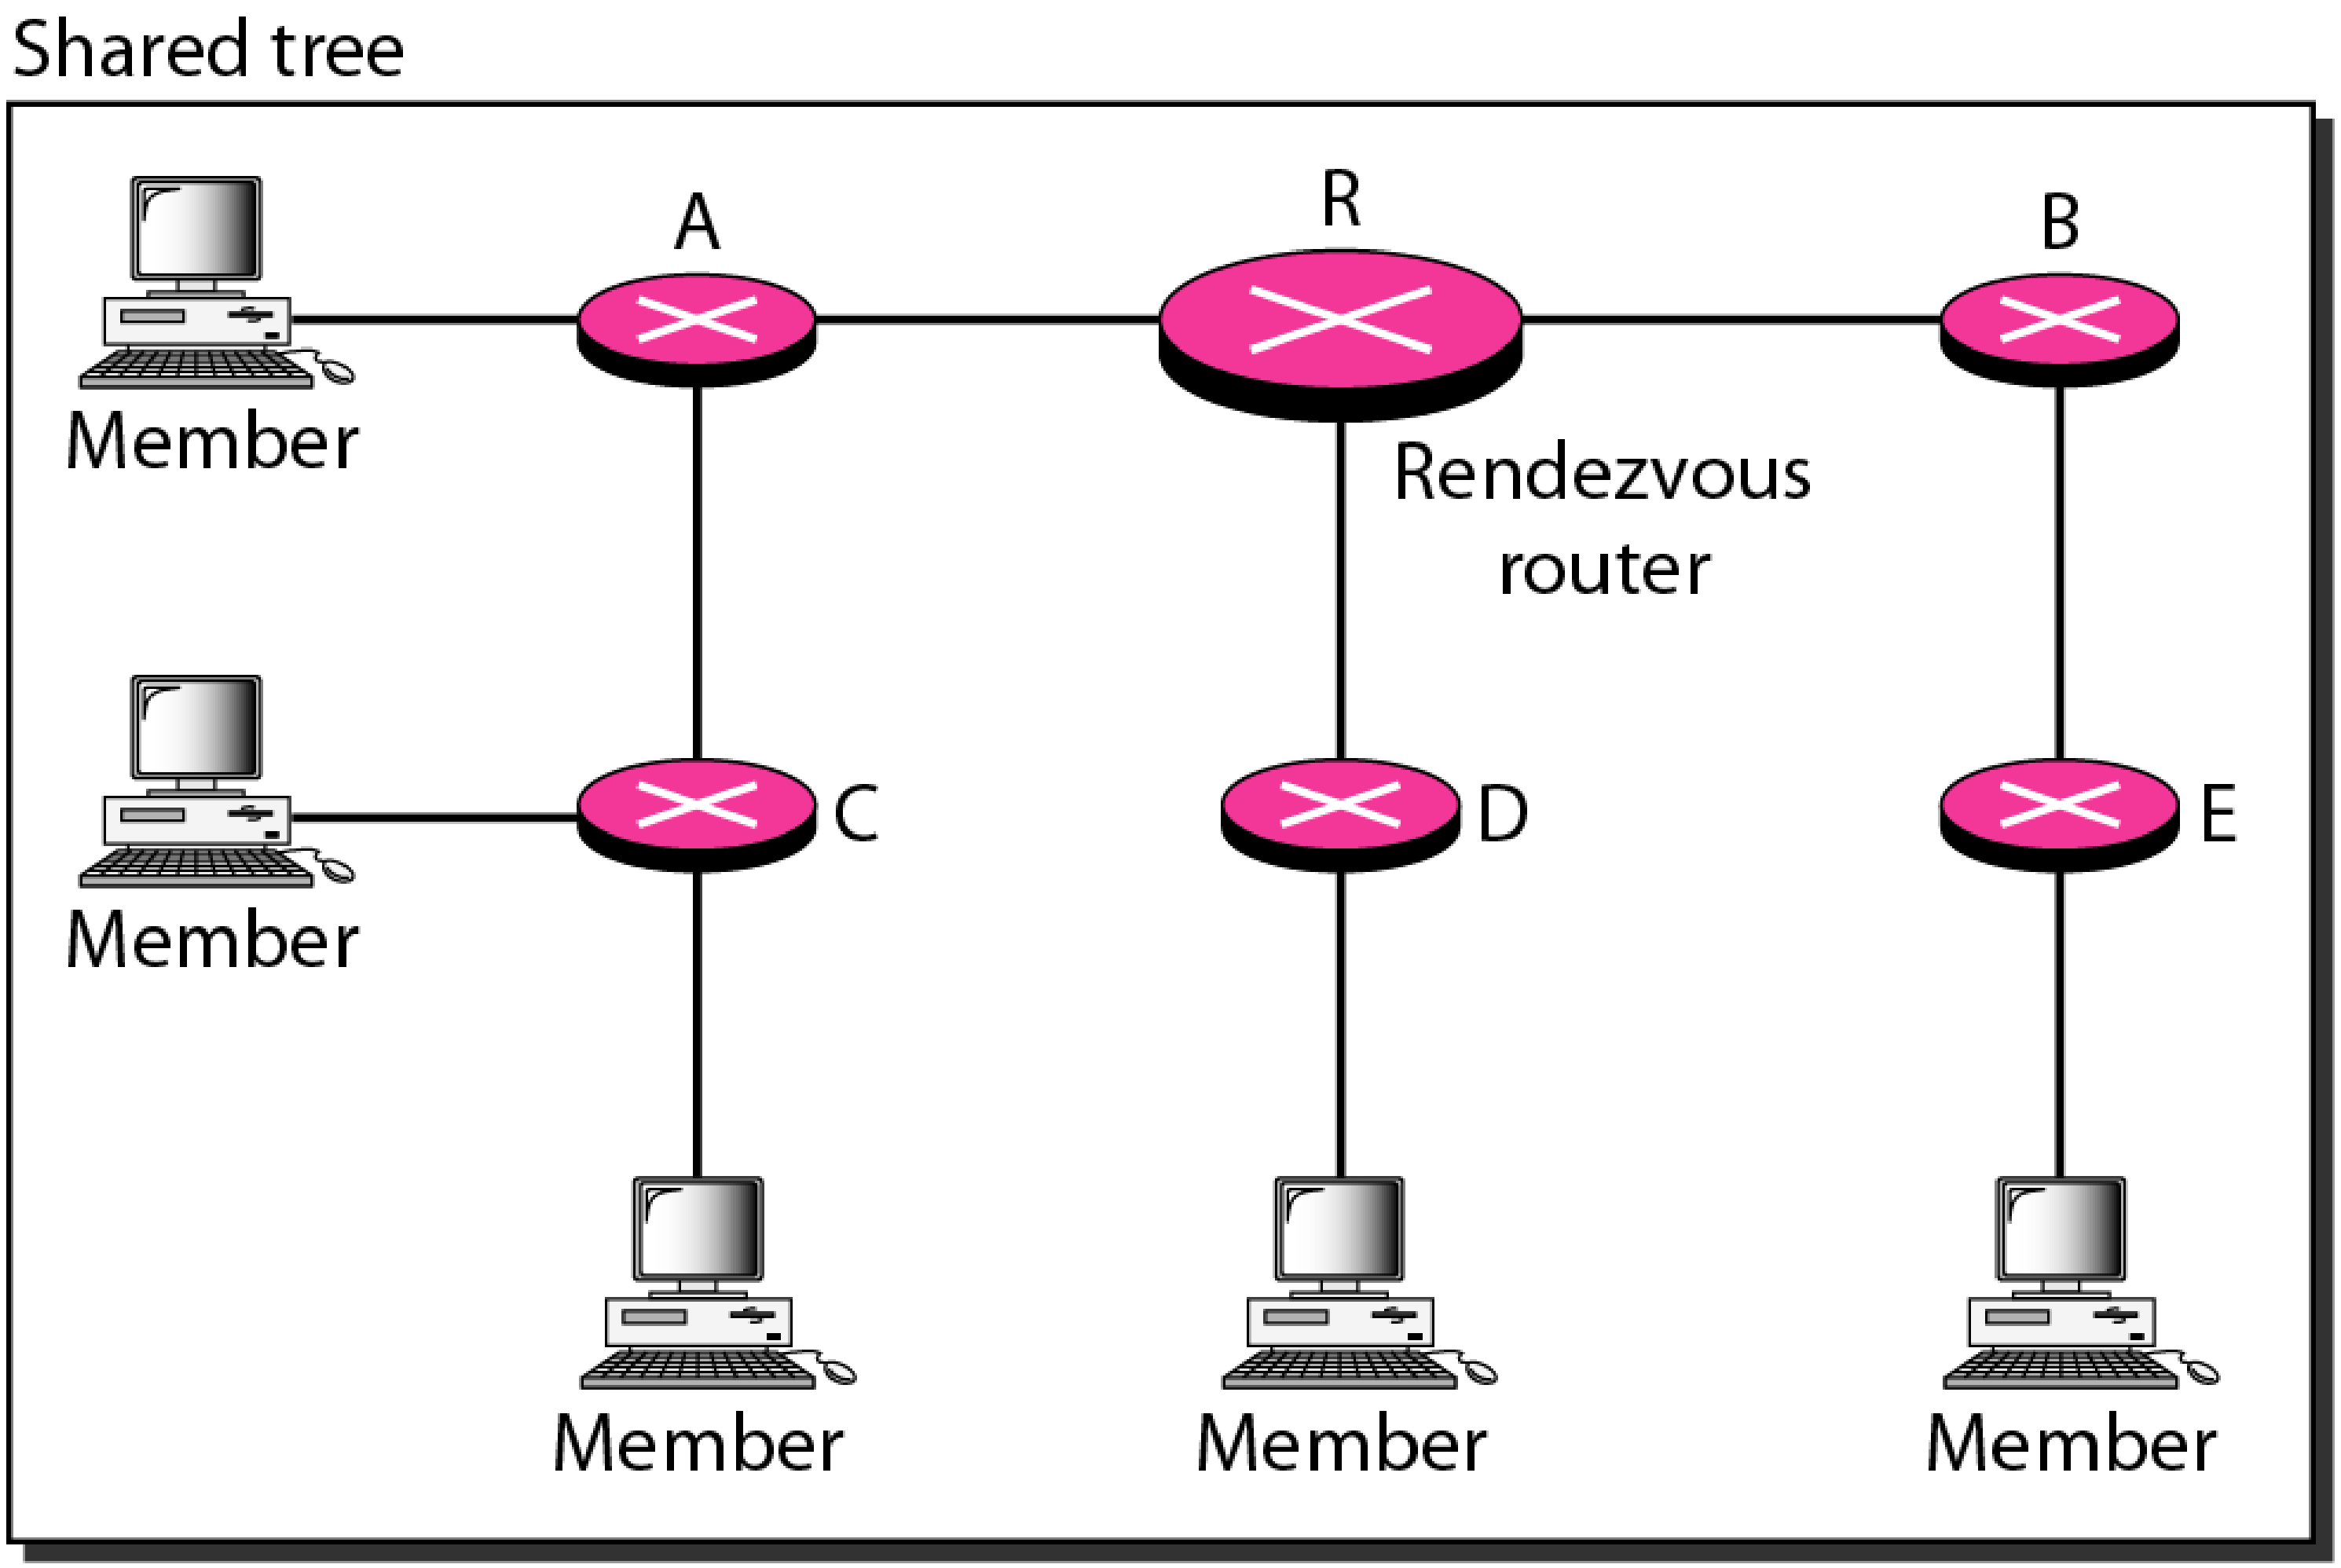

Figure 22.45 *Sending a multicast packet to the rendezvous router*

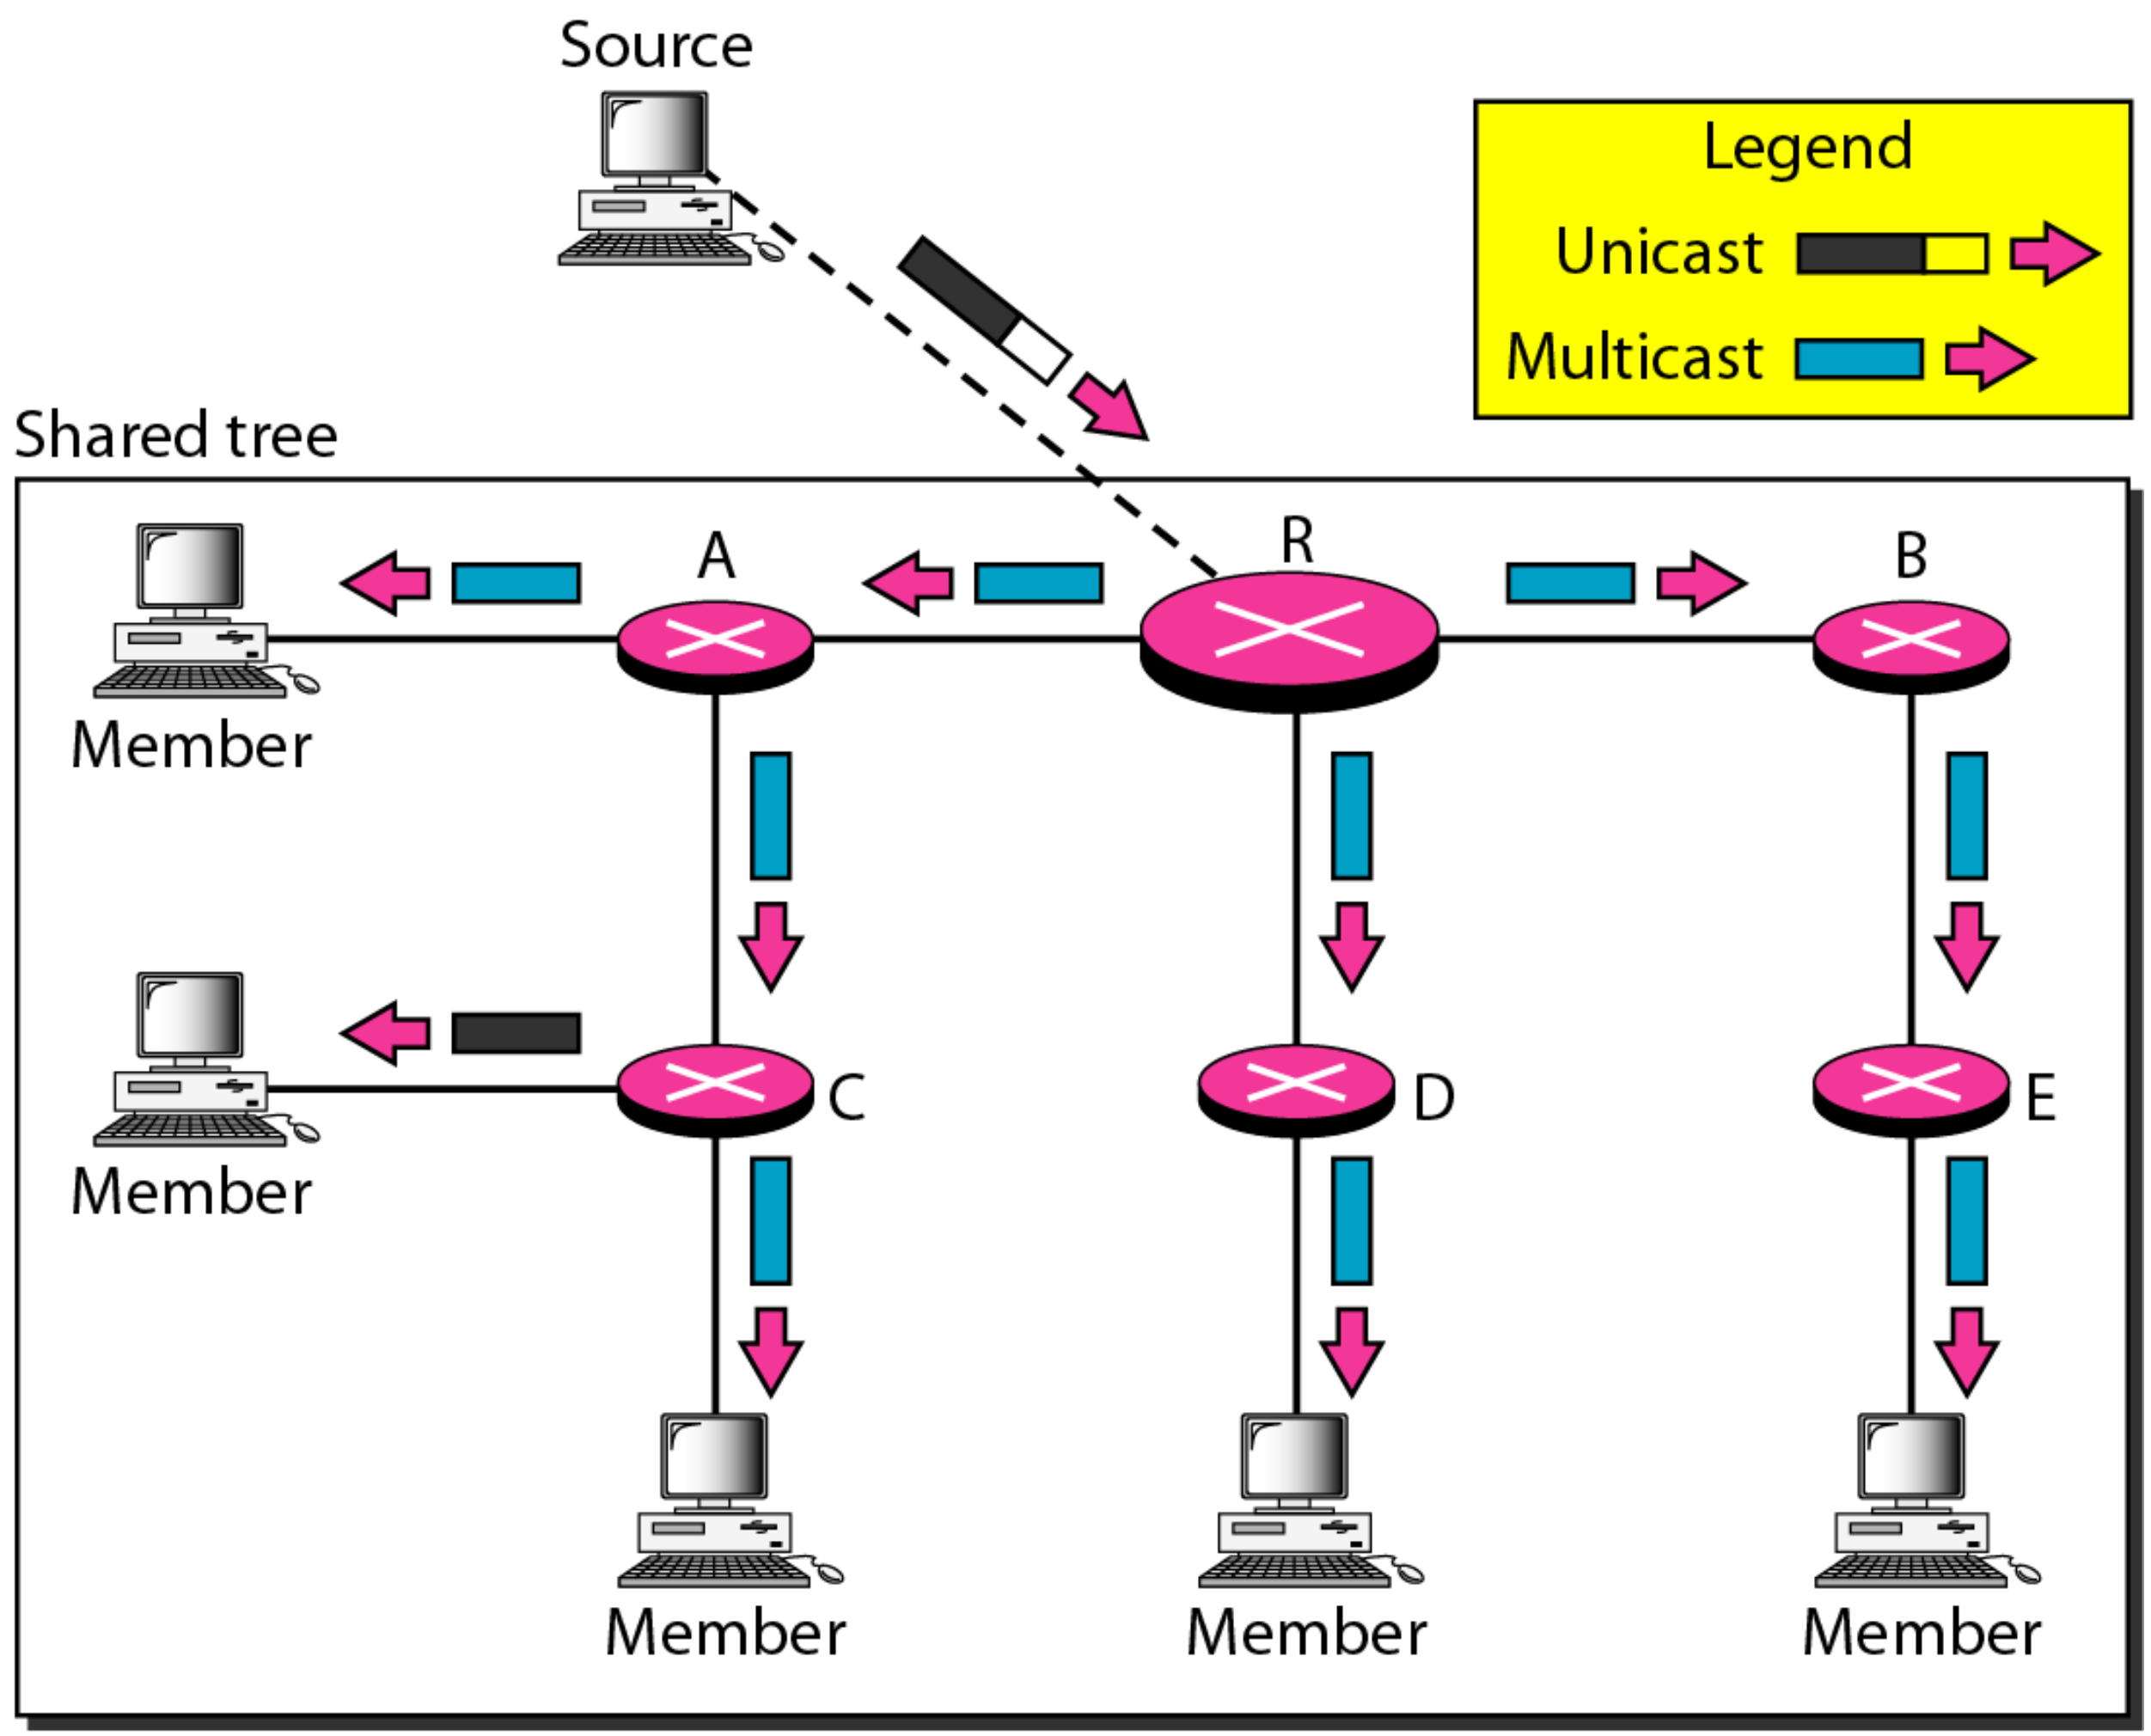

Note

In CBT, the source sends the multicast packet (encapsulated in a unicast packet) to the core router. The core router decapsulates the packet and forwards it to all interested interfaces.

Note

PIM-DM is used in a dense multicast environment, such as a LAN.

Note

PIM-DM uses RPF and pruning and grafting strategies to handle multicasting.
However, it is independent of the underlying unicast protocol.

Note

PIM-SM is used in a sparse multicast environment such as a WAN.

Note

PIM-SM is similar to CBT but uses a simpler procedure.

Figure 22.46 *Logical tunneling*

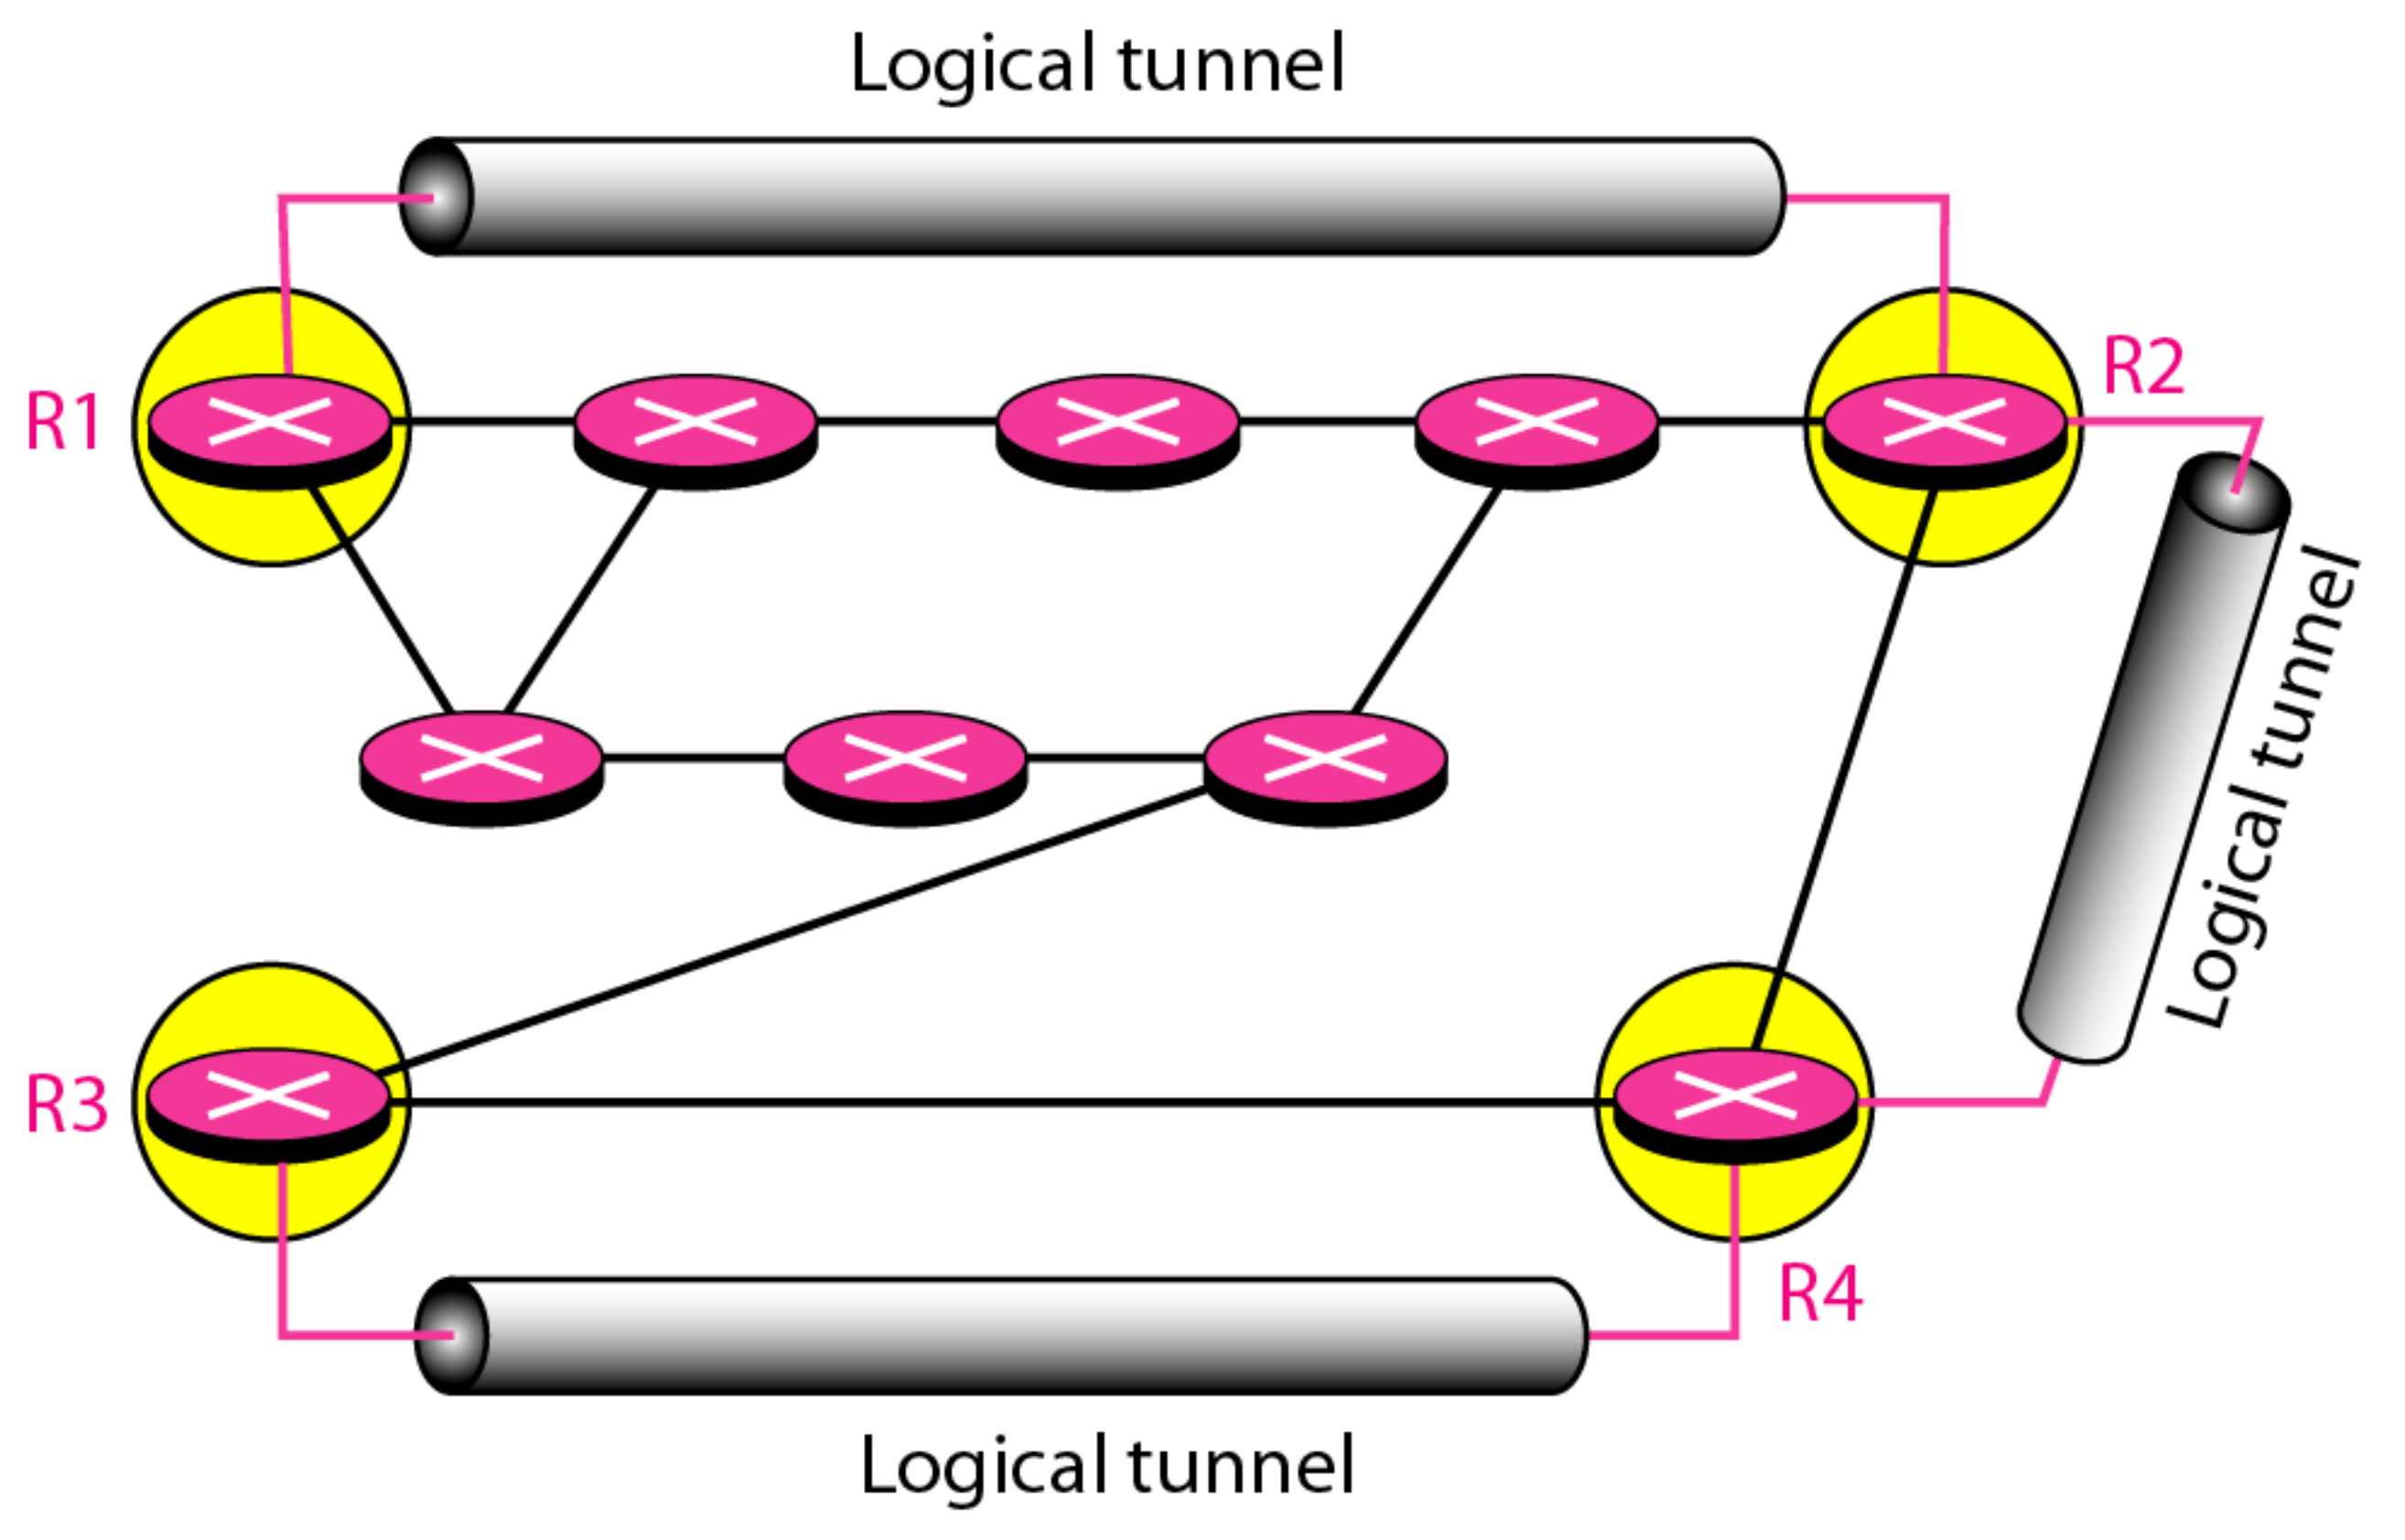

Figure 22.47 *MBONE*