




UNITY MODEL-A

C&I All In One System

KEY FEATURES

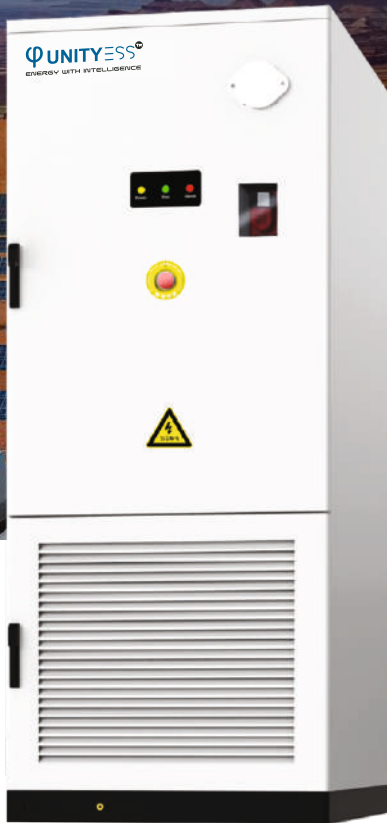

SCALABILITY

Scalable upto 12 units in parallel.



EFFICIENCY

Optimized BMS and inverter performance.



SAFETY

Fire-protected compartments with advanced cooling.



VERSATILITY

Reliable across voltage and frequency



DURABILITY

IP66 protection and corrosion-resistant C3–C5 grade enclosure.



RELIABILITY

Consistent performance even in demanding environments.



1800 2026 252

TECHNICAL PARAMETERS

MODEL A	Model A-105-233	Model A-125-261
AC Parameters		
AC rated Power	105 kW	125 kW
Rated Grid Voltage (V)	400V	400V
Voltage Range (AC)	360~440V	360~440V
Power Factor	0.99/-1~1	0.99/-1~1
AC Standard	3P/N/PE	3P/N/PE
THDU	<2%	<2%
Rated Frequency	50/60Hz	50/60Hz
Overload Capacity	110% overload (long time), 120% 1 minute	110% overload (long time), 120% 1 minute
AC Protection	Circuit breaker + AC lightning protection	Circuit breaker + AC lightning protection
Battery Parameters		
Cell Type	LFP	LFP
Nominal Voltage	832V	832V
Voltage Range (V)	728~936V	728~936V
System Energy (kWh)	233 kWh	261 kWh
Charge/ Discharge Rate	0.5C/0.5P	0.5C/0.5P
Cooling Mode	Liquid Cooling	Liquid Cooling
Series of Battery	1P*52*5S	1P*52*5S
Pack Protection level	IP66	IP66
General Parameters		
System Efficiency	>86%	>86%
Operating Temp Range	-25~60°C (Decadation above 45 °C)	-25~60°C (Decadation above 45 °C)
Operating Humidity	0%-95% R.H	0%-95% R.H
IP Rating	IP66	IP66
Anti Corrosion grade	C3-M (Standard)/ C4/ C5	C3-M (Standard)/ C4/ C5
Firefighting System	PACK-level aerosol + Cabin level aerosol + Water firefighting (optional)	
Communication Port	RS485/ CAN 2.0/ Ethernet/ Dry Contact	RS485/ CAN 2.0/ Ethernet/ Dry Contact
Noise	≤76dB@1m	
Certification	GB/T 36276, UN38.3, IEC62619, IEC62477, IEC61000	
Dimension (WxDxH)	1100 x 1320 x 2560 mm	1100 x 1320 x 2560 mm
Equipment Weight	2600Kg	2600 Kg
AC Protection	Circuit breaker + AC lightning protection	Circuit breaker + AC lightning protection

UNITY MODEL-A2

C&I All In One System

KEY FEATURES



SCALABILITY

Scalable upto 12 units in parallel.



SAFETY

Fire-protected compartments with advanced cooling.



DURABILITY

IP66 protection and corrosion-resistant C3–C5 grade enclosure.



EFFICIENCY

Optimized BMS and inverter performance.



VERSATILITY

Reliable across voltage and frequency



RELIABILITY

Consistent performance even in demanding environments.



1800 2026 252

TECHNICAL PARAMETERS

MODEL A	Model A2 209-418
AC Parameters	
AC rated Power	209 kW
Rated Grid Voltage (V)	800V
Voltage Range (AC)	720~880V
Power Factor	0.99/-1~1
AC Standard	3P/N/PE
THDU	<2%
Rated Frequency	50/60Hz
Overload Capacity	110% overload (long time), 120% 1 minute
AC Protection	Circuit breaker + AC lightning protection
Battery Parameters	
Cell Type	LFP
Nominal Voltage	1331.2V
Voltage Range (V)	1164.8~1497.6V
System Energy (kWh)	418 kWh
Charge/ Discharge Rate	0.5C/0.5P
Cooling Mode	Liquid Cooling
Series of Battery	1P*52*8S
Pack Protection level	IP66
General Parameters	
System Efficiency	>90%
Operating Temp Range	-30~55°C
Operating Humidity	0%-95% R.H
IP Rating	IP54
Anti Corrosion grade	C3-M (Standard)/ C4/ C5
Firefighting System	Cabin level aerosol + Water firefighting (optional)
Communication Port	RS485/ CAN 2.0/ Ethernet/ Dry Contact
Noise	≤76dB@1m
Certification	GB/T 36276, UN38.3, IEC62619, IEC62477, IEC61000
Dimension (WxDxH)	1600 x 1350 x 2450 mm
Equipment Weight	3700Kg
AC Protection	Circuit breaker + AC lightning protection

UNITY MODEL-A3

C&I All In One System

KEY FEATURES



SCALABILITY

Scalable upto 12 units in parallel.



SAFETY

Fire-protected compartments with advanced cooling.



DURABILITY

IP66 protection and corrosion-resistant C3–C5 grade enclosure.



EFFICIENCY

Optimized BMS and inverter performance.



VERSATILITY

Reliable across voltage and frequency



RELIABILITY

Consistent performance even in demanding environments.



1800 2026 252

TECHNICAL PARAMETERS

MODEL A	Model A3 125kW-313
AC Parameters	
Nominal Power	125 kW
Nominal Grid Voltage	400V
Access Method	3P3W
Nominal Grid Frequency	50 Hz
Frequency Range	47 Hz - 52 Hz
THDI	<3%
DC Component	< 0.5%
Power Factor Range	1.0 Leading - 1.0 Lagging
Standard	EN 62477-1, EN IEC 61000-6-2/4, EN 50549-1, C10/11:2021, VDE-AR-N4110
Battery Parameters	
Cell Specifications	LFP 314 Ah
Battery Configuration	312S1P
Nominal Capacity	313.497 kWh
Voltage Range	873.6 V - 1100 V
Nominal Voltage	998.4 V
Cooling Method	Liquid Cooling
Standard	IEC 62619, UN38.3, IEC 63056
System Parameter	
Communication Interfaces	Rs485 / Ethernet
Communication Protocol	Modbus-RTU / Modbus-TCP
Noise	≤ 70 dB
Life Cycle	≤ 6,000 cycles
Ingress Protection	IP55
Working Temperature Range	-30°C-50°C (> 40°C derating
Altitude	2,000 m
Dimensions(W * H * D)	1,300 mm * 2,150 mm * 1,320 mm
Fire Fighting System	Temperature & Smoke Detector, Aerosol, Water Fire Interface
Weight	2960±20 kg
Standard	EN IEC 61000-6-2/4, EN 62477 - 1, IEC 63056, IEC 62619, UN 38.3

UNITY MODEL-B

Hybrid Integrated System




KEY FEATURES



DURABILITY

High-grade design for all environments.



INTELLIGENCE

Advanced BMS for safer performance.



SAFETY

Self-contained batteries with enhanced fire safety.



SCALABILITY

Flexible DC design for large scale operations.



EFFICIENCY

Delivers reliable power with minimal loss.



CONTROL

Easy monitoring and remote management.



1800 2026 252

TECHNICAL PARAMETERS

MODEL B - LV	Model B-100-261	Model B-250-522	Model B-500-1044
DC side PV			
Rated PV Power (kW)	100 kW	250 kW	500 kW
Peak PV Loading (kW)	125 kW	300kW	600 kW
Max PV Input Voltage (V)	1000V	1000V	1000V
MPPT Voltage Range (V)	200~850V	200~850V	200~850V
Max PV Input Voltage (V)	1000V	1000V	1000V
Battery Parameters			
Cell Type	LFP	LFP	LFP
Battery Voltage Range (V)	600-1000V	600-1000V	600-1000V
Recommended Battery Config.	261 kWh	522 kWh	1044 kWh
Charge/ Discharge Rate	0.5C/0.5P	0.5C/0.5P	0.5C/0.5P
Max Charge/ Discharge Power	100 kW	250 kW	500 kW
Cooling Mode	Liquid Cooling	Liquid Cooling	Liquid Cooling
AC Side			
Rated Apparent Power (kVA)	100 kVA	250 kVA	500 kVA
Max AC Power (kVA)	110 kVA	275 kVA	550 kVA
Rated Voltage (V)	400V	400V	400V
Voltage Range (AC)	360~440V	360~440V	360~440V
Power Factor	>0.99 (-0.8~0.8 adjustable)	>0.99 (-0.8~0.8 adjustable)	>0.99 (-0.8~0.8 adjustable)
AC Standard	3/N/PE	3/N/PE	3/N/PE
THDU	<3% @ Rated Power	<3% @ Rated Power	<3% @ Rated Power
Rated Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Overload Capacity	110% overload (long time)	110% overload (long time)	110% overload (long time)
General Parameters (Hybrid Inverters)			
Operating Temp Range	-25~60°C (Decration above 45 °C)	-25~60°C (Decration above 45 °C)	-25~60°C (Decration above 45 °C)
Operating Humidity	5%-95% R.H	5%-95% R.H	5%-95% R.H
IP Rating	PCS: IP55 Battery: IP54	PCS: IP55 Battery: IP54	PCS: IP55 Battery: IP54
Communication Port	RS485/ CAN / ETH/ Dry Contact	RS485/ CAN / ETH/ Dry Contact	RS485/ CAN / ETH/ Dry Contact
Noise	≤75dB@1m	≤75dB@1m	≤75dB@1m
Cooling	Intelligent Air Cooling	Intelligent Air Cooling	Intelligent Air Cooling



UNITY MODEL-C

Container Energy Storage System

KEY FEATURES



LIQUID COOLING

Smart liquid system extends battery life and performance.




RELIABILITY

Integrated BMS, fire safety and real-time monitoring.



EFFICIENCY

High round-trip efficiency for maximum energy utilization.



INTELLIGENCE

Cloud-based EMS ensures efficient energy management.



SCALABILITY

Modular design expandable up to 6 MWh.



MONITORING

Real-time data tracking and predictive maintenance support.



1800 2026 252

TECHNICAL PARAMETERS

MODEL C	Model C-5.00 MWh	Model C-6.25 MWh
Battery Parameters		
Nominal Capacity (kWh)	5015.96 kWh	6251.3 kWh
Nominal Voltage (V)	1331.2V	1331.2V
Voltage Range	1164.8~1497.6 V	1123.2~1497.6 V
Cell Type	LFP 3.2V/ 314 Ah	LFP 3.2V/ 587 Ah
Cluster Configuration	1P 416S*12	1P 416S*8
Nominal Power	2507.9 kW@0.5CP ; 1253.8 kW @0.25CP	3125.6 kW @0.5CP ; 1562.8 kW @0.25CP
System Parameters		
Auxiliary Power Supply	400V AC, 50/60 Hz	400V AC, 50/60 Hz
Operation Ambient Temp	-30°C to 50°C	-30°C to 55°C
Altitude	≤3000m	≤3000m
SOC Calculation Accuracy	≤3% (after balancing)	≤3% (afterbalancing)
Relative Humidity	≤100% RH (non condensing)	≤100% RH (non condensing)
Altitude	≤3000m	≤3000m
General Paramaters		
IP Rating	Container: IP55 Module: IP67	Container: IP55 Module: IP67
Cooling Mode	Liquid Cooling	Liquid Cooling
Noise	≤75dB (A), Standard Version ; ≤65db (A), Silencer Assembly (Optional)	
Weight	42T	49T
Corrosion Proof Grade	C4	C4
Fire Suppression System	Smoke and heat detectors, FACP, ventilation system, dry pipes with sprinklers, aerosol	
Communication Port	Support CAN/ Modbus 485/ TCP communication Methods ; CAN communication is recommended	
Dimensions	6058 x 2436 x 2896 mm	6058 x 2436 x 2896 mm
Certification		
Battery Cell	IEC62619, UL1973, UL9540A	IEC62619, UL1973, UL9540A
Battery Pack	IEC60730-1, UN38.3 UL1973 UL9540A U 60730-1	IEC60730-1, UN38.3 UL1973 UL9540A UL 60730-1
Battery Rack	IEC62619, IEC 60730-1, IEC 63056, IEC62477-1 UL1973, UL 9540A, UL 60730-1	IEC62619, IEC 60730-1, IEC 63056, IEC62477-1 UL1973, UL 9540A, UL 60730-1
System	IEC 62477-1, IEC 60730-1 EN IEC 61000-6-2/4, UN38.3 UN3536 UL9540 UL 60730-1	IEC 62477-1, IEC 60730-1 EN IEC 61000-6-2/4, UN38.3 UN3536, UL9540, UL 60730-1