


Aura

AIR COOLED • COMMERCIAL & INDUSTRIAL

Power your operations with a BESS built for India's toughest industrial conditions. Delivers clean, reliable, and uninterrupted power — reducing diesel usage, cutting energy bills, and stabilizing your plant during peak loads

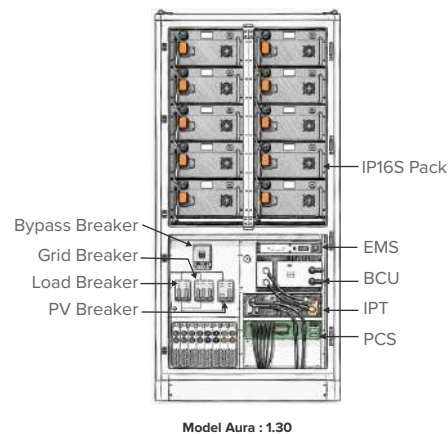

PRODUCT FEATURES



Built in MPPT for solar input



High-capacity LFP cells with 10,000 cycle life. Built and validated by Inverted Energy .



From dispatch, predictive optimization, monitoring, to tari arbitrage all managed by the Unity EMS platform.




Designed for scalability from 100-225kWh by adding modules parallelly.



Built-in safety through cell level BMS to system-level protection and automatic fire protection

Battery Degradation

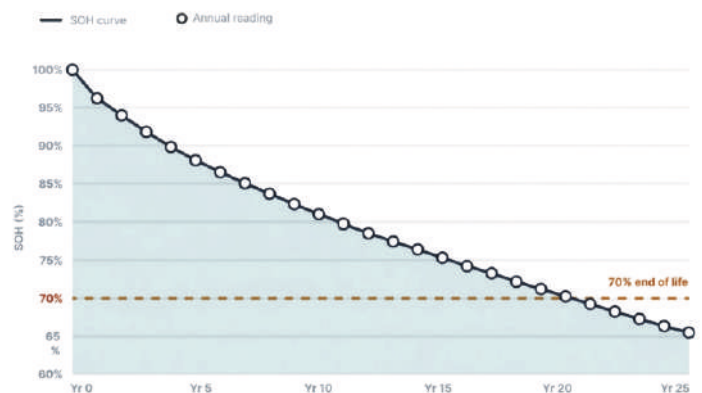

Product
model

Aura

Aux consumption (130 kWh)

1.42 kW
while operating

0.5 kW
while idle

AC side (Grid connected)

	Aura 1.0		Aura 1.30	
Rated capacity	100 kWh	100 kWh	130 kWh	130 kWh
AC rated power	25 kW	50 kW	35 kW	65 kW
Nominal Voltage (AC)	415 V			
Rated Voltage (AC)	380 - 420 Vac			
Frequency	49.5 - 50.5 Hz			
THDi	≤ 3%			
Power factor	1.0 leading - 1.0 lagging			

AC side (Off grid)

Rated output power	25 kW	50 kW	35 kW	65 kW
No. of hours of Backup	4 hours	2 hours	4 hours	2 hours
Rated output voltage	415 V			
Overload capacity	110% for 10 minutes			

PV side

Maximum PV loading	100 kW			
Maximum input current	160 A			
PV rated voltage (DC)	650 - 800 Vdc			
Input switch	250 A / 1000 Vdc / 2p, Supports single MPPT input			

Battery side

Cell	Lithium Ferrous Phosphate			
Battery pack	1P16S			
Nominal DC voltage	308 V		410 V	
DC Voltage range	269 V ~ 461 V			
Cooling method	Air cooled (HVAC)			

Distribution and Switching time

Intelligent power transfer (IPT)	144 A / 110 kW			
Switching time	< 20 ms			

General parameters

Battery efficiency	> 95%			
Communication	RS485 / Ethernet TCP IP			
Fire Fighting system	Temperature / Smoke detection, Aerosol, Flooding			
Noise	< 80 db			
IP Rating	IP54			
Dimension (W x D x H)	1050 x 1050 x 2200 mm			
Weight	1500 kgs ± 100 kgs			
Standard	IEC62619, IEC61000, UL9540(A), UN38.3			