


AQUA 4

LIQUID COOLED • BEHIND THE METER

Optimize your operations with an Energy Storage System designed for Open Access Applications. Aqua stores low-cost renewable energy for later utilization and delivers reliable power - solar when available, grid when required, storage. always balancing the two.

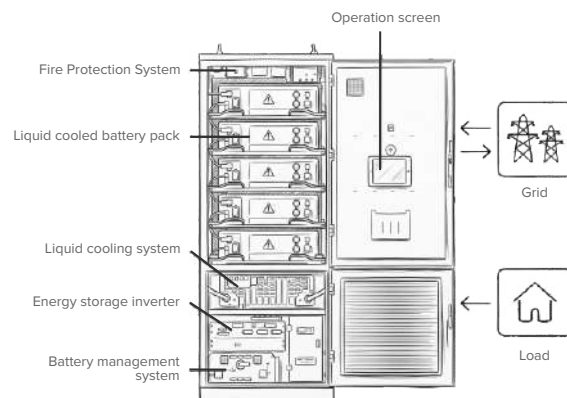

Model Aqua 4 : 269 kWh

PRODUCT FEATURES

Battery Degradation



Quick-connect interface between battery packs and liquid cooling system.



High-capacity LFP cells with 10,000 cycle life. Built and validated by Inverted Energy .




From dispatch, predictive optimization, monitoring, to tari arbitrage all managed by the Unity EMS platform.



Designed for scalability from 261 kWh to over 2.5 MWh by adding modules parallelly.



Built-in safety through cell level BMS to system-level protection and automatic fire protection

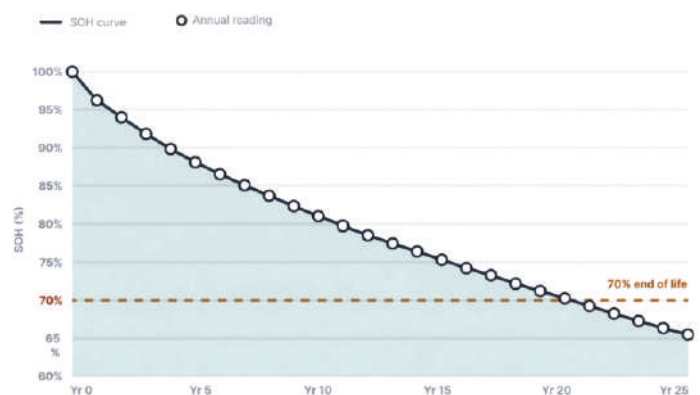

Product
model

Aqua 4

Aux consumption (269 kWh)

2.63 kW
while operating

0.05 kW
while idle

AC side

Rated capacity	269 kWh	430 kWh	539 kWh	539 kWh
AC rated power	125 kW	125 kW	125 kW	250 kW
Nominal Voltage (AC)	415 V			
Rated Voltage (AC)	380 - 420 Vac			
Frequency	49.5 - 50.5 Hz			
THDi	≤3%			
Power factor	1.0 leading - 1.0 lagging			
Overload capacity	110% for 10 minutes			

DC side

Cell	Lithium Ferrous Phosphate			
Battery pack	1P52S			
Nominal DC voltage	832 V	1331 V	832 V	832 V
DC voltage range	754 V - 936 V	1100 V - 1500 V	754 V - 936 V	754 V - 936 V
Cooling	Liquid cooled			


General parameters

Communication	RS485 / CAN / Ethernet			
Battery Efficiency	> 96%			
Lifetime	10,000 cycles			
Fire Fighting system	Temperature / Smoke detection, Aerosol, Flooding			
Noise	≤ 75 db			
Operating temperature	-30 to 55°C			
Max. operating altitude	3000m			
Humidity range	5% > 95% RH, No Condensation			
Corrosion level resistance	C3 - M			
IP Rating	IP54			
Dimension (W x D x H)	1100 x 1320 x 2560 mm	1710 x 1300 x 2400 mm	1920 x 1350 x 2260 mm	1920 x 1350 x 2260 mm
Weight	2600 kg ± 100 kg	3600 kg ± 100 kg	4150 kg ± 100 kg	4150 kg ± 100 kg
Standard	IEC62619, IEC61000, UL9540(A), UN38.3			

AQUA 6/8

LIQUID COOLED • OPEN ACCESS & INDUSTRIAL

Optimize your operations with an Energy Storage System designed for Open Access Applications. Aqua stores low-cost renewable energy for later utilization and delivers reliable power - solar when available, grid when required, storage. always balancing the two.

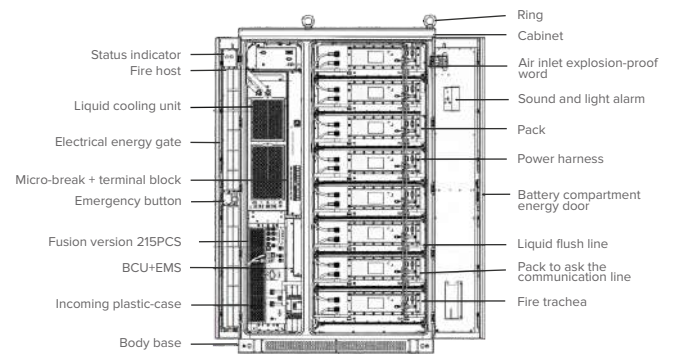

Model Aqua 6/8 : 430kWh

PRODUCT FEATURES

Battery Degradation



Quick-connect interface between battery packs and liquid cooling system.



High-capacity LFP cells with 10,000 cycle life. Built and validated by Inverted Energy .




From dispatch, predictive optimization, monitoring, to tari arbitrage all managed by the Unity EMS platform.



Designed for scalability from 261 kWh to over 2.5 MWh by adding modules parallelly.



Built-in safety through cell level BMS to system-level protection and automatic fire protection

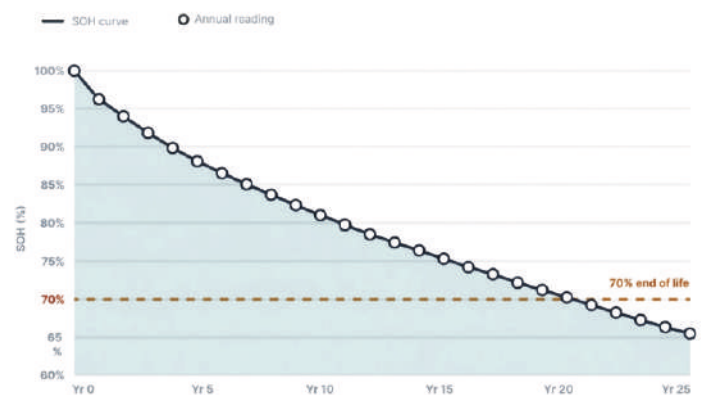

Product
model

Aqua 6/8

Aux consumption (430 kWh)

5.32 kW
while operating

0.09 kW
while idle

AC side

Rated capacity	430 kWh	860 kWh
AC rated power	215 kW	
Nominal Voltage (AC)	690 - 800V	
Rated Voltage (AC)	655 / 840 Vac	
Frequency	49.5 - 50.5 Hz	
THDi	≤ 3%	
Power factor	1.0 leading - 1.0 lagging	

DC side

Cell	Lithium Ferrous Phosphate
Battery pack	1P52S
Nominal DC voltage	1331V
DC voltage range	1100 - 1500 V
Cooling	Liquid cooled

General parameters

Communication	RS485 / CAN / Ethernet	
Battery Efficiency	> 96%	
Lifetime	10,000 cycles	
Fire Fighting system	Temperature / Smoke detection, Aerosol, Flooding	
Noise	< 80 db	
Operating temperature	-30 to 55°C	
Max. operating altitude	3000m	
Humidity range	5% > 95% RH, No Condensation	
Corrosion level resistance	C3 - M	
IP Rating	IP54	
Dimension (W x D x H)	1710 x 1400 x 2400 mm	1710 x 2800 x 2400 mm
Weight	3800 kg ± 100 kg	6600 kg ± 100 kg
Standard	IEC62619, IEC61000, UL9540(A), UN38.3	