


ULTIMA

CONTAINERISED • UTILITY SCALE

Built for India's fast-growing utility-scale solar and hybrid projects - delivering high-density, multi-megawatt-hour storage in a single containerized unit. Plug-and-operate design minimizes civil work for faster commissioning.

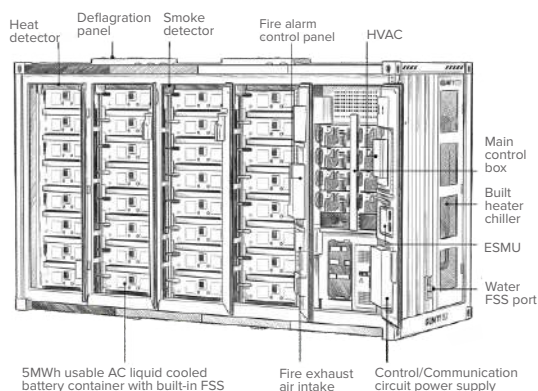

Model : Ultima

PRODUCT FEATURES



Suitable for coastal and high-humidity environments. IP55 protection. Built for Indian site conditions



Batteries, PCS, thermal management, fire protection, and Unity EMS in one 20ft container.



Ramp-rate control. Frequency response. Peak shaving. Mid-day solar shift to evening peak. The Unity EMS manages the full dispatch stack




High-capacity LFP cells with 10,000 cycles.



Built-in safety through cell level BMS to system-level protection and automatic fire protection

Battery Degradation

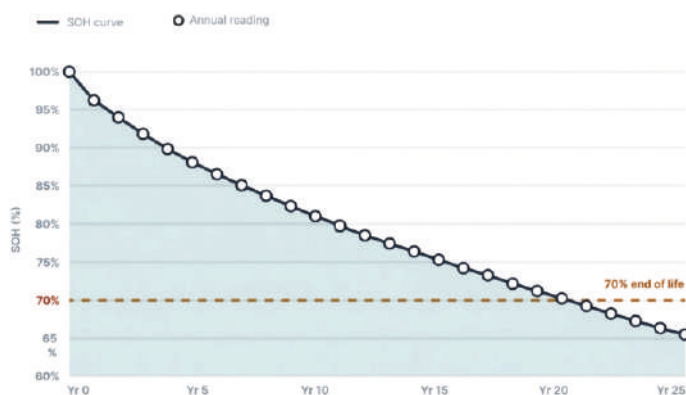

Product
model

Ultima 314

Aux consumption (5 MWh)

36.39 kW
while operating

0.71 kW
while idle

AC side

Rated capacity	3.340 MWh	4.180 MWh	5.016 MWh
AC rated power	2.5 MVA		
Nominal Voltage (AC)	690V		
Rated Voltage (AC)	655 - 724 Vac		
Frequency	49.5 - 50.5 Hz		
THDi	≤ 3%		
Power factor	1.0 leading - 1.0 lagging		

DC side

Cell	Lithium Ferrous Phosphate		
Battery pack	1P52S		
Battery rack	8P8S	10P8S	12P8S
Nominal DC voltage	1331V		
DC voltage range	1100 - 1500 V		
Cooling	Liquid cooled		

General parameters

Communication	RS485 / CAN / Ethernet		
Battery Efficiency	> 96%		
Lifetime	10,000 cycles		
Fire Fighting system	Temperature / Smoke detection, Aerosol, Flooding, alarm bell and stobe		
Noise	< 80 db		
Operating temperature	-30 to 55°C		
IP Rating	C3 - M		
Dimension (W x D x H)	6058 x 2436 x 2896 mm		
Weight	40 - 49 tons		
Standard	IEC62619, IEC61000, UL9540(A), UN38.3		

Product
model

Ultima 350

Aux consumption (5 MWh)

36.39 kW
while operating

0.71 kW
while idle

AC side

Rated capacity	3.340 MWh	4.300 MWh	5.161 MWh
AC rated power	2.5 MVA		
Nominal Voltage (AC)	690V		
Rated Voltage (AC)	655 - 724 Vac		
Frequency	49.5 - 50.5 Hz		
THDi	≤ 3%		
Power factor	1.0 leading - 1.0 lagging		

DC side

Cell	Lithium Ferrous Phosphate		
Battery pack	1P128S		
Battery rack	8P3S	10P3S	12P3S
Nominal DC voltage	1230 V		
DC voltage range	1000 - 1500 V		
Cooling	Liquid cooled		

General parameters

Communication	RS485 / CAN / Ethernet
Battery Efficiency	> 96%
Lifetime	10,000 cycles
Fire Fighting system	Temperature / Smoke detection, Aerosol, Flooding
Noise	< 80 db
Operating temperature	-30 to 55°C
IP Rating	C3 - M
Dimension (W x D x H)	6058 x 2436 x 2896 mm
Weight	40 - 49 tons
Standard	IEC62619, IEC61000, UL9540(A), UN38.3

Product
model

Ultima 587

Aux consumption (5 MWh)

36.39 kW
while operating

0.71 kW
while idle

AC side

Rated capacity	4.690 MWh	5.470 MWh	6.25 MWh
AC rated power	3.125 MVA		
Nominal Voltage (AC)	690V		
Rated Voltage (AC)	655 - 724 Vac		
Frequency	49.5 - 50.5 Hz		
THDi	≤ 3%		
Power factor	1.0 leading - 1.0 lagging		

DC side

Cell	Lithium Ferrous Phosphate		
Battery pack	1P52S		
Battery rack	6P8S	7P8S	8P8S
Nominal DC voltage	1331 V		
DC voltage range	1100 - 1500 V		
Cooling	Liquid cooled		

General parameters

Communication	RS485 / CAN / Ethernet		
Battery Efficiency	> 96%		
Lifetime	10,000 cycles		
Fire Fighting system	Temperature / Smoke detection, Aerosol, Flooding, Alarm bell and strobe		
Noise	< 80 db		
Operating temperature	-30 to 55°C		
IP Rating	C3 - M		
Dimension (W x D x H)	6058 x 2436 x 2896 mm		
Weight	40 - 49 tons		
Standard	IEC62619, IEC61000, UL9540(A), UN38.3		