




AURA

AIR COOLED • COMMERCIAL & INDUSTRIAL

Power your operations with a BESS built for India's toughest industrial conditions. Delivers clean, reliable, and uninterrupted power — reducing diesel usage, cutting energy bills, and stabilizing your plant during peak loads

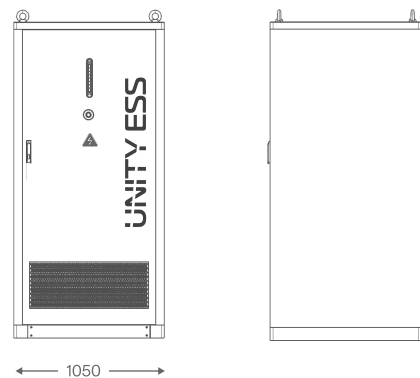

PRODUCT FEATURES



Built in MPPT for solar input



High-capacity LFP cells with 8,000+ cycle life. Built and validated by Inverted Energy .



From dispatch, predictive optimization, monitoring, to tariff arbitrage all managed by the Unity EMS platform.




Designed for scalability from 261 kWh to over 2.5 MWh by adding modules parallelly.



Built-in safety through cell level BMS to system-level protection and automatic fire protection

BATTERY DOD

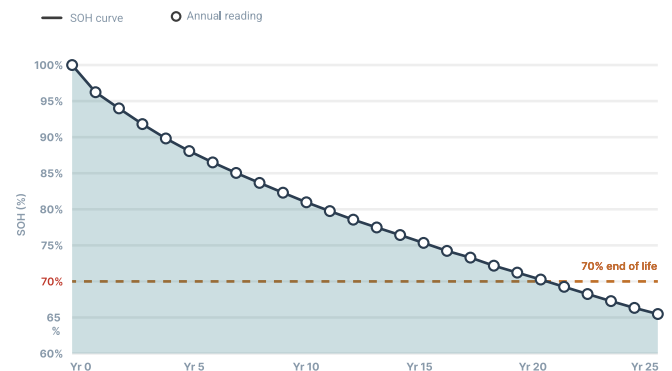

Product Model		AURA
AC Side (Grid Connected)		
Rated Capacity		128 kWh
AC Rated Power		64kW
Nominal Voltage (AC)		415V
Rated Voltage (AC)		380 to 420 Vac
Frequency		49.5 - 50.5Hz
THDi		≤ 3%
Power factor		1.0 leading - 1.0 lagging
AC Side (Off grid)		
Rated output power		64kW
Maximum single-phase output power		30kW
Rated output voltage		400V
PV Side		
Max PV loading		100KW
Max input current		160A
PV Rated Voltage (DC)		650 - 800 Vdc
Input Switch		250A/1000Vdc/2p, Supports single MPPT input
Battery Side		
Cell		LFP 314 Ah
Battery Pack		1P16S
Battery Rack		1P8S
Nominal DC Voltage		410V
DC Voltage Range		359V~461V
Cooling Method		Air Cooled
Distribution and Switching Time		
STS		144A/100kW
Switching time		<20ms
General Parameters		
DC RTE		>94%
Communication		RS485 / Ethernet TCP IP
Operating Temperature		-30 to 55°C
Fire Fighting System		Temperature/Smoke Detection, Aerosol, Flooding
Noise		< 80db
Rating		IP54
Dimension (W x D x H)		1050 x 1050 x 2200 mm
Weight		3500 kg
Standard		IEC62619, IEC61000, UL9540(A), UN38.3