




AQUA 4

LIQUID COOLED • BEHIND THE METER

Optimize your operations with an Energy Storage System designed for Open Access Applications. Aqua stores low-cost renewable energy for later utilization and delivers reliable power - solar when available, grid when required, storage always balancing the two.

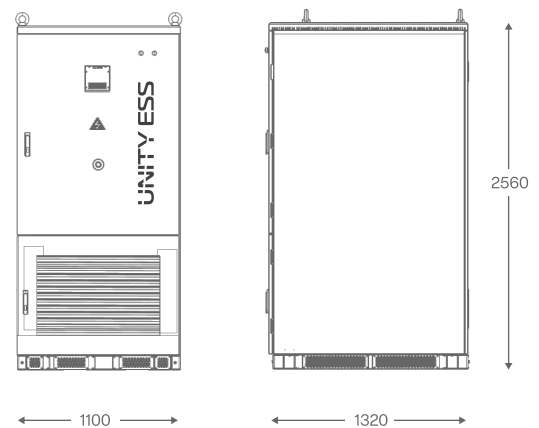

PRODUCT FEATURES



Quick-connect interface between battery packs and liquid cooling system.



High-capacity LFP cells with 8,000+ cycle life. Built and validated by Inverted Energy .



From dispatch, predictive optimization, monitoring, to tariff arbitrage all managed by the Unity EMS platform.




Designed for scalability from 261 kWh to over 2.5 MWh by adding modules parallelly.



Built-in safety through cell level BMS to system-level protection and automatic fire protection

BATTERY DOD

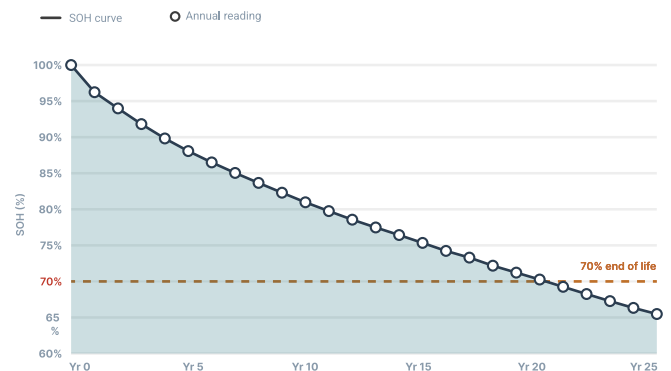

PRODUCT MODEL		AQUA 4
AC Side		
Rated Capacity	261 kWh	522 kWh
AC Rated Power	125kW	
Nominal Voltage (AC)	415V	
Rated Voltage (AC)	380 to 420 Vac	
Frequency	49.5 - 50.5Hz	
THDi	≤ 3%	
Power factor	1.0 leading - 1.0 lagging	
DC Side		
Cell	LFP 314 Ah	
Battery Pack	1P52S	
Battery Rack	1P260S	2P260S
Nominal DC Voltage	832V	
DC Voltage Range	754 - 936V	
Cooling Method	Liquid Cooled	
General Parameters		
Communication	RS485 / CAN / Ethernet	
DC RTE	>94%	
Lifetime	8000 cycles	
Fire Fighting System	Temperature/Smoke Detection, Aerosol, Flooding	
Noise	< 80db	
Operating Temperature	-30 to 55°C	
Rating	IP54	
Dimension (W x D x H)	1100 x 1320 x 2560 mm	2200 x 1320 x 2560 mm
Weight	2600 kg	4150kg
Standard	IEC62619, IEC61000, UL9540(A), UN38.3	


Aux Consumption (261KWh)	while Operating (kW)	while Idle (kW)
	2.63	0.05



AQUA 6/8

LIQUID COOLED • OPEN ACCESS & INDUSTRIAL

Optimize your operations with an Energy Storage System designed for Open Access Applications. Aqua stores low-cost renewable energy for later utilization and delivers reliable power - solar when available, grid when required, storage always balancing the two.

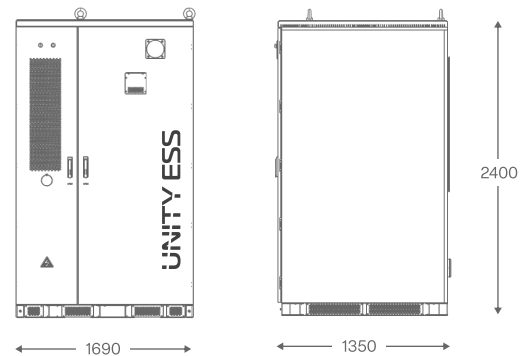

PRODUCT FEATURES



Quick-connect interface between battery packs and liquid cooling system.



High-capacity LFP cells with 8,000+ cycle life. Built and validated by Inverted Energy .



From dispatch, predictive optimization, monitoring, to tariff arbitrage all managed by the Unity EMS platform.




Designed for scalability from 261 kWh to over 2.5 MWh by adding modules parallelly.



Built-in safety through cell level BMS to system-level protection and automatic fire protection

BATTERY DOD

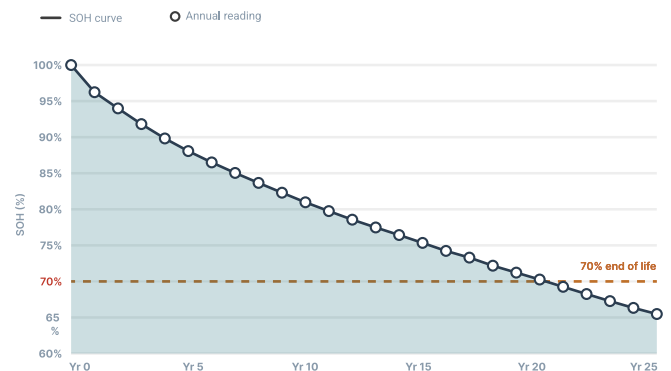

Product Model		AQUA 8
AC Side		
Rated Capacity	418 kWh	836 kWh
AC Rated Power	215kW	
Nominal Voltage (AC)	800V	
Rated Voltage (AC)	760 - 840 Vac	
Frequency	49.5 - 50.5Hz	
THDi	≤ 3%	
Power factor	1.0 leading - 1.0 lagging	
DC Side		
Cell	LFP 314 Ah	
Battery Pack	1P52S	
Battery Rack	1P416S	2P416S
Nominal DC Voltage	1331V	
DC Voltage Range	1100 - 1500 V	
Cooling Method	Liquid Cooled	
General Parameters		
Communication	RS485 / CAN / Ethernet	
DC RTE	>94%	
Lifetime	8000 cycles	
Fire Fighting System	Temperature/Smoke Detection, Aerosol, Flooding	
Noise	< 80db	
Operating Temperature	-30 to 55°C	
Rating	IP54	
Dimension (W x D x H)	1690 x 1350 x 2400 mm	3400 x 1350 x 2400 mm
Weight	3800kg	6600kg
Standard	IEC62619, IEC61000, UL9540(A), UN38.3	

Aux Consumption (418KWh)	while Operating (kW)	while Idle (kW)
	5.32	0.09