



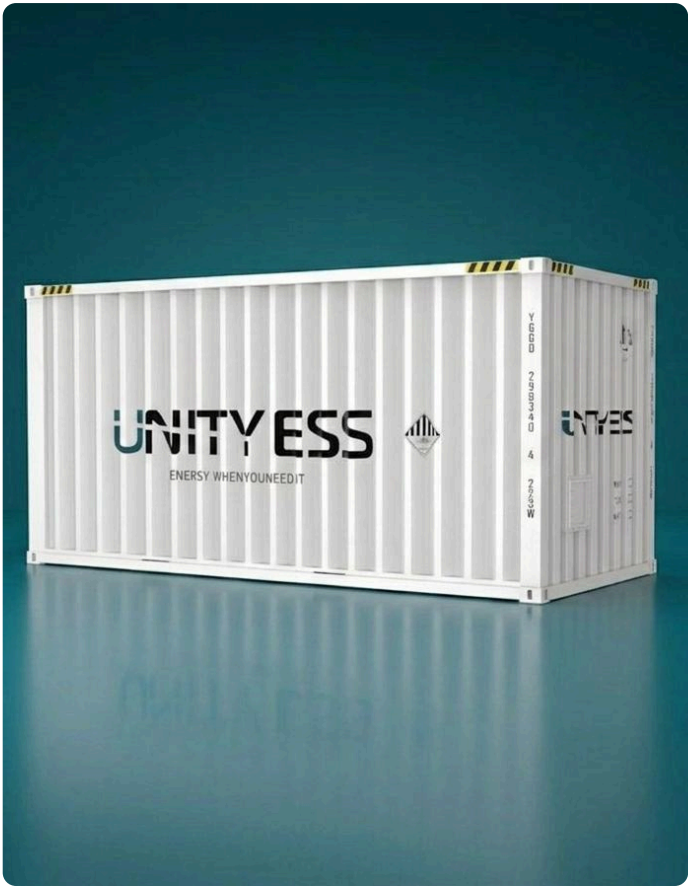

ULTIMA

CONTAINERISED • UTILITY SCALE

Built for India's fast-growing utility-scale solar and hybrid projects - delivering high-density, multi-megawatt-hour storage in a single containerized unit. Plug-and-operate design minimizes civil work for faster commissioning.

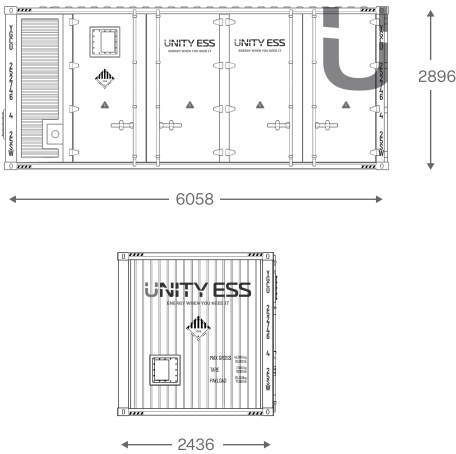

PRODUCT FEATURES



Suitable for coastal and high-humidity environments. IP66 protection. Built for Indian site conditions



Batteries, PCS, thermal management, fire protection, and Unity EMS in one 20ft container.



Ramp-rate control. Frequency response. Peak shaving. Mid-day solar shift to evening peak. The Unity EMS manages the full dispatch stack




High-capacity LFP cells with 12,000+ cycles. A system commissioned today runs through 2044 and beyond.



Built-in safety through cell level BMS to system-level protection and automatic fire protection

BATTERY DOD

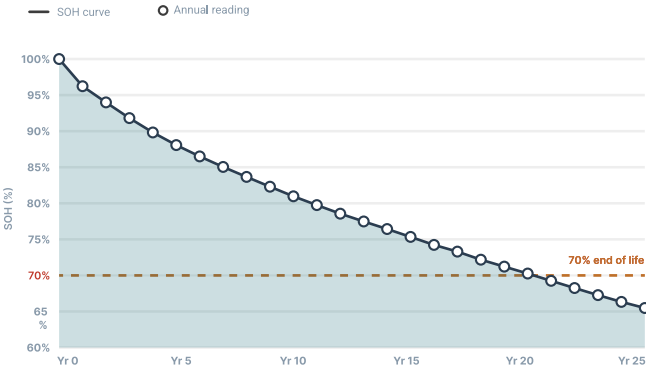

PRODUCT MODEL		ULTIMA 314	
AC Side			
Rated Capacity	3.340 MWh	4.180 MWh	5.016 MWh
AC Rated Power	2.5 MVA		
Nominal Voltage (AC)	690V		
Rated Voltage (AC)	655 - 724Vac		
Frequency	49.5 - 50.5Hz		
THDi	≤ 3%		
Power factor	1.0 leading - 1.0 lagging		
DC Side			
Cell	LFP 314 Ah		
Battery Pack	1P52S		
Battery Rack	8P416S	10P416S	12P416S
Nominal DC Voltage	1331V		
DC Voltage Range	1100 - 1500 V		
Cooling Method	Liquid Cooled		
General Parameters			
Communication	RS485 / CAN / Ethernet		
DC RTE	>94%		
Lifetime	8000 cycles		
Fire Fighting System	Temperature/Smoke Detection, Aerosol, Flooding, alarm bell and strobe		
Noise	< 80db		
Operating Temperature	-30 to 55°C		
Rating	C4		
Dimension (W x D x H)	6058 x 2436 x 2896mm		
Weight	40 - 49 tons		
Standard	IEC62619, IEC61000, UL9540(A), UN38.3		

Aux Consumption (5MWh)	while Operating (kW)	while Idle (kW)
	36.39	0.71

PRODUCT MODEL		ULTIMA 350	
AC Side			
Rated Capacity	3.440 MWh	4.300 MWh	5.161 MWh
AC Rated Power	2.5 MVA		
Nominal Voltage (AC)	690V		
Rated Voltage (AC)	655 - 724Vac		
Frequency	49.5 - 50.5Hz		
THDi	≤ 3%		
Power factor	1.0 leading - 1.0 lagging		
DC Side			
Cell	LFP 350 Ah		
Battery Pack	1P128S		
Battery Rack	8P384S	10P384S	12P384S
Nominal DC Voltage	1230V		
DC Voltage Range	1100 - 1500 V		
Cooling Method	Liquid Cooled		
General Parameters			
Communication	RS485 / CAN / Ethernet		
DC RTE	>94%		
Lifetime	8000 cycles		
Fire Fighting System	Temperature/Smoke Detection, Aerosol, Flooding, alarm bell and strobe		
Noise	< 80db		
Operating Temperature	-30 to 55°C		
Rating	C4		
Dimension (W x D x H)	6058 x 2436 x 2896mm		
Weight	40 - 49 tons		
Standard	IEC62619, IEC61000, UL9540(A), UN38.3		

Aux Consumption (5MWh)	while Operating (kW)	while Idle (kW)
	36.39	0.71