



1. Description

1.1. Project

Project Name	AES_RND_image
Board Name	custom
Generated with:	STM32CubeMX 6.15.0
Date	05/05/2026


1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F407/417
MCU name	STM32F407VETx
MCU Package	LQFP100
MCU Pin number	100

1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

2. Pinout Configuration

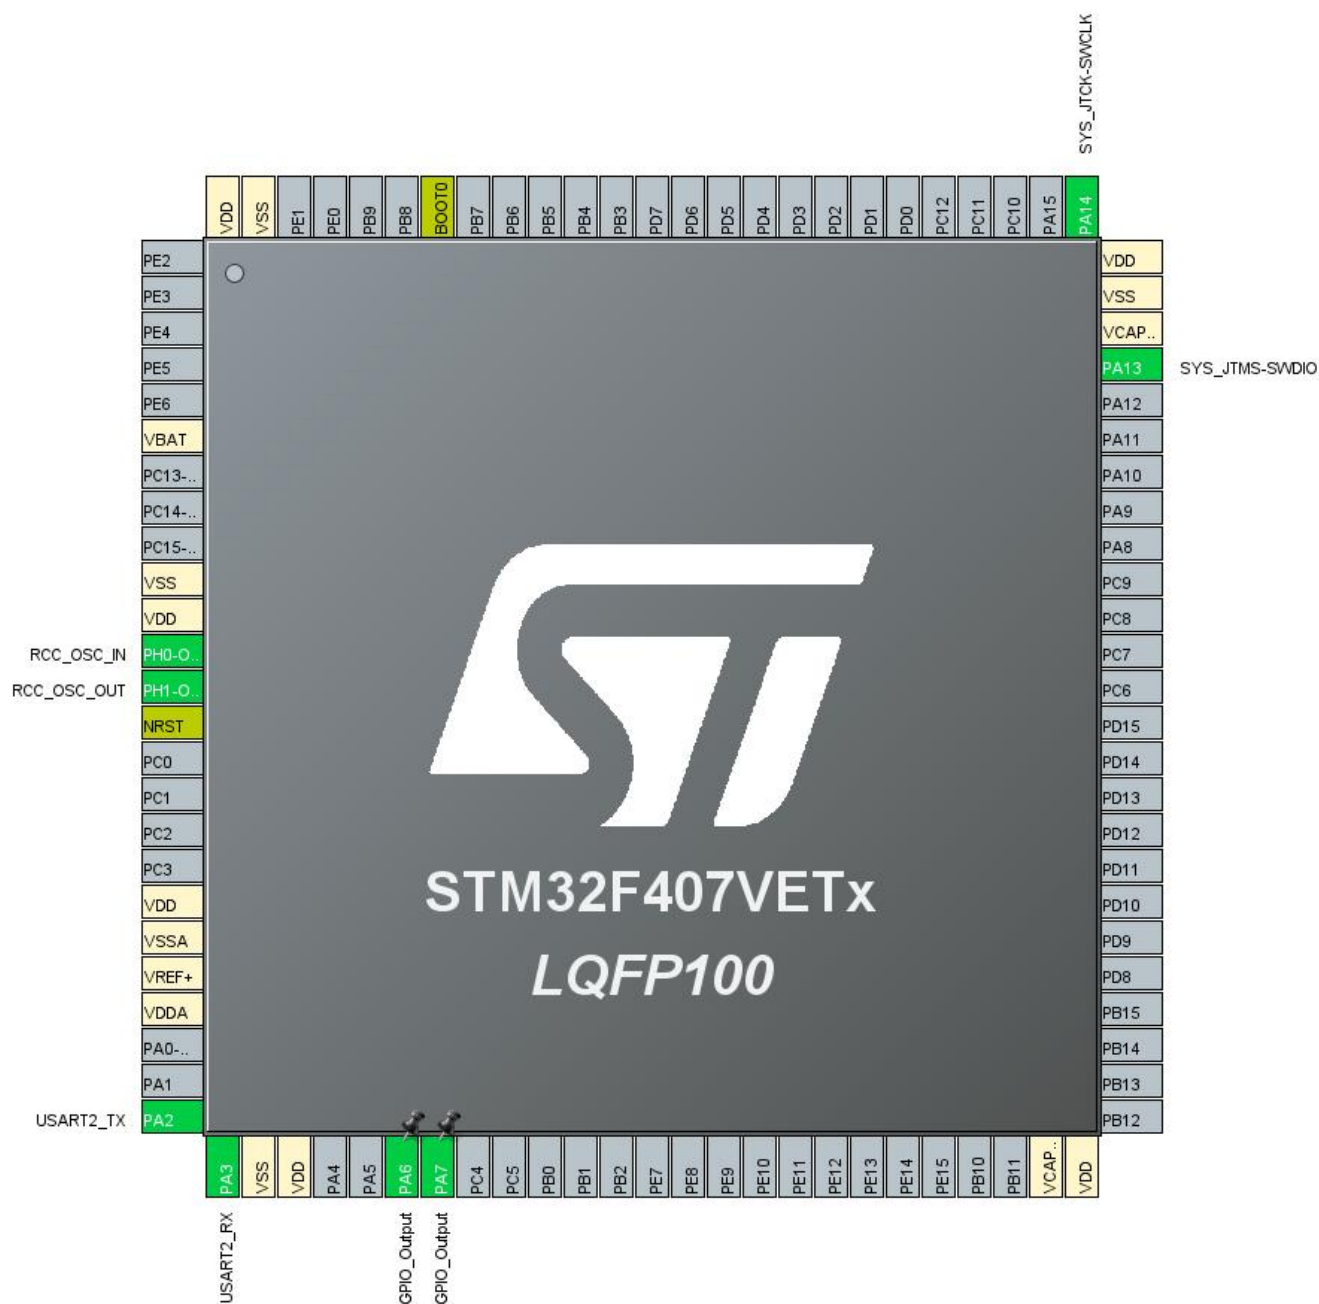

3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
10	VSS	Power		
11	VDD	Power		
12	PH0-OSC_IN	I/O	RCC_OSC_IN	
13	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
14	NRST	Reset		
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
25	PA2	I/O	USART2_TX	
26	PA3	I/O	USART2_RX	
27	VSS	Power		
28	VDD	Power		
31	PA6 *	I/O	GPIO_Output	
32	PA7 *	I/O	GPIO_Output	
49	VCAP_1	Power		
50	VDD	Power		
72	PA13	I/O	SYS_JTMS-SWDIO	
73	VCAP_2	Power		
74	VSS	Power		
75	VDD	Power		
76	PA14	I/O	SYS_JTCK-SWCLK	
94	BOOT0	Boot		
99	VSS	Power		
100	VDD	Power		

* The pin is affected with an I/O function

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32F4
Line	STM32F407/417
MCU	STM32F407VETx
Datasheet	DS8626 Rev8

1.2. Parameter Selection

Temperature	25
Vdd	3.3

1.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	168 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	46 mA	280 μ A
Duration	0.1 ms	0.9 ms
DMIPS	210.0	0.0
Ta Max	98.47	104.96
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	4.85 mA
Battery Life	29 days, 4 hours	Average DMIPS	210.0 DMIPS

1.6. Chart

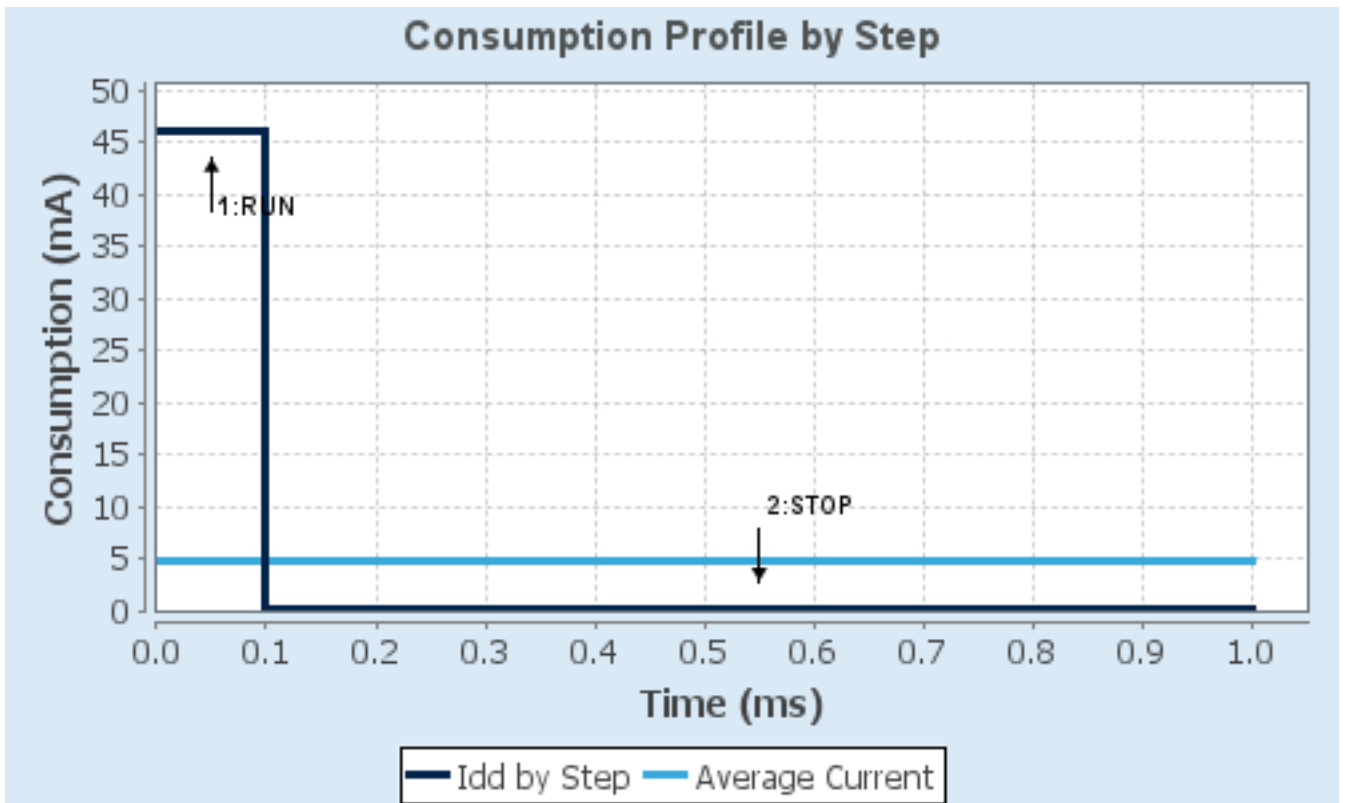

2. Software Project

2.1. Project Settings

Name	Value
Project Name	AES_RND_image
Project Folder	C:\stm32\AES_image
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F4 V1.28.3
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_USART2_UART_Init	USART2
4	MX_RNG_Init	RNG

3. Peripherals and Middlewares Configuration

3.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

3.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

3.2. RNG

mode: Activated

3.3. SYS

Debug: Serial Wire

Timebase Source: SysTick

3.4. USART2

Mode: Asynchronous

3.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

*** User modified value**

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
GPIO	PA6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	

4.2. DMA configuration

nothing configured in DMA service

4.3. NVIC configuration

4.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	15	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USART2 global interrupt	unused		
HASH and RNG global interrupts	unused		
FPU global interrupt	unused		

4.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true

* User modified value

5. System Views

5.1. Category view

5.1.1. Current

Middleware						
System Core	Analog	Timers	Connectivity	Multimedia	Security	Computing
DMA			USART2 ✓		RNG ✓	
GPIO ✓						
NVIC ✓						
RCC ✓						
SYS ✓						

6. Docs & Resources

Type	Link
------	------