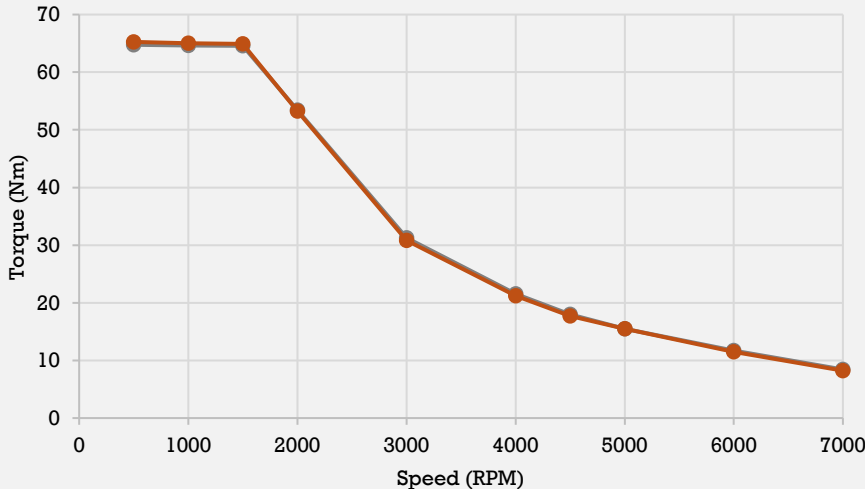
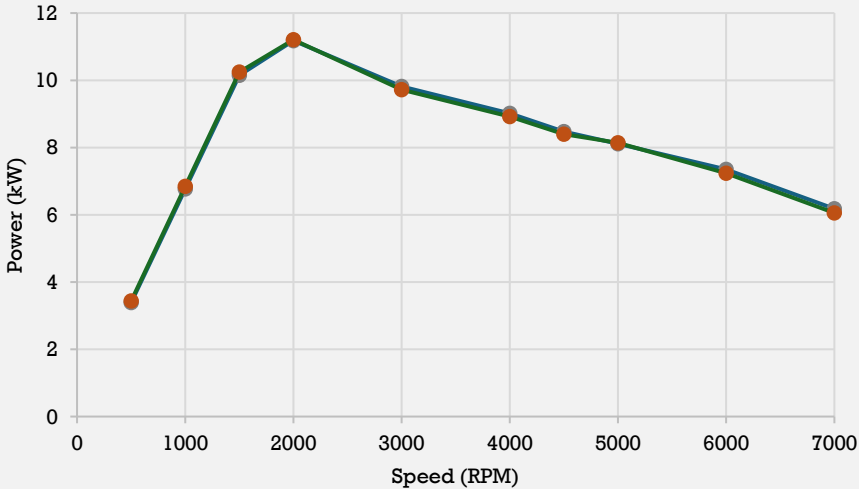
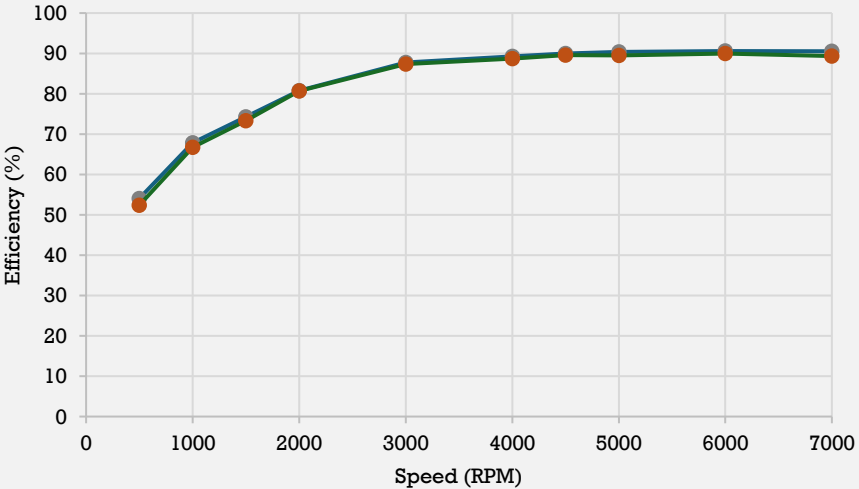


End of Line Report				Confidentiality Note: This report contains proprietary and confidential information intended solely for the use of authorized personnel. Any unauthorized disclosure, distribution, or reproduction of this document or its contents is strictly prohibited.											
Program Name:		Firefly										Motor Code:		ML2A05-C05	
Motor Model:		ML2B										Serial no:		A260430A000046	
Datasheet				Back-EMF				Validation Checklist							
Parameter	Golden Sample	DUT	Deviation	Speed	AVG	DUT	Deviation	Parameter		Compliance					
Model	ML2A05B-51V_P39&P40	A260430A000046	-	500	4.44	4.46	0.34%	Back EMF		OK					
Nominal DC Voltage	52	52	-	1000	8.89	8.78	-1.26%	Peak Power		OK					
Peak Power	10.80	11.21	-	1500	13.33	13.13	-1.56%	Peak Torque		OK					
Peak Torque	63.64	65.26	-	2000	17.78	17.49	-1.64%	Characterstics Curves		OK					
Peak Current - AC	356.46	360	-	3000	26.67	26.24	-1.59%	Average Efficiency		OK					
Motor Max Speed	7200	7200	-	4000	35.55	35.00	-1.55%								
Document Ref.	EOL - ML2A05B-51V_P39&P40		5000	44.44	43.74	-1.59%									
			5500	48.89	48.14	-1.53%									
Comparison - Torque Specs				Comparison - Power Specs				Comparison - Group Efficiency Specs							
Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Diffrence				
500	64.76	65.26	0.77%	500	3.39	3.43	1.30%	500	54.06	52.40	-3.08%				
1000	64.65	65.01	0.56%	1000	6.77	6.84	1.09%	1000	67.82	66.71	-1.62%				
1500	64.60	64.90	0.46%	1500	10.15	10.25	0.99%	1500	74.27	73.31	-1.29%				
2000	53.39	53.23	-0.30%	2000	11.18	11.21	0.23%	2000	80.78	80.72	-0.08%				
3000	31.24	30.79	-1.42%	3000	9.81	9.72	-0.91%	3000	87.75	87.34	-0.47%				
4000	21.53	21.19	-1.58%	4000	9.02	8.92	-1.06%	4000	89.28	88.74	-0.60%				
4500	17.98	17.72	-1.45%	4500	8.47	8.39	-0.93%	4500	90.00	89.60	-0.44%				
5000	15.49	15.47	-0.13%	5000	8.11	8.14	0.40%	5000	90.37	89.52	-0.94%				
6000	11.71	11.46	-2.09%	6000	7.35	7.24	-1.58%	6000	90.58	89.96	-0.69%				
7000	8.43	8.22	-2.49%	7000	6.18	6.06	-1.98%	7000	90.51	89.37	-1.25%				
Peak Torque (Golden sample & DUT)  Torque (Nm) Speed (RPM) Golden Sample DUT				Peak Power (Golden sample & DUT)  Power (kW) Speed (RPM) Golden Sample DUT				Motor Efficiency (Golden sample & DUT)  Efficiency (%) Speed (RPM) Golden Sample DUT							
Integration Details		sin min	1176	cos min	1178	sin max	2968	cos max	2966	sinP-P	1792	cosP-P	1788	Offset	766.0
Electrical PDI		Leakage current(mA)		1.39		Insulation Resistance(MOhms)		9999		RESISTANCE(mOhms)		8.69			
END OF LINE RESULT						PASS		Tested by		Approval					
								HRN - 30 April 2026		This is a system-approved document; signatures are not required.					