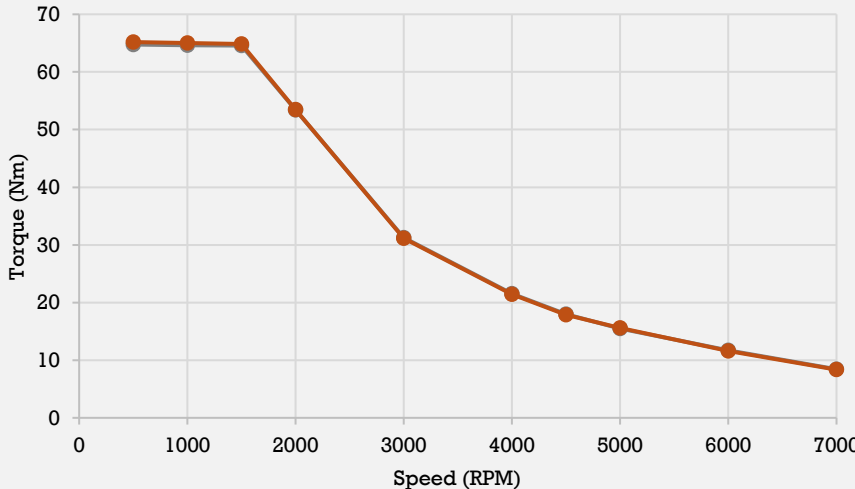
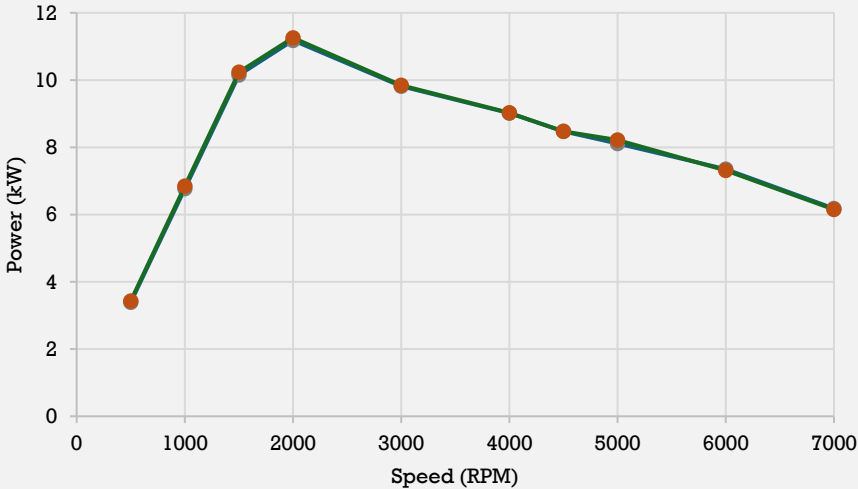
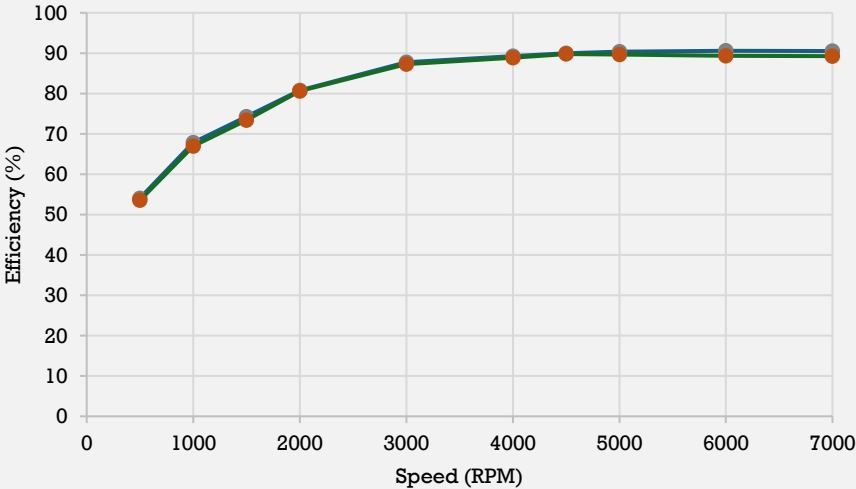


End of Line Report					Confidentiality Note: This report contains proprietary and confidential information intended solely for the use of authorized personnel. Any unauthorized disclosure, distribution, or reproduction of this document or its contents is strictly prohibited.											
Program Name:		Firefly		Motor Code:											ML2A05-C05	
Motor Model:		ML2A		Serial no:	A260430A000057											
Datasheet				Back-EMF				Validation Checklist								
Parameter	Golden Sample	DUT	Deviation	Speed	AVG	DUT	Deviation	Parameter	Compliance							
Model	ML2A05B-51V_P39&P40		A260430A000057	-	500	4.44	4.47	0.59%	Back EMF						ok	
Nominal DC Voltage	52		52	-	1000	8.89	8.80	-0.97%	Peak Power						ok	
Peak Power	10.80		11.26	-	1500	13.33	13.17	-1.19%	Peak Torque						ok	
Peak Torque	63.64		65.19	-	2000	17.78	17.55	-1.28%	Characterstics Curves						ok	
Peak Current - AC	356.46		360	-	3000	26.67	26.32	-1.28%	Average Efficiency						ok	
Motor Max Speed	7200		7200	-	4000	35.55	35.11	-1.25%								
Document Ref.	EOL - ML2A05B-51V_P39&P40		5000	44.44	43.91	-1.20%										
			5500	48.89	48.30	-1.20%										
Comparison - Torque Specs				Comparison - Power Specs				Comparison - Group Efficiency Specs								
Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Difference					
500	64.76	65.19	0.66%	500	3.39	3.43	1.19%	500	54.06	53.55	-0.95%					
1000	64.65	65.00	0.55%	1000	6.77	6.84	1.08%	1000	67.82	66.99	-1.21%					
1500	64.60	64.83	0.36%	1500	10.15	10.24	0.88%	1500	74.27	73.39	-1.17%					
2000	53.39	53.47	0.15%	2000	11.18	11.26	0.68%	2000	80.78	80.61	-0.21%					
3000	31.24	31.17	-0.21%	3000	9.81	9.84	0.32%	3000	87.75	87.26	-0.55%					
4000	21.53	21.43	-0.46%	4000	9.02	9.02	0.06%	4000	89.28	88.84	-0.49%					
4500	17.98	17.89	-0.50%	4500	8.47	8.47	0.02%	4500	90.00	89.78	-0.25%					
5000	15.49	15.62	0.84%	5000	8.11	8.22	1.37%	5000	90.37	89.65	-0.79%					
6000	11.71	11.58	-1.07%	6000	7.35	7.31	-0.55%	6000	90.58	89.37	-1.33%					
7000	8.43	8.35	-0.95%	7000	6.18	6.15	-0.43%	7000	90.51	89.29	-1.35%					
Peak Torque (Golden sample & DUT)  — Golden Sample — DUT				Peak Power (Golden sample & DUT)  — Golden Sample — DUT				Motor Efficiency (Golden sample & DUT)  — Golden Sample — DUT								
Integration Details			sin min	1162.00	cos min	1172.00	sin max	2947.00	cos max	2956.00	sinP-P	1785.00	cosP-P	1784.00	Offset	766
Electrical PDI			Leakage current(mA)		1.35		Insulation Resistance(MOhms)		9999		RESISTANCE(mOhms)		8.52			
END OF LINE RESULT							PASS		Tested by		Approval					
									HRN - 06 MAY 2026		This is a system-approved document; signatures are not required.					