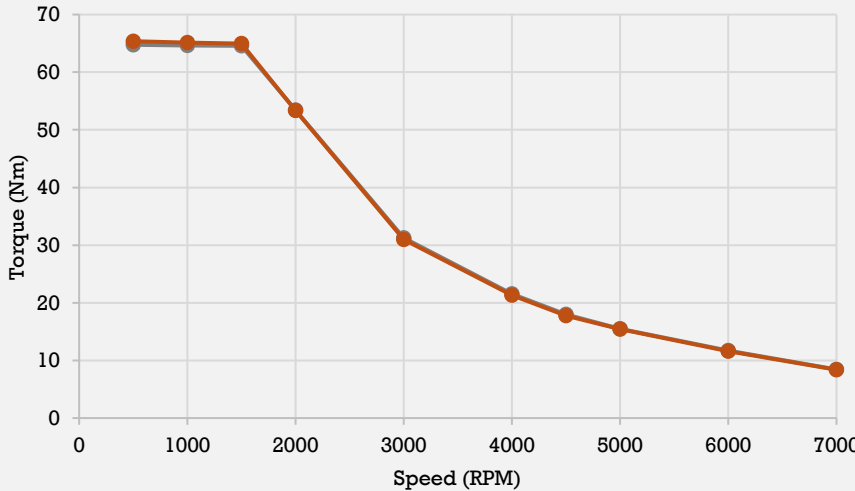
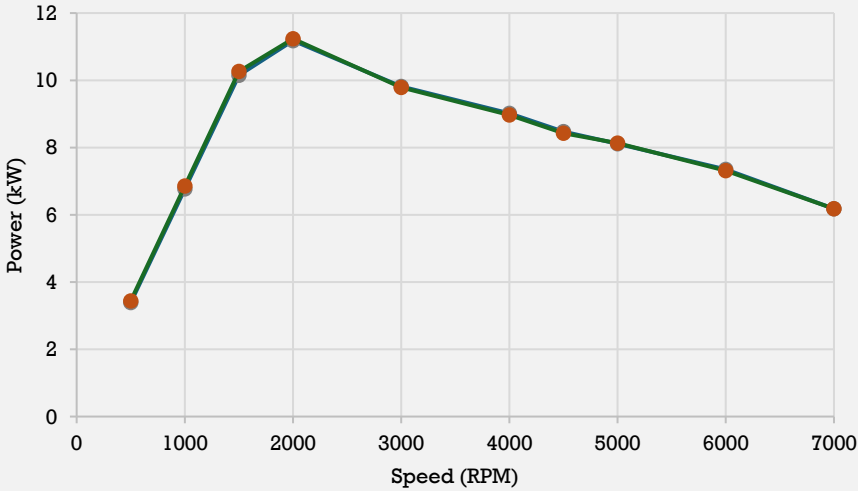
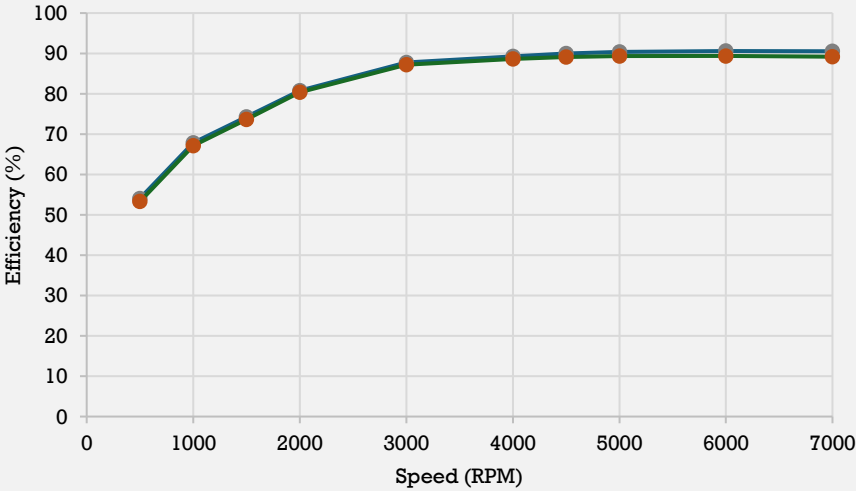


End of Line Report					Confidentiality Note: This report contains proprietary and confidential information intended solely for the use of authorized personnel. Any unauthorized disclosure, distribution, or reproduction of this document or its contents is strictly prohibited.					 ABHINAVA RIZEL								
Program Name:		Firefly		Motor Code:											ML2A05-C05			
Motor Model:		ML2B		Serial no:											A260430A000058			
Datasheet				Back-EMF				Validation Checklist										
Parameter	Golden Sample	DUT	Deviation	Speed	AVG	DUT	Deviation	Parameter	Compliance									
Model	ML2A05B-51V_P39&P40		A260430A000058	-	500	4.44	4.43	-0.24%	Back EMF	ok								
Nominal DC Voltage	52	52	-	1000	8.89	8.71	-1.96%	Peak Power	ok									
Peak Power	10.80	11.24	-	1500	13.33	13.04	-2.17%	Peak Torque	ok									
Peak Torque	63.64	65.38	-	2000	17.78	17.39	-2.21%	Characterstics Curves	ok									
Peak Current - AC	356.46	360	-	3000	26.67	26.09	-2.16%	Average Efficiency	ok									
Motor Max Speed	7200	7200	-	4000	35.55	34.78	-2.18%											
Document Ref.	EOL - ML2A05B-51V_P39&P40		5000	44.44	43.50	-2.11%												
			5500	48.89	47.88	-2.06%												
Comparison - Torque Specs				Comparison - Power Specs				Comparison - Group Efficiency Specs										
Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Difference							
500	64.76	65.38	0.96%	500	3.39	3.44	1.49%	500	54.06	53.29	-1.43%							
1000	64.65	65.12	0.73%	1000	6.77	6.85	1.26%	1000	67.82	67.15	-0.98%							
1500	64.60	64.99	0.60%	1500	10.15	10.26	1.13%	1500	74.27	73.62	-0.87%							
2000	53.39	53.37	-0.04%	2000	11.18	11.24	0.49%	2000	80.78	80.40	-0.47%							
3000	31.24	30.99	-0.78%	3000	9.81	9.79	-0.26%	3000	87.75	87.18	-0.64%							
4000	21.53	21.30	-1.07%	4000	9.02	8.97	-0.55%	4000	89.28	88.66	-0.69%							
4500	17.98	17.78	-1.11%	4500	8.47	8.42	-0.59%	4500	90.00	89.09	-1.01%							
5000	15.49	15.45	-0.26%	5000	8.11	8.13	0.27%	5000	90.37	89.31	-1.17%							
6000	11.71	11.58	-1.07%	6000	7.35	7.31	-0.55%	6000	90.58	89.37	-1.33%							
7000	8.43	8.38	-0.59%	7000	6.18	6.17	-0.07%	7000	90.51	89.15	-1.50%							
Peak Torque (Golden sample & DUT)  — Golden Sample — DUT				Peak Power (Golden sample & DUT)  — Golden Sample — DUT				Motor Efficiency (Golden sample & DUT)  — Golden Sample — DUT										
Integration Details		sin min	1161	cos min	1166	sin max	2972	cos max	2972	sinP-P	1811	cosP-P	1806	Offset	766.00			
Electrical PDI		Leakage current(mA)		1.32		Insulation Resistance(MOhms)		9999		RESISTANCE(mOhms)		8.67						
END OF LINE RESULT					PASS			Tested by		Approval								
								HRN - 06 MAY 2026		This is a system-approved document; signatures are not required.								