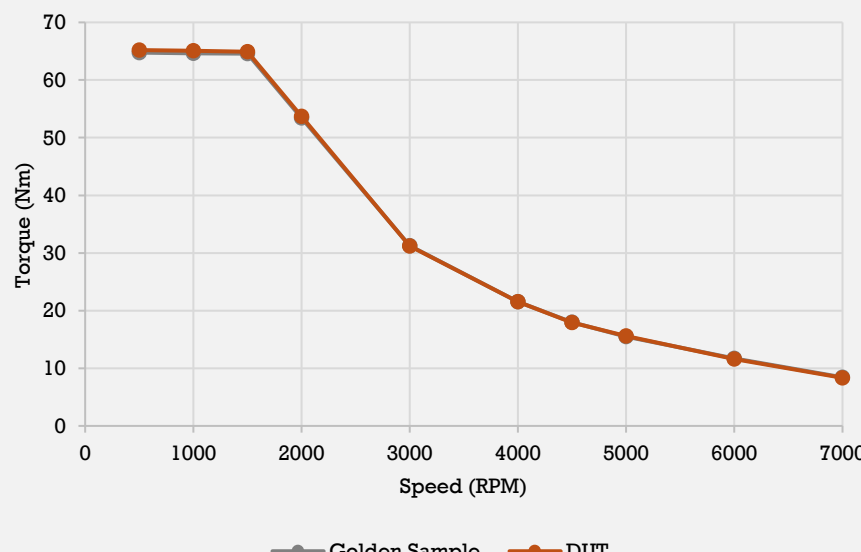
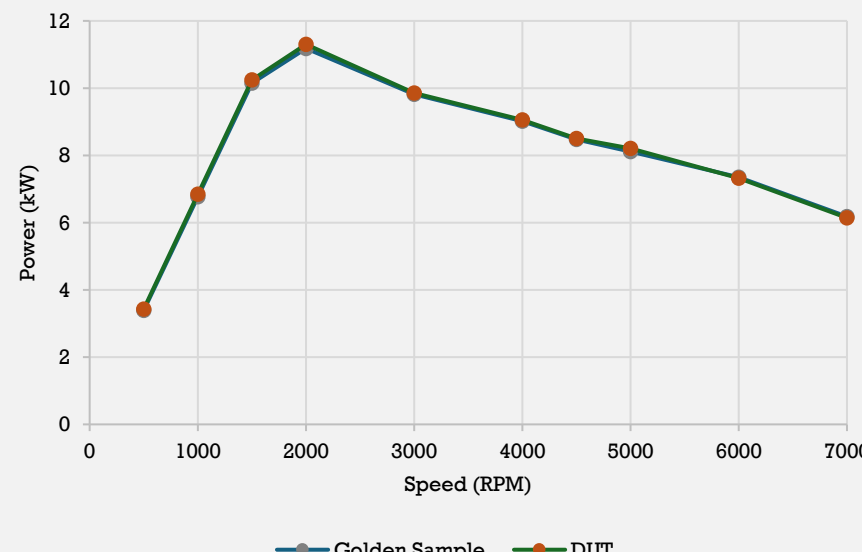


End of Line Report					Confidentiality Note: This report contains proprietary and confidential information intended solely for the use of authorized personnel. Any unauthorized disclosure, distribution, or reproduction of this document or its contents is strictly prohibited.												
Program Name:		Firefly		Motor Code:											ML2A05-C05		
Motor Model:		ML2B		Serial no:											A260430A000059		
Datasheet				Back-EMF				Validation Checklist									
Parameter		Golden Sample	DUT	Deviation	Speed	AVG	DUT	Deviation	Parameter		Compliance						
Model		ML2A05B-51V_P39&P40	A260430A000059	-	500	4.44	4.47	0.68%	Back EMF		ok						
Nominal DC Voltage		52	52	-	1000	8.89	8.80	-1.02%	Peak Power		ok						
Peak Power		10.80	11.30	-	1500	13.33	13.18	-1.16%	Peak Torque		ok						
Peak Torque		63.64	65.20	-	2000	17.78	17.53	-1.39%	Characterstics Curves		ok						
Peak Current - AC		356.46	360	-	3000	26.67	26.32	-1.28%	Average Efficiency		ok						
Motor Max Speed		7200	7200	-	4000	35.55	35.10	-1.27%									
Document Ref.		EOL - ML2A05B-51V_P39&P40		5000	44.44	43.90	-1.23%										
				5500	48.89	48.28	-1.23%										
Comparison - Torque Specs				Comparison - Power Specs				Comparison - Group Efficiency Specs									
Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Difference						
500	64.76	65.20	0.68%	500	3.39	3.43	1.21%	500	54.06	53.55	-0.94%						
1000	64.65	65.05	0.63%	1000	6.77	6.85	1.16%	1000	67.82	67.75	-0.09%						
1500	64.60	64.91	0.48%	1500	10.15	10.25	1.01%	1500	74.27	74.00	-0.36%						
2000	53.39	53.69	0.56%	2000	11.18	11.30	1.09%	2000	80.78	81.27	0.60%						
3000	31.24	31.22	-0.05%	3000	9.81	9.86	0.48%	3000	87.75	87.24	-0.58%						
4000	21.53	21.51	-0.09%	4000	9.02	9.06	0.43%	4000	89.28	88.78	-0.56%						
4500	17.98	17.95	-0.17%	4500	8.47	8.50	0.36%	4500	90.00	89.36	-0.71%						
5000	15.49	15.59	0.65%	5000	8.11	8.21	1.18%	5000	90.37	89.97	-0.44%						
6000	11.71	11.59	-0.98%	6000	7.35	7.32	-0.46%	6000	90.58	89.30	-1.41%						
7000	8.43	8.34	-1.07%	7000	6.18	6.15	-0.55%	7000	90.51	89.17	-1.48%						
Peak Torque (Golden sample & DUT) 				Peak Power (Golden sample & DUT) 				Motor Efficiency (Golden sample & DUT) 									
Integration Details			sin min	1173	cos min	1164	sin max	2971	cos max	2963	sinP-P	1798	cosP-P	1799	Offset	766.00	
Electrical PDI			Leakage current(mA)		1.32		Insulation Resistance(MOhms)		9999		RESISTANCE(mOhms)		8.77				
END OF LINE RESULT							PASS		Tested by		Approval						
									HRN - 06 MAY 2026		This is a system-approved document; signatures are not required.						