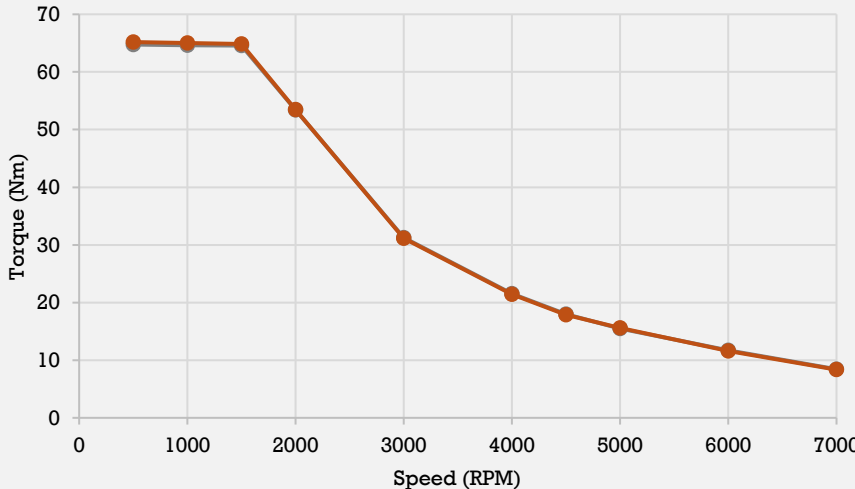
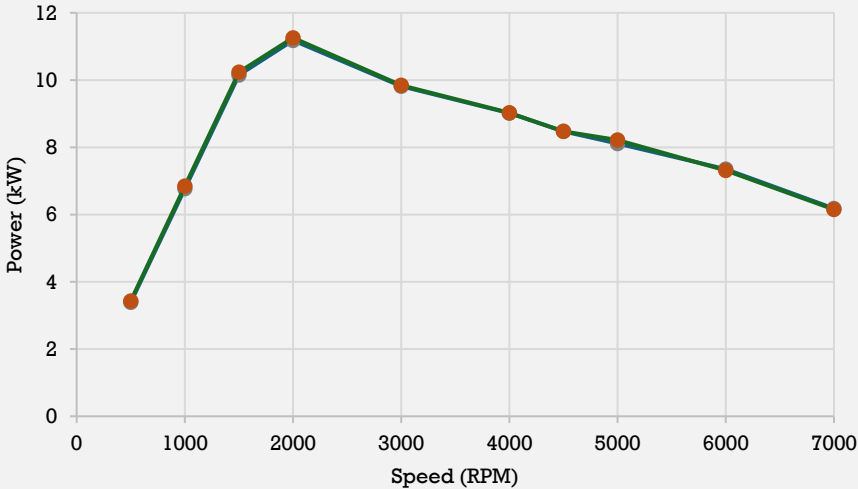
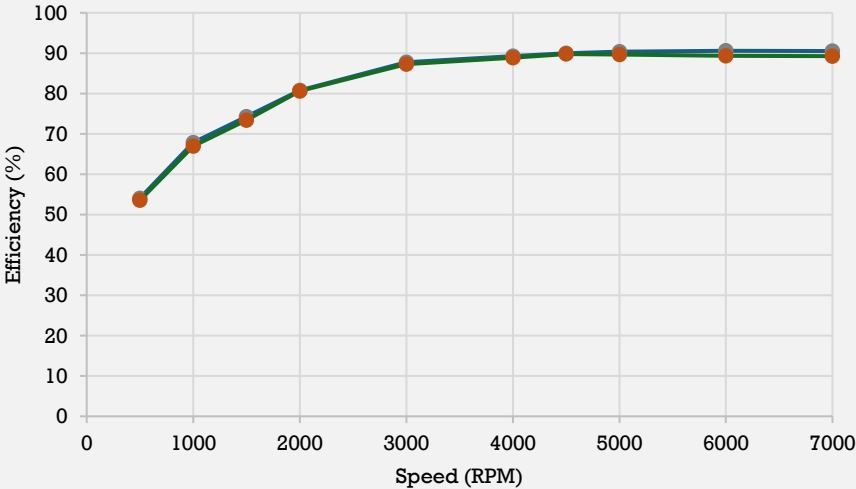


End of Line Report				Confidentiality Note: This report contains proprietary and confidential information intended solely for the use of authorized personnel. Any unauthorized disclosure, distribution, or reproduction of this document or its contents is strictly prohibited.												
Program Name:		Firefly Motor										Motor Code:		ML2A05-C05		
Motor Model:		ML2B		Serial no:		A260506A000057										
Datasheet				Back-EMF								Validation Checklist				
Parameter	Golden Sample	DUT	Deviation	Speed	AVG	DUT	Deviation					Parameter	Compliance			
Model	ML2A05B-51V_P39&P40		A260506A000057	-	500	4.44	4.47					0.59%	Back EMF	ok		
Nominal DC Voltage	52		52	-	1000	8.89	8.80					-0.97%	Peak Power	ok		
Peak Power	10.80		11.26	-	1500	13.33	13.17					-1.19%	Peak Torque	ok		
Peak Torque	63.64		65.19	-	2000	17.78	17.55					-1.28%	Characterstics Curves	ok		
Peak Current - AC	356.46		360	-	3000	26.67	26.32					-1.28%	Average Efficiency	ok		
Motor Max Speed	7200		7200	-	4000	35.55	35.11					-1.25%				
Document Ref.	EOL - ML2A05B-51V_P39&P40		5000	44.44	43.91	-1.20%										
			5500	48.89	48.30	-1.20%										
Comparison - Torque Specs				Comparison - Power Specs				Comparison - Group Efficiency Specs								
Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Difference					
500	64.76	65.19	0.66%	500	3.39	3.43	1.19%	500	54.06	53.55	-0.95%					
1000	64.65	65.00	0.55%	1000	6.77	6.84	1.08%	1000	67.82	66.99	-1.21%					
1500	64.60	64.83	0.36%	1500	10.15	10.24	0.88%	1500	74.27	73.39	-1.17%					
2000	53.39	53.47	0.15%	2000	11.18	11.26	0.68%	2000	80.78	80.61	-0.21%					
3000	31.24	31.17	-0.21%	3000	9.81	9.84	0.32%	3000	87.75	87.26	-0.55%					
4000	21.53	21.43	-0.46%	4000	9.02	9.02	0.06%	4000	89.28	88.84	-0.49%					
4500	17.98	17.89	-0.50%	4500	8.47	8.47	0.02%	4500	90.00	89.78	-0.25%					
5000	15.49	15.62	0.84%	5000	8.11	8.22	1.37%	5000	90.37	89.65	-0.79%					
6000	11.71	11.58	-1.07%	6000	7.35	7.31	-0.55%	6000	90.58	89.37	-1.33%					
7000	8.43	8.35	-0.95%	7000	6.18	6.15	-0.43%	7000	90.51	89.29	-1.35%					
Peak Torque (Golden sample & DUT)  — Golden Sample — DUT				Peak Power (Golden sample & DUT)  — Golden Sample — DUT				Motor Efficiency (Golden sample & DUT)  — Golden Sample — DUT								
Integration Details			sin min	1162	cos min	1172	sin max	2947	cos max	2956	sinP-P	1785	cosP-P	1784	Offset	766.00
Electrical PDI			Leakage current(mA)		1.35		Insulation Resistance(MOhms)		9999		RESISTANCE(mOhms)		8.52			
END OF LINE RESULT							PASS		Tested by		Approval					
									HRN - 06 MAY 2026		This is a system-approved document; signatures are not required.					