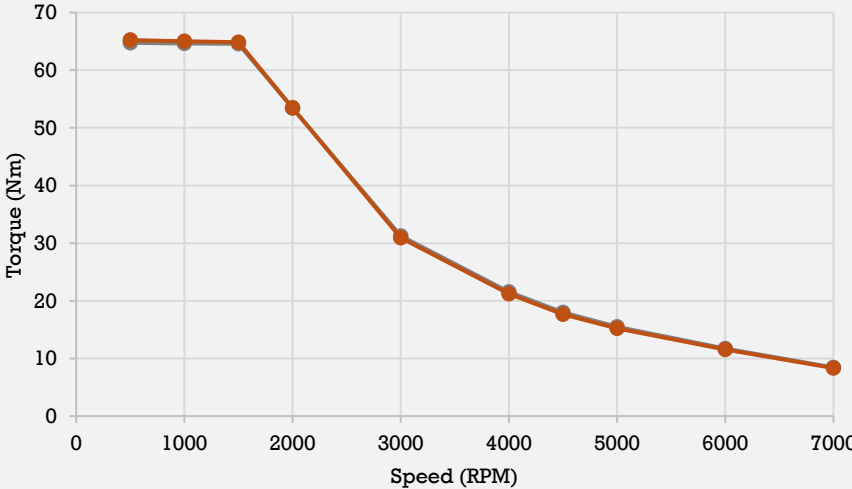
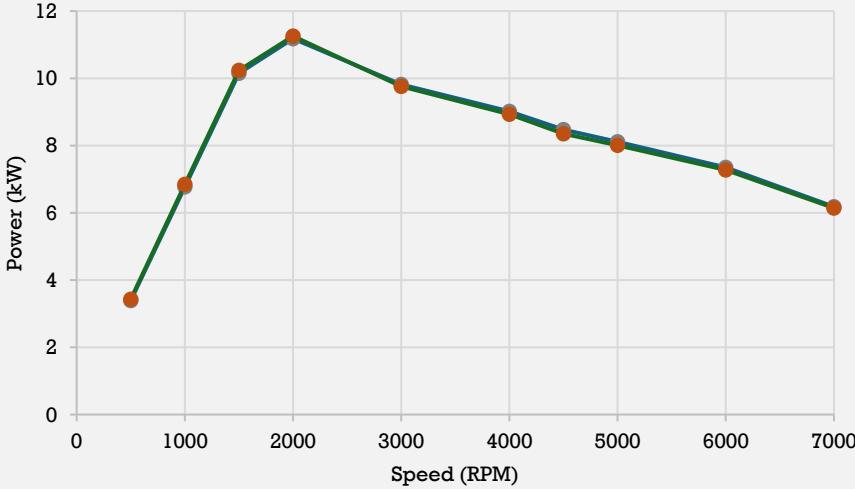
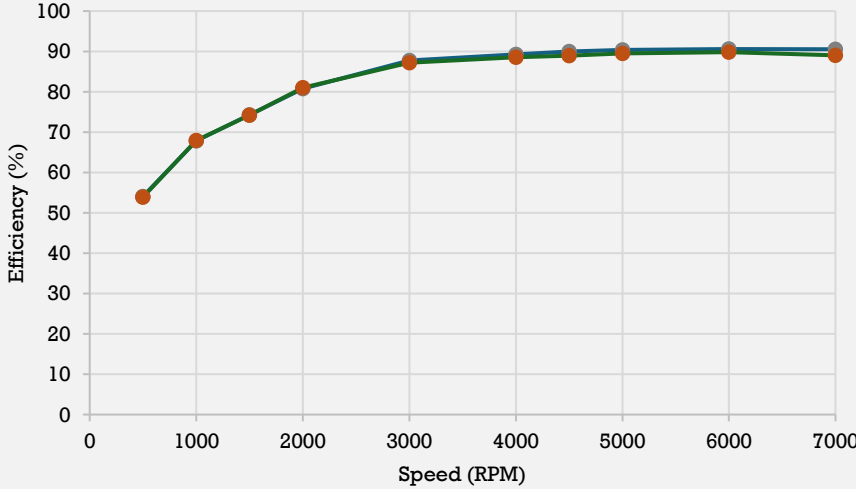


End of Line Report				Confidentiality Note: This report contains proprietary and confidential information intended solely for the use of authorized personnel. Any unauthorized disclosure, distribution, or reproduction of this document or its contents is strictly prohibited.								ABHINAVA RIZEL							
Program Name:		Firefly Motor														Motor Code:		ML2A05-C05	
Motor Model:		ML2B														Serial no:		A260506A000062	
Datasheet				Back-EMF				Validation Checklist											
Parameter	Golden Sample	DUT	Deviation	Speed	AVG	DUT	Deviation	Parameter		Compliance									
Model	ML2A05B-51V_P39&P40	A260506A000062	-	500	4.44	4.47	0.63%	Back EMF		ok									
Nominal DC Voltage	52	52	-	1000	8.89	8.79	-1.09%	Peak Power		ok									
Peak Power	10.80	11.25	-	1500	13.33	13.14	-1.43%	Peak Torque		ok									
Peak Torque	63.64	65.22	-	2000	17.78	17.53	-1.40%	Characterstics Curves		ok									
Peak Current - AC	356.46	360	-	3000	26.67	26.28	-1.46%	Average Efficiency		ok									
Motor Max Speed	7200	7200	-	4000	35.55	35.07	-1.35%												
Document Ref.	EOL - ML2A05B-51V_P39&P40		5000	44.44	43.86	-1.32%													
			5500	48.89	48.26	-1.29%													
Comparison - Torque Specs				Comparison - Power Specs				Comparison - Group Efficiency Specs											
Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Diffrence								
500	64.76	65.22	0.71%	500	3.39	3.43	1.24%	500	54.06	53.89	-0.31%								
1000	64.65	65.01	0.56%	1000	6.77	6.84	1.09%	1000	67.82	67.95	0.21%								
1500	64.60	64.85	0.39%	1500	10.15	10.24	0.92%	1500	74.27	74.16	-0.15%								
2000	53.39	53.46	0.13%	2000	11.18	11.25	0.66%	2000	80.78	80.98	0.25%								
3000	31.24	30.91	-1.04%	3000	9.81	9.76	-0.52%	3000	87.75	87.19	-0.64%								
4000	21.53	21.20	-1.53%	4000	9.02	8.93	-1.01%	4000	89.28	88.51	-0.87%								
4500	17.98	17.63	-1.95%	4500	8.47	8.35	-1.43%	4500	90.00	88.91	-1.21%								
5000	15.49	15.22	-1.74%	5000	8.11	8.01	-1.23%	5000	90.37	89.52	-0.94%								
6000	11.71	11.52	-1.58%	6000	7.35	7.28	-1.06%	6000	90.58	89.81	-0.85%								
7000	8.43	8.33	-1.19%	7000	6.18	6.14	-0.67%	7000	90.51	89.02	-1.64%								
Peak Torque (Golden sample & DUT)  — Golden Sample — DUT				Peak Power (Golden sample & DUT)  — Golden Sample — DUT				Motor Efficiency (Golden sample & DUT)  — Golden Sample — DUT											
Integration Details		sin min	1169	cos min	1161	sin max	2971	cos max	2967	sinP-P	1802	cosP-P	1806	Offset	766.00				
Electrical PDI		Leakage current(mA)		1.24		Insulation Resistance(MOhms)		9999		RESISTANCE(mOhms)		8.24							
END OF LINE RESULT						PASS		Tested by		Approval									
								HRN - 06 MAY 2026		This is a system-approved document; signatures are not required.									