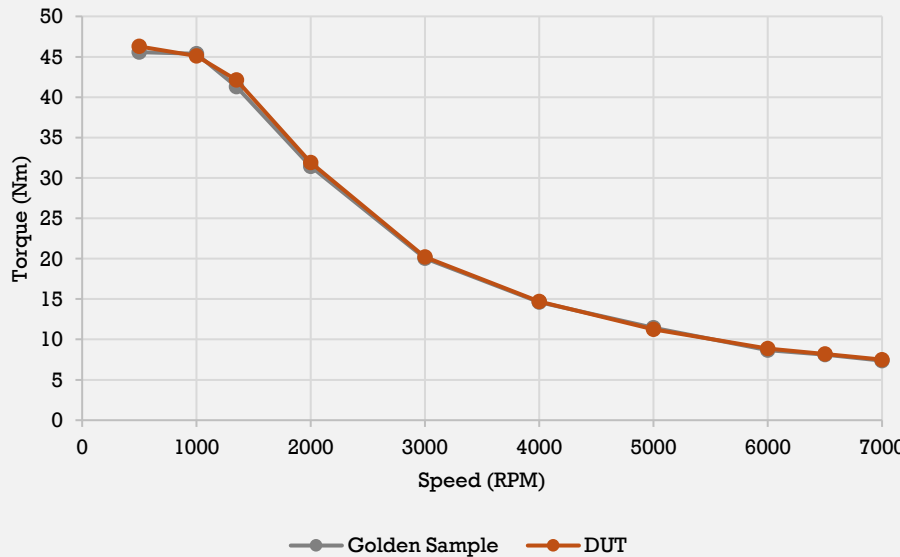
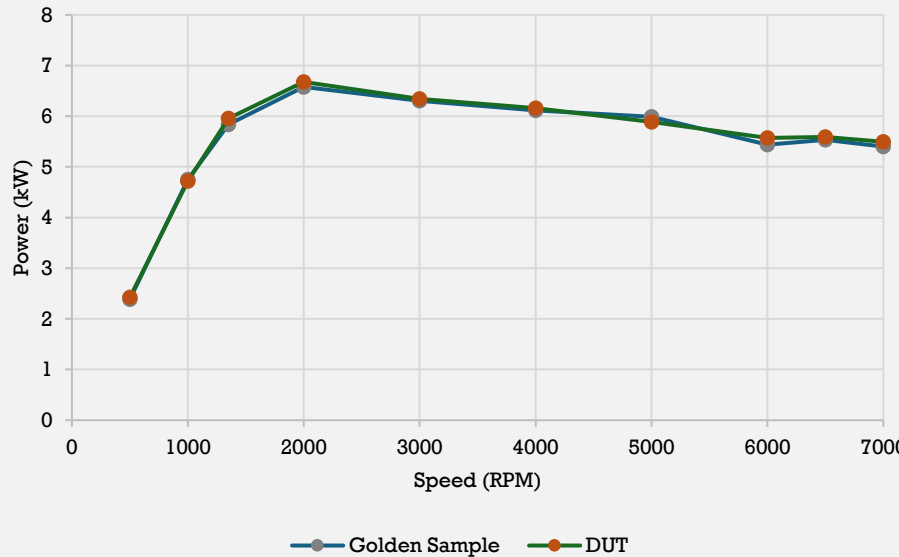
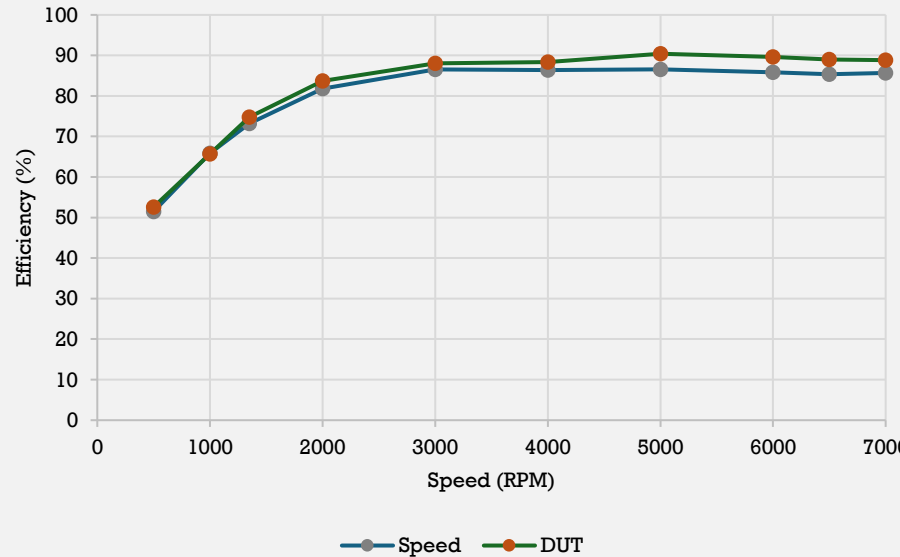


End of Line Report				Confidentiality Note: This report contains proprietary and confidential information intended solely for the use of authorized personnel. Any unauthorized disclosure, distribution, or reproduction of this document or its contents is strictly prohibited.				 ABHINAVA RAZEL							
Program Name:		Firefly Motor										Motor Code:		ML2A05-C01	
Motor Model:		ML2A										Serial no:		A260511A000038	
Datasheet				Back-EMF				Validation Checklist							
Parameter	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Deviation	Parameter		Compliance					
Model	ML2A05A-51V_P05	A260511A000038	-	500	4.80	4.82	0.40%	Back EMF		OK					
Nominal DC Voltage	51	51	-	1000	9.50	9.51	0.04%	Peak Power		OK					
Peak Power	6.58	6.68	-	1500	14.26	14.24	-0.11%	Peak Torque		OK					
Peak Torque	45.60	46.28	-	2000	18.99	18.99	-0.02%	Characterstics Curves		OK					
Peak Current - AC	240	240	-	3000	28.50	28.48	-0.08%	Average Efficiency		OK					
Motor Max Speed	7200	7200	-	4000	38.02	37.98	-0.12%								
Document Ref.	AR_Golden Sample Report			5000	47.55	47.47	-0.16%								
				5500	52.32	52.26	-0.12%								
Comparison - Torque Specs				Comparison - Power Specs				Comparison - Group Efficiency Specs							
Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Diffrence				
500	45.57	46.28	1.56%	500	2.39	2.42	1.56%	500	51.50	52.60	2.15%				
1000	45.37	45.08	-0.64%	1000	4.75	4.72	-0.64%	1000	65.87	65.68	-0.29%				
1350	41.29	42.12	2.00%	1350	5.84	5.95	2.00%	1350	73.18	74.79	2.21%				
2000	31.41	31.88	1.50%	2000	6.58	6.68	1.50%	2000	81.82	83.70	2.29%				
3000	20.06	20.19	0.63%	3000	6.30	6.34	0.63%	3000	86.51	88.08	1.81%				
4000	14.60	14.71	0.74%	4000	6.12	6.16	0.74%	4000	86.36	88.32	2.28%				
5000	11.43	11.25	-1.61%	5000	5.99	5.89	-1.61%	5000	86.56	90.41	4.45%				
6000	8.65	8.87	2.51%	6000	5.44	5.57	2.51%	6000	85.83	89.64	4.44%				
6500	8.13	8.21	1.02%	6500	5.53	5.59	1.02%	6500	85.37	88.97	4.21%				
7000	7.37	7.50	1.74%	7000	5.40	5.50	1.74%	7000	85.67	88.87	3.74%				
Peak Torque (Golden sample & DUT) 				Peak Power (Golden sample & DUT) 				Group Efficiency (Golden sample & DUT) 							
Integration Details		sin min	1185	cos min	1170	sin max	2865	cos max	2881	sinP-P	1680	cosP-P	1711	Offset	766.00
Electrical PDI		Leakage current(mA)		1.13		Insulation Resistance(MOhms)		9999		RESISTANCE(mOhms)		17.04			
END OF LINE RESULT				PASS		Comment		Tested by		Approval					
						Motor tested at 35°C; winding resistance was higher and found acceptable within limits.		GMN-11.05.2026		This is a system-approved document; signatures are not required.					