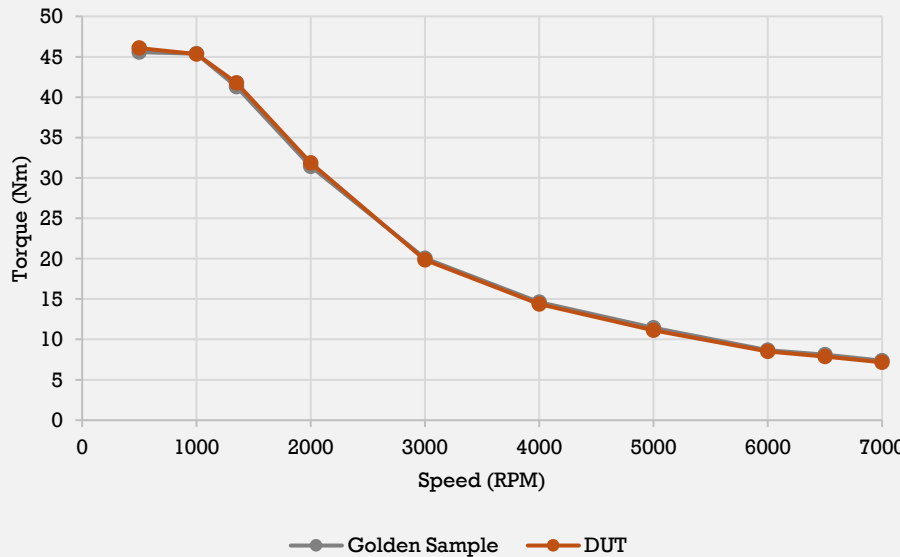
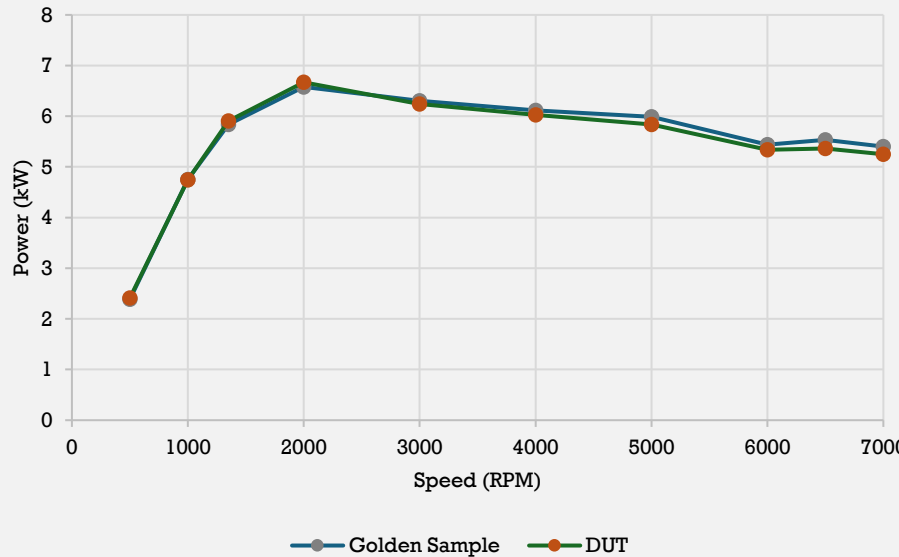
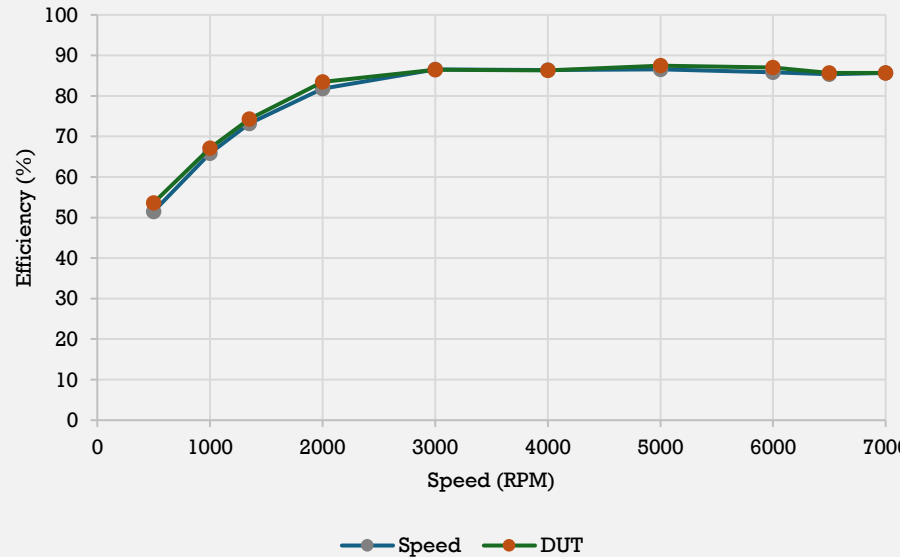


End of Line Report				Confidentiality Note: This report contains proprietary and confidential information intended solely for the use of authorized personnel. Any unauthorized disclosure, distribution, or reproduction of this document or its contents is strictly prohibited.				 ABHINAVA RAZEL							
Program Name:		Firefly Motor										Motor Code:		ML2A05-C01	
Motor Model:		ML2A										Serial no:		A260518A000046	
Datasheet				Back-EMF				Validation Checklist							
Parameter	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Deviation	Parameter	Compliance						
Model	ML2A05A-51V_P05	A260518A000046	-	500	4.80	4.83	0.61%	Back EMF	OK						
Nominal DC Voltage	51	51	-	1000	9.50	9.54	0.38%	Peak Power	OK						
Peak Power	6.58	6.67	-	1500	14.26	14.29	0.27%	Peak Torque	OK						
Peak Torque	45.60	46.08	-	2000	18.99	19.06	0.34%	Characterstics Curves	OK						
Peak Current - AC	240	240	-	3000	28.50	28.61	0.38%	Average Efficiency	OK						
Motor Max Speed	7200	7200	-	4000	38.02	38.13	0.29%								
Document Ref.	AR_Golden Sample Report			5000	47.55	47.65	0.22%								
				5500	52.32	52.46	0.27%								
Comparison - Torque Specs				Comparison - Power Specs				Comparison - Group Efficiency Specs							
Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Difference				
500	45.57	46.08	1.11%	500	2.39	2.41	1.11%	500	51.50	53.64	4.17%				
1000	45.37	45.33	-0.10%	1000	4.75	4.75	-0.10%	1000	65.87	67.12	1.90%				
1350	41.29	41.79	1.19%	1350	5.84	5.91	1.19%	1350	73.18	74.29	1.52%				
2000	31.41	31.85	1.39%	2000	6.58	6.67	1.39%	2000	81.82	83.46	2.00%				
3000	20.06	19.87	-0.99%	3000	6.30	6.24	-0.99%	3000	86.51	86.47	-0.05%				
4000	14.60	14.39	-1.49%	4000	6.12	6.03	-1.49%	4000	86.36	86.31	-0.05%				
5000	11.43	11.15	-2.53%	5000	5.99	5.84	-2.53%	5000	86.56	87.47	1.04%				
6000	8.65	8.50	-1.82%	6000	5.44	5.34	-1.82%	6000	85.83	86.99	1.35%				
6500	8.13	7.88	-3.10%	6500	5.53	5.36	-3.10%	6500	85.37	85.71	0.40%				
7000	7.37	7.17	-2.81%	7000	5.40	5.25	-2.81%	7000	85.67	85.67	0.00%				
Peak Torque (Golden sample & DUT) 				Peak Power (Golden sample & DUT) 				Group Efficiency (Golden sample & DUT) 							
Integration Details		sin min	1128	cos min	1141	sin max	2904	cos max	2920	sinP-P	1776	cosP-P	1779	Offset	766.00
Electrical PDI		Leakage current(mA)		1.22		Insulation Resistance(MOhms)		9999		RESISTANCE(mOhms)		16.47			
END OF LINE RESULT						PASS		Tested by		Approval					
								GGs-(16.05.2026)		This is a system-approved document; signatures are not required.					