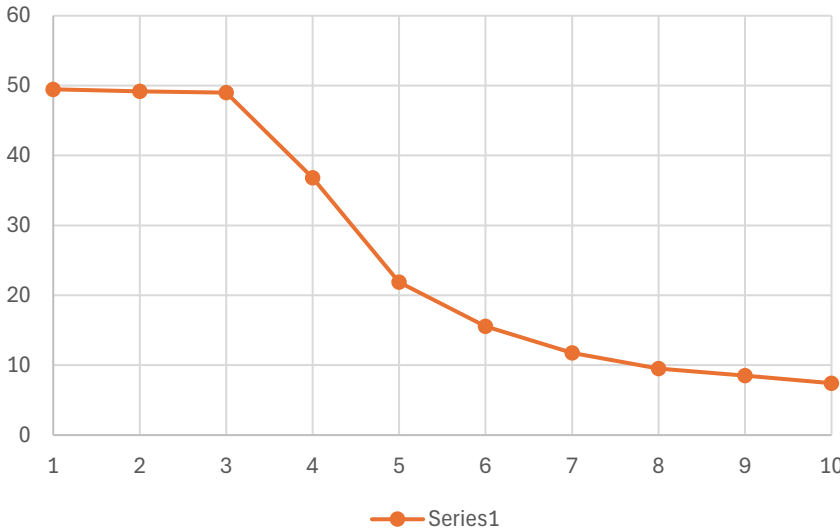
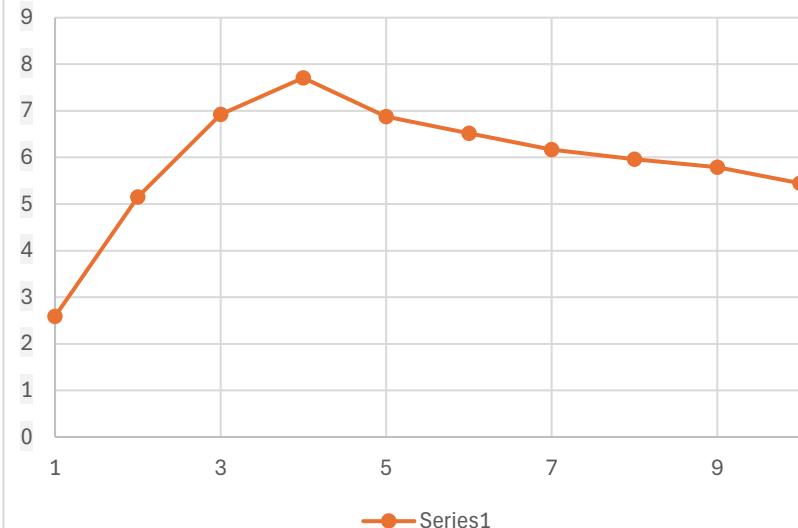
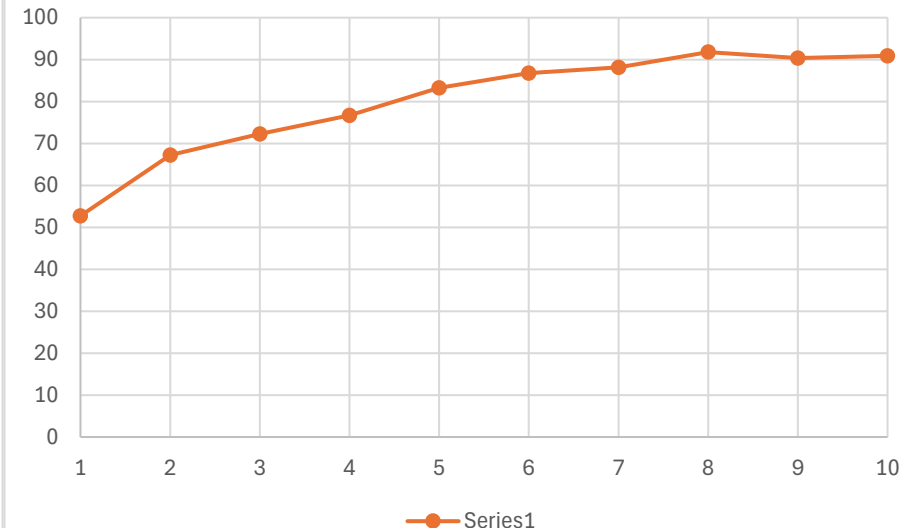


End of Line Report				Confidentiality Note: This report contains proprietary and confidential information intended solely for the use of authorized personnel. Any unauthorized disclosure, distribution, or reproduction of this document or its contents is strictly prohibited.									
Program Name:		Firefly Motor								Motor Code:		ML2A05-C01	
Motor Model:		ML2A								Serial no:		A260521A000045	
Datasheet				Back-EMF				Validation Checklist					
Parameter	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Deviation	Parameter	Compliance				
Model	ML2A05A-51V_P05	A260521A000045	-	500	4.80	4.79	-0.30%	Back EMF	OK				
Nominal DC Voltage	51	51	-	1000	9.50	9.58	0.77%	Peak Power	OK				
Peak Power	6.58	7.71	-	1500	14.26	14.35	0.65%	Peak Torque	OK				
Peak Torque	45.60	49.48	-	2000	18.99	19.16	0.87%	Characterstics Curves	OK.				
Peak Current - AC	240	240	-	3000	28.50	28.74	0.85%	Average Efficiency	OK				
Motor Max Speed	7200	7200	-	4000	38.02	38.34	0.84%						
Document Ref.	AR_Golden Sample Report			5000	47.55	47.95	0.85%						
				5500	52.32	52.79	0.90%						
Motor Torque		Motor Power		Group Efficiency		Integration Details		Electrical PDI					
Speed	DUT	Speed	DUT	Speed	DUT	Parameter	Values	Parameter	Values				
500	49.48	500	2.59	500	52.74	sin min	1.99	Leakage current(mA)	1.22				
1000	49.17	1000	5.15	1000	67.25	cos min	1.98	Insulation Resistance(MOhms)	9999				
1350	48.98	1350	6.92	1350	72.29	sin max	4.38	RESISTANCE(mOhms)	14.62				
2000	36.80	2000	7.71	2000	76.68	cos max	4.36						
3000	21.88	3000	6.87	3000	83.25	sinP-P	2.39						
4000	15.56	4000	6.52	4000	86.81	cosP-P	2.38						
5000	11.78	5000	6.17	5000	88.14	Offset	-16.31						
6000	9.49	6000	5.96	6000	91.79								
6500	8.51	6500	5.79	6500	90.40								
7000	7.43	7000	5.44	7000	90.93								
Motor Torque 				Motor Power 				Group Efficiency 					
END OF LINE RESULT					PASS		Tested by		Approval				
							GGS-(21-05-2026)		This is a system-approved document; signatures are not required.				