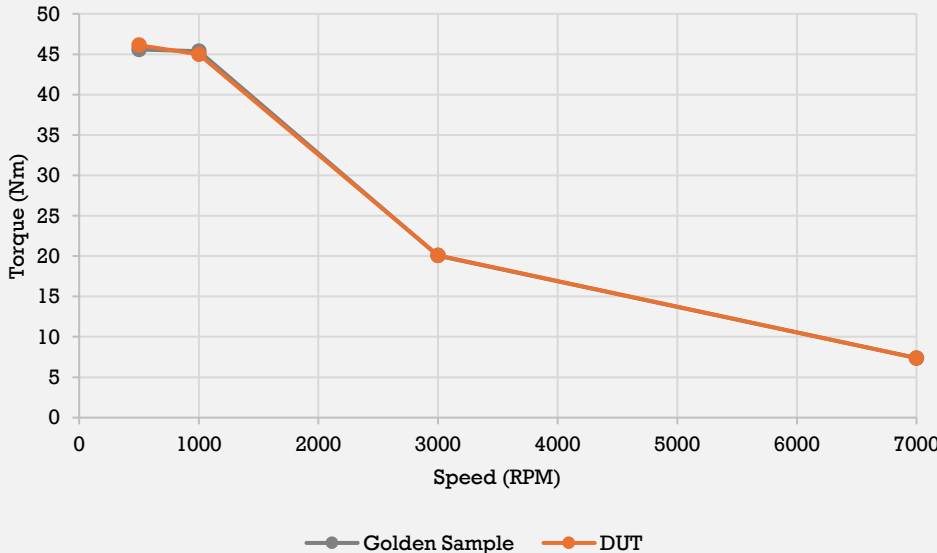
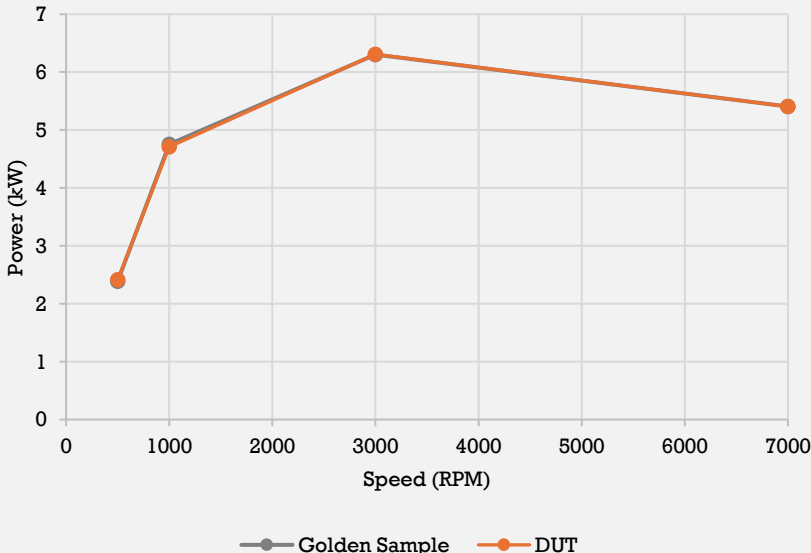
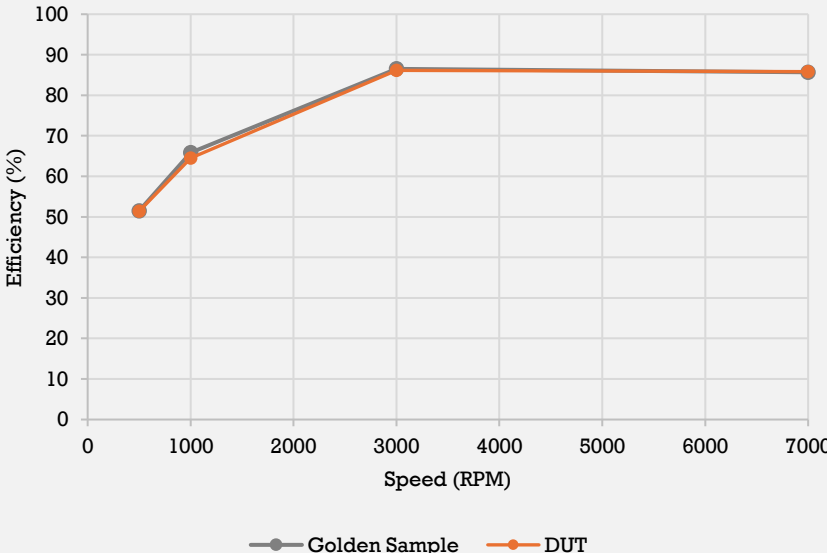


End of Line Report				Confidentiality Note: This report contains proprietary and confidential information intended solely for the use of authorized personnel. Any unauthorized disclosure, distribution, or reproduction of this document or its contents is strictly prohibited.				 ABHINAVA RAZEL							
Program Name:		Firefly Motor										Motor Code:		ML2A05-C01	
Motor Model:		ML2A										Serial no:		A260604A000070	
Datasheet				PDI (ELectrical)				Position Sensor Parameters							
Parameter	Golden Sample	DUT	Deviation	Test	Acceptance Ceteria	DUT	Deviation	Parameter	Golden Smaple	DUT	Deviation				
Model	ML2A05A-51V_P05	A260604A000070	-	Hipot	<3.5 mA	2.00	OK	Sine min	1150	1132	OK				
Nominal DC Voltage	51	51	-	IR	>10 Mohm	1061	OK	Sine Max	2900	2926	OK				
Peak Power	6.58	6.31	-4.14%	Ohm	15.3	15.60	OK	Cos Min	1150	1125	OK				
Peak Torque	45.60	46.11	1.12%	Back-EMF				Cos Max	2900	2909	OK				
Peak Current - AC	240	237.6	-0.99%	Voltage @3000 RPM	28.50	28.39	-0.40%	Sine P - P	1750	1794	OK				
Motor Max Speed	7200	7200	-					Cos P - P	1750	1784	OK				
Document Ref.	AR_Golden Sample Report ML2A - P05							Offset	766	766	OK				
Comparison - Torque Specs				Comparison - Power Specs				Comparison - Group Efficiency Specs							
Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Deviation	Speed	Golden Sample	DUT	Deviation				
500	45.57	46.11	1.18%	500	2.39	2.41	1.18%	500	51.50	51.38	-0.11%				
1000	45.37	44.97	-0.87%	1000	4.75	4.71	-0.87%	1000	65.87	64.52	-1.35%				
3000	20.06	20.08	0.08%	3000	6.30	6.31	0.08%	3000	86.51	86.14	-0.37%				
7000	7.37	7.38	0.09%	7000	5.40	5.41	0.09%	7000	85.67	85.87	0.20%				
Peak Torque (Golden sample & DUT) 				Peak Power (Golden sample & DUT) 				Group Efficiency (Golden sample & DUT) 							
END OF LINE RESULT						PASS		Tested by		This is a system-approved document; signatures are not required.					
								SPR-04-JUN-2026							