


Fiber multimode 8 fibrar  
Fiber 62,5/125um

Patch panel LAB  
1 TX  
2 RX

Patch panel garasje  
1 RX  
2 TX

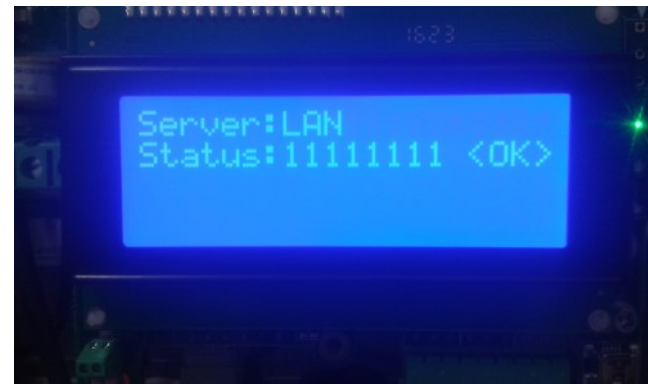

MAC Inverter  
00:27:02:1A:4B:92

OUI : 00:27:02 Solaredg SolarEdge Technologies  
Fra <<https://www.wireshark.org/tools/oui-lookup.html>>

<https://www.solaredge.com/us/products/pv-monitoring#/>

MAC HP Switch Garasje  
00:1F:FE:B6:23:80



## Summary HP J4858

A small form-factor pluggable (SFP) Gigabit SX transceiver that provides a full-duplex Gigabit solution up to 550 m on multimode fiber.

2-220 m (62.5 µm core diameter, 160 MHz\*km bandwidth), 2-275 m (62.5 µm core diameter, 200 MHz\*km bandwidth), 2-500 m (50 µm core diameter, 400 MHz\*km bandwidth), 2-550 m (50 µm core diameter, 500 MHz\*km bandwidth)

1 LC 1000Base-SX port(IEEE 802.3z Type 1000Base-SX), Duplex: full only