
OMNI ANTENNA Frequency- 2.4GHz


RF INNOVATE YOU SHARE, WE DELIVER


KEY FEATURES

- 1) **Designed for Commercial Applications**
- 2) **Suitable for Outdoor applications**
- 3) **High Power Handling Capacity**
- 4) Low profile Design
- 5) Low loss, High Gain
- 6) Ingress Protection - IP 57

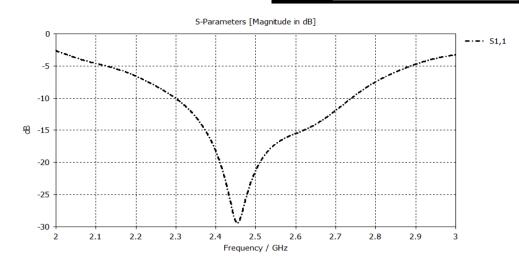

Parameter	Description
Frequency Range	2.4GHz
Gain (max)	5.1dBi
Polarization	Vertically Polarization
Radiation Pattern	Omnidirectional
Mounting Options	Both standard/Custom Available
Connector Type	SMA
Construction	Fiberglass
Environmental	Operating temperature range: -20 to
Specifications	+50°C
Electrical Specifications	Input Impedance: [Specify input impedance]
	HPBW: 40° (-12° to 28°)
Application Examples	Omni direction broadcasting and
	jamming
Ordering Information	- Part Number: RFI-OA-0024
	- Mounting clamps (optional)
Warranty and Support	- Warranty Period: 1 year
	- Support: 24*7 available





Farfield Realized Gain Abs (Theta=90)

